

z/OS  
3.2

*Resource Measurement Facility  
User's Guide*



**Note**

Before using this information and the product it supports, read the information in [“Notices” on page 307](#).

Last updated: 2025-09-20

© **Copyright International Business Machines Corporation 1990, 2025.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

© **Rocket Software, Inc. 2019, 2025.**

---

# Contents

<b>Figures.....</b>	<b>xi</b>
<b>Tables.....</b>	<b>xv</b>
<b>About this document.....</b>	<b>xvii</b>
Who should use this document.....	xvii
z/OS RMF library.....	xvii
z/OS Data Gatherer library.....	xvii
z/OS information.....	xvii
How to read syntax diagrams.....	xvii
Symbols.....	xviii
Syntax items.....	xviii
Syntax examples.....	xviii
<b>How to provide feedback to IBM.....</b>	<b>xxi</b>
<b>Summary of changes.....</b>	<b>xxiii</b>
Summary of changes for z/OS Resource Measurement Facility User's Guide 3.2.....	xxiii
Summary of changes for z/OS Resource Measurement Facility User's Guide 3.1.....	xxiii
<b>Part 1. Introduction.....</b>	<b>1</b>
Chapter 1. RMF - your performance management tool.....	3
Gathering data.....	3
Short-term data collection with Monitor III.....	3
Snapshot monitoring with Monitor II.....	4
Long-term data gathering with Monitor I and Monitor III.....	4
Storing data.....	4
RMF Sysplex Data Server.....	5
Reporting data.....	5
Short-term interactive performance analysis with Monitor III.....	5
Snapshot reporting with Monitor II.....	5
Long-term overview reporting with the Postprocessor.....	5
Viewing reports on spreadsheets.....	6
Monitoring on the workstation.....	6
Providing data for other applications.....	6
Resource monitoring of systems running AIX or Linux.....	7
Long-term performance analysis with RMF XP.....	7
What you can gather and report.....	7
Activity monitoring.....	8
Delay monitoring.....	8
<b>Part 2. Administration.....</b>	<b>11</b>
Chapter 2. Setting up RMF functions.....	13
Migrating from previous releases.....	13
Customizing the system environment.....	14
Define RMF library authorization.....	14
Ensure linkage to language environment.....	14

Ensuring common storage tracking.....	15
Specifying access definitions.....	15
Define RMF user IDs and ensure access to z/OS UNIX System Services.....	15
Assign started task procedures to user IDs.....	15
Considerations for z/OS UNIX level of security.....	16
Ensure READ access for RMF Language Environment applications under Program Control to IEAABD.DMPAUTH.....	16
Ensure RACF access to the Distributed Data Server (GPMSEVER and GPM4CIM).....	16
Ensure READ access for GPM4CIM to the BPX.SMF profile.....	17
Configuring PassTicket support for the Distributed Data Server.....	17
Controlling access to RMF data for the sysplex data services.....	18
Setting up the Distributed Data Server for z/OS.....	19
Setting up secure communication for the Distributed Data Server.....	21
Prerequisites for IBM Health Checker for z/OS.....	27
DDS options.....	28
OpenMetrics Endpoint.....	30
Synchronizing SMF recording intervals.....	32
Defining SMF record writing.....	32
Defining SMF synchronization.....	32
Considering reporting aspects.....	33
Setting up the RMF CLISTS.....	33
Grouping Monitor II and Monitor III Users.....	35
Installing workstation functions.....	35
Installing the RMF Spreadsheet Reporter.....	35
Installing RMF Performance Monitoring (RMF PM).....	35
Installing the z/OSMF Resource Monitoring plug-in.....	35
<b>Part 3. Operation.....</b>	<b>37</b>
Chapter 3. Starting the Distributed Data Server.....	39
MODIFY command.....	40
<b>Part 4. Performance management.....</b>	<b>41</b>
Chapter 4. Performance administration.....	43
What is performance administration?.....	43
Defining procedures and parameters.....	43
Setting performance goals.....	43
z/OS workload management.....	44
Service definition.....	44
Workload management concepts.....	44
Workloads and service classes.....	45
Performance goals.....	45
Importance.....	46
Service class periods.....	46
Reporting hierarchy.....	46
Sysplex view.....	46
System view.....	46
Job or resource view.....	46
Chapter 5. Performance monitoring.....	47
Watching performance goals.....	47
Observing response times.....	47
Monitoring throughput.....	48
Transaction rate.....	48
Workflow and velocity.....	48
Observing bottlenecks and exceptions.....	49

Chapter 6. Performance analysis.....	51
What is a performance problem?.....	51
Reports that provide data for analysis.....	51

## **Part 5. Reporting reference..... 55**

Chapter 7. The online reporting environment.....	57
Starting the reporters.....	57
Reference information.....	58
Quick start.....	61
Getting help with RMF dialogs.....	61
Getting help for a report.....	61
Some words about the tutorial.....	62
Message help and stacked messages.....	62
Chapter 8. Interactive performance analysis with Monitor III.....	63
Before you start Monitor III.....	63
Data set allocation.....	63
Transferring Monitor III VSAM data sets to other systems.....	64
Messages during Monitor III start.....	65
Sysplex considerations.....	66
The Monitor III Primary Menu.....	66
Navigating from the Primary Menu.....	66
STOP and GO.....	70
Using the Data Index (DI).....	71
Contents of the Data Index.....	71
Monitor III session and option commands - Overview.....	74
Session commands.....	75
Option commands.....	75
Monitor III session tasks.....	76
Backward and forward referencing.....	76
Cancelling entries on option panels.....	79
Getting help for RMF commands.....	79
Displaying current range data.....	79
Searching for a field.....	79
Setting GO mode.....	80
Activating GRAPHIC mode.....	80
Printing screens and tabular reports.....	81
Printing graphic reports.....	81
Using program function keys.....	82
Resetting entries on option panels.....	83
Retrieving the last command.....	83
Activating TABULAR mode.....	83
Toggling between tabular and graphic display.....	84
Displaying user-written reports.....	84
Changing session options.....	84
Changing color graphic options.....	85
Changing language options.....	86
Changing report options.....	87
Selecting an option set.....	88
Using cursor-sensitive control.....	89
Monitor III help facility.....	90
Monitor III report commands - Overview.....	90
Chapter 9. Snapshot reporting with Monitor II.....	95
Monitor II sessions.....	95

The ISPF session.....	95
The TSO/E session.....	98
The background session.....	99
Structure of Monitor II reports.....	99
Display session report fields.....	99
Different formats of Monitor II reports.....	101
Different modes of Monitor II reports.....	102
Monitor II session commands and options - Overview.....	102
Display session commands.....	102
Background-session options.....	104
Monitor II session tasks.....	104
Display the menu.....	104
Display and set options.....	105
Reset default options.....	107
Leave options unchanged.....	107
Display commands.....	107
Define session options.....	107
Scroll through report frames.....	108
Recall the previous data.....	108
Sort reports.....	109
Find text string.....	109
Repeat Find.....	109
Set delta mode.....	109
Create a hardcopy report.....	110
Refresh a report automatically.....	111
Assign PF keys.....	112
Print a report page.....	113
Write SMF records.....	113
Specify the system to be monitored.....	114
Stop the session.....	114
Monitor II report commands - Overview.....	115
Details of report commands.....	116
Conflicting session options.....	126
Chapter 10. Long-term reporting with the Postprocessor.....	127
Postprocessor reporting.....	127
Preparing SMF records for postprocessing.....	128
Sysplex considerations.....	129
Sysplex reporting across time zones.....	129
Optimized coupling facility hardware data.....	130
Starting the Postprocessor.....	130
Starting with JCL.....	131
Starting from ISPF.....	132
Defining output data sets.....	135
How the Postprocessor processes control statements.....	138
Defining the reporting period.....	138
Postprocessor completion.....	138
How to use control statements.....	138
DATE.....	139
DELTA.....	140
DINTV.....	140
ETOD.....	143
EXCEPT.....	143
EXITS.....	145
EXRPTS.....	145
OVERVIEW.....	146
OVW.....	147
REPORTS.....	147

RTOD.....	153
SESSION.....	154
STOD.....	154
SUMMARY.....	155
SYSID.....	155
SYSOUT.....	155
SYSRPTS.....	156
Examples of control statements.....	157
Overview and exception conditions.....	161
CPU Activity - SMF record type 70-1.....	161
Crypto Hardware Activity - SMF record type 70-2.....	169
Paging Activity - SMF record type 71.....	175
Workload Activity - SMF record type 72-3.....	178
Channel Path Activity - SMF record type 73.....	188
Device Activity - SMF record type 74-1.....	190
Coupling Facility Activity - SMF record type 74-4.....	191
Cache Activity - SMF record type 74-5.....	193
Ficon Director Activity - SMF record type 74-7.....	199
Enterprise Disk Systems Statistics - SMF record type 74-8.....	200
PCIe Function Activity - SMF record type 74-9.....	204
EADM Activity - SMF record type 74-10.....	205
Page Data Set Activity - SMF record type 75.....	206
Enqueue Activity - SMF record type 77.....	206
Virtual Storage Activity - SMF record type 78-2.....	207
I/O Queuing Activity - SMF record type 78-3.....	207
 Chapter 11. Cross platform monitoring with RMF XP.....	211
How to set up RMF XP.....	213
Configuration files and parameters.....	213
Post-installation steps.....	215
Security setup.....	215
How to start GPM4CIM and assign userIDs.....	216
How to use RMF XP for long-term performance analysis.....	216
AIX on System p performance data: subtype 1-12.....	216
Linux on System x performance data: subtype 20-31.....	217
Linux on System z performance data: subtype 40-53.....	217
How to request SMF record type 104 collection.....	218
How to authorize GPM4CIM to write SMF record type 104.....	219
Diagnostic aids.....	219
 Chapter 12. Batch reporting with Monitor III.....	221
Monitor III batch reporter components.....	221
Monitor III batch reporter processing workflow.....	223
How to use the RMF Monitor III batch reporter.....	224
How to customize exceptions.....	226
How to modify RMF sample report exits.....	228
How to use your own report exits.....	229
Setup and usage considerations.....	229
Exception handling for all Monitor III report data.....	229
User-defined exception-initiated monitoring.....	230
The automated approach.....	230
 <b>Part 6. Analysis on the workstation.....</b>	<b>231</b>
 Chapter 13. How to work with Postprocessor XML reports.....	233
Producing and viewing XML reports with the Spreadsheet Reporter.....	233
Producing and viewing XML reports with the HTTP API of the DDS.....	233

How to view XML reports in a browser.....	233
Chapter 14. RMF Spreadsheet Reporter.....	235
Concepts of performance analysis with the RMF Spreadsheet Reporter.....	235
Get more out of Postprocessor reports with the Spreadsheet Reporter.....	235
The Spreadsheet Reporter's resource-oriented concept.....	237
Installing the Spreadsheet Reporter.....	238
How to use the RMF Spreadsheet Reporter.....	239
Spreadsheet Reporter resources.....	240
Spreadsheet Reporter main dialog.....	242
Menu bar.....	243
How to work with Resources.....	243
How to work with Systems.....	248
How to specify settings for the RMF Spreadsheet Reporter.....	251
How to specify processing options and report types.....	251
How to specify reporting periods and duration intervals.....	254
How to create Working Sets in batch mode.....	254
Using the Jclgen.bat procedure.....	254
Using the Collect.bat procedure.....	255
Using the CreateRptWSet.bat procedure.....	256
Using the CreateOvwWSet.bat procedure.....	257
Using RMF spreadsheet macros.....	257
Available RMF spreadsheet macros.....	257
Macros for Report Working Sets.....	257
Macros for Overview Working Sets.....	259
Sets of overview control statements.....	260
LPAR Overview Report.....	260
System Overview Report.....	261
Workload Overview Report.....	262
Device Overview Report.....	263
Cache Subsystem Overview Report.....	264
Channel Overview Report.....	265
Spreadsheet usage examples.....	265
Open RMF Overview Spreadsheets usage example.....	268
Setting the security level for Excel macros.....	269
Chapter 15. RMF Performance Monitoring.....	271
Performance monitoring - Overview.....	271
Installing RMF Performance Monitoring.....	272
RMF PM - Let's go.....	273
Sysplex logon dialog.....	273
Working with sysplexes.....	274
Sysplex dialog.....	275
Open and close a sysplex.....	276
Expand a sysplex.....	276
Expand a Resource.....	276
Creating a DataView from a Resource.....	276
Working with PerfDesks and DataViews.....	277
Creating a PerfDesk folder.....	277
Creating a PerfDesk.....	277
Opening a PerfDesk.....	277
Expanding the tree.....	277
Start and stop a PerfDesk.....	278
Save a PerfDesk.....	278
Close a PerfDesk.....	278
Stepping through the history of DataViews.....	278
Synchronize all DataViews.....	279
Startup.....	279



Add a DataView to a PerfDesk.....	279
Change the name of a PerfDesk.....	279
Paste DataView to a PerfDesk.....	279
Exporting and Importing a PerfDesk.....	279
DataView.....	280
Creating a DataView.....	280
Working with DataViews.....	281
Sampling dialog.....	284
Sample intervals.....	284
Use Common Interval.....	284
Sample From.....	284
Sample To.....	284
Wrap-around buffer size.....	285
Set Time-zone.....	285
Series.....	285
Series time-stamps.....	285
Series definition dialog.....	285
Plot/Save Series dialog.....	286
Filter dialog.....	288
Work Scope dialog.....	290
Analysis dialog.....	291
What is monitored?.....	291
Sysplexes.....	291
Resources.....	291
Metrics.....	295
Work Scopes.....	295
Message Browser.....	295
Save messages to a file.....	295
Delete messages.....	296
Query help for a message.....	296
Close the Message Browser.....	296
Chapter 16. z/OS Management Facility - Resource Monitoring.....	297
<b>Part 7. Using OpenMetrics .....</b>	<b>299</b>
Chapter 17. OpenMetrics Configuration.....	301
Chapter 18. Monitor III metrics in Grafana.....	303
<b>Appendix A. Accessibility.....</b>	<b>305</b>
<b>Notices.....</b>	<b>307</b>
Terms and conditions for product documentation.....	308
IBM Online Privacy Statement.....	309
Policy for unsupported hardware.....	309
Minimum supported hardware.....	309
Programming Interface Information.....	310
Trademarks.....	310
<b>Glossary.....</b>	<b>311</b>
<b>Index.....</b>	<b>317</b>



---

# Figures

1. RMF - Your Performance Management Tool.....	4
2. Sample Policy Agent policy for secure communication setup for the DDS.....	22
3. Sample Policy Agent rule for secure communication for DDS clients.....	23
4. Sample Policy Agent rule for secure communication with client certificate authentication for the DDS.....	25
5. Sample Policy Agent rule for secure communication for DDS clients with client certificate authentication.....	27
6. RMF Performance Management Menu.....	57
7. Monitor III Primary Menu.....	66
8. Monitor III Sysplex Report Selection Menu.....	68
9. Monitor III Overview Report Selection Menu.....	68
10. Monitor III Job Report Selection Menu.....	69
11. Monitor III Resource Report Selection Menu.....	69
12. Monitor III Subsystem Report Selection Menu.....	70
13. Monitor III User-written Report Selection Menu.....	70
14. Header of Monitor III Single-System Reports.....	70
15. Data Index.....	71
16. Data Index - Condensed Version.....	72
17. Data Index Options Panel.....	74
18. Option Selection Menu.....	76
19. Header of Monitor III Single-System Reports.....	77
20. Interactive Chart Utility (ICU) DIRECTORY Panel.....	82
21. Session Options Panel.....	84
22. Color Graphic Options - Panel 1.....	85

23. Color Graphic Options - Panel 2.....	86
24. Language Options Panel.....	87
25. DELAY Report Options Panel.....	87
26. Option Set Menu.....	88
27. Monitor II Primary Menu.....	96
28. Monitor II Address Space Report Selection Menu.....	96
29. Monitor II I/O Report Selection Menu.....	97
30. Monitor II Resource Report Selection Menu.....	97
31. Monitor II Library List and OPT Settings Selection Menu.....	98
32. Monitor II User Report Selection Menu.....	98
33. Monitor II Display Menu.....	99
34. CHANNEL report as example of a Monitor II report header (TSO/E session).....	100
35. ARD, ASD and ASRM Report Options Panel.....	105
36. Monitor II TSO/E session - Default Options.....	106
37. JCL example for preparing SMF records.....	130
38. JCL example for starting the Postprocessor.....	131
39. Postprocessor - Setup Panel.....	132
40. Postprocessor Input for SMF Data Sets.....	134
41. Postprocessor - Output Data Sets.....	134
42. Postprocessor Options panel.....	135
43. Relationship between Duration Interval and Reporting Period.....	142
44. Cross platform performance monitoring.....	212
45. RMF XP startup member in SYS1.PROCLIB(GPM4CIM).....	213
46. GPM4CIM configuration file example for AIX.....	214
47. GPM4CIM security concept.....	215

48. Log file entries during GPM4CIM processing.....	219
49. RMF Monitor III batch reporter workflow diagram.....	224
50. Sortable data in Postprocessor reports in XML format.....	234
51. Overview Report and Spreadsheet.....	236
52. From SMF Dump Data to a Spreadsheet presentation.....	238
53. Processing a file containing overview control statements (1).....	249
54. Processing a file containing overview control statements (2).....	250
55. DASD Activity Report.....	266
56. Activity of Top 10 Volumes.....	267
57. Spreadsheet Reporter Output — Open RMF Overview Spreadsheets macro.....	269
58. RMF PM — main window.....	273
59. Sysplex logon dialog.....	273
60. Initial DataViews.....	274
61. Sysplex Dialog.....	275
62. Collecting historical data in RMF PM.....	278
63. Sample DataView.....	280
64. Filter Dialog.....	288
65. Work Scope Dialog.....	290
66. System Status task.....	297
67. Resource Monitoring task.....	298



---

# Tables

1. Syntax examples.....	xix
2. Monitored activities and SMF record types.....	8
3. Fields available for Report class.....	58
4. Fields available for Job ID.....	58
5. Fields available in PROCU.....	59
6. Field Descriptions for the Data Index.....	74
7. Monitor III Session Commands.....	75
8. Monitor III Option Commands.....	76
9. Program Function Keys Defaults.....	82
10. Fields on the Graphic Options Panels.....	86
11. Report Commands.....	91
12. User-Written Report Commands.....	93
13. Monitor II Display Session Areas.....	100
14. Monitor II Display session commands.....	102
15. Monitor II Background Session Options.....	104
16. Monitor II OPTIONS Command Sources.....	106
17. Monitor II Report Commands.....	115
18. Postprocessor ddnames - text output.....	136
19. Postprocessor ddname - Overview record output.....	137
20. Postprocessor ddnames - XML output.....	137
21. Postprocessor Control Statement Summary.....	139
22. CPU Activity - Conditions Based on SMF Record Type 70–1.....	161
23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2.....	170

24. Paging Activity - Conditions Based on SMF Record Type 71.....	175
25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3.....	179
26. Channel Path Activity - Conditions Based on SMF Record Type 73.....	188
27. Device Activity - Conditions Based on SMF Record Type 74-1.....	190
28. Coupling Facility Activity - Conditions Based on SMF Record Type 74-4.....	192
29. Cache Activity - Conditions Based on SMF Record Type 74-5.....	193
30. Cache Activity - Conditions Based on SMF Record Type 74-5.....	199
31. Ficon Director Activity - Conditions Based on SMF Record 74-7.....	200
32. ESS Link Statistics - Conditions Based on SMF Record 74-8.....	200
33. ESS Extent Pool Statistics - Conditions Based on SMF Record 74-8.....	202
34. ESS Rank Statistics - Conditions Based on SMF Record 74-8.....	203
35. ESS Synchronous I/O Link Statistics – Conditions Based on SMF Record 74-8 .....	203
36. PCIE Function Activity - Conditions Based on SMF Record 74-9.....	204
37. Page Data Set Activity - Conditions Based on SMF Record Type 75.....	206
38. Enqueue Activity - Conditions Based on SMF Record Type 77.....	206
39. Virtual Storage Activity - Conditions Based on SMF Record Type 78-2.....	207
40. I/O Queuing Activity - Conditions Based on SMF Record Type 78-3.....	208
41. RMF Monitor III batch reporter components.....	221
42. Supported reports for spreadsheets.....	252
43. Supported reports for web browser display.....	253
44. Variables in Jclgen.bat.....	254
45. Additional variables in Collect.bat.....	256
46. Macros Based on Reports.....	257
47. Macros Based on Overview Records.....	259



## About this document

---

The Resource Measurement Facility (RMF) is the strategic IBM® product for performance management in a z/OS host environment.

This document describes RMF, what it can do, and how to use RMF sessions. For information about analyzing the various reports that RMF produces, see *z/OS Resource Measurement Facility Report Analysis*.

## Who should use this document

---

This document is intended for use by:

- System administrators and programmers responsible for installing RMF and modifying its functions
- Performance analysts responsible for measuring and improving system performance,
- System operators

Because RMF is a product for measuring system performance of a z/OS system, this document assumes that the reader has extensive knowledge of the z/OS system.

## z/OS RMF library

---

The z/OS RMF library contains the following information units:

- *z/OS Resource Measurement Facility Programmer's Guide*
- *z/OS Resource Measurement Facility User's Guide*
- *z/OS Resource Measurement Facility Report Analysis*
- *z/OS Resource Measurement Facility Messages and Codes* (includes z/OS Data Gatherer messages)

## z/OS Data Gatherer library

---

The z/OS Data Gatherer library contains the following information units:

- *z/OS Data Gatherer Programmer's Guide*
- *z/OS Data Gatherer User's Guide*

Messages issued by z/OS Data Gatherer are included in *z/OS Resource Measurement Facility Messages and Codes*.

## z/OS information

---

This information explains how z/OS® references information in other documents and on the web.

When possible, this information uses cross-document links that go directly to the topic in reference using shortened versions of the document title. For complete titles and order numbers of the documents for all products that are part of z/OS, see *z/OS Information Roadmap*.

To find the complete z/OS library, go to [IBM Documentation \(www.ibm.com/docs/en/zos\)](http://www.ibm.com/docs/en/zos).

## How to read syntax diagrams

---

This section describes how to read syntax diagrams. It defines syntax diagram symbols, items that may be contained within the diagrams (keywords, variables, delimiters, operators, fragment references, operands) and provides syntax examples that contain these items.

Syntax diagrams pictorially display the order and parts (options and arguments) that comprise a command statement. They are read from left to right and from top to bottom, following the main path of the horizontal line.


For users accessing the Information Center using a screen reader, syntax diagrams are provided in dotted decimal format.

## Symbols

The following symbols may be displayed in syntax diagrams:

### Symbol

#### Definition



Indicates the beginning of the syntax diagram.



Indicates that the syntax diagram is continued to the next line.



Indicates that the syntax is continued from the previous line.



Indicates the end of the syntax diagram.

## Syntax items

Syntax diagrams contain many different items. Syntax items include:

- Keywords - a command name or any other literal information.
- Variables - variables are italicized, appear in lowercase, and represent the name of values you can supply.
- Delimiters - delimiters indicate the start or end of keywords, variables, or operators. For example, a left parenthesis is a delimiter.
- Operators - operators include add (+), subtract (-), multiply (\*), divide (/), equal (=), and other mathematical operations that may need to be performed.
- Fragment references - a part of a syntax diagram, separated from the diagram to show greater detail.
- Separators - a separator separates keywords, variables or operators. For example, a comma (,) is a separator.

**Note:** If a syntax diagram shows a character that is not alphanumeric (for example, parentheses, periods, commas, equal signs, a blank space), enter the character as part of the syntax.

Keywords, variables, and operators may be displayed as required, optional, or default. Fragments, separators, and delimiters may be displayed as required or optional.

### Item type

#### Definition

#### Required

Required items are displayed on the main path of the horizontal line.

#### Optional

Optional items are displayed below the main path of the horizontal line.

#### Default

Default items are displayed above the main path of the horizontal line.

## Syntax examples

The following table provides syntax examples.

Table 1. Syntax examples

Item	Syntax example
<p>Required item.</p> <p>Required items appear on the main path of the horizontal line. You must specify these items.</p>	
<p>Required choice.</p> <p>A required choice (two or more items) appears in a vertical stack on the main path of the horizontal line. You must choose one of the items in the stack.</p>	
<p>Optional item.</p> <p>Optional items appear below the main path of the horizontal line.</p>	
<p>Optional choice.</p> <p>An optional choice (two or more items) appears in a vertical stack below the main path of the horizontal line. You may choose one of the items in the stack.</p>	
<p>Default.</p> <p>Default items appear above the main path of the horizontal line. The remaining items (required or optional) appear on (required) or below (optional) the main path of the horizontal line. The following example displays a default with optional items.</p>	
<p>Variable.</p> <p>Variables appear in lowercase italics. They represent names or values.</p>	
<p>Repeatable item.</p> <p>An arrow returning to the left above the main path of the horizontal line indicates an item that can be repeated.</p> <p>A character within the arrow means you must separate repeated items with that character.</p> <p>An arrow returning to the left above a group of repeatable items indicates that one of the items can be selected, or a single item can be repeated.</p>	
<p>Fragment.</p> <p>The fragment symbol indicates that a labelled group is described below the main syntax diagram. Syntax is occasionally broken into fragments if the inclusion of the fragment would overly complicate the main syntax diagram.</p>	



## How to provide feedback to IBM

---

We welcome any feedback that you have, including comments on the clarity, accuracy, or completeness of the information. See [How to send feedback to IBM](#) for additional information.



## Summary of changes

---

This information includes terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations for the current edition are indicated by a vertical line to the left of the change.

**Note:** IBM z/OS policy for the integration of service information into the z/OS product documentation library is documented on the z/OS Internet Library under [IBM z/OS Product Documentation Update Policy](http://www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy) ([www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy](http://www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy)).

## Summary of changes for z/OS Resource Measurement Facility User's Guide 3.2

---

### New

The features and enhancements described in the following section also apply to RMF for z/OS 3.1.

#### September 2025

- Monitor III metrics can now be exposed using the OpenMetrics format, allowing easy integration with popular monitoring tools such as Prometheus, VictoriaMetrics, Telegraf, and Grafana.  
By default, DDS exposes all available metrics, but you can configure it to expose only selected metrics and customize metric names to suit your needs. See [OpenMetrics Endpoint](#).
- Introduced support for interpreting documents returned from DDS in JSON format, in addition to the existing XML format. This enhancement offers flexibility when extracting performance data from DDS responses. You can now choose to work with either XML or JSON, depending on your preferred data format. See [How to interpret documents returned by the DDS](#).

**Important:** The features and enhancements described also apply to RMF for z/OS 3.1. RMF for z/OS 3.1 documentation will no longer be published or maintained. To find the latest updates, refer to the RMF for z/OS 3.2 documentation.

## Summary of changes for z/OS Resource Measurement Facility User's Guide 3.1

---

The following content is new, changed, or no longer included in z/OS 3.1.

### New

The following content is new.

#### September 2025

- Monitor III metrics can now be exposed using the OpenMetrics format, allowing easy integration with popular monitoring tools such as Prometheus, VictoriaMetrics, Telegraf, and Grafana.  
By default, DDS exposes all available metrics, but you can configure it to expose only selected metrics and customize metric names to suit your needs. See [OpenMetrics Endpoint](#).
- Introduced support for interpreting documents returned from DDS in JSON format, in addition to the existing XML format. This enhancement offers flexibility when extracting performance data from DDS responses. You can now choose to work with either XML or JSON, depending on your preferred data format. See [How to interpret documents returned by the DDS](#).

## June 2025

- The overview conditions in CPU Activity based on SMF Record Type 70-1 have been updated. See [“CPU Activity - SMF record type 70-1”](#) on page 161.
- The overview conditions in Workload Activity based on SMF Record Type 72-3 have been updated. See [Workload Activity - SMF record type 72-3](#).

## April 2025

HTTP compression has been enabled in the Distributed Data Server (DDS).

## December 2024

The new fields added for Enterprise Disk Systems Statistics report also serve as overview conditions for the SMF record type 74-8. See [ESS Extent Pool Statistics - Conditions Based on SMF Record 74-8](#).

## September 2024

The default parmlib member (GPMSRV00) of RMF for z/OS now includes a new parameter that enables HTTP Strict Transport Security. See [DDS options](#).

## June 2024

The overview or exception conditions in Paging Activity based on SMF Record Type 71 have been updated. See [“Paging Activity - SMF record type 71”](#) on page 175.

## November 2023

Using IBM RMF for z/OS Grafana plugin, you can now visualize and analyze the RMF Monitor III metrics and reports in Grafana. You must install and configure the IBM RMF z/OS plugin in Grafana. Create a Datasource connection to a DDS to explore RMF Monitor III metrics and reports. For more information, refer to the [IBM RMF for z/OS Grafana Plugin](#) documentation.

## September 2023 release

- A new topic [“EADM Activity - SMF record type 74-10”](#) on page 205 has been added to show the overview or exception conditions in the EADM activity report.
- [“MODIFY command”](#) on page 40 topic has been added to include **TRACEON**, **TRACEOFF**, **OPTIONS**, and **DISPLAY**.

## Changed

The following content is changed.

## February 2025

The following topics have been updated to include the supported Java version in the new version of DDS:

- [“Migrating from previous releases”](#) on page 13
- [“Setting up the Distributed Data Server for z/OS”](#) on page 19

## December 2024

- The [“Macros for Report Working Sets”](#) on page 257 topic has been updated to include the information on Reporting Trade Streams (RepTrdStr) and Reporting Interval Structure (RepIntStr).
- The [MODIFY command](#) topic has been updated to include the command syntax for both newer and legacy versions of the Distributed Data Server (DDS).

## November 2024

- The installation topic of [Spreadsheet Reporter](#) has been updated to include support for the Windows 11 operating system.
- The [“Configuration files and parameters”](#) on page 213 have been updated to include the missing **GPM\_CIMTIMEOUT** parameter.

## October 2024

The installation topics of [RMF Performance Monitoring](#) and [Spreadsheet Reporter](#) have been updated to include the GitHub repository link.



**August 2024**

The Chapter 16, [“z/OS Management Facility - Resource Monitoring,”](#) on page 297 topic has been updated to show a new user interface of z/OSMF, replacing the older images.

**June 2024**

A note has been added for the EXCP and EXCPRT overview conditions in [“Workload Activity - SMF record type 72-3”](#) on page 178.

**March 2024**

The topic of [migrating from previous releases](#) has been updated to include the details of the DDS upgrade.

**December 2023**

The link to the IBM RMF for z/OS Grafana plugin documentation has been updated.

**September 2023 release**

- The [“Starting the Postprocessor”](#) on page 130 topic has been updated to include the information on viewing Postprocessor Reports in a Web browser, Spreadsheet Reporter, and HTTP API of the DDS.
- Updated the syntax of the **MODIFY** command in the following topics:
  - [“DDS options”](#) on page 28
  - [Chapter 3, “Starting the Distributed Data Server,”](#) on page 39



---

# Part 1. Introduction

The introduction provides an overview of the capabilities of RMF.

- Data Gathering with Monitor I, Monitor II, and Monitor III
- Reporting with Monitor III, Monitor II, and the Postprocessor
- Creating spreadsheets with the Spreadsheet Reporter
- Resource monitoring of systems running Linux® or AIX® with RMF XP
- Resource monitoring on the workstation with RMF PM



---

# Chapter 1. RMF - your performance management tool

Many different activities are required to keep your system running smoothly, and to provide the best service on the basis of the available resources and workload requirements. The operator, the administrator, the system programmer, or the performance analyst will do these tasks. RMF is the tool that helps each of these people do the job effectively.

RMF consists of several components:

- Monitor I - Monitor II - Monitor III
- Postprocessor
- Spreadsheet Reporter
- Client/Server Enabling
- Sysplex Data Server
- Distributed Data Server for z/OS
- Distributed Data Server for AIX and Linux systems (RMF XP)
- RMF Performance Monitoring

These components work together in providing the capabilities you need for performance management:

- Gathering data
- Reporting data
- Accessing data across the sysplex

---

## Gathering data

RMF gathers data using three monitors:

- short-term data collection with Monitor III
- snapshot monitoring with Monitor II
- long-term data gathering with Monitor I and Monitor III

The system operator starts all monitors as non-interactive (background) sessions with a variety of options that determine what type of data is collected and where it is stored.

You can run data gathering on each z/OS system and use the RMF Sysplex Data Server to have all data available on the one system on which you run your performance management tasks.

### Short-term data collection with Monitor III

The Monitor III gatherer session has a typical gathering cycle of one second, and consolidated records are written for a range which is typically set to 100 seconds.

You can collect short-term data and continuously monitor the system status to solve performance problems. You get actual performance data (response times, execution velocity) on a very detailed level for later comparison with performance policy goals.

You can collect data that indicate how fast jobs or groups of jobs are running — this is called **workflow** or **speed**. You also get data that show how resource-intensive jobs are using the processor, the DASD devices, and the storage — the reports describe this under the term **using**.

There is also information about delays, which are important indicators of performance problems. This simplifies comparison of reports created from Monitor I and Monitor III data.

## Snapshot monitoring with Monitor II

The scope of Monitor II data gathering is mainly related to single address spaces or resources, giving snapshots of the current status. You can collect data about address space activities and resource consumption, and about processor, DASD volume, and storage activities and utilization.

With Monitor II, it is also possible to monitor one specific job or volume continuously.

## Long-term data gathering with Monitor I and Monitor III

Monitor I and Monitor III provide long-term data collection about system workload and resource utilization, and cover all hardware and software components of your system: processor, I/O device and storage activities and utilization, as well as resource consumption, activity and performance of groups of address spaces.

Data is gathered for a specific cycle time, and consolidated data records are written at a specific interval time. The default value for data gathering is one second and for data recording 30 minutes. You can select these options according to your requirements and change them whenever the need arises.

The SMF synchronization function ensures that records are written from all monitors in the sysplex for the same intervals.

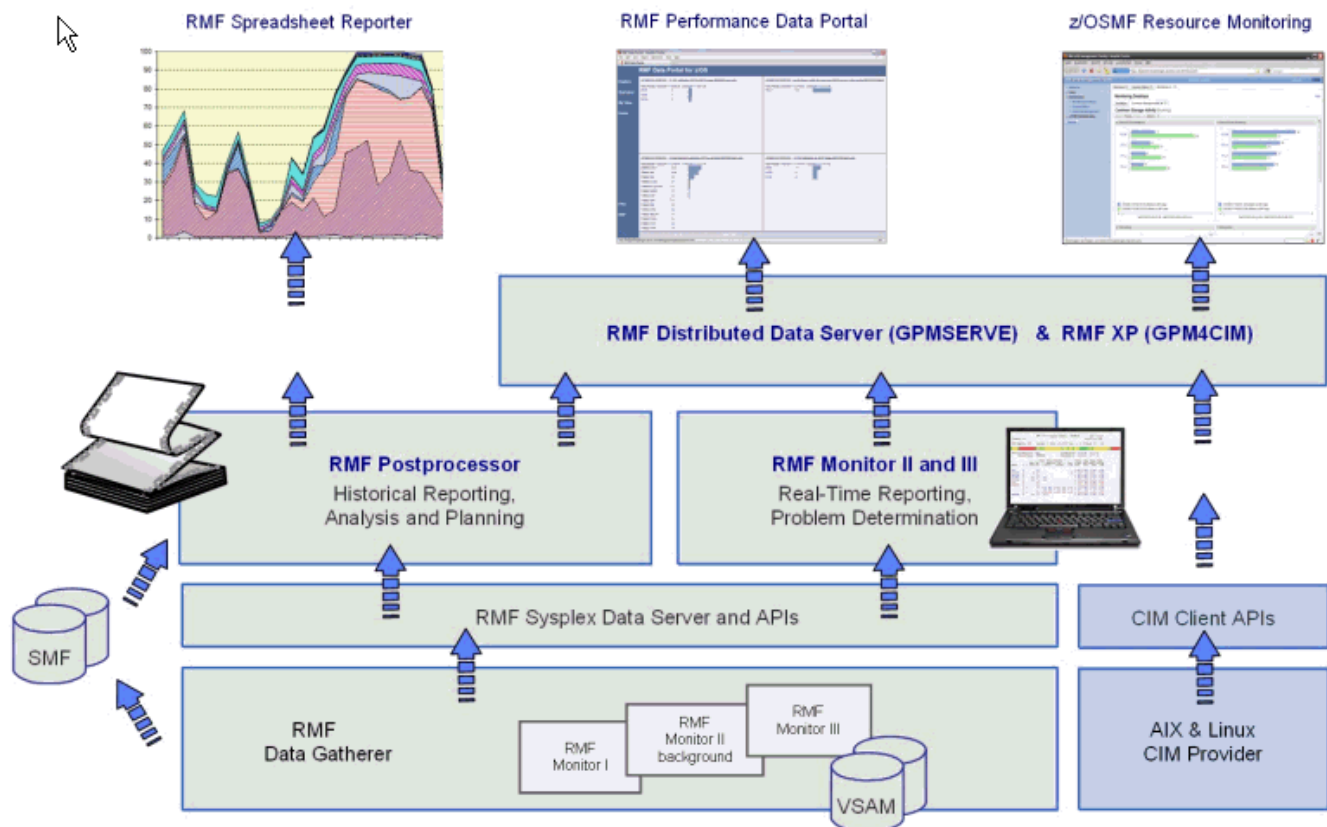


Figure 1. RMF - Your Performance Management Tool

## Storing data

RMF stores data in two types of record:

- All three monitors write SMF records (type 70 — type 79) if you define the appropriate SMF recording options.
- In addition, Monitor III writes VSAM records to in-storage buffers or into RMF-owned VSAM data sets.

## RMF Sysplex Data Server

The RMF Sysplex Data Server is a distributed RMF function. It is started as an identical copy on each system of the sysplex. Each copy of the data server communicates with all other copies in the sysplex. RMF uses this sysplex communication method to provide access to distributed RMF measurement data from any point in the sysplex.

## Reporting data

---

All three monitors can create reports, and so does the Postprocessor.

### Short-term interactive performance analysis with Monitor III

The Monitor III reporter runs in a TSO/E session under ISPF and provides sysplex or system performance reports by:

- Displaying your current system status in real time mode
- Showing previously collected data that is still available in either in-storage buffers or preallocated VSAM data sets

Monitor III offers a wide spectrum of reports answering questions that arise during the various performance management tasks.

Cursor-sensitive control is one specific highlight of the Monitor III reporter you can use to navigate among different types of reports that all describe the system status at the same point in time from different perspectives. Once you have used it, you will never want to be without it — it helps you to get the report that points directly to the problems you need to solve.

All reporting is available within one TSO/E session, so there's no need to logon to different systems in the sysplex to get all performance data. All reports are available on one screen.

**Tip:** You can view data from other systems using the ISPF interface for Monitor III. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Monitor III data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

In addition, when a user initiates a reporter session on a system within a sysplex that does not run on the highest RMF level available, Monitor III generates an information message ERB955I. This message is intended to assist users in preventing reporting issues and ensuring the smooth functioning of the system.

### Snapshot reporting with Monitor II

Monitor II is a snapshot reporting tool for very fast information about how specific address spaces or system resources (processor, DASD volumes, storage) are performing. Monitor II has two modes for reporting on the performance of your system:

- Monitor II display session: You select the ISPF version in the RMF Performance Management menu, or you call the monitor with the TSO/E command RMFMON.
- Monitor II background session: You start a non-interactive session to create a report for printing.

Some reports offer continuous monitoring of single address spaces or DASD devices. You can get an one-line report each time you press ENTER, or you can request a periodically refreshed report.

### Long-term overview reporting with the Postprocessor

Typically, you call the Postprocessor in a batch job, although running it in a TSO/E session is possible. You provide a set of options that define the scope of reporting and you get reports of various types with all the data you need for optimum running of your system.

The standard procedure is to allocate SMF data sets or SMF log streams with records from all monitors as input for the Postprocessor. A variation is to get reports on the RMF records that are available in the RMF data buffers of all systems in the sysplex while the Postprocessor is running. This data is automatically made available to the Postprocessor by calling the RMF Sysplex Data Server, a quick path to access performance data without having to go through dumping, sorting, and merging the SMF records.

The Postprocessor offers different types of report:

**Interval reports:** they show the sysplex performance for each interval for which data has been gathered. Most single-system reports are also available as real-time reports from Monitor I.

**Duration reports:** the data is summarized over longer periods of time with a maximum value of 100 hours.

**Summary, exception, and overview reports:** these Postprocessor capabilities let you create the reports you need to manage the performance of your system.

In addition, the Postprocessor can create Overview records which are the base for further spreadsheet processing on the workstation.

The Postprocessor can also generate a set of Postprocessor reports in XML format for display in a web browser.

**Tip:** You can view data from other systems using the ISPF interface for Postprocessor. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Postprocessor data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

## Viewing reports on spreadsheets

The **Spreadsheet Reporter** is the function in RMF that assists you in converting Postprocessor listings and Overview records into spreadsheets. In addition, it provides sample spreadsheets to help you in presenting and analyzing performance data at a glance.

## Monitoring on the workstation

**IBM z/OS Management Facility (z/OSMF)** is a web-browser based management console for z/OS. The **z/OSMF Resource Monitoring** plug-in allows cross-sysplex performance monitoring from a single point of control. From the z/OSMF task tree, you can select the following subtasks:

- The **System Status task** provides an enterprise-wide health check of all z/OS sysplexes.
- For further analysis, the **Resource Monitoring** task can graphically display RMF Monitor III metrics as well as AIX or Linux metrics by means of customizable views.

**RMF Performance Monitoring (RMF PM)** gives you the capability to construct monitoring scenarios and use them whenever necessary. This is done on the Windows workstation, and the access to the current performance data of your z/OS systems is possible without the need to have a TSO/E session running.

## Providing data for other applications

**RMF Distributed Data Server (DDS):** Applications that want to access sysplex-wide performance data, can retrieve their input from a single data server on one system in the sysplex, which gathers the data distributed on all systems in the sysplex. Therefore, this is called the Distributed Data Server (DDS).

The DDS offers an HTTP API which can access short-term data from the Monitor III as well as long-term data from the Postprocessor. An application program can send an HTTP request for selected performance data to the DDS.

For more information see [“Setting up the Distributed Data Server for z/OS” on page 19](#) and see *z/OS Resource Measurement Facility Programmer's Guide*.



**z/OS Common Information Model (CIM):** This z/OS component allows access to RMF performance data from within systems management applications. These applications (called CIM clients) invoke the CIM server, which returns z/OS performance metrics collected by RMF Monitor III.

You find information on how RMF supports CIM in *z/OS Resource Measurement Facility Programmer's Guide*.

**Tip:** You can view data from other systems using the ISPF interface for Postprocessor. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Postprocessor data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

## Resource monitoring of systems running AIX or Linux

The z/OS RMF Cross Platform (RMF XP) Distributed Data Server provides CIM-based performance data gatherers to monitor AIX on System p, Linux on System z® and Linux on System x. With RMF XP you can monitor operating systems that can run in an IBM Z environment, including the IBM z BladeCenter Extension (zBX)

You can exploit the RMF XP capabilities in the following ways:

- With the **Resource Monitoring** task of the **IBM z/OS Management Facility (z/OSMF)**, performance metrics from connected AIX or Linux systems can be displayed in the same way and together with z/OS in heterogeneous customer environments.
- Exploiters of RMF XP can send an HTTP request to retrieve performance data from the endpoints running the AIX or Linux operating systems. Requests can be directed against an instance of the RMF XP core component called GPM4CIM, as soon as it is configured and running. GPM4CIM returns the requested data as a structured XML document.

You find information on how to set up RMF XP in [Chapter 11, “Cross platform monitoring with RMF XP,” on page 211](#). It provides information on how to exploit the HTTP API of the RMF XP DDS if you want to submit requests for AIX and Linux performance data.

## Long-term performance analysis with RMF XP

To enable long-term performance analysis of AIX and Linux, you can turn on SMF recording for SMF record type 104. This record type provides one range of subtypes for each supported platform. One specific subtype is used to keep the data for one individual CIM metric category according to the CIM data model on the affected platform.

### Subtype 1-12

AIX on System p performance data

### Subtype 20-31

Linux on System x performance data

### Subtype 40-53

Linux on System z performance data

For information on the metric categories provided in the subtypes and how to request the collection of SMF record type 104 from the systems of all or selected supported platforms, refer to [Chapter 11, “Cross platform monitoring with RMF XP,” on page 211](#).

## What you can gather and report

The type of RMF session you run depends on what you need to know about your system. This section describes which sessions measure and report on each type of activity in the system and the various types of delays. Depending on the type of activity and the system environment, the reports can be either sysplex or single-system reports.

## Activity monitoring

The RMF gatherer sessions create either SMF or VSAM data that are available for reporting sessions. The following table

- displays the SMF type of all records that will be written by gatherer sessions
- indicates all Monitor III data stored in VSAM data sets
- shows all report capabilities

Table 2. Monitored activities and SMF record types								
Gathering				Activity	Reporting			
Short-term Mon III		Snapshot Mon II	Long-term Mon I		Interactive Mon III	Snapshot Mon II	Real-time Mon I	Long-term Post-processor
SMF	VSAM	SMF	SMF					
	*	79.1/2/5		Address space	*	*		*
	*		74.5	Cache	*			*
	*	79.12	73	Channel path	*	*	*	*
74.4	*			Coupling facility	*			*
	*		70.2	Cryptographic hardware	*		*	*
	*	79.9	74.1	Device	*	*	*	*
74.10	*			EADM Activity	*			*
	*			Enclave	*			
	*	79.7	77	Enqueue	*	*	*	*
			74.8	Enterprise Storage Server (ESS)				*
			74.7	FICON director				*
		79.15		IRLM long locks		*		
	*	79.14	78.3	I/O queuing	*	*	*	*
		79.11	75	Page data set		*	*	*
		79.4	71	Paging		*	*	*
74.9	*			PCIE Activity	*			*
	*	79.3	70.1	Processor	*	*	*	*
		79.6		Reserve		*		*
72.5				Serialization Delay				*
72.4	*	79.3		Storage	*	*		*
			76	System counters			*	*
74.3/6	*			UNIX	*	*		*
	*		78.2	Virtual storage	*		*	*
	*		72.3	Workload Service classes and report classes	*			*
74.2	*			XCF	*			*
	*			zFS	*			

## Delay monitoring

In addition to monitoring and reporting system activity, Monitor III reports provide various types of delay information.

## **Delayed address spaces and groups**

For each address space or group of address spaces, Monitor III reports the delay experienced for the report interval and identifies the primary cause for the delay:

- System (all jobs)
- TSO, batch, and started tasks
- ASCH and OMVS address spaces
- Service and report classes and workload groups
- Enclaves

For any service class, report class and workload group, Monitor III reports on response time breakdown, using the GROUP report to display the information.

## **Delay reasons for address spaces**

For each of the above address space groups Monitor III offers information which of the following resources or subsystems caused the delays:

- CICS and IMS subsystem
- Devices
- Enclaves
- Enqueues
- HSM
- JES
- Operator (message, mount, and quiesce)
- Processors
- XCF



---

## Part 2. Administration

Administration is what you have to do after installing RMF and before you start using it for measuring resources. The administrator creates the prerequisites that the daily user takes for granted, like setting up job control procedures and defining standard data sets for the installation.

Unlike installation, administration is typically an on-going task, though not as frequent as resource measurement. Start with administrative effort after installation, and continue as the needs of the users change with changing conditions in the system.

An RMF administrator can:

- Define **system parameters** and **access definitions** being required for smoothly running gathering functions.
- Update the **RMF cataloged procedure** to define the gatherer options, and to set default values for the SMF wrap-around data buffer, in which RMF monitors store the data they collect.
- Preallocate **reporter data sets** for Monitor I and Monitor II output, to be used instead of the default SYSOUT.
- Tailor the **options** for the Distributed Data Server.
- Synchronize **SMF recording intervals** with data collection intervals of the RMF monitors, to obtain comparable measurements.
- Define **VSAM data sets** for storing data from Monitor III gatherer sessions.
- Define the **parmlib members** for the RMF monitors. These determine the default options for the respective monitors, so their contents should be agreed upon between administrator and performance analyst. A parmlib member for each monitor is provided with RMF, but can be modified as required. The options that can be included in the members are described in detail in [Data gathering reference in z/OS Data Gatherer User's Guide](#) and [Part 5, "Reporting reference," on page 55](#).
- Specify the default **Monitor III Options, Option Sets, and Reports** to be shared among RMF users.

Most of these tasks have to be performed only once during the initial customization of RMF according to the requirements of your installation. An ongoing task is the migration from one release to the next one. Therefore, these migration steps are described separately to highlight the differences between releases and the actions which might be required to ensure that you exploit the new functions that RMF is offering with each new release.

In addition, this chapter points to installation steps that have to be performed individually by everybody who wants to exploit the **workstation-based functions** that are available with RMF.



---

## Chapter 2. Setting up RMF functions

After installing RMF and configuring the z/OS Data Gatherer, you have to perform certain administration tasks:

- Tasks for migrating to the release described in this document
- Steps for activating RMF functions
- Data sets that you can preallocate, and how to specify them in the start-up procedure
- Tailoring of the options for the Distributed Data Server
- Synchronization with SMF data recording
- Parmlib members that contain your system's standard gatherer options
- Considering reporting aspects
- Installation of workstation functions

---

### Migrating from previous releases

You can find the information about changes in RMF that might require migration actions. All required or optional migration actions for RMF are detailed in the *z/OS Upgrade Workflow*.

#### **AT-TLS configuration for the RMF Distributed Data Server (DDS)**

By default, in RMF V2R4 and later, AT-TLS is required for incoming communication with the DDS. An active Policy Agent definition is needed. You can address this change before installing z/OS 3.1. IBM Health Checker for z/OS check RMF\_DDS\_ATTLS is provided for this action.

**Note:** To define health checks and to read the Policy Agent definitions, the GPMSEVER user ID needs permission. See [“Prerequisites for IBM Health Checker for z/OS” on page 27](#).

#### **Removed DDS options**

In RMF 3.1 and later, the following DDS options have been removed:

- DM\_PORT
- DM\_ACCEPTHOST
- MAXSESSIONS\_INET
- SESSION\_PORT

#### **Removal of RMF Client/Server (RMFCS) enabling**

RMFCS requires the ISPF Workstation Agent (WSA), also known as the ISPF client/server component. z/OS V2R5 or later removes support for WSA, and you must remove any dependencies on WSA from your system. You can address this change before installing z/OS V2R5 or later.

#### **RMF structural changes**

In RMF V2R4, the RMF product is restructured into the Data Gatherer and Reporter components. Starting from z/OS V2R5, the Data Gatherer component is packaged and delivered as a separate FMID, and the term *RMF* refers to the RMF Reporter component. With the z/OS Data Gatherer now included in the z/OS base, the RMF installation procedure and licensing model are changed.

- The RMF load modules reside in the library SYS1.SERBLNKE, which is renamed from SYS1.SERBLINK. To activate RMF, you must change the SERBLINK library to SERBLNKE in the link list and the APF list.
- PDS data sets SERBLINK and AERBMOD1 are converted to PDSE data sets SERBLNKE and AERBMOD2, respectively. You can run the job in SAMPLIB member ERB00CLN to remove the DDDEF SMP/E entries and data sets for SERBLINK and AERBMOD1.
- RMF must be licensed on all systems in the sysplex. RMF must be licensed on all platforms or unpredictable behavior will occur.

### Upgrading DDS to a newer version

From 3.1, two types of Data Distributed Servers (DDS) are available. The first one, the legacy version, can be found under the cataloged procedure GPMSESV1. Similarly, the newer version can be found under the cataloged procedure GPMSESV. By default, the cataloged procedures are stored as follows:

DDS types	Data sets
Newer version	SYS1.PROCLIB(GPMSESV)
Legacy version	SYS1.PROCLIB(GPMSESV1)

If you plan to migrate to the new version of DDS, you need to update the procedure that is used to run it. You must use the GPMSESV procedure from the shipped version and customize the parameters, such as the JAVA home location or parmLib member, to fit into your specific environment. In order to run the newer version of DDS, you must use IBM Semeru Runtimes 17 or IBM Semeru Runtimes 21. For more details, refer to the [IBM Semeru support page](#).

**Note:** If you want to continue with the legacy version, use the legacy cataloged procedure GPMSESV1.

The newer version of DDS provides features similar to the legacy version without making any disruptive changes. As such, it can be used as a seamless drop-in replacement for the legacy version of DDS.

## Customizing the system environment

This section describes the required tasks for customizing the system environment in order to ensure a proper functioning of RMF on this system.

### Define RMF library authorization

All RMF load modules reside in the library SYS1.SERBLNKE. If you are activating RMF for the first time, you must define SYS1.SERBLNKE as an APF-authorized library. You can choose to do it either with or without an IPL.

To activate RMF with an IPL:

1. Add the SERBLNKE library to the link list.
2. Add the SERBLNKE library to the APF list.
3. IPL the system.

To activate RMF without an IPL:

1. Add the SERBLNKE library to a dynamic link list.
2. Change the APF format to dynamic, if it is not already dynamic.
3. Add the SERBLNKE library to the dynamic APF list.
4. Issue SETPROG commands to make the changes effective.

For more information about adding libraries to the link and APF lists with or without an IPL, see *z/OS MVS Initialization and Tuning Reference*. For information about the syntax of the SETPROG command, see *z/OS MVS System Commands*.

### Ensure linkage to language environment

Two components of RMF, the Postprocessor and the Distributed Data Server (GPMSESV, GPM4CIM), use the services of the Language Environment®. They need access to the data set SYS1.SCEERUN. GPM4CIM additionally needs access to data set SYS1.SCEERUN2. There are two ways of providing this access:

- The recommended way is to include data sets SYS1.SCEERUN and SYS1.SCEERUN2 in the LINKLST of the system on which RMF is running. No further action is then required when starting the separate components.



- If you do not wish to include SYS1.SCEERUN or SYS1.SCEERUN2 in the LINKLST, you must specify these data sets as the STEPLIB of the job step that starts the component.

You can use the following JCL members to do this: for the Postprocessor use ERBSAMPP in SYS1.SAMPLIB and for the Distributed Data Server use GPMSEVER or GPM4CIM in SYS1.PROCLIB.

## Ensuring common storage tracking

To ensure that the Common Storage report (STORC) provides complete data, it is required that VSM common storage tracking is active. This can be achieved by issuing the command:

```
SET DIAG=01
```

The defaults in the parmlib member DIAG01 are:

```
VSM TRACK CSA(ON) SQA(ON)
```

If VSM common storage tracking is not active, one of the messages ERB617I, ERB618I, or ERB619I will indicate that the report can be incomplete for some jobs.

## Specifying access definitions

Read the following subtopics for information on how to grant the required access rights for setting up RMF:

- [“Define RMF user IDs and ensure access to z/OS UNIX System Services” on page 15](#)
- [“Assign started task procedures to user IDs” on page 15](#)
- [“Considerations for z/OS UNIX level of security” on page 16](#)
- [“Ensure RACF access to the Distributed Data Server \(GPMSEVER and GPM4CIM\)” on page 16](#)
- [“Ensure READ access for GPM4CIM to the BPX.SMF profile” on page 17](#)
- [“Configuring PassTicket support for the Distributed Data Server” on page 17](#)
- [“Controlling access to RMF data for the sysplex data services” on page 18](#)
- [“Prerequisites for exploiting the SMF data set support of the Postprocessor HTTP API” on page 20](#)
- [“Setting up secure communication for the Distributed Data Server” on page 21](#)

## Define RMF user IDs and ensure access to z/OS UNIX System Services

At first, you should define a user ID that is associated with RMF Distributed Data Server.

Because RMF started tasks use UNIX System Services or resources, the procedures must be defined to the security program. For example, the RMF Distributed Data Server (GPMSEVER) must be defined so that it can obtain the correct data and can use the required UNIX system services.

The following example contains RACF® commands to define an RMF user ID, give it an OMVS user ID (UID), and designate the root directory as its home directory:

```
ALG omvsgrp OMVS(GID(2))
ADDUSER GPMSEVER DFLTGRP(omvsgrp) OMVS(UID(nnn) HOME('/'))
```

In the above example, nnn can be any number, but must not be zero. For details, see *z/OS UNIX System Services Planning*.

## Assign started task procedures to user IDs

RMF provides four different started tasks, of which two are associated with the Distributed Data Server. The other two tasks are related to data gathering and are discussed in *z/OS Data Gatherer User's Guide*. In

this step, you define the two Data Server started tasks to RACF and assign them to the RMF user IDs that you created in the previous step.

```
RDEFINE STARTED GPMSEVE.* STDATA(USER(GPMSEVE) TRUSTED(YES))
RDEFINE STARTED GPM4CIM.* STDATA(USER(GPMSEVE) TRUSTED(YES))
SETROPTS RACLIST(STARTED) REFRESH
```

The Distributed Data Server uses the IWMSRSRG service to register itself for sysplex routing. This service is an authorized service. Therefore, the calling DDS user ID GPMSEVE must either have the attribute TRUSTED or must have explicit READ access to the BPX.WLMSEVER Facility. Otherwise, the DDS cannot propagate hostname and port number for potential exploiters. If you did not mark the GPMSEVE task as TRUSTED(YES), as shown in the example above, you must grant access for this task to the RACF Facility BPX.WLMSEVER as shown below:

```
PERMIT BPX.WLMSEVER CLASS(FACILITY) ID(GPMSEVE) ACCESS(READ)
```

## Considerations for z/OS UNIX level of security

If the BPX.DAEMON FACILITY resource is defined, your system has z/OS UNIX security and can exercise more control over your superusers.

Because the RMF distributed data server runs as a daemon, it must have access to the BPX.DAEMON facility, and all programs loaded by GPMSEVE, GPM4CIM, and GRB3XDRS must be defined to PROGRAM CONTROL. In addition, access to the BPX.SERVER and BPX.STOR.SWAP facilities must be defined for user ID GPMSEVE.

The minimum definitions for the RMF Distributed Data Server are listed in this example. You can use more generic definitions.

```
PERMIT BPX.DAEMON CLASS(FACILITY) ID(GPMSEVE) ACCESS(READ)
PERMIT BPX.SERVER CLASS(FACILITY) ID(GPMSEVE) ACCESS(READ)
PERMIT BPX.STOR.SWAP CLASS(FACILITY) ID(GPMSEVE) ACCESS(READ)
RDEFINE PROGRAM GPM* ADDMEM('SYS1.SERBLNKE'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM ERB* ADDMEM('SYS1.SERBLNKE'//NOPADCHK) UACC(READ)
RALTER PROGRAM ERB* ADDMEM('SYS1.SGRBLINK'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM CEEBINIT ADDMEM('CEE.SCEERUN'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM IEEMB878 ADDMEM('SYS1.LINKLIB'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM CELHV003 ADDMEM('SYS1.SCEERUN2'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM C128 ADDMEM('SYS1.SCEERUN2'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM CELHDCPP ADDMEM('SYS1.SCEERUN2'//NOPADCHK) UACC(READ)
RDEFINE PROGRAM GRB* ADDMEM('SYS1.SGRBLINK'//NOPADCHK) UACC(READ)
SETROPTS WHEN(PROGRAM) REFRESH
SETROPTS RACLIST(FACILITY) REFRESH
```

## Ensure READ access for RMF Language Environment applications under Program Control to IEAABD.DMPAUTH

The RMF Distributed Data Server (GPMSEVE and GPM4CIM) and RMF Postprocessor can be configured as program controlled Language Environment applications.

If RACF resource IEAABD.DMPAUTH is defined on your system and you want to ensure that the generation of dumps are not suppressed, users assigned to these applications must be permitted to resource IEAABD.DMPAUTH in the FACILITY class.

```
PERMIT IEAABD.DMPAUTH CLASS(FACILITY) ID(user) ACCESS(READ)
```

where *user* is the user ID assigned to the RMF Language Environment application.

## Ensure RACF access to the Distributed Data Server (GPMSEVE and GPM4CIM)

The RMF Distributed Data Server (GPMSEVE) uses the RACF application name GPMSEVE. If the RACF Application class (APPL) is active and the GPMSEVE application is protected by a profile in this class,

a user must have read access to this profile. Otherwise RACF does not allow the user to access the GPMSEVER application.

Correspondingly, the GPM4CIM component of the DDS provided by RMF XP uses the RACF application name GPM4CIM. If this application is protected by a profile in the same way as described for GPMSEVER, you also need to provide read access to this application.

The minimum definitions for the DDS for both GPMSEVER and GPM4CIM are listed in this example. You can also use more generic definitions.

```
RDEFINE APPL GPMSEVER UACC(READ)
RDEFINE APPL GPM4CIM UACC(READ)
```

## Ensure READ access for GPM4CIM to the BPX.SMF profile

To write SMF record type 104, the GPM4CIM started task needs at least READ access to the RACF BPX.SMF profile of the FACILITY class, specified with your security authorization facility (SAF) product. See [“How to authorize GPM4CIM to write SMF record type 104” on page 219](#) for a RACF example.

## Configuring PassTicket support for the Distributed Data Server

If the RMF Distributed Data Server (DDS) is configured to require authentication (see [“Setting up the Distributed Data Server for z/OS” on page 19](#)), instead of a user ID and a password, a user ID and a PassTicket can be supplied.

The PassTicket key can be defined as either a DES key for legacy PassTickets or an HMAC key for enhanced PassTickets, as described in [Using PassTickets in z/OS Security Server RACF Security Administrator's Guide](#). IBM strongly recommends the use of enhanced PassTickets.

A PassTicket is validated against an application name. The RACF application name of the DDS is GPMSEVER. Before creating the necessary application profile, the RACF class PTKTDATA must be activated:

```
SETROPTS CLASSACT(PTKTDATA)
SETROPTS RACLIST(PTKTDATA)
```

Define a DDS application profile with an associated encryption key:

```
RDEFINE PTKTDATA GPMSEVER SSIGNON(KEYLABEL(<key>))
```

where <key> is a user-supplied 16-digit value used to generate the PassTicket. You can specify a value of your choice. Valid characters are 0 - 9 and A - F.

The user calling the DDS must have RACF permissions in order to generate PassTickets. Define a profile in the PTKTDATA class controlling access to the PassTicket services and explicitly set the universal access authority to NONE:

```
RDEFINE PTKTDATA IRRPTAUTH.GPMSEVER.* UACC(NONE)
```

The user ID connecting to the DDS needs update permission to the newly created profile:

```
PERMIT IRRPTAUTH.GPMSEVER.* CLASS(PTKTDATA) ID(<user>) ACCESS(UPDATE)
```

where <user> is the user ID connecting to the DDS. In a CIM environment, this is the user ID associated to the CIM server started task.

Finally you must activate the changes:

```
SETROPTS RACLIST(PTKTDATA) REFRESH
```

## Controlling access to RMF data for the sysplex data services

Users of applications that call sysplex data services to access data from the RMF Sysplex Data Server's SMF buffer must have RACF authorization.

RMF has defined a RACF resource profile of class FACILITY called ERBSDS.SMFDATA to control access to SMF data in the RMF Sysplex Data Server's SMF buffers. Every user accessing the SMF records in this SMF buffer must be authorized.

### ERBSDS.SMFDATA

controls access to SMF data in the SMF buffer by the ERBDSQRY service (Query Available Sysplex SMF Data) or the ERBDSREC service (Request Sysplex SMF Record Data). One application using these services is the RMF Postprocessor, if the SMF records are retrieved directly from the SMF buffers.

Also, if you want to exploit the DDS HTTP API (see *z/OS Resource Measurement Facility Programmer's Guide*), you must grant read access to the ERBSDS.SMFDATA profile for the GPMSEVER user ID, which is assigned to the DDS started task GPMSEVER as described in [“Assign started task procedures to user IDs” on page 15](#).

Another application using the mentioned services is the data gatherer of the Monitor II ILOCK command.

RMF does not perform mandatory access checks for Monitor II data (accessed by the ERB2XDGS service) and Monitor III set-of-samples data (accessed by the ERB3XDRS service). If you want to protect this data, define RACF resource profiles called ERBSDS.MON2DATA and ERBSDS.MON3DATA in the FACILITY class. If you do not define a profile, RACF does not restrict any user ID from invoking the mentioned sysplex data services:

### ERBSDS.MON2DATA

controls access to Monitor II SMF type 79 data by the ERB2XDGS and ERBSMFI services. For example, a Monitor II reporter session invokes this service when reporting about another system in the sysplex.

### ERBSDS.MON3DATA

controls access to Monitor III set-of-samples data by the ERB3XDRS service. For example, the Distributed Data Server as server address space for users of RMF PM calls this service. If this profile is defined, the TSO user ID of RMF PM users must be authorized. Also, a Monitor III reporter session calls this service when sysplex-wide reports are requested.

If the same group of users takes advantage of all RMF sysplex data services, you can work with the generic profile ERBSDS.\*.

## Security server example

This information unit presents a security server coding example using RACF to achieve the required access and invocation control as described in [“Controlling access to RMF data for the sysplex data services” on page 18](#).

1. To activate the resource class FACILITY:

```
SETROPTS CLASSACT(FACILITY) GENCMD(FACILITY) GENERIC(FACILITY)
```

2. To define the profile:

```
RDEFINE FACILITY profile UACC(NONE)
```

where *profile* is one of the following profile names:

- ERBSDS.SMFDATA (mandatory)
- ERBSDS.MON2DATA (optional)
- ERBSDS.MON3DATA (optional)
- or the generic profile name ERBSDS.\*.

3. To grant the user ID of the application program READ access:

```
PERMIT profile CLASS(FACILITY) ID(userid) ACC(READ)
```

#### 4. Activate changes:

```
SETROPTS RACLIST(FACILITY) REFRESH
```

## Setting up the Distributed Data Server for z/OS

Applications that want to access sysplex-wide performance data, can retrieve their input from a single data server on one system in the sysplex, which gathers the data distributed on all systems in the sysplex. Therefore, this is called the Distributed Data Server (DDS).

The DDS offers an HTTP API which can access short-term data from the Monitor III as well as long-term data from the Postprocessor. An application program can send an HTTP request for selected performance data to the DDS.

**Note:** Equivalent to the DDS component GPMSEVER, which gathers performance data from z/OS systems in a sysplex, RMF XP provides a second DDS component called GPM4CIM, which you can use to gather performance data from AIX and Linux operating systems. For general and setup information about RMF XP refer to [Chapter 11, “Cross platform monitoring with RMF XP,”](#) on page 211. *z/OS Resource Measurement Facility Programmer's Guide* provides information about how to exploit the HTTP API of GPM4CIM if you want to submit requests for AIX and Linux performance data. The remaining information in this topic is about GPMSEVER for z/OS only.

Exploiters of Monitor III performance data provided by the DDS are, among others, z/OS Capacity Provisioning, z/OSMF, or RMF PM. If you want to monitor systems in a sysplex, you must set up a Distributed Data Server (DDS) host session on the system in the sysplex with the highest RMF release. If you want to monitor several sysplexes, each one needs to have an active DDS.

To start the DDS, RMF provides the cataloged procedure stored in SYS1.PROCLIB(GPMSEVER):

```
//GPMSEVER PROC ROOT='/usr/lpp/gpm',
//  JAVA='/usr/lpp/java/J17.0_64',
//  MEMBER=00,
//  OUTCLS='*',
//  JAVAVR='17',
//  JAVALGLV='',
//  REGSIZE='0M',
//  LEPRM=''
...
//PMJAVA EXEC PGM=JVMLDM&JAVAVR,REGION=&REGSIZE,
//  PARM='&LEPRM/&JAVALGLV'
...
//GPMPPJCL DD DISP=SHR,DSN=SYS1.SERBPWSV(GPMPPJCL)
...
```

The memory requirements for the DDS are dependent on several factors:

- Number of Cache Slots
- Number of Resources in the Sysplex
- Number of DDS clients and so on.

**Note:** DDS provides support for HTTP compression and zEnterprise Data Compression (zEDC). For more information about zEDC, refer to the [IBM Semeru Runtime Certified Edition for z/OS](#) documentation.

### Prerequisites for exploiting the Monitor III HTTP API

On those systems where you want to monitor short-term Monitor III data, you need to start the Monitor III gatherer with identical MINTIME and SYNC options (see [Description of Monitor III data gatherer options](#) in *z/OS Data Gatherer User's Guide*).

Also make sure, that the following prerequisites are met on your z/OS host:

- Unix System Services must be configured in *full function mode*.

- TCP/IP under Unix System Services must be configured and fully initialized.

## Prerequisites for exploiting the Postprocessor HTTP API

To get access to Postprocessor data provided by the DDS, the GPMSEVERE started task points to a Postprocessor job called GPMPPJCL. A JCL template for this job is stored in SYS1.SERBPWSV(GPMPPJCL).

You must adapt or replace the GPMPPJCL member to suit your installation, ensuring that the DDS is able to run RMF Postprocessor jobs. If you do not want to request Postprocessor data with the DDS, you can omit the GPMPPJCL DD card from the GPMSEVERE started task.

By default, the RMF Postprocessor retrieves data from all available intervals in the SMF buffer. You can modify the GPMPPJCL template to retrieve only SMF data from the most current interval by adding a job step similar to the following GETSMF sample job step:

```
//GETSMF EXEC PGM=ERBAPPL,PARM='?/*70:78'
//SMFDATA DD DISP=(NEW,PASS),UNIT=SYSDA,SPACE=(CYL,(2,2))
//ERBLIST DD SYSOUT=*
```

The example job step retrieves data from SMF record types 70 through 78 for the most current interval, indicated by the question mark used for the start time. If you use ERBAPPL in your GPMPPJCL job, you must add an MFINPUT DD card to the Postprocessor job step RMFPP in GPMPPJCL with a backward reference to the SMFDATA DD card of the GETSMF job step, for example:

```
//MFINPUT DD DISP=(OLD,PASS),DSN=*.GETSMF.SMFDATA
```

## GPMPPJCL template

```
/*JOBPARM SYSAFF=*
//RMFPP EXEC PGM=ERBRMFPP
//MFPMGDS DD SYSOUT=*
//XPRPTS DD SYSOUT=*
//XPXSRPTS DD SYSOUT=*
//XPOVWRPT DD SYSOUT=*
//SYSOUT DD SYSOUT=*
//SYSIN DD *
```

Note that the Postprocessor API functionality is only available with JES2 installed. Omit the GPMPPJCL ddname in a JES3 environment.

The complete DDS HTTP API is described in *z/OS Resource Measurement Facility Programmer's Guide*.

## Prerequisites for exploiting the SMF data set support of the Postprocessor HTTP API

To get access to preallocated SMF data from data sets or log streams with the Postprocessor HTTP API provided by the DDS, the GPMSEVERE started task must point to a Postprocessor job with its GPMPPJCL DD card. The Postprocessor JCL provided here should be derived from the JCL template stored in SYS1.SERBPWSV(GPMPPJV2).

You must adapt this GPMPPJV2 member to suit your installation (like with GPMPPJCL) and additionally, you must provide a user ID for the USER parameter of the JOB card. The user ID used at this place depends on the setting of the HTTP\_NOAUTH option in your GPMSEVERE started task.

- Distributed Data Server running with HTTP\_NOAUTH(\*) or HTTP\_NOAUTH(ip-addr):

Provide a universal user ID, GPMUID, with the USER parameter on the JOB statement (USER=GPMUID); here, *universal* means that the user ID can be used by all exploiters of the DDS (by all authorized exploiters in the case of HTTP\_NOAUTH(ip-addr) to access the SMF data sets. The user ID GPMUID may be empty, in which case the Postprocessor job runs under the authority of the GPMSEVERE started task user ID.

- Distributed Data Server running with HTTP\_NOAUTH():

Leave the `//*UID` line in the GPMPPJV2 template unchanged in this case. The Distributed Data Server takes the user ID which is used for authorization to the DDS to substitute the user ID in the `USER` parameter.

The GPMSEVER user ID needs permission to submit jobs on behalf of GPMUID and it needs `UPDATE` access to the job output on the JES spool. The following example shows RACF commands which allow these actions:

```
RDEFINE SURROGAT GPMUID.SUBMIT UACC(NONE) OWNER(GPMUID)
PERMIT GPMUID.SUBMIT CLASS(SURROGAT) ID(GPMSEVER) ACCESS(READ)
SETROPTS RACLIST(SURROGAT) REFRESH

RDEFINE JESSPOOL nodename.GPMUID.GPMSEVER.** UACC(NONE) OWNER(GPMUID)
PERMIT nodename.GPMUID.GPMSEVER.** CLASS(JESSPOOL) ID(GPMSEVER) ACCESS(UPDATE)
SETROPTS RACLIST(JESSPOOL) REFRESH
```

In order to use the job deletion functionality implemented with the `joboutdel` request parameter, a RACF profile in the JESJOBS class has to be defined like in the following example for the user GPMUID and the Postprocessor job GPMDDSP started by GPMSEVER:

```
RDEFINE JESJOBS PURGE.nodename.GPMUID.GPMDDSP UACC(NONE)
PERMIT PURGE.nodename.GPMUID.GPMDDSP CLASS(JESJOBS) ID(GPMUID) ACC(ALTER)
```

## Setting up secure communication for the Distributed Data Server

This topic describes how to enable secure communication with the DDS using Application Transparent - Transport Layer Security (AT-TLS).

**Note:** Using AT-TLS to secure communication with the DDS affects all DDS clients. If AT-TLS is used to enable secure communication with the DDS, all DDS clients, for example, the RMF CIM provider, have to use secure communication with the DDS. Unsecure communication with the DDS is no longer possible and will fail.

Before you can start with the DDS setup, you must enable the Policy Agent for AT-TLS. Information about setting up AT-TLS communication is provided in *z/OS Communications Server: IP Configuration Guide*.

For information about policies, see

- [Policy Agent and policy applications](#)
- [Application Transparent Transport Layer Security Data Protection](#)

The example in [Figure 2 on page 22](#) uses a RACF key ring. The key ring must contain a valid default certificate, otherwise the certificate label to be used must be specified using the `TTLSEnvironmentAdvancedParms ServerCertificateLabel`. The DDS server started task user ID (e.g. GPMSEVER) must have access to the key ring. Consider using a certificate from a trusted Certificate Authority (CA), since this may be required by RMF DDS Clients.

After you have completed your Policy Agent configuration, use the `REFRESH` command to refresh the Policy Agent configuration:

```
MODIFY PAGENT,REFRESH
```

For more information, see *z/OS Security Server RACF Security Administrator's Guide*. For other security management products, refer to your security product documentation.

### RMF Distributed Data Server AT-TLS rule

The following example shows a rule that enables secure communication with the DDS.

```

# RMF Distributed Data Server Rule
TTLSRule
{
  LocalPortRange      8803
  Jobname              GPMSERVE
  Direction            Inbound
  Priority              1
  TTLSGroupActionRef   DDSServerGRP
  TTLSEnvironmentActionRef DDSServerENV
}
TTLSGroupAction      DDSServerGRP
{
  TTLSEnabled         On
  Trace               1
}
TTLSEnvironmentAction DDSServerENV
{
  HandshakeRole        Server
  TTLSKeyringParms
  {
    Keyring            DDSServerKeyring
  }
  TTLSEnvironmentAdvancedParms
  {
    ServerCertificateLabel RMFDDS
    SSLv2                 Off
    SSLv3                 Off
    TLSv1                 Off
    TLSv1.1               Off
    TLSv1.2               On
  }
}
}

```

Figure 2. Sample Policy Agent policy for secure communication setup for the DDS

#### **TTLSRule: Jobname**

The name value specifies the job name of the application. GPMSERVE is the job name of the DDS.

#### **TTLSRule: LocalPortRange**

The local port the application is bound to for this rule's action to be performed. 8803 is the default HTTP Port of the DDS.

#### **TTLSRule: Direction**

Specifies the direction the connection must be initiated from for this rule's action to be performed. In this example, Inbound is specified, which means that the rule applies to connection requests that arrive to the local host.

#### **TTLSRule: Priority**

An integer value in the range 1 - 2000000000 that represents the priority associated with the rule. The highest priority value is 2000000000.

When using multiple rules for the DDS server, the more specific the rule, the higher its priority should be. Generic rules without detailed specifications of the incoming connections should have a low priority.

#### **TTLSEnvironmentAction: HandshakeRole**

Specifies the SSL handshake role to be taken for connections in this AT-TLS environment. In this example, Server is specified which means that the SSL handshake is performed as a sever.

#### **TTLSKeyringParms: Keyring**

Specifies the z/OS UNIX path and file name of the key database file, the ring name of the SAF key ring, or the name of the z/OS PKCS #11 token. In this example, the RACF key ring DDSServerKeyring is specified.

#### **TTLSEnvironmentAdvancedParms: ServerCertificateLabel**

Specifies the label of the certificate for a server application to authenticate the server. In this example, the DDS server certificate with the label RMFDDS is used.

#### **TTLSEnvironmentAdvancedParms: SSLv2**

Specifies the state of the SSL Version 2 protocol. In this example, Off is specified, which means that the SSL Version 2 protocol is disabled.



**TTLSEnvironmentAdvancedParms: SSLv3**

Specifies the state of the SSL Version 3 protocol. In this example, *Off* is specified, which means that the SSL Version 3 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1**

Specifies the state of the TLS Version 1 protocol. In this example, *Off* is specified, which means that the TLS Version 1 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1.1**

Specifies the state of the TLS Version 1.1 protocol. In this example, *Off* is specified, which means that the TLS Version 1.1 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1.2**

Specifies the state of the TLS Version 1.2 protocol. In this example, *On* is specified, which means that the TLS Version 1.2 protocol is enabled.

## AT-TLS rule for clients, using secure communication with the RMF Distributed Data Server

The following example shows a rule to enable a client running on z/OS to establish secure communication with the DDS. The RACF key ring *DDSClientKeyring* must contain the server certificate that is used by the RMF Distributed Data Server rule.

When using a server certificate from a trusted certificate authority (CA), the virtual RACF CA key ring *\*AUTH\*/\** can be used.

```
# RMF Distributed Data Server Client Rule
TTLRule
{
  RemotePortRange      8803
  RemoteAddr           1.0.0.0
  Direction            Outbound
  TTLGroupActionRef    DDSClientGRP
  TTLEnvironmentActionRef DDSClientENV
}
TTLGroupAction        DDSClientGRP
{
  TTLEnabled           On
  Trace               1
}
TTLEnvironmentAction  DDSClientENV
{
  HandshakeRole        Client
  TLSKeyringParms
  {
    Keyring            DDSClientKeyring
  }
  TTLEnvironmentAdvancedParms
  {
    SSLv2              Off
    SSLv3              Off
    TLSv1              Off
    TLSv1.1            Off
    TLSv1.2            On
  }
}
}
```

Figure 3. Sample Policy Agent rule for secure communication for DDS clients

**TTLRule: RemoteAddr**

The remote IP address specification that must match for this rule's action to be performed—that is, the IP address of the DDS to which the client is connecting.

**TTLRule: RemotePortRange**

The remote port to which the application must be connecting for this rule's action to be performed. The default HTTP port of the DDS is 8803.

**TTLRule: Direction**

Specifies the direction from which the connection must be initiated to perform this rule's action. In this example, Outbound is specified, which means that the rule applies to connection requests that are initiated by the application.

**TTLSEnvironmentAction: HandshakeRole**

Specifies the SSL handshake role to be taken for connections in this AT-TLS environment. In this example, Client is specified, which means that the SSL handshake is performed as a client.

**TTLSEnvironmentParms: Keyring**

Specifies the z/OS UNIX path and file name of the key database file, the ring name of the SAF key ring, or the name of the z/OS PKCS #11 token. In this example, the RACF key ring DDSClientKeyring is specified.

**TTLSEnvironmentAdvancedParms: SSLv2**

Specifies the state of the SSL Version 2 protocol. In this example, Off is specified, which means that the SSL Version 2 protocol is disabled.

**TTLSEnvironmentAdvancedParms: SSLv3**

Specifies the state of the SSL Version 3 protocol. In this example, Off is specified, which means that the SSL Version 3 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1**

Specifies the state of the TLS Version 1 protocol. In this example, Off is specified, which means that the TLS Version 1 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1.1**

Specifies the state of the TLS Version 1.1 protocol. In this example, Off is specified, which means that the TLS Version 1.1 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1.2**

Specifies the state of the TLS Version 1.2 protocol. In this example, On is specified, which means that the TLS Version 1.2 protocol is enabled.

**RMF Distributed Data Server AT-TLS rule with client certificate authentication**

The DDS supports the communication scenario in which a client authenticates itself via a client certificate that is associated with a RACF user ID. No user ID/password authentication is performed in this case. To enable this communication mode, the CLIENT\_CERT(ACCEPT) option must be set in the DDS parmlib member.

The following example shows a rule that uses a RACF key ring. The RACF key ring DDSServerKeyring must contain the server certificate that is used by the rule. The server certificate must either be the default certificate, or the certificate label to be used must be specified using the TTLSEnvironmentAdvancedParms ServerCertificateLabel. The DDS server started task user ID (for instance, GPMSERVE) must have access to the key ring. Consider using a certificate from a trusted certificate authority (CA), since this may be required by RMF DDS clients.

The DDSServerKeyring must also contain the client certificate associated with a RACF user ID. If your access to Monitor III data is protected by RACF resource profile ERBSDS.MON3DATA, the associated user ID must have READ access.

For more information, see *z/OS Security Server RACF Security Administrator's Guide*.

```

# RMF Distributed Data Server Rule
TTLRule
{
  LocalPortRange      8803
  Jobname              GPMSERVE
  RemoteAddr          1.0.0.0
  Direction            Inbound
  TTLGroupActionRef    DDServerClientCertGRP
  TTLEnvironmentActionRef DDServerClientCertENV
  Priority              2
}
TTLGroupAction        DDServerClientCertGRP
{
  TTLEnabled          On
  Trace                1
}
TTLEnvironmentAction  DDServerClientCertENV
{
  HandshakeRole        ServerWithClientAuth
  TTLKeyringParms
  {
    Keyring              DDServerKeyring
  }
  TTLEnvironmentAdvancedParms
  {
    ClientAuthType        SAFCheck
    ServerCertificateLabel RMFDDS
    SSLv2                  Off
    SSLv3                  Off
    TLSv1                  Off
    TLSv1.1                Off
    TLSv1.2                On
  }
}
}

```

Figure 4. Sample Policy Agent rule for secure communication with client certificate authentication for the DDS

#### **TTLRule: Jobname**

The name value specifies the job name of the application. GPMSERVE is the job name of the DDS.

#### **TTLRule: LocalPortRange**

The local port to which the application is bound for this rule's action to be performed. The default HTTP port of the DDS is 8803.

#### **TTLRule: RemoteAddr**

The remote IP address specification that must match for this rule's action to be performed. You can use this option to specify that this rule applies only to a subset of client connections, where the clients are running on a specific system. When using multiple rules for the DDS server, be sure to use the TTLRule Priority setting.

#### **TTLRule: Priority**

An integer value in the range 1 - 2000000000 that represent the priority associated with the rule. The highest priority value is 2000000000.

When using multiple rules for the DDS server, the more specific a rule, the higher its priority should be.

#### **TTLRule: Direction**

Specifies the direction from which the connection must be initiated for this rule's action to be performed. In this example, Inbound is specified, which means that the rule applies to connection requests that arrive at the local host.

#### **TTLEnvironmentAction: HandshakeRole**

Specifies the SSL handshake role to be taken for connections in this AT-TLS environment. In this example, ServerWithClientAuth is specified, which means that the SSL handshake is performed as a sever, and a client certificate is required.

#### **TTLKeyringParms: Keyring**

Specifies the z/OS UNIX path and file name of the key database file, the ring name of the SAF key ring, or the name of the z/OS PKCS #11 token. In this example, the RACF key ring DDServerKeyring is specified.

**TTLSEnvironmentAdvancedParms: ClientAuthType**

Specifies the type of client certificate validation to be performed for connections in this AT-TLS environment. Client certificates are requested only if HandshakeRole is set to ServerWithClientAuth. That option needs to be set to SAFCheck, which requires the client to present a certificate, to perform a client certificate validation and to have a client certificate which is associated with an user ID defined to the security product. If the option is not set to SAFCheck, the DDS will not use client certificate authentication.

**TTLSEnvironmentAdvancedParms: ServerCertificateLabel**

Specifies the label of the certificate for a server application to authenticate the server. In this example, the DDS Server certificate with the label RMFDDS is used.

**TTLSEnvironmentAdvancedParms: SSLv2**

Specifies the state of the SSL Version 2 protocol. In this example, Off is specified, which means that the SSL Version 2 protocol is disabled.

**TTLSEnvironmentAdvancedParms: SSLv3**

Specifies the state of the SSL Version 3 protocol. In this example, Off is specified, which means that the SSL Version 3 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1**

Specifies the state of the TLS Version 1 protocol. In this example, Off is specified, which means that the TLS Version 1 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1.1**

Specifies the state of the TLS Version 1.1 protocol. In this example, Off is specified, which means that the TLS Version 1.1 protocol is disabled.

**TTLSEnvironmentAdvancedParms: TLSv1.2**

Specifies the state of the TLS Version 1.2 protocol. In this example, On is specified, which means that the TLS Version 1.2 protocol is enabled.

**AT-TLS for clients, using secure client certificate authentication with the RMF Distributed Data Server**

The following example shows a rule to enable a client running on z/OS to establish secure communication to the DDS with client certificate authentication. No user ID/password authentication is performed. The RACF key ring DDSClientKeyring must contain the server certificate used by the RMF Distributed Data Server rule and the client certificate. The client certificate must either be the default certificate, or the certificate label to be used must be specified using the TTLSEnvironmentAdvancedParms CertificateLabel. Also, the client certificate must be associated with a RACF user ID. If your access to Monitor III data is protected via RACF resource profile ERBSDS.MON3DATA, the associated user ID must have READ access.

```
# RMF Distributed Data Server Client Rule for Client Certificate Authentication
TTLSRule
{
  RemotePortRange      8803
  RemoteAddr           1.0.0.0
  Direction            Outbound
  TTLSGroupActionRef   DDSClientCertGRP
  TTLSEnvironmentActionRef DDSClientCertENV
}
TTLSGroupAction
{
  TTLSEnabled          On
  Trace                1
}
TTLSEnvironmentAction DDSClientCertENV
{
  HandshakeRole        Client
  TTLSKeyringParms
  {
    Keyring             DDSClientKeyring
  }
  TTLSEnvironmentAdvancedParms
  {
    CertificateLabel     RMFDDSCIENT
  }
}
}
```

Figure 5. Sample Policy Agent rule for secure communication for DDS clients with client certificate authentication

#### **TTLSRule: RemotePortRange**

The remote port to which the application must be connecting for this rule's action to be performed. The default HTTP port of the DDS is 8803.

#### **TTLSRule: RemoteAddr**

The remote IP address specification that must match for this rule's action to be performed—that is, the IP address of the DDS to which the client is connecting.

#### **TTLSRule: Direction**

Specifies the direction from which the connection must be initiated for this rule's action to be performed. In this example, Outbound is specified, which means that the rule applies to connection requests that are initiated by the application.

#### **TTLSEnvironmentAction: HandshakeRole**

Specifies the SSL handshake role to be taken for connections in this AT-TLS environment. In this example, Client is specified, which means that the SSL handshake is performed as a client.

#### **TTLSKeyringParms: Keyring**

Specifies the z/OS UNIX path and file name of the key database file, the ring name of the SAF key ring, or the name of the z/OS PKCS #11 token. In this example, the RACF key ring DDSClientKeyring is specified.

#### **TTLSEnvironmentAdvancedParms: CertificateLabel**

Specifies the label of the certificate to be used for authentication. In this example, the DDS client certificate with the label RMFDDSCIENT is used.

## **Prerequisites for IBM Health Checker for z/OS**

Health checks for RMF are available in the IBM Health Checker. To define health checks and to read the Policy Agent definitions, the GPMSSERVE user ID needs permission. The following example shows RACF commands that allow these actions:

```
RDEFINE XFACILIT HZS.<system|*>.IBMRMF.*.ADD UACC(NONE)
PERMIT HZS.<system|*>.IBMRMF.*.ADD CLASS(XFACILIT) ID(GPMSSERVE) ACCESS(CONTROL)
SETROPTS RACLIST(XFACILIT) REFRESH

RDEFINE SERVAUTH EZB.PAGENT.<system|*>.<tcpip stack|*>.TTLS UACC(NONE)
PERMIT EZB.PAGENT.<system|*>.<tcpip stack|*>.TTLS CLASS(SERVAUTH) ID(GPMSSERVE) ACCESS(READ)
SETROPTS RACLIST(SERVAUTH) REFRESH
```

For more information about the health checks available for RMF, see [RMF checks \(IBMRMF\)](#) in *IBM Health Checker for z/OS User's Guide*

## DDS options

The preparation of the z/OS component of the DDS host session (GPMSERVE) as server address space for possible exploiters requires the customization of options in a parmlib member that is needed for the GPMSERVE procedure to start the Distributed Data Server.

RMF provides a default parmlib member GPMSRV00, which you may tailor according to your needs.

To display the current options, you can use the following command:

```
MODIFY GPMSERVE,APPL=OPTIONS
```

**Note:** A subset of the DDS options is also used by the GPM4CIM component of RMF XP, for example, CACHESLOTS, or HTTP\_NOAUTH. For information on the RMF XP setup refer to [“How to set up RMF XP”](#) on page 213.

Here is the content of GPMSRV00:

```
/* **** */
/* */
/* NAME:          GPMSRV00 */
/* */
/* DESCRIPTION:  PARMLIB MEMBER FOR THE RMF DISTRIBUTED DATA SERVER */
/*              HOST ADDRESS SPACE (GPMSERVE) */
/* */
/* **** */
CACHESLOTS(4)          /* Number of timestamps in CACHE */
DEBUG_LEVEL(0)          /* No informational messages */
SERVERHOST(*)          /* Don't bind to specific IP-Address */
MAXSESSIONS_HTTP(20)   /* MaxNo of concurrent HTTP requests */
HTTP_PORT(8803)        /* Port number for HTTP requests */
TIMEOUT(300)           /* Default timeout 300 seconds */
HTTP_ALLOW(*)          /* Mask for hosts that are allowed */
HTTP_NOAUTH()          /* No server can access without auth. */
EXCLUDE_REPORTS()      /* Reports to be deactivated */
HTTPS(ATTLS)           /* AT-TLS setup required */
CLIENT_CERT(NONE)      /* Client certificates are ignored */

HSTS(NO)               /* Enables HTTP Strict Transport Security */
```

### CACHESLOTS

Number of CACHE entries (one for each MINTIME). The valid scope is 3 through 32.

### DEBUG\_LEVEL

Amount of messages that is sent to the SYSPRINT data set. The valid scope is 0 through 3.  
DEBUG\_LEVEL(0) suppresses all informational messages.

### SERVERHOST

TCP/IP address (or hostname) to which the server binds when it opens any listener sockets. You should only use this option, if a host has several TCP/IP addresses (different network adapters) and you want the DDS server to bind its services to one specific TCP/IP address. Make sure, that the value you specify is the valid TCP/IP address (or hostname) of the host where the DDS server runs. On z/OS, you may use the TSO HOMETEST command to find out the valid TCP/IP addresses.

**Example:** SERVERHOST(9.164.123.244)

**Default:** SERVERHOST(\*) (any TCP/IP address).

### MAXSESSIONS\_HTTP

Maximum number of permitted concurrent HTTP server threads. The maximum allowed value is 100.

### HTTP\_PORT

TCP/IP port number for HTTP requests.

### TIMEOUT

Number of seconds of inactivity, before DDS assumes a timeout condition to a TCP/IP connection.

## HTTP\_ALLOW

Host names or TCP/IP addresses that can use the HTTP interface. Wildcards \* and ? are allowed. You may specify more than one HTTP\_ALLOW statement.

### Examples:

```
HTTP_ALLOW(*.ibm.com)
HTTP_ALLOW(9.164.*.*)
HTTP_ALLOW(sys?.boeblingen.de.ibm.com)
```

**Default:** HTTP\_ALLOW(\*)

**Note:** If your installation uses a proxy server for http access, you have to specify the hostname of the proxy server to allow access from users which use this proxy server.

## HTTP\_NOAUTH

Host names or TCP/IP addresses that can use the HTTP interface without authentication (user ID/password). Wildcards \* and ? are allowed. You may specify more than one HTTP\_NOAUTH statement.

**Example:** HTTP\_NOAUTH(sysa.boeblingen.ibm.com)

**Default:** HTTP\_NOAUTH()

### Note:

1. The DDS supports PassTickets (see “Configuring PassTicket support for the Distributed Data Server” on page 17). If you run a CIM server in your z/OS environment, you can use PassTickets to grant this server access to the DDS. Otherwise, to grant CIM clients access to performance data, you must authorize the CIM server host via HTTP\_NOAUTH, since the corresponding CIM RMF monitoring providers use the DDS HTTP API.
2. If your installation uses a proxy server for http access, you have to specify the hostname of the proxy server to allow access from users who use this proxy server.

## EXCLUDE\_REPORTS

List of Monitor III reports to be deactivated. All reports that are contained in this list will not be provided by the DDS.

You can mix single system and sysplex reports. The listed reports must be separated by a comma. You may specify more than one EXCLUDE\_REPORTS statement.

### Examples:

```
EXCLUDE_REPORTS(CFOVER,CFSYS)
EXCLUDE_REPORTS(ZFSOVW,ZFSFS,ZFSKN)
```

**Default:** EXCLUDE\_REPORTS()

**Note:** Deactivating reports has impacts on DDS exploiters:

- All metrics based on the deactivated reports will not be provided by the DDS.
- **z/OS Capacity Provisioning** connects to the DDS via the CIM server to obtain performance data from the CPC, SYSINFO, and SYSSUM reports. Therefore, never specify CPC, SYSINFO, or SYSSUM on EXCLUDE\_REPORTS() when running **Capacity Provisioning**.

## HTTPS

If ATTLS is specified, the DDS requires that the incoming HTTP connection is secured by an AT-TLS setup. If the incoming connection is not secured by an AT-TLS setup, the connection is refused. See “Setting up the Distributed Data Server for z/OS” on page 19 for information about how to set up secure communication for the DDS.

If NO is specified, no further checks are done by the DDS. In this case, communication with the DDS can either be via HTTP or via HTTPS secured by AT-TLS.

**Example:** HTTPS(ATTLS)

**Default:** HTTPS(ATTLS)

**Note:** The RMF\_DDS\_ATTLS health check will check for the correct AT-TLS configuration and setup. For more information, see [RMF\\_DDS\\_ATTLS](#) in *IBM Health Checker for z/OS User's Guide*.

#### CLIENT\_CERT

If ACCEPT is specified, the DDS will accept incoming HTTP connections and will take the user ID from an AT-TLS provided client certificate to check the authorization against the ERBSDS.MON3DATA FACILITY class profile instead of using user ID/password authentication. If the incoming HTTP connection does not supply a client certificate that is associated with a user ID, user ID/password authentication is performed. See [“Setting up the Distributed Data Server for z/OS” on page 19](#) for information about how to set up secure communication for the DDS.

If NONE is specified, no further checks are done.

**Example:** CLIENT\_CERT(ACCEPT)

**Default:** CLIENT\_CERT(NONE)

#### HSTS

The HSTS option enables HTTP Strict Transport Security, which may be necessary to meet security requirements. It directs the DDS to include the HTTP Strict Transport Security header with the specified settings in every response. This informs browsers that the DDS server must be accessed using HTTPS. The HSTS option only works if the DDS uses AT-TLS. Otherwise, the value is ignored, and the message GPM084I is displayed.

**Remember:** This option may have an unintended side effect on other web services running on the same MVS system that do not use HTTPS.

For instance, if DDS is running on host SYS1 port 8803 using both AT-TLS and HSTS and another service is running on SYS1 port 80 that does not use HTTPS(AT-TLS) but uses plain HTTP instead, it could lead to issues.

In such a scenario, if a client browser initially accesses the DDS at `https://sys1.local:8803`, it might refuse to load the page at `http://sys1.local:80` altogether. The page never loads, and instead, a timeout message is displayed. This is because browsers interpret the HSTS headers sent by a server host as instructions only to use HTTPS when connecting to any service on that host, regardless of the port.

To reset this behavior, you need to set HSTS(0) (as opposed to the default HSTS(NO)), recycle the DDS, and then re-access `https://sys1.local:8083` in the same browser.

#### Examples:

```
HSTS(63072000,SUBDOMAINS)
Adds header:    Strict-Transport-Security", "max-age=63072000; includeSubDomains"
```

```
HSTS(63072000)
Adds header:    Strict-Transport-Security", "max-age=63072000"
```

```
HSTS(0)
Adds header:    Strict-Transport-Security", "max-age=0"
```

```
HSTS(NO)
no header added, default
```

**Default:** HSTS(NO)

## OpenMetrics Endpoint

The Monitor III metrics can be exposed to third-party tools using the OpenMetrics exposition format.

This approach standardizes monitoring and enhances the observability of Monitor III data for better integration and analysis with various monitoring tools.



Some examples of the tools are:

- [Prometheus](#)
- [VictoriaMetrics](#)
- [Telegraf](#)
- [Grafana](#) (on top of any data source solutions such as Prometheus, VictoriaMetrics, InfluxDB and others.)

By default, DDS exposes all the available Monitor III metrics in the format. It can be configured to expose only chosen metrics and metric categories and also to customize names.

## OpenMetrics Endpoint Configuration

This is optional.

Each Monitor III metric can be skipped or exposed by default or given a custom name. This behavior can be configured through a configuration file, which is referenced by the GPMOMC DD (see the sample proclib GPMSEVER). The default sample configuration is shipped in SERBPWSV(GPMOMC) in the yaml format (SYS1. SERBPWSV(GPMOMC) by default). For more information, refer to the sample.

If the provided configuration is missing, then DDS runs with the default OpenMetrics options.

You can run the RELOADOM modify command to reload the configuration without restarting the DDS.

**Note:** When multiple DDS instances are running on the same CPC to expose data, it is recommended to enable the cpcs or lpars metric groups on only one of the DDS instances to prevent data duplication.

## Define target definitions

You must define a target to enable a third-party tool to scrape exposed metrics.

The /metrics/m3 endpoint must be used to define the target. The scrape interval must be equal to the Monitor III mintime value. For more information, refer to the MINTIME section in the *z/OS Data Gatherer User's Guide*.

If you want to scrape specific metric groups, you can use the group endpoint parameter as mentioned in the example below. For more information see the *z/OS Resource Measurement Facility Programmer's Guide*. Refer to the specific documentation for the tool you are using for precise information on target definition.

Some of the target definition examples for Prometheus or VictoriaMetrics are as follows:

To scrape all the metrics as defined in GPMOMC:

```
- job_name: "m3@plex00"
  scrape_interval: 100s # Should be equal to the Monitor III mintime
  scrape_timeout: 50s
  metrics_path: /metrics/m3
  scheme: https # Remove or change to "http" if AT/TLS for DDS is not set
  tls_config:
    insecure_skip_verify: false # Change to "true" if self-signed certificates are used
  basic_auth: # Use DDS credentials or remove if DDS authentication is disabled
    username: 'DDSUSER'
    password: 'XXXXXXX'
  static_configs:
    - targets: [ "ddshostname:8803" ]
```

To scrape only CPC and LPAR related metrics as defined in GPMOMC:

```
- job_name: "m3@plex00"
  scrape_interval: 100s # Should be equal to the Monitor III mintime
  scrape_timeout: 50s
  metrics_path: /metrics/m3
  scheme: https # Remove or change to "http" if AT/TLS for DDS is not set
  tls_config:
    insecure_skip_verify: false # Change to "true" if self-signed certificates are used
  basic_auth: # Use DDS credentials or remove if DDS authentication is disabled
    username: 'DDSUSER'
```

```
password: 'XXXXXXX'
params:
  groups: cpcs,lpars
static_configs:
  - targets: [ "ddshostname:8803" ]
```

## Grafana Sample Dashboards

The Grafana sample dashboards can be imported into Grafana using the following methods:

- [Importing the dashboards directly into Grafana.](#)
- [Provisioning the dashboards using Grafana's provisioning system.](#)
- [Installing IBM RMF for z/OS Grafana plugin.](#)

For more information, see [Grafana Sample Dashboards](#).

## Synchronizing SMF recording intervals

---

RMF writes SMF records if you specify the appropriate data gatherer options. In this topic, only SMF record type 104, which is written by RMF XP, is discussed. For all other SMF record types that are written by the RMF monitors, see *z/OS Data Gatherer User's Guide*. The Postprocessor can later process these records to create comprehensive reports of either single-system or sysplex scope. For sysplex reports, the Postprocessor requires all records written by RMF to be synchronized, and for single-system reports, synchronization is recommended.

## Defining SMF record writing

You can specify by SMF options (defined in the SMFPRMxx parmlib member) whether you want to write SMF records.

Record type 104 writing can be requested by setting both of the following two options:

1. Specifying the TYPE option in the active SMFPRMxx parmlib member
2. Specifying the RECORD(YES) option in the GPM4CIM configuration file, which specifies record type 104 collection as defined by SMFPRMxx

For detailed information, see [“How to request SMF record type 104 collection” on page 218](#).

## Suppressing SMF record writing

If RMF per default writes an SMF record type or subtype that you do not want to be written, you can use one of the following methods to suppress SMF recording:

- Use the SUBSYS command in the SMFPRMxx parmlib member. The SUBSYS specification overrides the SYS specification. For example, if you have defined `SYS(TYPE(...,104,...))` in your SMFPRMxx parmlib member, you can use `SUBSYS(STC, NOTYPE(104(1)))` to make exceptions to your SYS specification and just exclude gathering of SMF record 104.1.

For more information, see *z/OS MVS Initialization and Tuning Reference*.

- Use the system command SETSMF. For more information, see *z/OS MVS System Commands*.

## Defining SMF synchronization

For long-term monitoring with RMF XP, you achieve synchronization of SMF record type 104 collection by specifying the INTERVAL parameter in the GPM4CIM configuration file. This parameter defines the length of the monitoring interval and determines the frequency, with which RMF retrieves data from the monitored endpoints.

## RMF XP Synchronization for SMF type 104

### INTERVAL(length)

Duration of the data monitoring interval in seconds - default: INTERVAL(300)

For more information see [“Configuration files and parameters” on page 213](#).

## Considering reporting aspects

---

- [“Setting up the RMF CLISTs” on page 33](#)
- [“Grouping Monitor II and Monitor III Users” on page 35](#)

## Setting up the RMF CLISTs

There are two ways to make the RMF Reporting sessions through the RMF CLIST available to all users in your system: either by SYSPROC concatenation or by a stand-alone CLIST.

### SYSPROC concatenation

Concatenate the RMF ISPF dialog library SYS1.SERBCLS to the library associated with file name SYSPROC in your LOGON procedure.

Check the following:

- Make sure all copies of RMF CLISTs from previous releases are deleted from the SYSPROC concatenation. If a CLIST from a previous RMF release is used, the RMF commands will not work.
- Make sure that SYS1.SERBCLS has the same RECFM as the other data sets in the SYSPROC concatenation.
- Make sure the block size for SYS1.SERBCLS is the same or smaller than the block size for the first data set in the SYSPROC concatenation.
- If you changed the name of SYS1.SERBCLS or copied SYS1.SERBCLS into a common dialog library, make sure the new name or common dialog library is associated with SYSPROC.
- If you customized the Monitor III CLISTs by copying the RMF dialog library members into the appropriate common dialog libraries and deleted the ALLOCATE and LIBDEF statements in the RMF CLISTs, make sure that the common dialog libraries are concatenated to the proper file names in your LOGON procedure.

### Stand-alone CLIST

Provide a 'stub CLIST' RMFSTART in an established SYSPROC library. The following is a sample stub:

#### CLIST RMFSTART

```
PROC 0 UTILITY
CONTROL MAIN MSG LIST CONLIST
IF &SYSISPF = ACTIVE THEN DO
  ISPSTART CMD(%RMFSTART &UTILITY)
  SET RC = &LASTCC
END
ELSE DO
  ALTLIB ACT APPL(CLIST) DA('SYS1.SERBCLS')
  IF &STR(&UTILITY) = &STR(UTILITY) THEN %ERBRMFU
  ELSE RMF
  SET RC = &LASTCC
  ALTLIB DEACTIVATE APPL(CLIST)
END
```

You can then invoke the RMF reporter session with the command

```
%RMFSTART
```

and you can invoke the Monitor III Report Definition Utility with the command

This alternative removes the task of copying the RMF CLISTs every time a new RMF release is installed or service is applied to the RMF CLISTs. However, the standard commands to invoke RMF (RMF and ERBRMFU) will not work.

## ISPF application ID (APPLID) considerations

When setting up RMF report invocation, consider that RMF uses the following application IDs:

```
ERB
ERBS
ERBU
ERB2
```

Do not use these IDs in a NEWAPPL(id) keyword of an RMF invocation command.

## Sharing Monitor III customizations

Optionally, share the Monitor III customizations, namely, Options, Option Sets, and Report Customizations among RMF users.

You can customize and store Monitor III Options, Option Sets, and Reports in a common RMF table library and share them among RMF users. Specify the dataset name of the shared library in the *SRMFTGRP* variable in the hlq.SERBCLS(ERBRMF3X) CLIST. This variable is set in the RMF dialog *libraries* section of the CLIST.

By default, this variable has a null value and no shared RMF table library is specified. When no shared RMF table library is specified, each RMF Monitor III user has access to their own customizations, but not to those for any other RMF Monitor III user. Providing a shared RMF table library allows an administrator to make customized Monitor III Options, Option Sets, and Reports available to all RMF Monitor III users. A user's personal customizations will override the customizations specified in the shared RMF table library.

If you are using this feature for the first time, allocate a PDS with the same characteristics as the hlq.SERBTENU dataset. Make sure that all RMF Monitor III users will have READ access to this dataset. Modify the *SRMFTGRP* variable in the hlq.SERBCLS(ERBRMF3X) CLIST to match the name of the new dataset just created.

For example, if you created an RMF shared table dataset called: EXAMPLE.SHARED.RMF.TABLES then the *SRMFTGRP* variable would be set as follows:

```
SET SRMFTGRP = &STR('EXAMPLE.SHARED.RMF.TABLES')
```

## Creating or modifying Monitor III customizations

The RMF administrator can use the following procedure to create or modify the customized Monitor III Options, Option Sets, and Reports in the RMF shared table dataset.

It is recommended that you make a backup copy of the RMF shared table dataset before proceeding.

1. Rename your current personal Monitor III table dataset:  

```
ren userid.RMFZV3R1.ISPTABLE userid.RMFZV3R1.ISPTABLE.TMP
```

This dataset will be renamed back to its original name later in this procedure.
2. Copy the shared Monitor III table dataset to a new dataset with the name of your personal Monitor III table dataset: `userid.RMFZV3R1.ISPTABLE`.
3. Perform customizations:
  - a) Perform the desired customizations to your Monitor III Options and Option Sets.
  - b) Perform the desired customizations to your Monitor III Reports using the RMF Utility.
4. Exit the RMF Monitor III session or RMF Utility.

5. Copy `userid.RMFZV3R1.ISPTABLE` to the RMF shared table dataset specified in `hlq.SERBCLS(ERBRMF3X)`.
6. Delete `userid.RMFZV3R1.ISPTABLE`.
7. Rename your original personal Monitor III table dataset back to its original name:  
`ren userid.RMFZV3R1.ISPTABLE.TMP userid.RMFZV3R1.ISPTABLE`

## Grouping Monitor II and Monitor III Users

Because both online monitors provide a timer-driven automatic update mode (T command in Monitor II and GO mode in Monitor III), response time for such a user can be meaningless. For example, when Monitor III is running in GO mode with a refresh period of 100 seconds, the TSO response time appears as 100 seconds. Consequently, the response time measured for the service class that the user is in may not be an accurate representation of what happened during the interval.

To avoid this situation, RMF recommends that Monitor II and Monitor III users are put in a separate service class.

## Installing workstation functions

---

In addition to the monitoring functions on the host system, RMF extends its monitoring capabilities by several functions that are available on the workstation. All required programs and procedures are automatically installed in the RMF distribution libraries on your host system through SMP/E. Each user can then perform the installation on the workstation according to the provided descriptions.

### Installing the RMF Spreadsheet Reporter

Download the RMF Spreadsheet Reporter to your workstation.

For instructions on downloading, as well as activation and usage of the Spreadsheet Reporter functions, please refer to chapter [Chapter 14, “RMF Spreadsheet Reporter,”](#) on page 235.

### Installing RMF Performance Monitoring (RMF PM)

The installation of RMF PM comprises the following steps.

1. Tailoring of parmlib member GPMSRVxx (“[Setting up the Distributed Data Server for z/OS](#)” on page 19)
2. Start of the Distributed Data Server ([Chapter 3, “Starting the Distributed Data Server,”](#) on page 39)
3. Installation of RMF PM (“[Installing RMF Performance Monitoring](#)” on page 272)

Running RMF PM requires an active TCP/IP connection between the host system and the workstation.

### Installing the z/OSMF Resource Monitoring plug-in

z/OSMF provides the **Resource Monitoring** application as a plug-in. To exploit this application, you need to install and configure z/OSMF accordingly. For instructions on how to achieve this, refer to [IBM z/OS Management Facility Configuration Guide](#).



---

## Part 3. Operation

Operation is what you have to do at the system console to start the RMF control session and certain monitor sessions. The default data sets and monitor options should already have been defined by the administrator.

An operator can override the default monitor options. It is best to do this in agreement with the performance analyst who will be evaluating the data that RMF gathers.

### What Operation Involves

Using system commands, the operator can:

- Start and stop the RMF control session
- Start and stop individual background sessions
- Specify monitor options that are to be valid for the session, as opposed to your system's default options; or change options during a monitor session.
- Influence the SMF data buffer, in which RMF data is stored

The monitor options which you can specify on the system commands are described in detail in [Data gathering reference](#) in *z/OS Data Gatherer User's Guide* and [Part 5, "Reporting reference,"](#) on page 55.

**Important:** If z/OS Data Gatherer is installed and has been started before RMF is installed, the z/OS Data Gatherer must be restarted before using the RMF Distributed Data Server (DDS) or the RMF ISPF interface. This requirement is for all systems in a sysplex.





## Chapter 3. Starting the Distributed Data Server

The Distributed Data Server (DDS) can serve multiple clients in a single-server address space. RMF PM uses this capability.

To have the DDS address space managed by RMF, you can start it automatically using the DDS option. This option ensures you always have one active instance of DDS within your sysplex. As soon as the RMF Sysplex Data Server recognizes the DDS option on any system in the sysplex, DDS is started on the RMF master system. The master system has an active Monitor III gatherer, the highest z/OS release, and an SMFBUF option set. The MASTER parmlib option can define a system as a master system candidate. If another system becomes the master system, DDS is automatically restarted on this system.

You can specify the DDS option as follows:

Options	Description
<b>PARM= ' DDS '</b>	Use this option to activate the sysplex-wide DDS management with the EXEC statement of the RMF procedure (see <a href="#">Customizing the RMF control session in z/OS Data Gatherer User's Guide</a> ).
<b>S RMF,,,DDS</b>	Use this option to activate the sysplex-wide DDS management with the RMF <b>START</b> command.  For example,  If you have stored the corresponding parameters in Parmlib member GPMSRV01, you can run the following command to start DDS manually: <b>S GPMSERVE, MEMBER=01</b>  <b>Note:</b> The <b>MEMBER</b> parameter can be omitted when utilizing the default member, GPMSRV00.
<b>F RMF, DDS</b>	Use this option to activate the sysplex-wide DDS management with the RMF <b>MODIFY</b> command.
<b>NODDS</b>	Use this option to stop the sysplex-wide DDS management.  For example, the <b>F RMF, NODDS</b> command shuts down the current sysplex-wide DDS instance, regardless of which system the command has been entered.  <b>Remember:</b> You must restart the DDS to ensure correct operation when the local time changes (daylight saving time).

There are two versions of DDS: GPMSERVE (new version) and GPMSERV1 (legacy version). The GPMSERVE version accepts the **MODIFY** command in a slightly different format than GPMSERV1. If you are using the legacy version of DDS, consider migrating to the newer version, GPMSERVE. This migration enables you to take advantage of the IBM RMF for z/OS Grafana plugin, enhancing your data analysis and visualization capabilities.

For detailed information on the usage of **MODIFY** commands in the new and legacy versions of DDS, see [“MODIFY command” on page 40](#).

## MODIFY command

The **MODIFY** command enables you to transmit essential information to a job or a started task within the system. By utilizing this command, you can dynamically adjust the parameters or settings associated with running tasks, ensuring they operate according to your specific requirements.

### New version of DDS (GPMSSERVE)

For the new version of DDS (GPMSSERVE), the syntax of the **MODIFY** command is as follows:

```
MODIFY | F jobname.identifier,APPL=command
```

Where:

- *jobname* is the name of the job.
- *identifier* is assigned to a job or started task.
- *command* can be any one of the following values:

Command	Description	Example
TRACEON	Use this option to activate the trace and puts the trace output to STDOUT.	F GPMSSERVE,APPL=TRACEON
TRACEOFF	Use this option to deactivate the trace and not to write trace output in STDOUT.	F GPMSSERVE,APPL=TRACEOFF
OPTIONS	Use this option to show the currently active GPMSSERVE options.	F GPMSSERVE,APPL=OPTIONS
DISPLAY	Use this option to show the status of DDS components.	F GPMSSERVE,APPL=DISPLAY
RELOADOM	Use this option to reload the OpenMetrics endpoint configuration.	F GPMSSERVE,APPL=RELOADOM

### Legacy version of DDS (GPMSSERV1)

For the legacy version of DDS (GPMSSERV1), the syntax of the **MODIFY** command is as follows:

```
MODIFY | F jobname.identifier,command
```

Where:

- *jobname* is the name of the job.
- *identifier* is assigned to a job or started task.
- *command* can be any one of the following values:

Command	Description	Example
OPTIONS	Use this option to show the currently active GPMSSERVE options.	F GPMSSERVE,OPTIONS
DISPLAY	Use this option to show the status of DDS components.	F GPMSSERVE,DISPLAY

---

## Part 4. Performance management

RMF offers you a wide variety of views on z/OS system performance. This part of the manual tells you which view will help you most in a particular situation, and what steps you can take to have RMF present you with this view. For help in analyzing the reports produced, see [\*z/OS Resource Measurement Facility Report Analysis\*](#).

There are many situations in which RMF can help you with performance management. You needn't wait until you have a problem in that area; RMF supplies data that you can use to check that things are running smoothly, or to see in good time where improvements may be necessary. The following chapters discuss how RMF helps you with:

- Performance monitoring, seeing that everything is running smoothly
- Performance analysis, getting to the seat of problems
- System tuning, ensuring the best usage of resources
- Capacity planning, ensuring that you have enough resources



---

## Chapter 4. Performance administration

This information unit provides information about planning and preparing for performance management in your sysplex:

- what you should know about z/OS workload management
- how the hierarchical performance view looks

---

### What is performance administration?

Is it a separate task, or is it part of monitoring and analysis?

The answer to these questions depends to a very high degree on the organization and size of your installation. If you have a group of system programmers and performance analysts, then you can assign different performance management tasks to different people. If, on the other hand, you are the only specialist, and responsible for everything, then you might see no need to distinguish the different tasks.

In the following considerations we will concentrate on the task itself without taking into consideration whether it is performed by the same specialist as the monitoring and analysis tasks.

As you see in [Part 2, “Administration,” on page 11](#), we have defined performance administration as the task of setting up everything required for the smoothest possible running of performance measurement and performance management.

### Defining procedures and parameters

The operator will start all the data-gathering functions that are performed by the three monitors. Monitor I and Monitor III will probably run continuously, while the Monitor II background session might be started on request only. But, in each case, the START command should be as easy as possible for the operator.

Ease of operation is important also with respect to the automatic start-up procedures in most installations. Here, you do not want to have the operator typing in commands with many parameters or replying to many requests from the application. We therefore recommended you to define all start parameters and options in such a way that the appropriate values are selected by default. Only in exceptional cases should the operator have to override these values to handle a specific situation.

Of course, setting up all gathering options requires a common understanding with the system programmers who work with the data. They have to decide what data is to be gathered. Do they need data for performance monitoring and analysis, or for capacity planning and tuning? Different tasks might need different data, and you have to implement appropriate gathering procedures for each.

When defining the scope of data to be gathered, you also have to specify where to store the data. As you know, the three monitors create two types of data:

- SMF records (Monitor I, Monitor II, Monitor III)
- VSAM records (Monitor III only)

It is part of the administration task to allocate the appropriate data sets to ensure that the performance analysts have access to everything they need; not only to data from today or yesterday, but also to data gathered some time ago.

### Setting performance goals

The human view of the performance of a system is often subjective, emotional and difficult to manage. However, the purpose of a system is to meet the business needs of the users.

To match business needs with subjective perception, the concept of *Service Level Agreements* (SLA) was introduced.

The SLA is a contract that objectively describes such measurables as:

- Average transaction response time for network, I/O, CPU, or total
- The distribution of these response times (for example, 90% TSO trivial at less than 0.2 of a second)
- Transaction volumes
- System availability

A *transaction* is a business unit of work and can be a CICS® end user interaction or a batch job, for example. Ideally, a transaction is defined from a user's point of view.

The definition and implementation of an SLA might be done in your installation in a more or less formal way, but the more precisely

- the expectations of the users
- the capabilities of the computer shop

have been defined, the easier tracking and monitoring are. This definition is important with regard to the capabilities of performance management in a z/OS system. There, the *Workload Manager* enables you to specify explicit performance goals for your applications, and the reporting capabilities within RMF will allow you to track them directly.

## z/OS workload management

---

z/OS workload management provides a solution for managing workload distribution, workload balancing, and distribution of resources to competing workloads. z/OS workload management is the cooperation of various subsystems (for example, CICS, DB2®, IMS, JES, APPC, TSO/E, UNIX System Services) with the z/OS workload manager (WLM) component.

**Fewer, simpler, and consistent system externals:** Workload management provides a way to define z/OS externals and tune z/OS without having to specify low-level parameters. The focus is on setting performance goals for work, and letting the workload manager handle processing to meet the goals.

**Externals reflect customer expectations:** Workload management provides z/OS performance management externals in a service policy that reflects goals for work, expressed in terms commonly used in service level agreements (SLA). Because the terms are similar to those commonly used in an SLA, you can communicate with users, with business partners, and with z/OS, using the same terminology.

## Service definition

Performance administration is the process of defining and adjusting performance goals. Workload management introduces the role of the service level administrator. The service level administrator is responsible for defining the installation's performance goals on the basis of business needs and current performance. This explicit definition of workloads and performance goals is called a *service definition*. The service definition applies to all types of work, including CICS, IMS, TSO/E, UNIX System Services, JES, and APPC/MVS. You can specify goals for all z/OS-managed work, whether online transactions or batch jobs, and the goals apply to the sysplex.

## Workload management concepts

---

The service definition contains all information about the installation needed for workload management processing. There is one service definition for the entire sysplex. The service level administrator sets up **policies** within the service definition to specify the goals for work. He must understand how to organize work, and be able to assign performance objectives to it.

A **service definition** consists of:

- One or more *service policies*, which are a named set of performance goals that an installation tries to meet. You can have different policies to specify goals intended for different times. Service policies are activated by an operator command, or through the ISPF administrative application utility function.
- *Workloads* and *service classes*, which are the categories of work. A workload is a grouping of work in a way that is meaningful for your installation to manage and monitor. It is made up of a group of service classes. You assign performance goals and, optionally, capacity boundaries, to service classes.

In addition, you can define *report classes* and *tenant report classes* which will help you in your reporting with another granularity as being possible with service classes.

The term *workload group* is also used in RMF documents and means the same as *workload*.

- *Resource groups* and *tenant resource groups*, which define processing capacity boundaries across the sysplex. You can assign CPU and memory consumption limits to work by assigning a resource group to one or more service classes or a tenant resource group to one or more tenant report classes.
- *Classification rules*, which determine how to assign incoming work to a service class.

## Workloads and service classes

To workload management, work is a demand for service, such as a batch job, an APPC, CICS, or IMS transaction, a TSO/E logon, or a TSO/E command. All work running in the installation is divided into workloads. Your installation may already have a concept of workload. A workload is a group of work that is meaningful for an installation to manage and monitor. For example, all the work created by a development group could be a workload, or all the work started by an application, or in a subsystem.

Within a workload, you group work with similar performance characteristics into service classes. You create a service class for a group of work with similar:

- Performance goals
- Resource requirements
- Business importance

You can create a service class for any combination of the above. You assign performance goals to the service classes, such as a response time goal, and you indicate how important it is to your business that the performance goal be achieved.

## Performance goals

There are three kinds of goal:

- Response time
- Velocity
- Discretionary

Response time goals indicate how quickly you want your work to be processed. Velocity goals are for kinds of work for which response time goals are not appropriate, such as long-running batch jobs.

### Response time

This is the expected amount of time required to complete the work submitted under the service class. Specify either an average response time, or response time with a percentile. A percentile is the percentage of work in that performance period that should complete within the response time.

You must specify the goal for system response time, not "end-to-end" response time. That is, workload management does not control all aspects of system performance, so response-time scope is confined to the time SRM has control of the work.

### Velocity

This is a measure of how fast work should run when ready, without being delayed for resources. Velocity is a percentage from 1 to 99. The formula for velocity is:

$$\text{Velocity} = \frac{\text{\# Using Samples}}{\text{\# Using Samples} + \text{\# Delay Samples}} * 100$$

Please, refer to [“Workflow and velocity” on page 48](#) for details and the difference to the term *Workflow*.

## Discretionary

Workload management defined goal. Associate this goal with work for which you do not have a specific performance goal. Work with a discretionary goal is run when resources are available.

## Importance

Importance is a reflection of how important it is to achieve the service-class goal. Workload management uses importance only when work is not meeting its goal. It is required for all goal types except discretionary. Importance applies on a performance-period level and you can change importance from period to period. There are five levels of importance: 1 to 5, 1 being the highest importance.

## Service class periods

A service class with a goal and an importance is called a service class period.

## Reporting hierarchy

---

There are different scopes for the reports available in RMF, this can be explained with the reporting hierarchy that RMF offers.

### Sysplex view

Comprehensive reports with summary and overview data about the sysplex. You can get these reports either interactively from Monitor III, or as Postprocessor reports based on measurement data gathered by Monitor I or Monitor III.

### System view

Reports that provide information for one selected system. This may be a stand-alone system or a member of a sysplex. Single-system reports offer a more detailed level of performance information.

All reports that are not explicitly related to one specific address space or system resource are called system reports. In contrast, job or resource reports concentrate on one specific component of your system.

### Job or resource view

This is the deepest level of detail. It concentrates on single jobs (or, more precisely, address spaces) or single-system resources, and helps you analyze a performance problem that is indicated by a sysplex or system report.



---

## Chapter 5. Performance monitoring

This information unit describes what to do on a daily basis to keep your finger on the pulse of the system. Thus you may avoid being surprised by performance degradation caused by gradually-changing factors. The task of performance monitoring involves:

- watching performance goals
- observing response times
- monitoring throughput
- observing bottlenecks and exceptions

---

### Watching performance goals

You have set performance goals for your workload within a sysplex by means of WLM, and you should observe if and how well these goals are being met. You can do this for your whole workload at one glance, independent of the single system your work is actually running on.

RMF offers two reports that provide information about performance goals, as defined in the active performance policy, and the corresponding actual values.

#### ***Monitor III - Sysplex Summary Report***

Use this report as the entry point for this kind of monitoring. It shows all active workloads with their performance values, including the goals for each service class period.

The performance status line offers a very easy way of monitoring the performance of your sysplex. It is displayed when continuous monitoring is active (in GO mode), and shows you the performance history of your system for the past two hours at a glance.

#### ***Postprocessor - Workload Activity Report***

Use this report if you want to evaluate the attainment of performance goals for time intervals in the past. This sysplex report shows performance goals and actual values at different levels of detail (from policy summaries to service class period details). You can select the type of information that best meets your installation's requirements.

---

### Observing response times

There might be times where you are interested in monitoring response times for single users and groups of users. This may be the case if you have defined service level agreements based on response times, or if you get complaints from users about slow response times on the system. For this task, you will call the

- ***Monitor III - Sysplex Summary Report:*** This report displays the average response time for each service and report class period.

If you would like more information about one specific service class period, use the cursor-sensitive control of the Monitor III to navigate directly to the

- ***Monitor III - Response Time Distribution Report:*** With this report, you get detailed data for the service class period you are interested in:
  - If you have defined a response time goal for a service class period, you see a response time distribution which is the lowest level of detail that is available.
  - In any case, you see the response time for each system from which this period is getting service.

If you want to concentrate on a single system, you get response time data from the

- **Monitor III - System Information Report:** This report shows the average response time for all workloads and service classes.

You get more detailed data for one group with the

- **Monitor III - Group Response Time Report:** The average response time is displayed as time that is split up into *using* and *delayed* time frames, so you can see how much time this group of address spaces was using the system resources, and how much time was spent waiting for resources.

If you need response time data for longer periods of time, then you will work with Monitor I data. Get the information by creating a

- **Postprocessor - Workload Activity Report:** This sysplex report provides response times for all service class periods and — if you have defined response time goals — response time distribution information. You select the level of detail by the corresponding report options.

## Monitoring throughput

---

There are various indicators that show throughput values.

### Transaction rate

Throughput definition is:

$$\text{Throughput} = \frac{\# \text{ transactions or jobs}}{\text{time}}$$

You get this information in various reports.

- **Monitor II Address Space SRM Data Report:** Data is available for all address spaces: you get the transaction count and the total session time for each address space.
- **Monitor III Reports:** You can get the transaction rate on sysplex level with the

- Sysplex Summary report.

You get summary statistics for all workloads, service classes, and service class periods.

- Response Time Distribution report and Work Manager Delay report

The transaction rate is shown for one selected service class period.

Throughput data on system level are available with the

- System Information report.

The values are summarized by high-level groups (system, TSO, UNIX System Services ...) and for all workloads and service classes.

- Group Response Time report.

This report shows detailed values for one selected service class period.

- **Postprocessor Reports:**

- Workload Activity report.

On sysplex level, you get transaction rates for all workloads and service classes.

- Exception report.

You can define exception criteria for transaction rates of specific workloads or service classes.

### Workflow and velocity

Another way to characterize the throughput could be to take the workflow or velocity data that is shown in several reports:

- *Workflow* is a term created by Monitor III for *reporting* purposes.

- *Velocity* is a term created by workload management for *managing* purposes.

For both terms, the definition has the same formula:

$$\text{Value} = \frac{\text{\# Using Samples}}{\text{\# Using Samples} + \text{\# Delay Samples}} * 100$$

### What is the difference between workflow and velocity?

Velocity (as a managing indicator) considers only the processor, the storage, and DASD devices — these are the resources which are under control of workload management.

Workflow (as a reporting indicator) reflects all system components (for example, tape activities or delays caused by mounts or HSM).

**Monitor III Reports:** Workflow data are shown primarily in the

- Workflow/Exceptions report
- System Information report
- Group Response Time report
- Sysplex Summary report: here you find velocity data

**Postprocessor Reports:** The

- The Workload Activity report

shows the velocity values.

## Observing bottlenecks and exceptions

There are two approaches to monitoring performance:

- You can check the performance of your system by observing indicators like *performance goals*, *performance index*, *workflow*, or *response times*, most of which have already been discussed.
- Or you can use a variety of Monitor III reports to look for *exceptions* or *delays* that might be the source of a performance problem.

To define your performance exceptions directly, use the

- **Monitor III - Workflow/Exceptions Report:** There are many types of exceptions you can specify: CPU utilization, response times, number of users, storage activities and many others.

You define thresholds and corresponding colors, and Monitor III indicates when a threshold has been reached.

Now, you can start investigating the reason, which hopefully will enable you to solve the problem either immediately, or with the next IPL, or with planning for a more powerful processor in the near future.

If you would prefer information about exceptions for a longer time range, you will call the

- **Postprocessor - Exception and Overview Reports:** For these single-system reports, you can define many types of exceptions or thresholds, on the basis of CPU, I/O, workload or paging data gathered by Monitor I. The reports list all relevant data and allow you to create the detailed interval reports.

The other method is to look directly for delays — situations in which jobs are waiting for resources (for example, processor, devices, storage).

- **Monitor III - System Information Report:** This report gives you an overview of all applications in your system at different levels (system, TSO, batch, and so on) or grouped by workloads or service classes. The information includes speed and delay indicators.

If you like to create your own performance reports that should contain the data you are interested in, you can do this with RMF PM.

- **RMF PM - PerfDesks:** RMF PM takes its input data from Monitor III. The data is suitable for monitoring and analyzing performance in real time and in the recent past. It provides a selected subset of the information provided by the Monitor III gatherer: general performance data, performance data for jobs, and workload-related performance data.

You can collect real-time data, combine data from different collection types, or even from different applications, and group resources together. Once you have created these scenarios, you can save them in your own panels, called *PerfDesks*.

---

## Chapter 6. Performance analysis

Monitoring your systems is an ongoing process. Analyzing performance problems is a task that needs to be performed only from time to time — but the full capability of RMF will help you here, too.

This information unit:

- discusses some ideas about performance problems
- points to reports that can help you analyze problems and evaluate possible solutions

---

### What is a performance problem?

There are many views on what constitutes a performance problem. Most of them revolve around unacceptably slow response times or high resource usage, which we can collectively refer to as "pain." The need for performance investigation and analysis is indicated by, for example:

- Slow or erratic response time:
  - Service level objectives being exceeded
  - Users complaining about slow response
  - Unexpected changes in response times or resource utilizations
- Other indicators showing stress;
  - Monitor III Workflow/Exceptions
  - System resource indicators (for example, paging rates, DASD response)
  - Expected throughput on the system not being attained

Finally you need to decide whether a given situation is a problem worth pursuing or not. This decision is based on your own experience, knowledge of your system, and sometimes politics. We simply assume for the following discussions that you are trying to relieve some sort of numerically quantifiable performance problems in your system.

Generally, a performance problem is the result of some workload not getting the resources it needs to complete in time. Or the resource is obtained but is not fast enough to provide the desired response time.

The most frequent cause of performance problems is having several address spaces compete for the same resource. These could be a hardware resource (processor, device, storage) or serially usable software resource (catalog, VTOC). While one address space is using the resource, the other address spaces are delayed. Therefore, one key aspect of Monitor III is to make visible who is using what, and who is delayed.

---

### Reports that provide data for analysis

Several Monitor III reports provide this information on different levels of detail.

#### **Monitor III Reports**

- Delay report

This report shows the address spaces that have the highest delays in your system.

- Job report

An address space can be delayed for many reasons. Several variations of this report (for example, PROC, DEV, JES, HSM, OPER) provide detailed information for your analyzing process.

- Resource reports

You can also analyze selected resources and see who is using and who is waiting for these resources.

- Storage reports

There are several types of storage reports that provide very detailed information about storage consumption (paging, migration, frames available, ...) and utilization of common storage (CSA, SQA, ECSA, and ESQA).

- Work Manager Delay report

This sysplex report provides information for your CICS and IMS subsystems and shows several types of delay that might be the source of a current performance problem.

## Postprocessor Reports

The reason for a performance problem can also be the overloading of resources in your systems, for example, of the processors, channels or devices. Here, you will find the best overview in the Postprocessor reports that are based on Monitor I data:

Some of the reports you might use are the:

- CPU Activity report
- Coupling Facility Activity report
- Channel Activity report
- Cache Subsystem Activity report
- Device Activity report
- Paging Activity report
- Virtual Storage Activity report

These are long-term reports showing intervals, typically of 15 or 30 minutes, that you have defined with your gathering options.

## Monitor II Reports

If you are interested in some snapshot data to analyze the current status of your system, you can get them from Monitor II.

You can get information about the utilization of the different resources from these reports:

- Central Storage/Processor/SRM Activity report
- Channel Path Activity report
- Device Activity report
- Paging Activity report

## Other Monitor II Reports

If you see overloading of resources because of:

- temporary or permanent workload peaks
- single applications that dominate others

you might be interested in evaluating your performance inhibitors.

If you need a snapshot of the current system status, you can get this with other Monitor II reports.

Here you will find data about resource consumption (CPU time, I/O rates, storage utilization) for all address spaces:

- Address Space Resource Data report
- Address Space SRM Data report

If you want to concentrate on one specific address space, you can tailor the report accordingly as a jobname report to monitor only one selected job in your system.

## **Postprocessor Workload Activity Report**

The other possibility is to get resource data for longer time frames either as interval (for example, 30 minutes) or duration (up to 100 hours) report with the Postprocessor Workload Activity Report.

This report provides resource data for different levels of detail. In addition to system control indicators such as service classes and workloads, you might also specify selected report classes to get the data reported according to your requirements and needs.

## **Postprocessor Trace Activity Report**

In specific situations, it might be necessary to get more detailed data. In this case, start Monitor I with some trace options.

You can get many types of data about the utilization of different system components and various activities in the system that can help you in solving a complex performance problem.

## **Spreadsheet Reporter Macros**

Based on Postprocessor data, you can perform the analysis of your system on the workstation using the Spreadsheet Reporter. You select the time range and scope of the data that is important to understand your system, you create records and download them to the workstation. There, you can use several spreadsheet macros which will provide you summary and detail reports for your key system components (processor, storage, DASD and Cache subsystem) and for your important workloads:

- System Overview Report
- Workload Overview Report
- I/O Subsystem Report
- Cache Subsystem Overview Report
- Coupling Facility Trend Report





---

## Part 5. Reporting reference

This part deals with the RMF reporting capabilities, and how to control them. Reports are available to help you with three different tasks:

- Interactive performance analysis, using the Monitor III Reporter Dialog
- Snapshot reporting, using the Monitor II Display Session, with the option of producing reports in printed form
- Long-term overview reporting, using the Postprocessor

In addition, Chapter 11, “[Cross platform monitoring with RMF XP](#),” on page 211 describes how to set up, configure and start RMF XP if you want to monitor the performance of heterogeneous environments running the following operating systems:

- AIX on System p
- Linux on System x
- Linux on System z



# Chapter 7. The online reporting environment

A common ISPF interface gives you access to Monitor II, Monitor III and the Postprocessor.

Online help is provided for Monitor II and Monitor III dialogs and the Postprocessor.

This information unit informs you about:

- the Performance Management menu
- online help
- the tutorial
- message help

## Starting the reporters

The RMF Performance Management menu offers easy access to the reporting capabilities of the Monitor II and Monitor III display sessions and the Postprocessor. Just enter the TSO/E command

- RMF (or RMFJPN for the Kanji version)

You will see the following panel:

```
Selection ==>          RMF - Performance Management          z/OS V3R2 RMF
Enter selection number or command on selection line.

1 Postprocessor      Postprocessor reports for Monitor I, II, and III      (PP)
2 Monitor II        Snapshot reporting with Monitor II                  (M2)
3 Monitor III       Interactive performance analysis with Monitor III     (M3)

U USER             User-written applications (add your own ...)         (US)

R RMF SR            Performance analysis with the Spreadsheet Reporter
N News              What's new in z/OS V3R2 RMF

                    T TUTORIAL      X EXIT

RMF Home Page:      http://www.ibm.com/systems/z/os/zos/features/rmf/
                    5655-ZOS Copyright IBM Corp. 1994, 2023.
                    Licensed Materials - Property of IBM
```

Figure 6. RMF Performance Management Menu

From here, you can access the RMF reporter you want by entering on the selection line:

- The selection number
- The abbreviation shown in parentheses to the right of the choice

Select U or US to access any user-written applications that you have defined.

Enter T to see a tutorial menu, from which you can select the RMF component you want to know more about.

Enter X to leave this panel without starting any reporter.

# Reference information

In addition to the selections for invoking a specific function, there are some selections that provide information either about the current release of RMF or about functions you can perform on your workstation. If you want to use these workstation functions, at first you have to install them.

## Performance analysis with the Spreadsheet Reporter

The Spreadsheet Reporter allows you to convert RMF data to spreadsheet format and provides a practical approach how to use spreadsheet macros for converted reports and Overview records.

You find all details in [Chapter 14, “RMF Spreadsheet Reporter,” on page 235.](#)

## RMF PM Java Edition

RMF Performance Monitoring (RMF PM) allows you to monitor the performance of your z/OS host from a workstation through a TCP/IP interface to one or more z/OS sysplexes. You logon to any sysplex, and you can monitor the resources in the corresponding sysplex.

You find all details in [Chapter 15, “RMF Performance Monitoring,” on page 271.](#)

## What's new in RMF for z/OS

You find a comprehensive overview of all new functions and enhancements in the current RMF for z/OS release, including improvements that enhance monitoring and reporting capabilities.

### Support for OpenMetrics

Support is added for the OpenMetrics exposition format for Monitor III, enabling integration with third-party monitoring tools. See [OpenMetrics Endpoint](#).

### Enhancement to Monitor III reports

RMF for z/OS has been enhanced to include new fields within the **Report class** and **Job ID** for Monitor III reports, providing additional data for performance analysis and reporting.

The following tables list the fields that are now available with Monitor III reports:

Table 3. Fields available for Report class	
Monitor III reports	Fields
DELAY	JDEPRPCL
PROC	PRCPRPCL
PROCU	PRUPRPCL

Table 4. Fields available for Job ID	
Monitor III reports	Fields
DELAY	JDELJID
PROC	PRCPJID
PROCU	PRUPJID
ENQ	ENQPWJID
DEV	DEVPJID
DSND	DNDPJID

<i>Table 4. Fields available for Job ID (continued)</i>	
<b>Monitor III reports</b>	<b>Fields</b>
HSM	HJSPJID
JES	HJSPJID
LOCKSP	LSPPJID
LOCKSU	LSUPJID
OPD	OPDPJID
STOR	STRPJID
STORC	CSXJESID
STORF	STFPJID
STORM	STMPJID
USAGE	JUSPJID

**Note:** These fields are not visible by default. You can view them by customizing your existing reports or creating new ones using RMF UTIL.

#### **CPU-time related fields added to the PROCU report**

RMF for z/OS has been enhanced to include CPU time-related fields in the PROCU report, providing more detailed CPU time usage information within the PROCU report.

The following table lists the fields that are now available with PROCU report:

<i>Table 5. Fields available in PROCU</i>		
<b>Field names</b>		
PRUTCPT	PRUTAAPE	PRUTSRB
PRUTCBCT	PRUTIIPE	PRUTPCS
PRUTAACT	PRUTTOTC	PRUTEPS
PRUTIICT	PRUTTOTE	
PRUTCPE	PRUTTCB	

For more information about the description of each field, see PROCU Tabular report data table topic in *z/OS Resource Measurement Facility Programmer's Guide*.

**Note:** These fields are not visible by default. You can view them by customizing your existing reports or creating new ones using RMF UTIL.

#### **Pop-up in the Monitor III SYSINFO report for enclave transactions**

The SYSINFO report now includes a pop-up display of Enclave Transaction metrics, when available. If the Enclave Transaction Rate exceeds zero, the TRANS/SEC metric is highlighted in turquoise to signal that a pop-up dialog can show the following metrics:

- Enclave transaction average execution time
- Enclave transaction rate

## Reporting of the WLM Batch Initiator AI status and Implicit CPU Critical state

The postprocessor and Monitor III reports of RMF for z/OS have been enhanced to report whether WLM Batch Initiators are AI Infused and indicate if the initial Service Class Period is classified as Implicit CPU Critical.

- **Postprocessor**

WLMGL report for Service Class (SCLASS) and Service Class Period (SCPER) now has an indicator if the WLM Batch Initiator is AI Infused. The CRITICAL field now indicates whether the first Service Class Period is Implicit CPU Critical. See Service Class report and Service Class Period report in *z/OS Resource Measurement Facility Report Analysis*.

- **Monitor III**

The Monitor III reports introduce new fields and values. These new fields and values indicate Implicit CPU protection and Batch AI for Monitor III reports. See DELAY report, System Information (SYSINFO) report, and Sysplex Summary (SYSSUM) report in *z/OS Resource Measurement Facility Report Analysis*.

## Enhanced I/O MGMT of Velocity Migration indicator

I/O MGMT of Velocity Migration is now bi-directional.

The value reported relates to the current I/O Priority Management setting. If I/O Priority Management is set to YES, then the I/O MGMT value reported is the Execution Velocity value to set when disabling I/O Priority Management. When I/O Priority Management is set to NO, the value reported for I/O MGMT is the Execution Velocity value to set when enabling I/O Priority Management.

## New EADM Overview conditions in Postprocessor

A new set of overview conditions has been introduced for the SMF record type 78, specifically for subtype 10. See [“EADM Activity - SMF record type 74-10” on page 205](#).

## Reporting added in Postprocessor for Dedicated Memory metrics

The Paging Activity report has been updated to include information about Dedicated Memory. The overview or exception conditions in the Paging Activity based on SMF Record Type 71 have also been updated. See Dedicated Memory in *z/OS Resource Measurement Facility Report Analysis* and [“Paging Activity - SMF record type 71” on page 175](#).

## Postprocessor support for IBM Storage DS8000 R10 subsystem compression metrics

The Enterprise Disk Systems Statistics (ESS) postprocessor report has been modified to report compression-related statistics. The **EXTENT POOL/TYPE** column has been enhanced to report the units according to the R748XEPS field. A new section, **COMPRESSION**, has been added for more comprehensive data analysis. The new values also serve as overview conditions for the SMF record type 74-8. See [“Enterprise Disk Systems Statistics - SMF record type 74-8” on page 200](#).

## Removed undocumented DDS parmlib options

The following undocumented PARMLIB options were removed:

- MAXSESSIONS\_INET
- SESSION\_PORT
- DM\_PORT
- DM\_ACCEPThOST
- MAXSESSIONS\_UNIX
- UNIXSOCKET\_PATH

To ensure the successful startup of the DDS, you must update your existing PARMLIB members (GPMSRVxx) to remove options that are no longer supported.

## New HSTS option for DDS

Added the HSTS option to enable HTTP Strict Transport Security, which might be required to fulfill security standards. See [“DDS options” on page 28](#).

## Enabled HTTP compression for DDS

Added support for HTTP compression. For additional documentation about controlling the use of zEDC for compression, refer to the [IBM Semeru Runtime Certified Edition for z/OS](#) documentation.

## Support for new channels and CF link on z17

Monitor III and Postprocessor reports now support channel measurement groups (CMGs) 4 and 5, as well as the coupling facility link of type CL6.

## Sustainability support and Power Consumption reporting in Postprocessor

- The CPU activity report has been enhanced to include information on power consumption. The overview conditions based on SMF Record Type 70-1 have also been updated. See Using the information in the Power Consumption report in *z/OS Resource Measurement Facility Report Analysis* and “CPU Activity - SMF record type 70-1” on page 161.
- The WLMGL report for Service and Report classes now includes power consumption information. The overview conditions in Workload Activity based on SMF Record Type 72-3 have also been updated. See Service Class report, Report Class report in *z/OS Resource Measurement Facility Report Analysis*, and “Workload Activity - SMF record type 72-3” on page 178.

## Inclusion of 2G memory frames in calculations

RMF for z/OS has been enhanced to include 2G memory frames in relevant calculations, providing a more accurate representation of system memory usage.

- **Postprocessor:**
  - WLMGL report (TOTAL and AVG STORAGE fields)
- **Monitor III:**
  - SYSINFO report (SYSMEMUS field)
  - SYSSUM report (SUMMEMUS field)

## Quick start

You can bypass the Primary menu if you want to get directly to the reporter you need. To do this, enter the RMF command with the appropriate option:

- RMF PP to call the Postprocessor
- RMF MON2 to call Monitor II
- RMF MON3 to call Monitor III
- RMF UTIL to call the Monitor III Utility (see *z/OS Resource Measurement Facility Programmer's Guide*)

## Getting help with RMF dialogs

---

Online help for RMF reporting sessions includes a tutorial, help, and message help panels. For more information about a report or a panel, press PF1. To use the RMF tutorial, either enter the **T** command on the Primary menu, or enter =T (using the ISPF "jump" facility) from the command line on any panel.

## Getting help for a report

Press the Help key while viewing any RMF panel to see the Extended Help for that panel. The Extended Help provides access to all information related to the panel.

For tabular reports, an example of the report is shown at the top of the Extended Help. Field Help is available for all of the highlighted column headers shown in this example.

**Note:** In some cases, the help for several fields has been grouped together (for example, there is only one help for all fields in the report header). The highlighted line below the example indicates which column headers in the last line have been combined into a single help topic.

To see help for one of the highlighted fields in an example of a report, tab to it and press the Help key (using the Tab key will show you which fields have separate help topics).

The non-highlighted areas in the example of the report represent sample data. There is no additional help available for these areas.

Help for fields on option panels and graphic reports (Monitor III only) is provided through a list.

## What do the highlighted areas mean?

The help panels for RMF contains two types of highlighted phrases. One type is called **emphasized text** and the other type is called a **reference phrase**.

- Emphasized text is highlighted merely to provide emphasis, and you cannot tab to it.
- A reference phrase is a highlighted phrase that you can tab to. If you do so, and then press the Help key, you will be presented with more information related to the phrase.

## Some words about the tutorial

The tutorial provides an overview of the latest RMF features, and also acts as a reference tool for system programmers, service administrators, performance analysts and operators who use RMF.

The tutorial consists of separate sections for Monitor III, Monitor II and the Postprocessor, respectively.

The Monitor III tutorial has been expanded to include several short scenarios that illustrate how to use some of the most common Monitor III reports.

Because of its task-oriented structure, you should be able to use this tutorial as an educational tool, by going through all of the information from start to finish, and also as a reference tool to find specific information.

Wherever possible, this tutorial takes advantage of the detailed help that is available for each report. It does this by providing an overview of a task with links into the existing help information.

## Message help and stacked messages

To access the message help, press PF1 after the RMF message appears on the panel. When multiple messages occur at the same time, RMF displays the first message, and stacks the others. When you press PF1, RMF displays the help panel for the first message. Below the help text, "Additional messages have occurred" appears. Press ENTER on the message help panel to display the stacked messages.



---

## Chapter 8. Interactive performance analysis with Monitor III

This information unit describes how to find your way through the ISPF panels that are your window on the data that Monitor III provides.

To start a Monitor III session, just enter the TSO/E command RMF and select "Monitor III" from the "RMF - Performance Management" panel that comes up.

This information unit provides the following information:

- what to do with the Monitor III Primary menu
- how to get to the other screens you need
- which commands and reports are available

Monitor III gives you a single point of control for monitoring resource usage within a sysplex. You can specify the appropriate system ID for the view you want in any system report.

**Tip:** You can view data from other systems using the ISPF interface for Monitor III. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Monitor III data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

In addition, when a user initiates a reporter session on a system within a sysplex that does not run on the highest RMF level available, Monitor III generates an information message ERB955I. This message is intended to assist users in preventing reporting issues and ensuring the smooth functioning of the system.

---

### Before you start Monitor III

#### Enabling RMF:

RMF is an optional feature of z/OS. It is present in the system, whether you have purchased it or not. If you have not specifically ordered RMF, it is disabled. The Monitor III session cannot be started, and you will receive the message:

**ERB911I RMF is not enabled to run on this system**

#### Data set allocation

During a Monitor III Reporter session, you can display either data gathered by a running Monitor III Gatherer session, or data recorded on VSAM data sets during an earlier gatherer session on any system. If you intend to display data from VSAM data sets, you must allocate them before you start the Monitor III Reporter session:

```
ALLOC FI(RMFDS00) DA(vsam_dsname) SHR
```

If you allocate more than one data set, and you can allocate data sets from different systems (for example, all members of your sysplex), then the DDNAMEs must be in ascending sequence without gaps. For example, if you need to allocate three data sets, the DDNAMEs would be RMFDS00, RMFDS01, and RMFDS02.

If you used names that were not contiguous, for example RMFDS00, RMFDS01, and RMFDS03, RMF would disregard those names following the gap that are not contiguous (in our example, RMFDS03).

**Note:**

1. If you are allocating data sets from a sysplex, it is of key importance that you allocate **all data sets** of the sysplex to enable complete reporting.
2. You can allocate only VSAM data sets which do not belong to an active Monitor III Gatherer session.

## Sysplex Allocation

If you have a sysplex with four members, and you have a naming convention that the VSAM data sets of each member have the name SYS1.ERB.&SYSNAME.VSAM (see [Generalizing parmlib members in z/OS Data Gatherer User's Guide](#)), then you would use this allocation:

```
ALLOC FI(RMFDS00) DA('SYS1.ERB.SYSTEMA.VSAM') SHR
ALLOC FI(RMFDS01) DA('SYS1.ERB.SYSTEMB.VSAM') SHR
ALLOC FI(RMFDS02) DA('SYS1.ERB.SYSTEMC.VSAM') SHR
ALLOC FI(RMFDS03) DA('SYS1.ERB.SYSTEMD.VSAM') SHR
```

This example implies that SYSTEMA is the MVS system name of the first member.

For more information, see [“Using the Data Index \(DI\)” on page 71](#).

## Transferring Monitor III VSAM data sets to other systems

A Monitor III Reporter session that uses preallocated data sets does not require the Monitor III data gatherer to be running on the same system. You can therefore display on one system data that RMF has gathered on another system. This allows you, for example, to run Monitor III Reporter sessions on one system, and send the data sets from other locations to be analyzed there. Once transmitted, the data sets can be preallocated and then analyzed during a reporter session in the usual manner.

**Note:** This transfer of Monitor III data from one system to another is not required for real-time monitoring in the sysplex. If you want to access current data from any system in the sysplex during a reporter session, the data is made available through the sysplex data server automatically.

## Sending data sets to a different system

When you have collected data in several VSAM data sets, use the CLIST **ERBV2S**, which is supplied with RMF, to unload them to a sequential data set for transport.

### ERBV2S Syntax

```
ERBV2S vsam_dsn seq_dsn [TRACKS(num_tracks)]
```

Where:

#### **vsam\_dsn**

The name of the Monitor III VSAM data set.

#### **seq\_dsn**

The name of the sequential data set to be created.

If this parameter is specified as \*, ERBV2S creates a data set name according to the following rules:

- The suffix **SEQ** is appended to the input data set name
- The first qualifier is replaced by the user's dsname prefix

#### **num\_tracks**

The size of the primary extent of the sequential output data set. The default is 250 tracks. Any unused space is released after REPRO.

## Examples

To unload the data from VSAM data set RMF.MONIII.DS1 to sequential data set RMF.MONIII.DS1.UNLOAD, enter:

```
ERBV2S 'RMF.MONIII.DS1' 'RMF.MONIII.DS1.UNLOAD'
```

To unload the same data to sequential data set userid.MONIII.DS1.SEQ, enter:

```
ERBV2S 'RMF.MONIII.DS1' *
```

Use TRANSMIT to send the resulting sequential file to another system for analysis.

## Receiving data sets at the analyzing system

When you have received the data sets, prepare them for display by running the CLIST **ERBS2V**, which is supplied with RMF. ERBS2V allocates a Monitor III VSAM data set and REPROs the input sequential data set to that VSAM data set.

### ERBS2V Syntax

```
ERBS2V seq_dsn vsam_dsn [VSAMVOL(volume)] [TRACKS(num_tracks)]
```

Where:

#### **seq\_dsn**

The name of the sequential input data set that contains unloaded Monitor III VSAM data.

#### **vsam\_dsn**

The name of the Monitor III VSAM data set to be created.

#### **volume**

The name of the volume on which the VSAM data set is to be allocated. If this parameter is omitted, the VSAM data set is allocated on the same volume as the input sequential data set *seq\_dsn*.

#### **num\_tracks**

The size of the primary extent of the VSAM output data set. If this parameter is omitted, the allocated space of the sequential input data set will be used.

## Example

To load the sequential data set RMF.MONIII.DS1.UNLOAD into the VSAM data set named RMF.M3.DS1 on volume DATA10, enter:

```
ERBS2V 'RMF.MIII.DS1.UNLOAD' 'RMF.M3.DS1' VSAMVOL(DATA10)
```

## Messages during Monitor III start

There are two special cases in which you might see a message on your terminal after calling Monitor III:

- ADM0873 I IF AVAILABLE, PLEASE SELECT PCLK, OTHERWISE, PRESS 'ENTER'

This messages indicates that your 3270 terminal either has no graphic capability, or that you run on a multisession terminal (for example 3279) in a session that has not been defined in the VTAM® control unit as graphic session. As result, Monitor III can create tabular reports only.

- IEC130I ADMPC DD STATEMENT MISSING

This messages might appear in a 3270 emulator session on your workstation. You can ignore it, and Monitor III will create graphic reports.

# Sysplex considerations

You can view data from other systems using the ISPF interface for Postprocessor. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Postprocessor data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

## The Monitor III Primary Menu

To start a Monitor III session, just enter the TSO/E command RMF and select "Monitor III" from the "RMF - Performance Management" panel that comes up. The panel that RMF displays in response to your selection is the Monitor III Primary Menu:

```
RMF Monitor III Primary Menu                                3.1
Selection ==>
Enter selection number or command on selection line.

S SYSPLEX           Sysplex reports and Data Index           (SP)
1 OVERVIEW          WFEX, SYSINFO, and Detail reports        (OV)
2 JOBS              All information about job delays          (JS)
3 RESOURCE          Processor, Device, Enqueue, and Storage   (RS)
4 SUBS              Subsystem information for HSM, JES, and XCF (SUB)

U USER             User-written reports (add your own ...)   (US)

O OPTIONS          T TUTORIAL          X EXIT

5655-ZOS Copyright IBM Corp. 1986, 2023.
Licensed Materials - Property of IBM

F1=HELP    F2=SPLIT    F3=END    F4=RETURN    F5=RFIND    F6=TOGGLE
F7=UP      F8=DOWN     F9=SWAP    F10=BREF   F11=FREF   F12=RETRIEVE
```

Figure 7. Monitor III Primary Menu

**Tip:** You can view data from other systems using the ISPF interface for Monitor III. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Monitor III data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

In addition, when a user initiates a reporter session on a system within a sysplex that does not run on the highest RMF level available, Monitor III generates an information message ERB955I. This message is intended to assist users in preventing reporting issues and ensuring the smooth functioning of the system.

## Navigating from the Primary Menu

On this panel, you can tell RMF

- What you want reported
- How you want it reported
- Whether for single or multiple systems

Select **what** you want reported in one of two ways:

1. Make a selection from the list that starts at the top of the panel:
  - The single number or letter on the left
  - The command shown in upper case beside it

- The abbreviated command shown on the right in parentheses

RMF then presents you the appropriate selection menu that allows you to select the individual report you want. Make your selection here in the same way.

2. Select an individual report directly by entering the appropriate command on the selection line. The available commands, with abbreviations and a short description of what the resulting report will contain, are listed in [Table 11 on page 91](#). These commands are called *report commands*.

Use the parameters of the report commands to narrow down the reports to essentials.

The first choice, SYSPLEX, leads you to the sysplex reports, and choices 1 to 4 lead you to single-system reports. You can specify the system you want on the panel that displays the individual single-system reports by overtyping the current system.

In addition, option U or USER leads to a menu with user-written reports. There you find three IBM-supplied examples that are created by help of the Monitor III Utility (see *z/OS Resource Measurement Facility Programmer's Guide*). Each installation can use this menu to offer all installation-specific own reports.

You can also influence **how** RMF presents the reports in two ways:

1. By entering 0 or OPTIONS to reach the Option Selection menu. This guides you in specifying the report options for the session.
2. By using *option commands* to call up the data-entry panels for the options you want to specify. You will find these commands listed in [“Option commands” on page 75](#).

As you can see from the bottom line of the panel you can also:

- Call up a tutorial about Monitor III by entering T or TUTORIAL
- End the session by entering X or EXIT

## **SYSPLEX**

The SYSPLEX command displays the Sysplex Report Selection menu. Use this menu to select one of the sysplex reports, or the Data Index.

All sysplex reports provide a sysplex view of your system. Whenever you invoke one of these reports, the data from all systems belonging to the sysplex is retrieved and transferred to the reporting system by the RMF Sysplex Data Server.

```

RMF Sysplex Report Selection Menu
Selection ==>
Enter selection number or command for desired report.

Sysplex Reports
 1 SYSSUM Sysplex performance summary (SUM)
1A SYSRG Resource Group activity (SRG)
 2 SYSRTD Response time distribution (RTD)
 3 SYSWKM Work Manager delays (WKM)
 4 SYSEQ Sysplex-wide Enqueue delays (ES)
 5 CFOVER Coupling Facility overview (CO)
 6 CFSYS Coupling Facility systems (CS)
 7 CFACT Coupling Facility activity (CA)
 8 CACHSUM Cache summary (CAS)
 9 CACHDET Cache detail (CAD)
10 RLSSC VSAM RLS activity by storage class (RLS)
11 RLSDS VSAM RLS activity by data set (RLD)
12 RLRLRU VSAM LRU overview (RLL)
13 ZFSOVW zFS Overview (ZFO)
14 ZFSFS zFS File System (ZFF)
15 ZFSKN zFS Kernel (ZFK)
16 CRYOVW Crypto hardware overview (CRO)
17 CRYACC Crypto accelerator activity (CRA)
18 CRYPKC Crypto PKCS11 coprocessor activity (CRP)

Data Index
 D DSINDEX Data index (DI)

```

Figure 8. Monitor III Sysplex Report Selection Menu

## OVERVIEW

The OVERVIEW command displays the Overview Report Selection menu. Use this menu to select Workflow/exceptions, system information, and various detail reports.

```

RMF Overview Report Selection Menu
Selection ==>
Enter selection number or command for desired report.

Basic Reports
 1 WFEX Workflow/Exceptions (WE)
 2 SYSINFO System information (SI)
 3 CPC CPC capacity

Detail Reports
 4 DELAY Delays (DLY)
4A USAGE Job Usage (USG)
 5 GROUP Group response time breakdown (RT)
 6 ENCLAVE Enclave resource consumption and delays (ENCL)
 7 OPD OMVS process data
10 SPACEG Storage space (SPG)
11 SPACED Disk space (SPD)
12 LOCKSP Spin locks (LSP)
13 LOCKSU Suspend locks (LSU)

```

Figure 9. Monitor III Overview Report Selection Menu

## JOBS

This command displays the Job Report Selection menu, which shows available reports about job delays. Use this menu to choose the specific job you want to analyze and the type of delay you want reported.

To get a list of active job names, use cursor-sensitive control on the **Jobname** field to invoke the Job Report Options panel.

```

RMF Job Report Selection Menu
Selection ==>

Enter selection number or command and jobname for desired job report.

Jobname ==> _____

 1 DEVJ          Delay caused by devices                (DVJ)
1A DSNJ          ..Data set level                      (DSJ)
 2 ENQJ          Delay caused by ENQ                    (EJ)
 3 HSMJ          Delay caused by HSM                    (HJ)
 4 JESJ          Delay caused by JES                    (JJ)
 5 JOB           Delay caused by primary reason          (DELAYJ)
 6 MNTJ          Delay caused by volume mount            (MTJ)
 7 MSGJ          Delay caused by operator reply          (MSJ)
 8 PROCL          Delay caused by processor              (PJ)
 9 QSCJ          Delay caused by QUIESCE via RESET command (QJ)
10 STORJ         Delay caused by storage                 (SJ)
11 XCFJ         Delay caused by XCF                     (XJ)

```

These reports can also be selected by placing the cursor on the corresponding delay reason column of the DELAY or JOB reports and pressing ENTER or by using the commands from any panel.

Figure 10. Monitor III Job Report Selection Menu

Job-oriented reports show delay components for jobs, such as resource delays, subsystem delays, operator, and device delays.

## RESOURCE

The RESOURCE command displays the Resource Report Selection Menu. Use this menu to select reports on processors, devices, enqueue and storage. Use this menu to choose what resource you want to see delays or storage problems for.

```

RMF Resource Report Selection Menu
Selection ==>

Enter selection number or command for desired report.

Processor      1 PROC      Processor delays                (PD)
                1A PROCU   Processor usage                (PU)
Device         2 DEV       Device delays                  (DD)
                3 DEVR     Device resource                (DR)
                3A DSND    ..Data set level by DSN         (DSN)
                3B DSNV    ..Data set level by volume      (DSV)
Enqueue        4 ENQ       Enqueue delays                 (ED)
                5 ENQR     Enqueue resource               (ER)
Storage        6 STOR      Storage delays for each job    (SD)
                7 STORF    Storage usage by frames        (SF)
                7A STORM   Storage usage by memory objects (SM)
                8 STORR    Storage usage for each resource (SR)
                9 STORS    Storage summary for each group  (SS)
                10 STORC   Common storage summary         (SC)
                11 STORCR  Common storage remaining       (SCR)
I/O Subsystem  12 CHANNEL  Channel path activity         (CH)
                13 IOQUEUE I/O queuing activity           (IQ)
                14 PCIE    PCIE activity                  (PCI)
                15 EADM    EADM activity                  (SCM)

```

Figure 11. Monitor III Resource Report Selection Menu

## SUBS

The SUBS command displays the Subsystem Report Selection menu. Use this menu to select HSM, JES, and XCF Delay reports.

```

RMF Subsystem Report Selection Menu
Selection ===>
Enter selection number or command for desired subsystem report.

1 HSM                Hierarchical Storage Manager delays      (HD)
2 JES                Job Entry Subsystem delays              (JD)
3 XCF                Cross System Coupling Facility delays    (XD)

```

Figure 12. Monitor III Subsystem Report Selection Menu

## USER

The USER command displays the **User-written Report Selection Menu**. Use this menu to select your user-written reports or those examples that are provided with Monitor III.

```

RMF User-written Report Selection Menu
Selection ===>
Enter selection number or command for desired report.

2 DSD                Detailed Storage Delays

Device Reports
DA DEVN              Device Activity
DT DEVT              Device Trend
                     Device   => _____

System Reports
ST SYSTREND          System and Workload Trend
                     Workload => _____

```

Figure 13. Monitor III User-written Report Selection Menu

## STOP and GO

Monitor III Reporter sessions can run in two modes: STOP and GO. You can specify the mode in commands or session options.

### STOP mode - This is the default mode

When you start Monitor III, the first report presents either the current time interval or, if you are reporting on preallocated data sets, the newest data.

When navigating among the various reports, you always cover the same range. This enables you to see your sysplex or system data from different viewpoints that belong together. You can modify the time or the range either by using the BREF and FREF commands, or by overtyping the time, date, or range fields in the header of the report panel:

```

RMF 3.1  TITLE                                     Line 1 of 30
Command ===>                                     Scroll ===> HALF

Samples: nnn    System: syst  Date: mm/dd/yy  Time: hh.mm.ss  Range: 100    Sec

```

Figure 14. Header of Monitor III Single-System Reports

### GO mode - You start this by command or option

GO mode is available only when reporting on current data in the sysplex. It is not possible with preallocated data sets. Use it to monitor your system continuously. By specifying a Refresh value in the session options, you define the frequency at which the requested report will be updated. Ideally, this interval should be the same as the gathering interval defined in the MINTIME gatherer option.



**Note:** We recommend a separate service class for TSO users who run permanently or frequently in GO mode, to avoid falsifying the average TSO response time. When you run the Monitor III Reporter in GO mode, each display of the updated report is considered as a TSO transaction. If the range is, for example, 100 seconds, the response time for each of these transactions is counted as 100 seconds. This has a significant impact on the overall TSO response-time report, especially on systems with a small number of TSO users.

For more information on STOP and GO modes, refer to [“Setting GO mode” on page 80](#).

## Using the Data Index (DI)

The Data Index (DI) provides information about the data that is currently available for your Reporter session:

- Current data from all active gatherers in the sysplex
- Preallocated data sets from previous gatherer sessions

To display the index, select it on the Primary menu or enter DI or DS on any command line.

You can also see if data is missing, or could not be retrieved for one of the following reasons:

- No data is available on the system
- The system does not respond
- The gatherer for the system is not active
- RMF is not active on a system
- The preallocated data set is empty or has an error

Thus the Data Index provides a compact overview of information about all systems belonging to the sysplex, regardless of whether RMF is active or not.

## Contents of the Data Index

Command ==>			RMF 3.1 Data Index - RMFPLEX1			Line 1 of 22			
						Scroll ==> HALF			
Samples: 118		System: MVS2		Date: 04/25/2023		Time: 10.12.00		Range: 120	Sec
----Begin/End----									
System		--Date--		--Time--		-DDNAME-		-----Data Set Name-----	
MVS1	04/25/2023		10.03.20						
			10.12.00		* * *		In-storage buffer		* * *
MVS1			SYS00002		RMF.MONITOR3.DATASET1.MVS3				
					* * *		Data from system MVS3		* * *
MVS1			SYS00001		RMF.MONITOR3.DATASET2.MVS3				
					* * *		Data from system MVS3		* * *
MVS2	04/25/2023		09.11.00		SYS00002		RMF.MONITOR3.DATASET1.MVS2		
			09.14.00						
MVS2	04/25/2023		10.03.00		SYS00003		RMF.MONITOR3.DATASET2.MVS2		
			10.12.00		* * *		Currently active		* * *
MVS2	04/25/2023		10.03.00						
			10.12.00		* * *		In-storage buffer		* * *
MVS3	04/25/2023		09.11.00		SYS00002		RMF.MONITOR3.DATASET1.MVS3		
			09.14.00						
MVS3	04/25/2023		10.03.00		SYS00003		RMF.MONITOR3.DATASET2.MVS3		
			10.12.00		* * *		Currently active		* * *
MVS3	04/25/2023		10.03.00						
			10.12.00		* * *		In-storage buffer		* * *
TEST					* * *		No response		* * *

Figure 15. Data Index

For each active Monitor III data gatherer in the sysplex, the Data Index lists:

- All data sets written by the gatherer
- The RMF in-storage buffer

For a Reporter session with preallocated data sets, the index lists these data sets.

## Reducing information on the report

The screen allows you to display all data sets that are available throughout the whole sysplex. As this may be a long list, you can use the **DDNAMES/DSNAMES** option on the Report Options panel to reduce the data-set level information per system. If this option is used to exclude the data set names from the index, the layout changes, and the screen looks as shown in the following figure.

```

RMF 3.1  Data Index - RMFPLEX1                               Line 1 of 4
Command ==>                                                    Scroll ==> HALF

Samples: 118      System: RMFE  Date: 04/25/2023  Time: 10.12.00  Range: 120   Sec

-----Begin-----      -----End-----
System --Date-- --Time--      --Date-- --Time--

MVS1  04/25/2023 10.03.20      04/25/2023 10.12.00
MVS2  04/25/2023 09.11.00      04/25/2023 10.12.00
MVS3  04/25/2023 09.11.00      04/25/2023 10.12.00
TEST                                     * * *   No response   * * *
```

Figure 16. Data Index - Condensed Version

This screen displays information about data that is available throughout the sysplex. It shows at a glance for which time ranges data is available on each system, or if no data is available at all, or could not be retrieved because of special conditions.

## Data sources

Two situations should be distinguished:

- Preallocated data sets

In this situation, the reporter retrieves data only from the preallocated data sets to the local reporter session, independent of any gatherers that are running on the various systems. It is possible to preallocate data sets created on different systems. The Data Index shows all data available in all the data sets, with the respective system-ID.

- Gatherer Session - no preallocated data sets

Here, the Data Index shows the data available through the gatherers running in the sysplex. For each gatherer, this may be the in-storage-buffer and, if data-set support is active, the data sets on which the gatherer is recording.

Rows with data that are available on the local system are displayed in turquoise. All other rows are displayed in dark blue.

## Messages

The following messages can be shown in special cases:

### \*\*\* Currently active \*\*\*

The currently active data set for the Monitor III data gatherer session (appears only on the Data Index for a reporter session without preallocated data sets)

### \*\*\* In-storage buffer\*\*\*

The local storage buffer entry of the Monitor III data gatherer

### \*\*\* Empty \*\*\*

Data set with no usable data. For a session without preallocated data sets, data set recording might not be active and RMF cannot find the LRECL or CI SIZE for the data sets. For a session with

preallocated data sets, the data set might be empty or contain other than sampled data gathered during a Monitor III data gatherer session.

**\*\*\* No data available \*\*\***

There is no data available for the system listed in the System: field on this line.

**\*\*\* No response \*\*\***

A system that is part of the sysplex, according to the XCF system name list, does not reply to the request for data

**\*\*\*Gatherer not active \*\*\***

RMF is active on a system, but the Monitor III gatherer is not started

**\*\*\* RMF not active in xxxxxxxx \*\*\***

The RMF address space is not active on system xxxxxxxx. Therefore, no data can be reported for this system.

The eight-character MVS system name xxxxxxxx is defined in the SYS1.PARMLIB(IEASYSxx) parameter SYSNAME.

The four-character SMF system ID, defined in the SYS1.PARMLIB(SMFPRMxx) parameter SID(yyyy) cannot be determined, and is set to '????'.

The following messages occur when the data gatherer tried to use the data set.

**\*\*\* Not Found \*\*\***

Uncataloged data set specified on the DATASET option of the Monitor III data gatherer session (the data set is unusable)

**\*\*\* Invalid RECSIZE \*\*\***

Data set specified with an invalid record size (the data set is unusable)

**\*\*\* Invalid CISIZE \*\*\***

Data set specified with an invalid control interval size (the data set is unusable)

**\*\*\* Open Error RC=xx reason=xxx \*\*\***

Error in opening the data set (the data set is unusable)

**\*\*\* Close Error RC=xx reason=xxx \*\*\***

Error in closing the data set (the data set is unusable)

**\*\*\* VSAM error RC=xx reason=xxx \*\*\***

Error in reading the VSAM data set (the data set is unusable)

**\*\*\* DYNALLOC RC=xx IRC=xxxx ERC=xxxx \*\*\***

Dynamic allocation error (the data set is unusable)

**\*\*\* UNALLOC RC=xx IRC=xxxx ERC=xxxx \*\*\***

Data set unallocated (the data set is unusable)

**\*\*\* Sample time exceeds current time \*\*\***

Data set with a sample time that is later than the current system time. The system time has probably been incorrectly set. (This message does not appear on the screen with preallocated data sets.)

**\*\*\* Data from sysplex xxxxxxxx \*\*\***

For either preallocated data sets or gatherer data sets, a data set that is from a sysplex other than the one selected has been encountered. Only one sysplex can be represented by the data on the Data Index. No other reports can be shown as long as this error persists.

**\*\*\* Data from system xxxx \*\*\***

The reporter cannot report data from gatherer data sets from another system. The gatherer marks the data sets as unusable if more than one system has written to a data set. The reporter cannot access the data in data sets that are marked unusable.

The reporter also cannot report data from different sysplexes in one session.

## Field descriptions

Table 6. Field Descriptions for the Data Index	
Field Heading	Meaning
System (on detailed and condensed version)	The four character SMF system identifier.
Begin/End Date Time (on detailed version)	These are the beginning and ending dates/times for the data in the usable and not empty data sets or the in-storage buffers.
Begin Date Time (on condensed version)	The begin date and time for which data is available on the respective system.
End Date Time (on condensed version)	The end date and time for which data is available on the respective system.

**Note:** If you are using old data, the sysplex ID and other fields may be blank.

## Cursor-sensitive control

Cursor-sensitive control on the *System* field switches to the selected system. This means that data from the requested system is retrieved, if available, and the Data Index is redisplayed, with the selected system shown in the header System field, and the corresponding lines of the report shown in turquoise.

## Data Index options

RMF Data Index Options	
Command ==>	
Change or verify parameters. Press END to save and end.	
DDNAMES/DSNAMES ==> YES	Include DDNAMES / DSNAMES information (YES NO)
Sort Order ==> ASCEND	Sort data set names (ASCEND DESCEND)

Figure 17. Data Index Options Panel

The Data Index has two options: the *DDNAMES/DSNAMES* and the *Sort Order* options.

### DDNAMES/DSNAMES

Allows switching between a panel listing data set names, as shown in [Figure 15 on page 71](#), and a panel giving a condensed list of systems belonging to the sysplex, as shown in [Figure 16 on page 72](#).

### Sort Order

Specifies the sort order of the displayed data sets.

The sort criteria are at first the System ID and within each system the end date/time of the available data.

If more rows than one with the same system ID exist, the usable data sets that are not empty are listed first, then the empty data sets, and finally the unusable data sets. The usable data sets that are not empty are sorted by the end time of the stored data.

## Monitor III session and option commands - Overview

This chapter provides an overview of the following types of Monitor III commands:

- “Session commands” on page 75: these commands help you to work within a session.
- “Option commands” on page 75: these commands help you to define the appearance of a session.

## Session commands

Table 7. Monitor III Session Commands			
Task	Command	Parameters	Result
<a href="#">“Backward and forward referencing” on page 76</a>	BREF FREF	DATE = TIME = RANGE = SYSTEM =	Changes date, time, range, and system
<a href="#">“Cancelling entries on option panels” on page 79</a>	CANCEL		Restores options to state at panel entrance (except Job Report Options panel)
<a href="#">“Getting help for RMF commands” on page 79</a>	COMMANDS (COM, CMD)		Displays RMF help menu for commands
<a href="#">“Displaying current range data” on page 79</a>	CURRENT (CU)		Retrieves current data for display
<a href="#">“Searching for a field” on page 79</a>	FIND (F, FI)		Searches for character string on report panels
<a href="#">“Setting GO mode” on page 80</a>	GO		Switches to GO mode processing
<a href="#">“Activating GRAPHIC mode” on page 80</a>	GRAPHIC (GR)	ON OFF	Switches to graphic mode Switches to tabular mode
<a href="#">“Printing screens and tabular reports” on page 81</a>	HARDCOPY (HC)	ON OFF REPORT SCREEN	Prints all displayed reports Prints no reports Prints tabular copy of reports Prints a copy of the screen image
<a href="#">“Printing graphic reports” on page 81</a>	ICU		Sends report data to ICU and starts an ICU session
<a href="#">“Using program function keys” on page 82</a>	PFK		Displays list of PF keys
<a href="#">“Resetting entries on option panels” on page 83</a>	RESET		Resets options (excluding JOBNAME options) to default values shipped with RMF
<a href="#">“Retrieving the last command” on page 83</a>	RETRIEVE		Displays last command entered on the command line
<a href="#">“Searching for a field” on page 79</a>	RFIND		Repeats the FIND command
<a href="#">“Activating TABULAR mode” on page 83</a>	TABULAR (TAB)	ON OFF	Switches to tabular mode Switches to graphic mode
<a href="#">“Toggling between tabular and graphic display” on page 84</a>	TOGGLE (TOG)		Switches between tabular and graphic display

## Option commands

To change the options of an RMF Monitor III Reporter session, select 0 on the Primary menu, or enter the command OPTIONS on the command line of any panel. In response, RMF displays the Option Selection menu:

```

                                RMF Option Selection Menu
Selection ==>

Select one of the following options or enter command.  Press ENTER.

 1 SESSION      Set Session Options                      (S0)
 2 COLOR        Set Graphics Colors and/or Patterns      (C0)
 3 LANGUAGE     Set Language and Date/Time Options       (L0)
 4 ROPTIONS     Select report options for                (R0)
                  REPORT ==> -----
 5 OPTSET       Change or Select Option Set              (OS)

```

Figure 18. Option Selection Menu

To leave the panel without making a selection, enter END on the selection line.

Table 8. Monitor III Option Commands		
Task	Command	Result
<a href="#">"Changing session options" on page 84</a>	SESSION	Specifies options that are valid for all reports displayed during this session.
<a href="#">"Changing color graphic options" on page 85</a>	COLOR	Defines the colors you like to have in the reports.
<a href="#">"Changing language options" on page 86</a>	LANGUAGE	Defines language-specific display of date and time.
<a href="#">"Changing report options" on page 87</a>	ROPTIONS	<p>Sets or modifies options for a specific report. Therefore, if you make this selection, you must enter a report name in the field</p> <pre>REPORT ==&gt;</pre> <p>Report names and their valid abbreviations are listed in <a href="#">Table 11 on page 91</a>.</p>
<a href="#">"Selecting an option set" on page 88</a>	OPTSET	Builds a set of options and stores it for later use. If you build several different sets of options, you can select the appropriate one for a given session.

## Monitor III session tasks

This topic provides information about the tasks that you can perform during Monitor III sessions, like for example, printing screens and tabular reports, changing session options or using cursor-sensitive control.

### Backward and forward referencing

In STOP mode, you can obtain reports on any data in the data gatherer's in-storage buffer or, with data set support, data contained in user-defined data sets through the use of the BREF (backward referencing) and FREF (forward referencing) commands. You can also do this by using the Date, Time, System and Range fields on the report panels.

Issue this command from a report screen. If you issue this command on a non-report screen, RMF displays the last report viewed for the current Date and Time, and for the Range specified on the Session Options panel. If you have not viewed any reports during the session, RMF displays the Workflow/Exceptions (WFEX) report.

Depending on the parameters specified, and on whether or not you are using data-set support, you can display data from either:

- The data gatherer's in-storage buffer on any or all of the systems in a sysplex
- The data gatherer data sets on any or all systems in the sysplex
- or
- Preallocated data sets

You can use the DI report to list, by system ID, the beginning date/time and end date/time for samples stored on each data set used during data set recording.

Please keep in mind that the easiest way to specify all these values is to enter them directly into the report header line, as in [Figure 19 on page 77](#), rather than on BREF or FREF commands:


```

Command ==>          RMF 3.1  TITLE                      Line 1 of 30
                                                                Scroll ==> HALF
Samples: nnn    System: syst  Date: mm/dd/yy  Time: hh.mm.ss  Range: 100  Sec

```

*Figure 19. Header of Monitor III Single-System Reports*

The syntax of the BREF and FREF commands is:

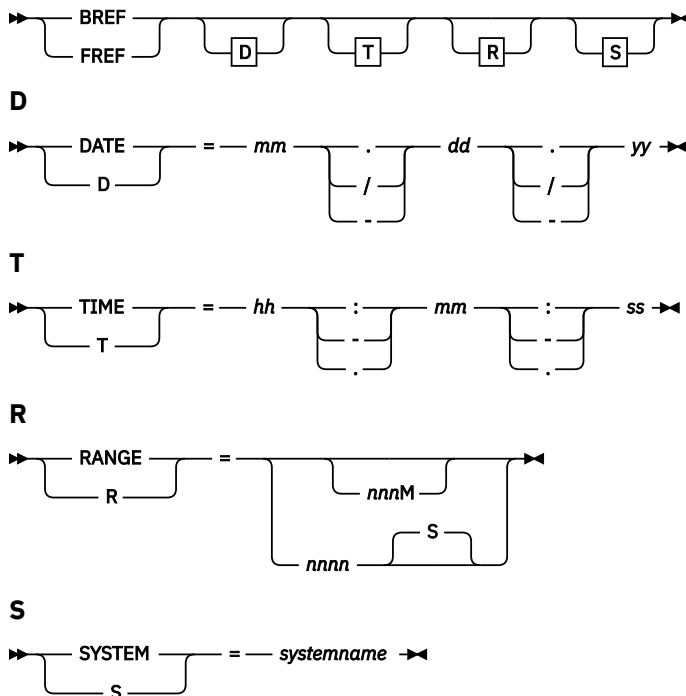

The parameters are all optional, and indicate the following:

#### DATE

Specifies the month, day, and year of the data you want. If you omit this parameter, RMF uses the date displayed on the screen. Leading zeroes can be omitted. The sequence you use for the month, day and year on the BREF/FREF commands must be the same as the sequence specified on the language options panel. RMF supports a sliding window which covers the time frame:

**Current Year - 50 ↔ Current Year + 49**

This sliding window will be used to define the correct value of the century.

#### TIME

Specifies the hour, minute, and second of the data you want to retrieve first. If you omit this parameter, RMF uses the begin or end time of the report currently displayed on the screen. The conditions under which RMF uses the begin or end time are described later in this section. Leading zeroes can be omitted. Seconds or hours can be omitted if they are zeroes. For example, specify TIME=9.5 or TIME=9:5, rather than TIME=09.05.00 or TIME=09:05.00. You can use T as an abbreviation for TIME.

#### RANGE

Specifies the time range over which you want RMF to summarize and present the sampled data. Valid time range values are 0 to 9999 seconds or 0 to 166 minutes. If you specify a value without M or S, RMF uses seconds. If you omit the RANGE parameter, RMF uses the RANGE value currently on the screen. You can use R as an abbreviation for RANGE.

## SYSTEM

Allows you to report on any single system in the sysplex. For systemname specify the name of the system you want to report on. All following single-system reports show data from the specified system, until you specify another system.

### Note:

1. If the data defined by the DATE, TIME, and RANGE parameters is not available in the data gatherer's storage or, if you have specified data sets, in either the data gatherer's storage or user-defined data sets, RMF issues a message to indicate which data is available.
2. If you have specified data sets during a Monitor III data gatherer session, time gaps in the recorded sets of samples might have occurred during data set recording. If, during the reporter session, RMF detects gaps for the requested RANGE time, the following occurs:
  - If all of the data defined by the DATE, TIME, and RANGE parameters is not available because of a time gap, RMF issues messages describing the BEGIN/END time of the gap.
  - If part of the data defined by the DATE, TIME, and RANGE parameters is not available because of one or more time gaps, RMF issues a message to indicate the BEGIN/END time of the first gap. RMF displays the available data, but because some reported values like TCB + SRB time depend on the actual time of the sampling, the results can be misleading.
3. If the TIME specified is not exactly at the beginning of a MINTIME interval, or the RANGE is not a multiple of MINTIME, RMF might present more data than you request. RMF always presents the data that includes the TIME and RANGE values you specify except if the begin or end time of an interval lies within a time gap.
4. You should be aware that a large RANGE value increases the local storage area and CPU time needed by the data reporter.

The BREF and FREF commands perform the same function when you specify a DATE and/or TIME value (with or without a RANGE value). Both commands allow you to pinpoint the time at which you want to start viewing data collected either prior to or subsequent to entering STOP mode.

The BREF and FREF commands perform different functions when one of the following conditions occurs.

- RANGE is the only parameter specified
- No parameters are specified.

## Using BREF/FREF with the RANGE value

If RANGE is the only parameter you specify, the FREF and BREF commands use the TIME value currently displayed on the top of the screen. The FREF command uses the TIME value as the beginning time of the new report and adds the RANGE value you specify to obtain the report interval. The BREF command uses the end time of the current report interval (TIME plus RANGE value displayed at the top of the screen) and subtracts the RANGE value you specify to obtain the beginning time of the new report interval.

Using BREF and FREF by specifying only a RANGE value allows you to include in the report interval data from the current report interval indicated by TIME and RANGE at the top of the screen. With BREF, you can access data in a previous interval as well as the current interval; with FREF, you can access data in a later interval as well as the current interval. For example, if the current RANGE and MINTIME values are 100 seconds, and the TIME on the top of the display screen is 9:00:00, then RMF displays a report containing data from 9:00:00 to the TIME + RANGE value at the top of the screen, which would be 9:01:40. To view data from a previous interval, as well as the currently displayed interval (9:00:00 to 9:01:40), specify BREF R=200. RMF presents a report containing data from 8:58:20 to 9:01:40. (8:58:20 being the TIME + RANGE value at the top of the screen minus 200.) To include one more preceding interval, specify BREF R=300 to present data from 8:56:40 to 9:01:40. If you want to display data only from the current interval again (9:00:00 to 9:01:40), shorten the range parameters on the command to 100 seconds (BREF R=100).

Using the FREF command you can display reports containing data from subsequent intervals. For example, specify FREF R=200 to display a report containing data from 9:00:00 to 9:03:20.



If you specify RANGE=0 with the date and/or time, you can pinpoint the time at which you want to start viewing data. RANGE=0 causes RMF to adjust the range to the smallest possible value, which is the MINTIME value you specified in the data gatherer options. If you want to begin viewing the report at the TIME value on the display screen and you specify BREF or FREF, you must specify RANGE = 0.

## Using BREF/FREF without parameters

If you do not specify any parameters, the **FREF** command uses the TIME value on the display screen and *adds* the RANGE value (on the screen) to calculate the begin time of the data RMF retrieves. The **BREF** command uses the TIME value on the display screen and *subtracts* the RANGE value to calculate the beginning time of the data RMF retrieves.

Once you pinpoint the time that you want to start viewing data collected by the data gatherer, you can issue additional FREF or BREF commands to move backward and forward in time. You can also use the PF10 or PF11 keys, which have default settings of BREF and FREF, respectively.

## Cancelling entries on option panels

If you have made changes and wish to return to the values that were originally on the panel when you first entered the screen, enter on the command line.

➡ CANCEL ⬅

CANCEL cancels all changes you have made except for Date, Time, and Range fields.

**Note:** CANCEL does not work on the Job Report Options panel.

## Getting help for RMF commands

The COMMANDS command displays the RMF help menu for commands, where you can access a definition of the command you want more information on:

➡ COMMANDS ⬅

## Displaying current range data

To display a report with data from the current time for the length of the current range value, enter on the command line:

➡ CURRENT ⬅

"Current range value" means the range value specified on the Session Options panel. This may be different from the range you saw last, if the range has been altered explicitly during the session by:

- A BREF or FREF command with an explicit RANGE option
- A BREF or FREF command using the range displayed on the screen
- Entering a range in the report panel input field

Issue this command from a report screen. If you issue it on a non-report screen, RMF displays the last report viewed for the current date and time, and for the range specified on the Session Options panel. If you have not viewed any reports during the session, RMF displays the Workflow/Exceptions (WFEX) report.

**Note:** The CURRENT command does not work when you are reporting from preallocated data sets.

## Searching for a field

To search for a field on a scrollable report, enter on the command line:

➤ FIND — *string* ➤

where *string* is a character string that can be enclosed in single quotes, but cannot contain any blanks.

To find the next occurrence of that string enter:

➤ RFIND ➤

RFIND is usually assigned to PF5.

When you issue a FIND command on a **tabular report**, RMF searches *from the cursor position* down, displays the line where the character string was found as the top row, and positions the cursor at the beginning of the character string.

When you issue a FIND command on a **graphic report**, RMF actually searches the tabular version of the report. That is, you can use FIND and RFIND successfully on a character string that does not appear in the graphic report, but appears in the tabular report. The search takes place *from the top line* down. RMF displays the bar corresponding to the line of the tabular report in which it found the character string as the top graphic bar, and positions the cursor on the command line.

## Setting GO mode

To switch from STOP mode to GO mode, enter on the command line:

➤ GO ➤

When you enter GO, RMF resets the Range from the value on the Session Options panel.

These are some rules to keep in mind while using the GO command:

- You can not enter any commands on the command line while in GO mode.
- If you enter GO on a panel that is not a report, the last displayed report will be displayed in GO mode or, if no report has been previously displayed during the session, the Workflow/Exceptions report.
- You cannot enter GO mode during a reporter session with preallocated data sets. If you have specified MODE(GO) on the Session Options panel, RMF ignores the GO option.

STOP mode is the default. To ensure the default mode for your system is current with the RMF default, enter the RESET command from the Session Options panel. RESET reestablishes the RMF default settings. When a new option set is created for a new user, the mode is automatically set to STOP.

To switch from GO mode to STOP mode, press the ATTN key or the PA1 key. When using a programmable workstation, typically you will get these keys with the right mouse-click. This action freezes the current report so you can page through it. While in STOP mode, the data gatherer continues to collect data and place it in local storage. With data set recording, the data gatherer continues to copy data from local storage to the data sets.

## Activating GRAPHIC mode

If you are in TABULAR mode when you start a session, use the GRAPHIC command to switch modes. Enter the GRAPHIC command on the command line of any report:


➤ GRAPHIC — { ON / OFF } ➤

RMF activates GRAPHIC mode, and if your terminal supports graphics, and your installation has the Graphical Data Display Manager (GDDM) and the Presentation Graphics Feature (PGF) program products, both Version 2 Release 1 or later, you can display graphic reports. The default for GRAPHIC is ON. To return to tabular report display, specify GRAPHIC OFF on the command line.

**Note:** Do not use a 3270 session with a screen size lower than 32x80.

## Printing screens and tabular reports

Enter the HARDCOPY command on the command line to print a screen or a report. This command has the syntax:

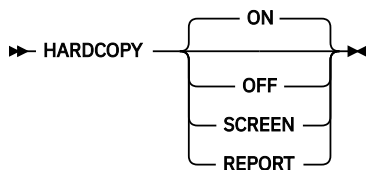

The parameters, which are optional, have the following effect:

### ON

Prints all reports requested during the session, and is equivalent to specifying HARDCOPY on the Session Options panel.

### OFF

Ends the hardcopy mode.

To print a single report or screen when you specify HARDCOPY OFF on the Session Options panel, enter HARDCOPY SCREEN or HARDCOPY REPORT.

### SCREEN

Prints the displayed screen.

HARDCOPY SCREEN will print any report-screen image.

### REPORT

Prints the whole report (because a report can be longer than one screen).

The command causes RMF to print all frames of the report whether they are displayed or not.

RMF writes all reports requested during the session to the output data set you specified on the Session Options panel, or to SYSOUT if an output data set is not specified. The output data set must have the DCB parameters:

```
RECFM(VBA) , LRECL(137)
```

Hardcopy prints only tabular reports; if you specify HARDCOPY ON and access any graphic reports during a session, RMF prints the tabular version of the report.

If you enter HARDCOPY without parameters on the command line, the default is ON, which prints the tabular version of all reports you access during the session.

**Note:** You should use the ISPF PRINT command only in tabular mode. If used in graphic mode, unpredictable results will occur. For more information about ISPF commands, see [z/OS ISPF User's Guide Vol I](#).

## Printing graphic reports

To print RMF graphic reports, use the Interactive Chart Utility (ICU). Issue the ICU command from the command line of a graphic report:

```
➡ ICU ➡
```

The ICU command creates a graphics data file (GDF) of the current screen, starts an ICU session, and displays the initial empty DIRECTORY panel.

To display all of the GDFs created, type **L** in the Commands column and **GDF** in the Type column of the line marked **\*\*\***. [Figure 20 on page 82](#) shows a sample DIRECTORY panel.

```

                                DIRECTORY
ADM1042 I 3 ITEM(S) LISTED

  Commands Name      Type      Library      Date and Time      Description
          ***      GDF      DDNAME      No.      Last Written
          001 DELAY   GDF      ADMGDF      0      09 NOV 2021 10:24 AM RMF
          002 WFEX    GDF      ADMGDF      0      08 NOV 2021 1:43 PM RMF
          003 WFEX1   GDF      ADMGDF      0      03 NOV 2021 9:47 AM RMF

Commands: D (Delete) P (Pick Name) C (Copy From) / (Scroll Here)
          SH (Show GDF File) PR (Print GDF File)
*** Line only: L (List) T (Copy To)

PF: 1=Help 6=Show Description 7=Up 8=Down 9=Exit

```

Figure 20. Interactive Chart Utility (ICU) DIRECTORY Panel

On the ICU DIRECTORY panel, use the ICU commands to view, print, and process the GDFs. For more information on the ICU commands, use the HELP (PF1) key. To return to the RMF session, use the EXIT (PF9) key.

When you enter the ICU command, RMF saves the displayed screen of the graphic report as a member in the data set:

```
userid.RMFZR21.ADMGDF(report name)
```

The member remains in this data set until you delete it. RMF saves and re-uses this data set every time you start a Monitor III Reporter session. Because RMF uses the report name as the member name, the next time you enter ICU on the same report, the member is overwritten. To avoid this, you can either:

- Copy the GDF member into a new member with a different name.  
On the ICU DIRECTORY panel, you can use the “Copy from” and “Copy to” commands.
- Rename the member before entering the ICU command again.

## Using program function keys

Issue the PFK command to display the program function keys:

➡ PFK ➡

You can also use the ISPF KEYS command.

Table 9 on page 82 shows the default PF key settings. The settings for PF keys 13 to 24 are identical to the settings for PF keys 1 to 12.

Table 9. Program Function Keys Defaults	
PF Key	Default Setting
PF1	HELP
PF2	SPLIT
PF3	END
PF4	RETURN
PF5	RFIND
PF6	TOGGLE
PF7	UP
PF8	DOWN

Table 9. Program Function Keys Defaults (continued)

PF Key	Default Setting
PF9	SWAP
PF10	BREF
PF11	FREF
PF12	RETRIEVE

## Using PF keys to build commands

When you press a program function key, RMF builds a command by using the command string defined for the PF key and adding any text in the input line. For example, if you specify T=10.05 on the input line and press PF10, RMF builds the command BREF T=10.05.

## Changing PF key settings

To change the settings for any of the 24 PF keys, use the ISPF KEYS command to access the ISPF PFK screen. There, change the setting next to the PF key, and press ENTER. Changes remain in effect until you alter them again.

**Note:** PF key changes are not stored in RMF option sets. There is only one set of PF key definitions associated with your RMF session.

## Resetting entries on option panels

To ensure the RMF default settings for option panels are in effect, enter RESET on the command line or the respective panel.

➤ RESET ➤

RESET reestablishes RMF's default settings.

**Note:** Because there is no default value for jobname, the RESET command is not valid on the job report options panel.

The CANCEL command changes the value back to what it was when you entered the panel.

For Workflow/Exception (WFEX) and GROUP report options, if you specified YES at "Customization" on the Session Options panel, RESET invokes automatic customization and re-establishes defaults.


## Retrieving the last command

Use the ISPF RETRIEVE command to recall the last command you entered.

➤ RETRIEVE ➤

## Activating TABULAR mode

Issue the TABULAR command on the command line to display tabular reports:

➤ TABULAR  ➤

TABULAR ON is the default. To return to a graphic display, you can specify TABULAR OFF on the command line of any panel.

## toggling between tabular and graphic display

To switch between tabular and graphic displays, press PF6 or enter the TOGGLE command on the command line of any report on a terminal that supports graphics.

➡ TOGGLE ➡

TOGGLE causes RMF to change the display format between graphic and tabular, maintaining the same scrolling position on the screen.

## Displaying user-written reports

Monitor III includes a user exit for both the data gatherer and the data reporter session. Use the Report Format Definition Utility to create unique user reports. Specify the report selection on the user-report menu. See *z/OS Resource Measurement Facility Programmer's Guide* for more information about user-written reports.

## Changing session options

The Session Options panel lets you specify options that apply to more than one report. To display it, select "Set Session Options" from the Option Selection menu, or enter the command SESSION on the command line of any panel.

```
RMF Session Options
Command ==>

Current option set: SYS1POL on MVS1
Change or verify parameters. Press END to save and end.

Mode          ==> STOP      Initial mode (STOP GO)
First Screen   ==> PRIMARY   Initial screen selection (ex: PRIMARY)
Refresh        ==> 100       Refresh period (in seconds)
Range          ==> 100S      Time range 10-9999 sec (ex: 100S, 100)
                                   1-166 min (ex: 2M)
Time Limit     ==> NONE      Time limit or NONE
                                   1-999 min (ex: 10M)
                                   1-128 hours (ex: 1H)
Hardcopy       ==> OFF       Hardcopy mode (ON OFF) (ex: ON)
SYSOUT         ==> A         Class for printed output (ex: A)
Output Data Set ==>          Data set for hardcopy (Overrides SYSOUT)
                                   (GRAPHIC TABULAR) (ex: GRAPHIC)
Report Format   ==> TABULAR   Automatically tailor WFEX report (YES NO)
Customization  ==> YES
Input Data Set ==> 'SYS1.PARMLIB'
                                   Data set for customization (COMPAT mode only)
```

Figure 21. Session Options Panel

Figure 21 on page 84 shows the RMF default session options. The values saved on this panel become part of the current option set, and apply to all displayed reports whenever that option set is in effect. For more information about options sets, see [“Selecting an option set” on page 88](#).

From the Session Options panel, you can:

- Select the display mode (STOP or GO)
- Select the panel you want to appear when you start an RMF session
- Set the refresh period for the reports (GO mode only)
- Set the time range over which you want data reported
- Set the time limit for reports (GO mode only)
- Turn hardcopy mode on or off
- Specify the SYSOUT class
- Specify an output data set for hardcopy reports. This overrides the SYSOUT specification. The data set must already exist. See [“Printing screens and tabular reports” on page 81](#).

- Choose graphic or tabular display for Monitor III reports
- Choose automatic customization for the WFEX report
- Specify the Parmlib from which customization information is to be taken

For more information about the parameters on the Session Options panel, use the HELP (PF1) command.

To leave the panel and save the changes, use the END (PF 3) command. If RMF detects errors, it displays the Session Options panel again with an appropriate error message. If all entries are correct, the changes take effect immediately and remain valid for subsequent sessions, until they are changed again or you choose another option set.

The options "Mode" and "First Screen" are exceptions. They take effect when you start the next RMF session.

To leave the panel without making any changes, enter CANCEL on the command line. If you have not typed anything in, F3 or END has the same effect.

## Changing color graphic options

This two-part panel allows you to specify colors and patterns for the graphic displays of Monitor III reports. You can use this panel only if:

- GDDM and PGF are installed on your host, and
- Your terminal supports graphics

To display the first part of the panel, select 2 on the Option Selection menu, or enter the command COLOR on the command line of any panel. To access the second part of the panel press the DOWN key, and to return to the first part, press the UP key.

[Table 10 on page 86](#) describes the fields on the color graphic options panel.

Command ==>

RMF Color Graphic Options

Screen 1 of 2

Change or verify the color and pattern assignments.

Press DOWN to view the second screen. Press END to save and end.

ID	Name	Color	Pattern	ID	Name	Color	Pattern
1	CMD Line	==> 7		9	ENQ DLY	==> 2	==> 14
2	Headings	==> 1		10	HSM DLY	==> 2	==> 5
3	Title	==> 7		11	JES DLY	==> 2	==> 13
4	CON	==> 5	==> 3	12	LOCL DLY	==> 2	==> 12
5	DSC	==> 5	==> 7	13	OUTR DLY	==> 2	==> 14
6	PND	==> 5	==> 5	14	PROC DLY	==> 2	==> 10
7	COMM DLY	==> 2	==> 9	15	STOR DLY	==> 2	==> 9
8	DEV DLY	==> 2	==> 12	16	SWAP DLY	==> 2	==> 13

1 2 3 4 5 6 7 Colors

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Patterns

Figure 22. Color Graphic Options - Panel 1

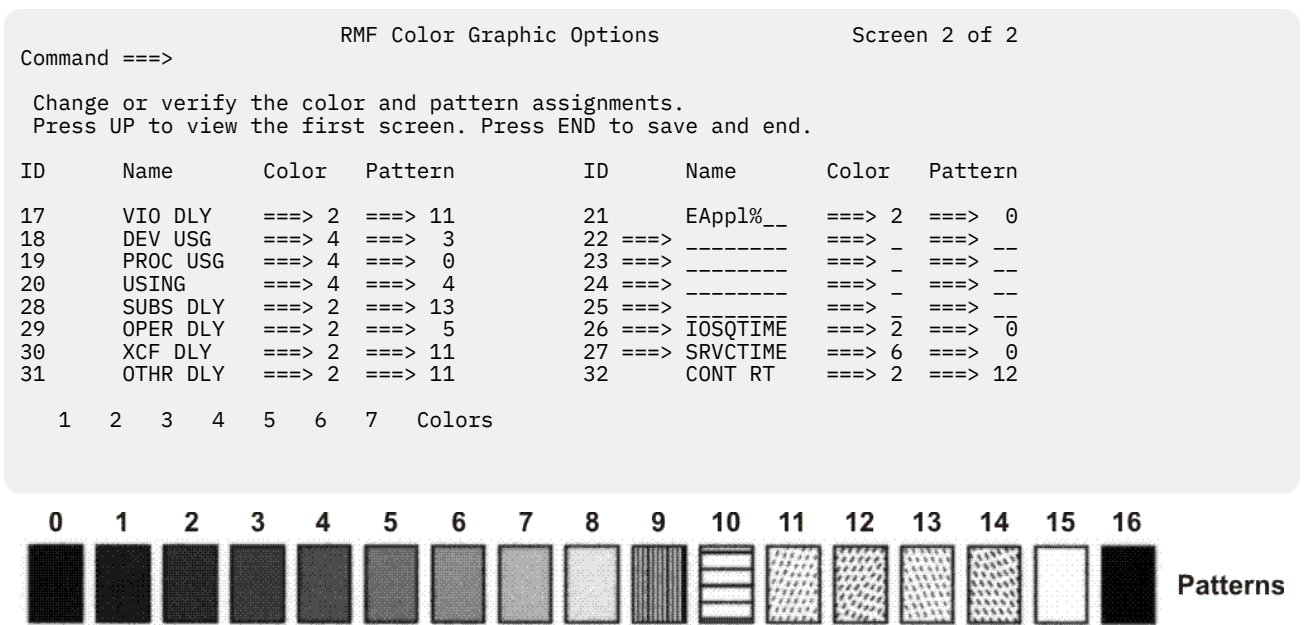


Figure 23. Color Graphic Options - Panel 2

Table 10. Fields on the Graphic Options Panels	
Field Heading	Meaning
ID	Specifies the ID number that represents the item's name, color and pattern assignments.
Name	Specifies the name of the report item that the colors and patterns represent.
Color	Specifies a number (1-7) that represents the color for the graphic bar that depicts the data for Name.
Pattern	Specifies a number (0-16) that represents the pattern for the graphic bar that depicts data for Name.

Items on the Color Graphic Options panel can represent the command line, headings, titles, and the graphic bars that contain and display data on the graphic reports. You can change, for example, the color of the command line (CMD Line), or the pattern for the device delay bar (DEV DLY). You enter changes directly on the panels by choosing colors or choosing patterns.

### Choosing Colors

You can choose among 7 colors. The numbers corresponding to the colors (1-7) appear at the bottom of the screen. Enter the desired color number under the Color column of the items you want to change.

### Choosing Patterns

You can choose among 17 patterns. The numbers corresponding to the patterns (0-16) appear at the bottom of the screen. Enter the desired pattern number under the Pattern column of the items you want to change.

If you want to add an item to be reported, enter it under the Name column on one of the blank lines on the second color graphic options panel and assign it a color and pattern. Entering the CANCEL and RESET commands changes the values on both panels, regardless of which one it was entered on. See [“Cancelling entries on option panels”](#) on page 79.

To save changes on the color graphic panels and exit, use the END key. Changes become part of your current option set and are saved across sessions.

## Changing language options

The Language Options panel allows you to specify the following for all Monitor III output and report options:



- Format of the date
- Character used to separate the date
- Character used to separate the time
- Character used as a decimal point for output values.

**Note:** On **input**, the decimal point is always ‘.’.

To display the language options panel, select option 3 on the Option menu or enter the LANGUAGE command on the command line of any panel.

```

Command ==>          RMF Language Options

Change or verify parameters.  Press END to save and end.

Date Format      ==> MDY      Order for input and output
                        Month (M), Day (D), and Year (Y)
Date Separator   ==> /       Date separator for output (/ or . or -)
Time Separator   ==> .       Time separator for output (. or : or -)
Decimal Point    ==> .       Decimal point in output (. or ,)

```

Figure 24. Language Options Panel

For more information about the parameters, use the HELP (PF1) command.

## Changing report options

The Report Options panels allow you to change the options for all RMF reports. You can customize reports to allow for different jobs, resource names, and workflow exceptions to appear in the report displays. In addition, you can specify service classes, report classes and workload groups.

To obtain the Report Options panel for a report, specify the ROPTIONS command on the command line of the report you wish to change. Figure 25 on page 87 shows a Report Options panel for the DELAY report. For a complete description of these panels for each Monitor III report, see [z/OS Resource Measurement Facility Report Analysis](#).

You can also select the Report Options panel for a report from the Option Selection menu. Enter the full name of the report (or any valid abbreviation) on the REPORT line of the ROPTIONS selection, and select 4 on the command line of the Option Selection menu.

Many Report Options panels offer **wild-card support**. To select groups or jobs with similar names, you can use an asterisk (\*) as a wild card in the last position of the name. You will find details in [z/OS Resource Measurement Facility Report Analysis](#).

RMF saves all of the values entered on a Report Options panel in your current option set. The options take effect immediately.

```

Command ==>          RMF Delay Report Options: DELAY          Line 1 of 1
                                                                Scroll ==> HALF

Change or verify parameters. To exit press END.
All changes (except for Summary and Criterion specification) will apply to
DELAY, DEV, ENQ, HSM, JES, PROC, STOR, STORC, STORF, and XCF.

Class            ==> ALL      Classes: ALL TSO BATCH Started task ASCH OMVS
Service class    ==> *ALL     *ALL or one of available service classes below
Summary          ==> NO      Class summary lines on DELAY report (YES NO)
Criterion        ==> 0       Minimum delay to include job in DELAY report

Jobs            ==> NO      View job selection/exclusion panel next (YES NO)

Available Service classes
APPPRIME  NRPRIME  OMVS    TSOPRIME  SYSTEM    SYSSTC

```

Figure 25. DELAY Report Options Panel

# Selecting an option set

An option set contains all the options that you can define on the option panels:

- Session
- Color graphic
- Report
- Language

The Option Set menu lets you build or select different sets of options to control an RMF display session. To display the menu, enter option O on the Option menu or enter the OPTSET command on the command line of any panel.

The menu allows you to add or delete option sets. All option sets appear in alphabetical order on the panel; however, only one option set can be active or current for an RMF session, and you cannot delete an active option set. If an option set is not current, RMF saves it by name and description. The recommended option set can be deleted only if automatic customization is not active (see [“When you use automatic customization”](#) on page 88).

RMF is shipped with a default option set called INITIAL, which appears on the Option Set menu:

```

Command ==>          RMF Option Set Selection Menu          Line 1 of 2
                                                                Scroll ==> HALF

Enter a code in the action column or fill in a new option set. Press END.
Action codes: Delete (D)   Select (S)

Current Option Set:      STANDARD on SYS5
Recommended Option Set:  STANDARD on SYS5

Action   Name      System   Description
-----
-        STANDARD  SYS5    Generated from option set INITIAL 11/30/22
-        INITIAL   -        initial RMF options
```

Figure 26. Option Set Menu

## When you use automatic customization

If you use automatic workflow/exceptions (WFEX) customization, RMF creates or selects option sets for you. If you specified Customization YES on the Session Options panel, RMF automatically selects the option set listed under Recommended Option Set and makes it current. When automatic customization selects the current option set, all options, not only the WFEX report options, are switched.

With automatic customization, every time data is retrieved from the data gatherer, RMF checks that the options set name and the system ID of the data match the option set name and the system ID of the current option set.

If the option set name and the system ID match, processing continues under the current option set. If the option set name and the system ID do not match, RMF does one of the following:

- If an option set exists whose name and system ID match the option set name and system id of the data from the data gatherer, RMF selects that option set and makes it current.
- If no option set exists with a matching name, RMF creates a new option set and makes it current. For option set name, RMF uses the name of the active service policy. RMF sets the options for all reports, except the WFEX and GROUP reports, from the previous option set that was in effect.

**Note:** The automatic customization can be performed only if you have access authority to the Parmlib data set. Otherwise, you will get an error message and Monitor III will continue with its default options.

## Creating a new option set

To create a new option set, enter a name and a description on the input lines on the option set selection menu, and press enter. RMF initializes the new option set with the values of the current option set. An entry in the Description field is optional.

## Making an option set current

To make an option set current, place an S in the Select column next to the option set name. You can create a new option set and make it current at the same time by placing an S next to the option set name you specify on the input line and then pressing ENTER. The option set you select becomes the current option set.

If automatic customization is active, and you select an option set other than the recommended option set, customization is de-activated. To re-activate automatic customization, you must make the recommended option set current.

## Deleting an option set

To delete an option set, enter D in the Select column next to the name of the option set and press ENTER. RMF displays a warning panel to confirm the delete. However, you cannot delete the current option set. If automatic customization is active you cannot delete the recommended option set. If customization is not active, you can delete the recommended option set.

## Changing an option set

If you want to change options in an option set, you must first make the option set current; then change the session, color graphic, report, and language options, using the option panels. RMF records the changes that you make on these panels during the session in the current option set.

## Using cursor-sensitive control

Cursor-sensitive control lets you place the cursor on a field in a tabular report, press the ENTER key, and see another report containing any additional information about the field. You can move from one RMF report to the other without returning to the primary menu or entering specific commands.

RMF keeps track of your path. Pressing the END (PF3) key returns you to the previous report until you reach the point at which you started.

**Note:** If you press the RETURN (PF4) key, or use the jump function, or, in a sysplex environment, switch from one system to another, RMF displays the Primary menu and you lose all return paths.

If you issue any RMF command while using cursor-sensitive control, or use cursor sensitivity to select a new system ID, RMF will erase the return path up to the point at which you did so.

Cursor-sensitive control is active on:

- Most fields on all tabular reports except STORCR
- The Jobname field of the Job Report Selection menu
- The Report Type field of the Option Selection menu
- All system lines in the Data Index

Cursor-sensitive control is not active on:

- Most selection and option panels
- Graphic reports
- The STORCR report panel
- RMF reports that you modify

## Monitor III help facility

For the Monitor III Reporter dialog, an online help structure is available, in addition to the relevant part of the RMF Tutorial. You can get help for any panel by pressing PF1.

For more details on scope and handling of online help, see [“Getting help with RMF dialogs” on page 61](#).

## Monitor III report commands - Overview

---

Table 11 on page 91 lists all report commands with their parameters and abbreviations. The "How to request this report" section in the *z/OS Resource Measurement Facility Report Analysis* for each report shows an example of the command and parameters.

You can enter the commands on any command line.

The **Parameters** column in [Table 11 on page 91](#) indicates what parameters, if any, you can specify on the respective commands:

### **cfname**

A coupling facility name

### **job\_class**

One of the following names of a job class:

ALL (A)  
ASCH (AS)  
BATCH (B)  
OMVS (O)  
STC (S)  
TSO (T)

### **Note:**

1. This parameter is optional. If it is not specified, ALL is used by default.
2. In addition, ENC (or E) can be specified as class for the DELAY report.

### **dsname**

A data set name

### **jobname**

A job name

### **period**

A service or report class period

### **resource**

A resource name

### **resource\_group**

The name of a resource group or tenant resource group

### **service\_class**

A service class name

### **s/r-class**

A service or report class name

### **ssid**

A cache subsystem identifier

### **sstype**

The name of a subsystem that schedules enclaves

### **storage\_class**

A storage class name

### **volser**

A serial number of a volume

**wlm**

The name of a workload group, a service class, or a report class

Table 11. Report Commands			
Command	Parameters	Displays	Abbreviation
CACHDET	ssid	Cache detail report	CAD
CACHSUM		Cache summary report	CAS
CFACT	cfname	coupling facility activity report	CA
CFOVER	cfname	coupling facility overview report	CO
CFSYS	cfname	coupling facility system report	CS
CHANNEL		Channel path activity report	CHAN, CH
CPC		CPC capacity report	
CRYACC		Crypto accelerator activity	CRA
CRYOVW		Crypto hardware overview	CRO
CRYPKC		Crypto PKCS11 coprocessor activity	CRP
DELAY	job_class, service_class	Delays report for all jobs or specified job groups	DEL, DLY, DL
DELAYJ	jobname	Job report variation for specified job reflecting primary delay reason	DLJ, DJ, DELJ, DLYJ, JOB, JO
DEV	job_class, service_class	Device delays report for all jobs or specified job groups	DD, DVD
DEVJ	jobname	Device delays variation of job report for specified jobname	DDJ, DVJ
DEVR	volser	Device delays report for all or specified resources	DR, DVR
DSINDEX		Data index information	DS, DI
DSND	dsname	Data set delays report for all or specified data sets	DSN
DSNJ	jobname	Data set delays - Job report for specified jobname	DSJ
DSNV	volser	Data set delays - Volume report for specified volume	DSV
EADM		EADM activity report	SCM
ENCLAVE	sstype	Enclave activity report	ENCL
ENQ	job_class, service_class	Enqueue delays report for all jobs or specified job groups	ED
ENQJ	jobname	Enqueue delays variation of job report for specified jobname	EJ
ENQR	resource	Enqueue delays for all or specified resources	ER
GROUP	s/r-class, period	Group response time breakdown	GP, GRP, GD, RT, GRT
HSM	job_class, service_class	HSM delays report for all jobs or specified job groups	HD
HSMJ	jobname	HSM delays variation of job report for specified jobname	HJ
IOQUEUE		I/O queuing activity report	IOQ, IQ
JES	job_class, service_class	JES delays report for all jobs or specified job groups	JD
JESJ	jobname	JES delays variation of job report for specified jobname	JJ
JOB	jobname	Job report variation for specified job reflecting primary delay reason	JO, DELAYJ, DLYJ, DELJ, DLJ, DJ
LOCKSP	HELD   SPIN   <u>BOTH</u>	Spin Lock Report about held spin locks and/or address spaces spinning due to a request for a spin lock	LSP

Table 11. Report Commands (continued)			
Command	Parameters	Displays	Abbreviation
LOCKSU	LOCAL   GLOBAL   <u>BOTH</u>	Suspend Lock Report about local and/or global suspend locks	LSU
MNTJ	jobname	Operator delays variation for mount request of job report for specified jobname	MTJ
MSGJ	jobname	Operator delays variation for message request of job report for specified jobname	MSJ
OPD		OMVS process data	
PCIE		Statistics and performance measurements about PCI Express-based functions	PCI
PROC	job_class, service_class	Processor delays report for all jobs or specified job groups	PD
PRO CJ	jobname	Processor delays variation of job report for specified job	PJ
PROCU	job_class, service_class	Processor usage of a job per processor type (standard or special purpose processors)	PU
QSCJ	jobname	Operator delays variation for quiesce command of job report for specified jobname	QJ
RLSDS	dsname	VSAM RLS activity by data set	RLD
RLSLRU		VSAM LRU overview	RLL
RLSSC	storage_class	VSAM RLS activity by storage class	RLS
SPACED		Disk space report	SPD
SPACEG		Storage space report	SPG
STOR	job_class, service_class	Storage delays report for all jobs or specified job group	SD
STORC	job_class, service_class	Common storage report	SC
STORCR		Common storage remaining at end of job report	SCR
STORF	job_class, service_class	Detailed information on frame counts for all jobs or specified job group	SF
STORM	job_class, service_class	Detailed information about the use of memory objects within the system	SM
STORJ	jobname	Storage delays variation of job report for specified job	SJ
STORR		Storage space and paging activity report for all system volumes	SR
STORS	wlm	Summarized storage information by workload group, service or report class	SS
SYSEQ		Sysplex enqueue delays report	ES
SYSINFO	wlm	System information, total and by user groups	SY, SYS, SI
SYSRG	resource_group	Resource Group Activity report	SRG
SYSRTD	s/r-class, period	Response time distribution report	RTD
SYSSUM	wlm	Sysplex summary	SUM
SYSWKM	s/r-class, period	Work manager delays report for subsystems	WKM
USAGE	job_class, service_class	Job usage report	USG
WFEX		Workflow/exceptions screen	WE, WF
XCF	job_class, service_class	Cross-system coupling facility delays report	XD

Table 11. Report Commands (continued)			
Command	Parameters	Displays	Abbreviation
XCFJ	jobname	XCF delays variation of the job report for specified jobname	XJ
ZFSFS		zFS file system	ZFF
ZFSKN		zFS file system kernel	ZFK
ZFSOVW		zFS file system overview	ZFO

Table 12 on page 93 contains commands for the examples of user-written reports that were delivered with RMF.

Table 12. User-Written Report Commands			
Command	Parameters	Displays	Abbreviation
DEVN		Device activity	DA
DEVT		Device trend	DT
DSD		Detailed storage delays	
SYSTREND		System trend	ST





---

## Chapter 9. Snapshot reporting with Monitor II

This information unit guides you in using the Monitor II sessions:

- ISPF sessions
- TSO/E sessions
- background sessions
- session commands and report commands

### Monitor II sessions

---

There are three types of Monitor II report sessions:

- ISPF session (page [“The ISPF session” on page 95](#))

Start this session with the command:

```
RMF
```

This leads to the RMF Primary menu, where you select **2** to start the Monitor II ISPF session.

- TSO/E session (page [“The TSO/E session” on page 98](#))

Start this session with the TSO/E command:

```
RMFMON
```

- Background session (page [“The background session” on page 99](#))

To start a Monitor II background session when all options are to be taken from the program defaults, issue the command:

```
MODIFY RMF,START AB
```

ISPF sessions and TSO/E sessions are also referred to as **Display sessions**, in contrast to **background session**.

You can obtain a **printout** of a Monitor II report:

- during a display session
- during or at the end of a background session

You can get the same reports in all sessions using a similar syntax:

- Display session

You call the reports using *commands* that conform to TSO/E syntax rules:

**Example:** ASD T,A

In an ISPF session, you can also select the reports from a menu.

- Background session

You call the reports using *options* that conform to option syntax rules:

**Example:** ASD(T,A)

### The ISPF session

**Enablement:** RMF is an optional feature of z/OS. It is present in the system, whether you have purchased it or not. If you have not specifically ordered RMF, it is disabled. The Monitor II session cannot be started, and you will receive the message:

## ERBA000I RMF is not enabled to run on this system

When you select **Monitor II** on the *RMF Primary Menu*, you get the *Monitor II Primary Menu*. You can go from here to the category of report that you want to display, or you can choose the tutorial or exit from Monitor II. You can also enter Monitor II report commands on the selection line.

```
RMF Monitor II Primary Menu                                z/OS V3R2 RMF
Selection ===>

Enter selection number or command on selection line.

 1 Address spaces      Address space reports
 2 I/O Subsystem      I/O Queuing, Device, Channel, and HFS reports
 3 Resource            Enqueue, Storage, SRM, and other resource reports

 L Library Lists      Program library and OPT information
 U User               User-written reports (add your own ...)

                        T TUTORIAL    X EXIT

5655-ZOS Copyright IBM Corp. 1994, 2023.
Licensed Materials - Property of IBM
```

Figure 27. Monitor II Primary Menu

The selection **U** displays the **RMF Monitor II User Reports** selection menu. This option is only meaningful if you have written some reports of your own and included them into the selection menu. For information on how to do this, see *z/OS Resource Measurement Facility Programmer's Guide*.

The Monitor II tutorial is available from the "RMF Primary Menu" as well as the "Monitor II Primary Menu". For information about how to use the Monitor II tutorial, see ["Getting help with RMF dialogs" on page 61](#).

When selected, each category of Monitor II presents a more detailed selection panel showing the individual reports. The categories are:

- Address space reports
- I/O queuing, device, channel, and HFS reports
- Enqueue, storage, SRM, and other resources reports
- Program library and OPT information - allows you to check whether the status of the program libraries or the settings of the OPT parameters are correct for your current environment
- User-written reports.

## Address-space reports

This panel lets you choose what you want to know about address-space activity. The reports offered in the lower part of the panel present information by job name, so if you select one of them, you must enter the appropriate jobname in the "Options" panel that corresponds to the chosen report.

Here is what the panel looks like:

```
RMF Monitor II Address Space Report Selection Menu
Selection ===>

Enter selection number or command on selection line.

 1 ARD      Address space resource data
 2 ASD      Address space state data
 3 ASRM      Address space SRM data

 4 ARDJ      Address space resource data by jobname
 5 ASDJ      Address space state data by jobname
 6 ASRMJ      Address space SRM data by jobname
```

Figure 28. Monitor II Address Space Report Selection Menu

Instead of making a selection, you can enter any Monitor II report command at the selection prompt. The next panel to appear is the report panel you have chosen.

## I/O Queuing, Device, Channel, and HFS reports

From this panel, you can choose whether you want information about channel path activity, about I/O queuing activity, about device activity, or about hierarchical file systems of the UNIX System Services.

Here is what it looks like:

```
RMF Monitor II I/O Report Selection Menu
Selection ==>
Enter selection number or command on selection line.

 1 CHANNEL      Channel path activity
 2 IOQUEUE      I/O queuing activity

 3 DEV          I/O device activity
 4 DEVV         I/O device activity by volume or number

 5 HFS          Hierarchical file system statistics
```

Figure 29. Monitor II I/O Report Selection Menu

Instead of making a selection, you can enter any Monitor II report command at the selection prompt.

## Enqueue, storage, and SRM reports

For your better orientation, the choices in this panel have been divided into:

- Enqueue activity reports, at the top of the panel
- Storage and System Resource Management-related reports, at the bottom

```
RMF Monitor II Resource Report Selection Menu
Selection ==>
Enter selection number or command on selection line.

Enqueue

 1 SENQ          Enqueue activity
 2 SENQR         Enqueue reserve activity

Storage and SRM

 3 PGSP          Page data set activity
 4 SPAG          System paging activity
 5 SRCS          Central storage / processor / SRM

Other Resources

 8 SDS           RMF Sysplex Data Server activity
 9 ILOCK         IRLM Long Lock detection
```

Figure 30. Monitor II Resource Report Selection Menu

Instead of making a selection, you can enter any Monitor II report command at the selection prompt.

## Program library and OPT information

This panel appears when you select option **L** in the Monitor II Primary Menu. The available types of library lists and the active OPT member are presented for selection.

```
RMF Monitor II Library List and OPT Settings Selection Menu

Enter selection number or command on selection line.

1 Link list          LNKLSTxx - Link Library list          (LLI)
2 LPA list           LPALSTxx - LPA Library List           (LLI LPA)
3 APF list           IEAAPFxx - Authorized Program List     (LLI APF)
4 OPT                IEAOPTxx - OPT Settings               (OPT)

Selection ==>
```

Figure 31. Monitor II Library List and OPT Settings Selection Menu

The Monitor II commands that are executed for each selection are shown in parentheses to the right of the selections. You can enter one of these at the selection prompt, if you prefer.

For the library lists, entering the command rather than making a selection, allows you to alter the scope of the resulting list. You can then specify the operand **A**, which causes device-type and serial-number information to be included in the list. This information is suppressed by default, because the necessary processing is time-consuming and only justifiable when you really want it. You will find a detailed description of the LLI command in [“LLI” on page 122](#).

### User Reports

This panel appears in response to the choice **U** in the Primary menu. The names of your reports are presented for selection, if you formatted the panel as described in *z/OS Resource Measurement Facility Programmer's Guide*:

```
RMF Monitor II User Reports

Selection ==>

Enter selection number or command on selection line.

1 USER              User report 1
```

Figure 32. Monitor II User Report Selection Menu

Here, too, you can enter any Monitor II report commands after the selection prompt, instead of making a selection.

### The TSO/E session

**Enablement:**

RMF is an optional feature of z/OS. It is present in the system, whether you have purchased it or not. If you have not specifically ordered RMF, it is disabled. The Monitor II reporter session will not start, and you will receive the message:

**ERB111I RMF IS NOT ENABLED TO RUN ON THIS SYSTEM**

When you start Monitor II using the command RMFMON, [Figure 33 on page 99](#) is the panel you see first.

RMF DISPLAY MENU		
NAME	PFK#	DESCRIPTION
ARD	1	ADDRESS SPACE RESOURCE DATA
ASD	2	ADDRESS SPACE STATE DATA
ASRM	3	ADDRESS SPACE SRM DATA
CHANNEL	4	CHANNEL PATH DISPLAY
DEV	6	SYSTEM DEVICE DATA
PGSP	7	SYSTEM PAGING SPACE DATA
SENQ	8	SYSTEM ENQUEUE CONTENTION
SENQR	9	SYSTEM ENQUEUE RESERVE
SPAG	10	PAGING DATA
SRCS	11	CENTRAL STORAGE / CPU / SRM DATA
ARDJ		RESOURCE DATA FOR SPECIFIC JOBNAME
ASDJ		STATE DATA FOR SPECIFIC JOBNAME
ASRMJ		SRM DATA FOR SPECIFIC JOBNAME
DEVV		SYSTEM DEVICE DATA FOR A SPECIFIC VOL/NUMBER
IOQUEUE		I/O QUEUING ACTIVITY DATA
SDS		RMF SYSPLEX DATA SERVER
LLI		PROGRAM LIBRARY INFORMATION
ILOCK		IRLM LONG LOCK DETECTION
OPT		SETTINGS
USER		USER PICTURE

Figure 33. Monitor II Display Menu

You can enter session commands, or you can select a specific report by entering the report command name shown in the NAME column, or by pressing the corresponding PF key, shown in the PFK# column.

Issue all commands from the **input area**. This is where the cursor appears when you begin a session.

## The background session

For a background session, the definition of all session and report options is done either with the appropriate Parmlib member (default member ERBRMF01), or with additional options that the operator can specify in a START or MODIFY command. For details, see [Starting a specific monitor in z/OS Data Gatherer User's Guide](#).

## Structure of Monitor II reports

This chapter provides some general information about Monitor II reports.

- Monitor II reports can have different formats:
  - Table reports
  - Row reports
- Monitor II can also have different report modes:
  - Total mode
  - Delta mode
- ISPF sessions and TSO/E sessions have different report headers.

Furthermore, the different ways to display and modify report options depending on the session type are explained in [“Display and set options” on page 105](#).

## Display session report fields

A Monitor II report header looks different, depending on whether you use the ISPF interface or the TSO/E interface.

### If you are using an ISPF session

Each report consists of:

- a header line identifying the report

- a status line for CPU, UIC, PR and System. For a description of these fields, refer to [Table 13 on page 100](#).  
This line also contains the current setting of the report mode (Delta/Total).
- a variable number of report data lines.

## If you are using the TSO/E session

Each report consists of:

- a title line
- two lines of heading information
- a variable number of report data lines.

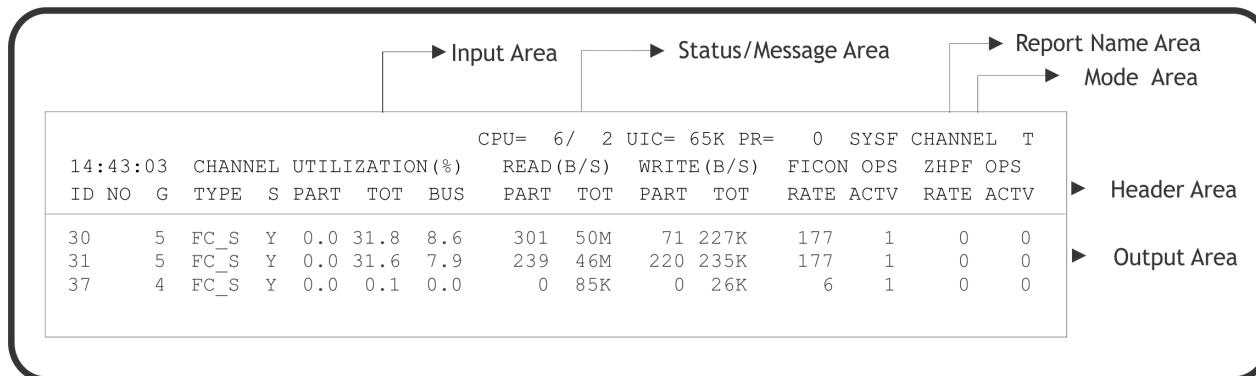


Figure 34. CHANNEL report as example of a Monitor II report header (TSO/E session)

Table 13. Monitor II Display Session Areas	
Area	Function
Report title	The type of measurement data
F	Indicates more pages
Input Area	Issue all commands from here. Separate commands from the MIG=xxx by at least one blank space, or use all 32 spaces, otherwise you get a syntax error.

Table 13. Monitor II Display Session Areas (continued)

Area	Function
Status/Message Area	<p>This area contains:</p> <p><b>CPU</b> Current average processor utilization. This information depends on the activity of Monitor I. If Monitor I CPU gathering is <b>active</b>, the header line shows two views separated by a slash (/):</p> <ul style="list-style-type: none"> <li>• The MVS view of the CPU utilization</li> <li>• The LPAR view of the CPU utilization</li> </ul> <p>If Monitor I CPU gathering is <b>not active</b>, the header line shows:</p> <ul style="list-style-type: none"> <li>• The SRM view of the CPU utilization.</li> <li>• '****' due to missing CPU measurement data for the LPAR view</li> </ul> <p><b>UIC</b> The current system unreferenced interval count. Values greater than 9999 are displayed as nnK to indicate a multiple of 1000. The maximum value is 65K.</p> <p><b>PR</b> The rate of page-ins per second excluding swap-ins, VIO (virtual input/output), reclaims, and hiperspaces.</p> <p><b>System</b> The SMF identifier associated with this system.</p>
Report Name Area	The report name.
Mode Area	The current setting for the delta mode (either D for delta or T for total) and hardcopy mode (either H for hardcopy, or blank)
Header Area	Consists of two lines of column headings that identify the data fields included in the report.
Output Area	Contains the report data.

When you begin a session, the cursor appears in the **input area**. During the session you issue all display commands from this area. Other areas indicated in the figure are described in [Table 13 on page 100](#).

## Different formats of Monitor II reports

Monitor II offers two types of reports:

- **Table Reports** - Example: ASD Report

Table reports have a variable number of data lines.

- **Row Reports** - Example: ASDJ Report

Row reports have only one line of data. When you request a row report repeatedly, each request adds one line of data to the display. You can use the repetitive requests to build a table of information.

**Note:** The current line might not be displayed on the screen if you have selected the ISPF option PFSHOW ON or if you are in split-screen mode. You can get the line either by issuing the command PFSHOW OFF or by appropriate scrolling.

## Different modes of Monitor II reports

Monitor II offers two modes for the session reports:

- **Total** mode

A total mode report shows the cumulative total since the beginning of the Monitor I interval.

- **Delta** mode

A delta mode report shows the change in the activity since the previous request for the report.

### Delta Mode Report

A delta report reflects changes in the activity shown in any report type. Its reporting interval is the time between two consecutive Monitor II requests.

To enter delta mode, type D on the command line, and press ENTER. This establishes the base for reporting, but **does not** request a report.

To request the first delta report, press ENTER again. The reporting interval is the time between the last total report and this first delta report, and the data reflects the change in activity within this interval. If no reports of this type have yet been requested in the current Monitor II session, the first delta report shows null values ('--') in the measurement columns.

To request further delta reports, just press ENTER each time. In each subsequent report in delta mode, the data reflects the change in activity since the previous report.

If a Monitor II interval expires between two consecutive Monitor II requests, no data is reported, and RMF prompts you to press ENTER.

To return to total mode, enter the command D OFF on the command line.

## Monitor II session commands and options - Overview

Table 14 on page 102 provides an overview of the Monitor II display session commands.

### Display session commands

Table 14. Monitor II Display session commands					
Task	ISPF Command	Parm	TSO/E Command	Parm	Result
<a href="#">“Display the menu” on page 104</a>	RETURN (PF4)		M		Returns to the Primary menu.
<a href="#">“Display and set options” on page 105</a>	RO		MM		<b>ISPF</b> Displays the Report Options panel for the current report <b>TSO/E</b> Displays the report option defaults for both the gatherer and reporter, and the current PF key assignments.
<a href="#">“Reset default options” on page 107</a>	RESET				<b>ISPF</b> On Report Option panels, resets all optional values to the defaults specified in the menu ERBFMENU
<a href="#">“Leave options unchanged” on page 107</a>	CANCEL				<b>ISPF</b> On Report Option panels, ends the option dialog without making any changes
<a href="#">“Display commands” on page 107</a>	COMMANDS				<b>ISPF</b> Shows you all the available commands



Table 14. Monitor II Display session commands (continued)

Task	ISPF Command	Parm	TSO/E Command	Parm	Result
<a href="#">“Scroll through report frames” on page 108</a>	PF8/PF7		F		<b>ISPF</b> Forward/backward scrolling <b>TSO/E</b> Forward scrolling
<a href="#">“Recall the previous data” on page 108</a>	Rrep	opts	Rrep	opts	Recalls the previous report, where <b>rep</b> is the report name and <b>opts</b> are any options for the report
<a href="#">“Sort reports” on page 109</a>	SORT (PF6)	A D			<b>ISPF</b> Sorts the report by the column in which the cursor is located.  Ascending order Descending order
<a href="#">“Find text string” on page 109</a>	FIND	string			<b>ISPF</b> Searches for a text string in a report
<a href="#">“Repeat Find” on page 109</a>	RFIND (PF5)				<b>ISPF</b> Repeats a previously entered FIND command
<a href="#">“Set delta mode” on page 109</a>	D	ON OFF	D	ON OFF	Sets the DELTA mode Sets the TOTAL mode
<a href="#">“Create a hardcopy report” on page 110</a>	H	ON OFF	H	ON OFF	Prints all displayed reports Prints no reports
<a href="#">“Refresh a report automatically” on page 111</a>	GO	n	T	m,n	<b>ISPF</b> Causes an automatic refresh of the report data every <i>n</i> seconds  <b>TSO/E</b> Updates a report automatically, where <i>m</i> is the number of times you want to update the report, and <i>n</i> is the number of seconds between updates.  Specify this command after requesting a report.
<a href="#">“Print a report page” on page 113</a>	PRINT		P		<b>ISPF</b> Writes the currently displayed screen to the ISPF list data set  <b>TSO/E</b> Writes the currently displayed report to the preallocated report data set
<a href="#">“Specify the system to be monitored” on page 114</a>	SYS[TEM]	smf_id	SYS[TEM]	smf_id	Identifies system to be monitored
<a href="#">“Assign PF keys” on page 112</a>	KEYS		#rep	opts	<b>ISPF</b> Standard ISPF key assignment  <b>TSO/E</b> Assigns PF keys where <b>rep</b> is the report name and <b>opts</b> are any options for the report.  You must press the PF key you want assigned to that report after entering the command.
<a href="#">“Stop the session” on page 114</a>	=X		END		Stops the session  In TSO/E, you can also use the Z, QUIT, QQ, X, or STOP command to stop the session.

## Background-session options

Table 15. Monitor II Background Session Options		
Task	Background Session Option	Result
<a href="#">“Refresh a report automatically” on page 111</a>	SINTV { (30S) } { (value[S]) }	Specifies number of seconds in each measurement interval.
<a href="#">“Stop the session” on page 114</a>	STOP (value {M} {H}) / NOSTOP	Desired duration of the Monitor II session, in minutes (M), or hours (H).
<a href="#">“Set delta mode” on page 109</a>	DELTA / NODELTA	Specifies whether RMF should report total values or values that reflect changes since the previous measurement.
<a href="#">“Write SMF records” on page 113</a>	RECORD / NORECORD	Specifies whether measured data is to be written to SMF records.
<a href="#">“Create a hardcopy report” on page 110</a>	REPORT { (REALTIME) } / (NOREPORT) { (DEFER) }	Specifies production of printed interval reports of measured data.
<a href="#">“Create a hardcopy report” on page 110</a>	SYSOUT (class)	SYSOUT class to which the formatted printed reports are directed.
<a href="#">“Define session options” on page 107</a>	MEMBER (list)	Parmlib member, or list of members, containing Monitor II background session options.
<a href="#">“Display and set options” on page 105</a>	{OPTIONS} / {NOOPTIONS} {OPTN } {NOOPTN }	Print an options list at the operator console at the start of the session.

## Monitor II session tasks

This topic provides information about the tasks that you can perform during Monitor II sessions, like for example, defining session options, sorting reports, writing SMF records or creating hardcopy reports.

### Display the menu

#### For an ISPF session

Press PF4 or enter the RETURN command to return to the Primary Menu (see [Figure 27 on page 96](#)).

#### For a TSO/E session

To display the menu of available reports, issue the menu command:

```
M
```

[Figure 33 on page 99](#) shows the menu panel. The menu lists each report name, its PF key assignment, and a description.

From the display menu, you can display the first report in the menu with defaults by pressing ENTER.

**Note:** If you assigned a different PF key to the first report in the display menu, and you press ENTER while the report field is blank, RMF displays the original report assigned to the PF key.

## Display and set options

### For an ISPF session

In an ISPF session, you select the report you want rather than specifying it in a command. When you enter a command for certain report types, you can specify options as part of the commands.

The options are remembered from one session to the next. The options used for the first session are the RMF defaults, but you can alter these in the Report Options panel for the respective report.

Call up the appropriate Report Options panel by entering the RO command at the command prompt of the report panel.

Figure 35 on page 105 presents an example of an Report Options panel:

```
RMF Monitor II - Address Space Options
Command ===>
Change or verify parameters. The input entered on this panel applies to
ARD, ASD, and ASRM. To exit press END.
Class          ===> T      Specify one of the following workloads:
                        A=All, B=Batch/STC, T=TSO, AS=ASCH, O=OMVS
Inactive       ===> NO    Specify YES to include inactive address spaces.
```

*Figure 35. ARD, ASD and ASRM Report Options Panel*

Type the options you want, and press ENTER. If an option is invalid for the report, RMF will issue a message telling you this, and leave the option panel on the screen for you to correct your input. If no message is issued, the values you entered are valid, and you can enter the END command or press PF3 to have them accepted.

### For a TSO/E session

You get an overview about the default options for all commands by entering the command:

```
MM
```

The standard definition of the default options is shown in this figure:

RMF DISPLAY MENU		
NAME	PFK#	DEFAULT OPERANDS FOR GATHERER AND REPORTER
ARD	1	A,A, --- A,I,
ASD	2	A,A, --- A,I,
ASRM	3	A,A, --- A,I,
CHANNEL	4	
DEV	6	DASD
PGSP	7	
SENQ	8	D --- S
SENQR	9	ALLVSR
SPAG	10	
SRCS	11	
ARDJ		
ASDJ		
ASRMJ		
DEVV		
SDS		
IOQUEUE		DASD
LLI		
ILOCK		
OPT		
USER		

Figure 36. Monitor II TSO/E session - Default Options

The data gatherer and reporter options are separated by three dashes (---). If both the options default are the same, only one set of options is displayed. If there are no default options for the data gatherer, the reporter options are displayed preceded by three dashes (---).

## For a background session

To display the current options during start of a background session, either specify

OPTIONS

in the Parmlib member (for example ERBRMF01), or in the START command. Then, you can respond with any desired changes, except the MEMBER option, from the operator console.

To avoid unnecessary console output and delay in starting the session, specify NOOPTIONS. However, if RMF detects any syntax errors while processing session options, OPTIONS is forced.

Table 16 on page 106 shows each possible option followed by its input source.

Table 16. Monitor II OPTIONS Command Sources	
Source	Where Option is Specified
COMMAND	On a START or MODIFY command.
DEFAULT	In the program defaults.
EXEC	On the EXEC statement in the RMF cataloged procedure.
CHANGED	RMF changed the option. A message describes the conflict and the change RMF made.
MEMBER	In the RMF Parmlib member.
REPLY	The option was changed from the operator console in reply to message ERB306I.

The following is an example of the console output produced when OPTIONS is in effect.

```

ERB103I LS : OPTIONS IN EFFECT
ERB103I LS : NOCHANNEL -- DEFAULT
ERB103I LS : NOPGSP -- DEFAULT
ERB103I LS : NODEVV -- DEFAULT
ERB103I LS : NODEV -- DEFAULT
ERB103I LS : NOSENQR -- DEFAULT
ERB103I LS : NOSENQ -- DEFAULT
ERB103I LS : NOASRMJ -- DEFAULT
ERB103I LS : NOASRM -- DEFAULT
ERB103I LS : NOARD -- DEFAULT
ERB103I LS : NOSRCS -- DEFAULT
ERB103I LS : NOSPAG -- DEFAULT

```

```

ERB103I LS : NOARDJ -- DEFAULT
ERB103I LS : NOASDJ -- DEFAULT
ERB103I LS : NOIOQUEUE -- DEFAULT
ERB103I LS : SYSOUT(A) -- MEMBER
ERB103I LS : OPTIONS -- MEMBER
ERB103I LS : REPORT(DEFER) -- MEMBER
ERB103I LS : RECORD -- MEMBER
ERB103I LS : STOP(30M) -- MEMBER
ERB103I LS : SINTV(30S) -- MEMBER
ERB103I LS : NODELTA -- MEMBER
ERB103I LS : NOUSER -- MEMBER
ERB103I LS : ASD -- MEMBER

```

## Reset default options

### For an ISPF session only

On the command line of any Report Options panels, you can enter the command:

```
RESET
```

This causes RMF to reset all the optional values available for the corresponding report to the those specified in the picture macro. These options take effect for the rest of the session.

## Leave options unchanged

### For an ISPF session only

On the command line of any Report Options panel, you can enter the command:

```
CANCEL
```

This causes RMF to continue the session without any changes to the options. You can use this command when you have inadvertently misspelled an option, or have decided not to specify one that you have typed in after all.

## Display commands

### For an ISPF session only


To display all the commands that are available, enter the command:

```
COMMANDS
```

## Define session options

### For a background session only

You can define whether other Parmlib members with Monitor II options should be used for the session, either using the START command or as part of the options in the ERBRMF01 Parmlib member.

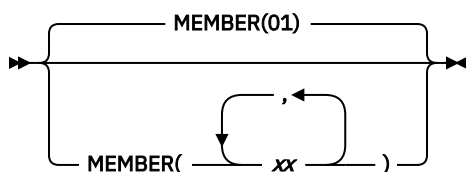

This specifies the Parmlib member(s) — you can specify up to five members — that contain Monitor II background options for the session, where (**— xx —**) contains from one to five members, separated by commas. Each member must be a two-character alphameric value, which RMF adds to the ERBRMF prefix to form the member name. For the Monitor II background session, the default is 01 indicating Parmlib member ERBRMF01. If you want to use your own Parmlib members, make sure you specified your Parmlib data set on the IEFRDER DD statement in the RMF cataloged procedure. See [Setting up the RMF control session including Monitor I and Monitor II in z/OS Data Gatherer User's Guide](#).

For more information on Parmlib members, including the contents of the Monitor II member ERBRMF01, see [Storing gatherer options in z/OS Data Gatherer User's Guide](#).

## Scroll through report frames

### For an ISPF session

Scrolling through ISPF session panels is achieved in the usual ISPF manner by using PF7 (Backward) and PF8 (Forward). The indication Line x of y at the top right corner of the panel tells you where you are in the report, and how many lines there are. The prompt SCROLL ==> shows you the current scroll amount, and you can change the scroll amount by altering the value, as in other ISPF panels.

### For a TSO/E session

To scroll through a multi-frame table report (a report that has more than the maximum number of lines for your device), use the frame command:

```
F
```

When RMF displays the first frame of a multi-frame report, a frame command (F) automatically appears in the input area. After inspecting the data in the current frame, press ENTER to see the next frame. Continue the process until you have seen all of the data that you require. If you decide at any point that you do not need to see all of the frames in a report, blank out the frame command or issue a new command. When RMF displays the last frame in the report, the input area is blank.

If you enter F when there are no subsequent frames, RMF ignores the command.

For example, if you are using a terminal with 24 output lines, an F appears in the input area and the first 21 lines of data appear in the output area. The F indicates that you are viewing a multi-frame report and should enter the frame command (F) to view the next frame of output data. Because the input area already contains an F, you can view the next frame by pressing ENTER. The F continues to appear in the input area until all frames of data have been viewed. When the last frame is displayed, the end of the report is indicated by a blank input area.

## Recall the previous data

### For ISPF and TSO/E sessions

To cause the most recently displayed set of data (either a full table for a table report or a single line for a row report) to be displayed again, use the recall command. The syntax is:

```
Rrep [options]
```

where **rep** is the report command and **options** are the options for the report. Do not leave any blanks between R and the report command name.

**Example:** You have requested the ASD report for all address spaces with the command:


```
ASD
```

Now, you would recall the report for TSO/E address spaces only:

## Sort reports

### For an ISPF session only

On the command line of most report panels, you can enter the command:



Before you press ENTER, place the cursor in one of the columns of the report. When you press ENTER, Monitor II will sort the lines of the report by the contents of this column.

This handling is easier if you use PF6, which is defined as SORT command.

You can sort the report in ascending or descending order. If you do not specify the sort order, then columns with numerical values will be sorted in descending order, and columns with character values will be sorted in ascending order.

## Find text string

### For an ISPF session only

To find a character string in the report, you can enter the command:

```
FIND textstring
```

If the string contains blanks, you must enclose it in quotes.

## Repeat Find

### For an ISPF session only


You can repeat a previous FIND command using:

```
RFIND (PF5)
```

## Set delta mode

### For ISPF and TSO/E sessions

To set the delta mode for the session, use the DELTA command. The syntax is:




When delta mode is in effect, certain fields in some reports, such as the processor (CPU) time in the ARD report, reflect values that show the change since the previous invocation of the report. The first request for the report will show the value RMF detects at that time; all subsequent invocations of the report will show only the change since the previous report.

Delta mode is set off when the session begins. You must enter D ON or D to set delta mode on for the session. Later, if you want to turn off delta mode, enter D OFF. All report fields that can reflect either session or delta values will then reflect session totals rather than changes.

The mode area indicates the current setting of the delta mode for the session (either Delta/Total for an ISPF session, or D/T for a TSO/E session).

## For a background session

To set the delta mode for the session, use the DELTA command:




**Note:** DELTA/NODELTA is a *reporting* option and has no impact on SMF recording in a background session.

## Create a hardcopy report

### For ISPF and TSO/E sessions

To create a report from the current session, you set the hardcopy mode on, using the hardcopy command:



When hardcopy mode is in effect, all data in all reports requested during the session is written to a preallocated output data set.

### Data Set Allocation for ISPF and TSO/E Sessions

- Allocate the output data set before you start the Monitor II session:

```
ALLOC F(RMFDMTS0) DS(data.set.name) SHR
```

where **data.set.name** is the name of the data set to be used for the hardcopy output. Any existing contents of the data set are overwritten.

- To add output from this session to existing data, use the command:

```
ALLOC F(RMFDMTS0) DS(data.set.name) MOD
```

Without any data set allocation, the output will be written to SYSOUT class A.


A single output data set is created for all print command (TSO/E session only) and hardcopy command output generated during a single session. Because reports requested might be multi-frame reports and you might choose not to scroll through all of the data during the display session, the data written to the output data set when hardcopy mode is in effect can be more extensive than that displayed on the screen.

Hardcopy mode is turned off when the session begins. You must enter H ON or H to set hardcopy mode on. The command takes effect with the next report you enter.

## For a background session

You define with the option



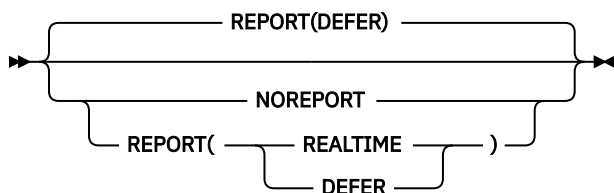

whether or not printed interval reports of the measured data are to be produced. When reports are to be produced (REPORT specified), the REALTIME or DEFER option indicates when the reports are to be printed.

When you omit the option, the default is REPORT(DEFER). If you specify REPORT, you must specify either REALTIME or DEFER; otherwise you get a syntax error.

REALTIME indicates that the reports are to be printed at the end of the session, and when you modify session options for one of the following reasons:

- To end a request for a particular report
- To end a request for all reports
- To replace REPORT(REALTIME) with REPORT(DEFER)

**Example:** For example, assume that the options ASRM, SPAG, and REPORT(REALTIME) are in effect for an active session. If you end the request for the system paging report by replacing SPAG with NOSPAG, any accumulated paging reports will be printed. If you change REPORT(REALTIME) to REPORT(DEFER) or NOREPORT, all accumulated reports will be printed.

DEFER indicates that the reports are to be printed after you stop RMF.

You can allocate data sets for the reports in the start-up JCL for the background session, or you can route the output to a SYSOUT class.


## Data Set Allocation

You define one or more JCL statements

```
//RMFxxnnn DD DSN=dataset.name, DISP=disp
```

**xx** is the session identifier, and **nnn** is a decimal number from 001 to 999.

Without this preallocation the output will be routed to SYSOUT. You can define the output class using the option




Class A is the default. You cannot modify the SYSOUT option during session processing.

## Refresh a report automatically

### For an ISPF session

To refresh a report automatically, enter on any report panel the command:




where **n** is a decimal integer, and **4** is the default. This causes the report to be refreshed automatically every **n** seconds.

To stop automatic refresh of the report, press the ATTN or PA1 key.

### For a TSO/E session

To update reports automatically, use the timed update command. The syntax is:



where **m** is the number of times you want to refresh the report and **n** is the number of seconds between refreshes. You can specify a maximum value of 99 for **m** and a maximum value of 999 for **n**. Defaults are:

- 10 for **m**
- 4 for **n**


That is, RMF updates the report automatically 10 times at 4-second intervals.

To stop the timed update, press the attention (PA1) key.

When you issue a timed update command (T), RMF displays the length of the time interval, and the number of intervals remaining in the **input area**.

### For a background session

To define the length of a measurement interval, specify:

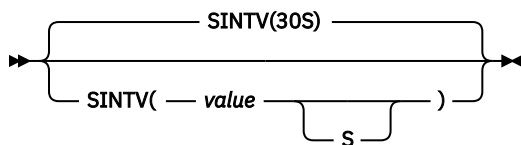

#### value

specifies the number of seconds in each measurement interval. The range is from 1 to 3600 seconds. The default is 30 seconds. The S is not required, but you can include it as a reminder that the specification is in seconds.

When you specify a small SINTV value, RMF overhead increases and excessive swapping can result. In such a case, you could make the RMF address space non-swappable to minimize this overhead.

**Note:** When you change either the SINTV or the STOP options during the session, the duration of the session could be affected. See [“Conflicting session options” on page 126](#).

## Assign PF keys

### For an ISPF session

You can use the standard ISPF capability of assigning functions to PF keys by calling the ISPF command KEYS. Most PF keys in Monitor II have the standard setting as in all other ISPF applications. There are two exceptions:

#### PF5

RFIND command

#### PF6

SORT command

If you want to make your own settings, you might use PF10 and PF11 (or PF13 — PF24), they have no predefined meaning in an ISPF Monitor II session. All PF key definitions remain valid across sessions.

## For a TSO/E session

You can assign PF keys to arbitrary reports for the duration of a Monitor II display session.

RMF assigns the first 12 program function (PF) keys as shown in [Figure 33 on page 99](#). To override these assignments, enter a pound sign (#) in the input area, followed by a report name, and any report options. Then press the PF key you want to assign to the report. The assignment remains for the duration of the Monitor II display session. RMF displays the default options menu after each # command so that you can confirm your PF key assignments.

**Example:** To associate PF 10 with the device report for devices with numbers 0150 through 0350 and device 0370 you specify:

```
#DEV NUMBER(0150:0350,0370)
```

and press PF 10. To request the report, press PF 10. For the duration of your session, PF 10 is associated with this report.

For a TSO/E session, the attention key (PA1) can be used in the same way as for any TSO/E command, as long as the timed update command is not active.

## Print a report page

### For an ISPF session

To print one page of a report, enter the ISPF command:

```
PRINT
```

This writes a copy of the currently-displayed screen contents to the ISPF list data set, which you can print or display after the session.

### For a TSO/E session

To print the data currently displayed on the screen, use the print command:

```
P
```

See [“Create a hardcopy report” on page 110](#) for more information about the output data set.

### General remark


Because both commands cause only the current screen image to be printed, you would have to use repetitive scroll commands and print commands to print all of the data in a multi-frame table report.

Use this command when you want to print a single report and the session is not in hardcopy mode. In hardcopy mode, the entire report is automatically printed, and you would not need to use the print command. You find details in [“Create a hardcopy report” on page 110](#).

## Write SMF records

### For a background session only

You can define whether SMF records should be written during a background session. You do this using the option:



## Specify the system to be monitored

### For all display sessions

You can specify which individual system in a sysplex you want a report to refer to. This may be the system you are using to run your Monitor II session, or another system. You do this using the option:

➤ **SYSTEM** — *smf\_id* ➤

where *smf\_id* is the identifier of the system for which you want the reports to be generated.

### For an ISPF session

You can use the **SYSTEM** command, or, alternatively, you can overwrite the value of the **SYSTEM** field in the header of the report panel with the identifier of the desired system.

## Stop the session


### For an ISPF session

To stop the session, enter the ISPF skip command on the command or selection line of any panel:

=X


### For a TSO/E session

To end the session, enter:



### For a background session

You can specify the duration of a background session in minutes (M) or hours (H) with the option

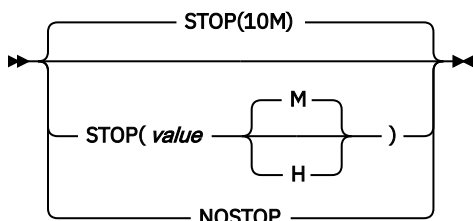

The range is from one minute to one week (168 hours or 10,080 minutes). The default value is ten minutes. If you specify a value outside the range, RMF substitutes the default value. If neither M nor H is specified, M (minutes) is assumed. NOSTOP means the session can be ended only by a STOP command.

**Note:**

1. You can stop a session at any time with the session STOP command regardless of the value specified for this option.
2. The STOP option applies only to a particular Monitor II background session. RMF remains active until the operator issues a STOP system command.
3. When you change either the SINTV or the STOP options during the session, the duration of the session could be affected. See [“Conflicting session options” on page 126](#).

## Monitor II report commands - Overview

Table 17 on page 115 gives an overview of the available report commands.

Table 17. Monitor II Report Commands		
Display Session Syntax	Background Session Syntax	Report
ARD [class,status,,boost]	ARD [(class,status,,boost)]/NOARD	Address space resource data reporting. See <a href="#">“ARD” on page 117</a> .
ARDJ jobname	ARDJ (jobname)/NOARDJ	Address space resource data reporting for a particular job. See <a href="#">“ARD” on page 117</a> .
ASD [class,status,,boost]	ASD[(class,status,,boost)]/NOASD	Address space state data reporting. See <a href="#">“ASD” on page 118</a> .
ASDJ jobname	ASDJ(jobname)/NOASDJ	Address space state data reporting for a particular job. See <a href="#">“ASDJ” on page 118</a> .
ASRM[class,status]	ASRM[(class,status)]/NOASRM	Address space SRM data reporting. See <a href="#">“ASRM” on page 118</a> .
ASRMJ jobname	ASRMJ(jobname)/NOASRMJ	Address space SRM data reporting for a particular job. See <a href="#">“ASRMJ” on page 118</a> .
CHANNEL	CHANNEL/NOCHANNEL	Channel path activity data reporting. See <a href="#">“CHANNEL” on page 119</a> .
DEV [type ]	DEV [(type)]/NODEV	Table reporting on I/O device activity. See <a href="#">“DEV” on page 119</a> .
DEVV {VOLSER(xxxxxx)} {NUMBER(yyyy) }	DEVV{VOLSER(xxxxxx)} {NUMBER(yyyy) }	Row reporting on a specific direct access device. See <a href="#">“DEVV” on page 120</a> .
HFS [hfsname]	--	Table reporting on UNIX hierarchical file system statistics. See <a href="#">“HFS” on page 121</a> .

Table 17. Monitor II Report Commands (continued)

Display Session Syntax	Background Session Syntax	Report
ILOCK [ALL]	--	IRLM Long Lock detection. See <a href="#">“ILOCK”</a> on page 121.
IOQUEUE [type]	IOQUEUE [(type)]/NOIOQUEUE	I/O request queuing reporting. See <a href="#">“IOQUEUE”</a> on page 121.
LLI {LNK}{,A} {LPA} {APF}	--	Program library information listing. See <a href="#">“LLI”</a> on page 122.
OPT	--	OPT Settings report. See <a href="#">“OPT”</a> on page 123.
PGSP	PGSP/NOPGSP	Page data set activity reporting. See <a href="#">“PGSP”</a> on page 123.
SDS	--	RMF Sysplex Data Server activity reporting. See <a href="#">“SDS”</a> on page 123.
SENQ {S {D {A, sysname {E, sysname {majorname[,minorname]}	SENQ { (S {D {A, sysname {E, sysname {majorname[,minorname]}	Enqueue contention activity reporting. See <a href="#">“SENQ”</a> on page 123.
SENQR {ALLVSR} {volser }	SENQR {(ALLVSR)}/NOSENQR {volser }	Reserve activity reporting. See <a href="#">“SENQR”</a> on page 124.
SPAG	SPAG/NOSPAG	System paging activity reporting. See <a href="#">“SPAG”</a> on page 125.
SRCS	SRCS/NO SRCS	Central storage/processor/SRM activity reporting. See <a href="#">“SRCS”</a> on page 125.
USER	USER/NOUSER	Specifies whether or not a user-specified activity is to be measured. See <a href="#">“USER”</a> on page 125.

## Details of report commands

This section describes the Monitor II report commands in alphabetical order. Program defaults are underscored where appropriate.

The same report commands are available for Monitor II display and background sessions, and the command syntax in the both types of sessions is similar, but what you can specify varies from one type of session to the other. For background details refer to [Table 17 on page 115](#).

## Display session

Specify commands either in the command or selection line of the ISPF panel or in the input area of a TSO/E panel.

## Background session

Specify background options in either one or both of the following:


- The **parm** field of the session command START that you issue to start the session. See [Starting a specific monitor in z/OS Data Gatherer User's Guide](#) for the START session command syntax.
- The Monitor II background session Parmlib member ERBRMF01. See the explanation of the background session MEMBER option (["Define session options" on page 107](#)). The contents of ERBRMF01 is described in [Storing gatherer options in z/OS Data Gatherer User's Guide](#).

RMF uses a program default for any option you do not specify.

How RMF processes session options in [z/OS Data Gatherer User's Guide](#) describes how RMF merges the options from these three sources. You can modify the options during a session as described in [Modifying RMF session options in z/OS Data Gatherer User's Guide](#).

**Note:** Some report options (ARDJ, ASDJ and ASRMJ) have "jobname" as a suboption. You can specify only one of these options per session. If you want to monitor several jobs in parallel, you have to start several background sessions.

## ARD



Specifies address space resource data reporting, where **class**, **status**, and **boost** specify the following selection criteria for the address spaces to be included:

### class

- A** All address spaces
- AS** ASCH address spaces
- B** batch, started task, and mount task address spaces
- O** OMVS address spaces
- T** TSO/E address spaces

### status

- A** All address spaces. This is default.
- I** Active address spaces; that is, those address spaces that are currently executing, non-swappable, or swapped out and eligible for swap-in

### boost

- A** All address spaces. This is default.
- B** Only address spaces that have been boosted.

The boost status of the address spaces shown on the report.

The operand fields are positional; if you omit any one, you must replace it with a comma. RMF uses the default value for any omitted operand.

Monitor II background sessions each set separate defaults for their data gathering routine and the reporting routine. For the data gathering routine, the value for **class** is A, and the value for **status** is A. For the data reporting routine, the value for **class** is A, and the value for **status** is I. This means that data is gathered for all address spaces, but reports are generated only for active ones.

You can change the menu defaults to fit the needs of your particular installation as described in *z/OS Resource Measurement Facility Programmer's Guide*.

**Example:** For a display session or background session:

- To report on all address spaces, enter  
ARD , A or ARD ( , A)
- To report on all OMVS address spaces that are currently active, enter  
ARD 0 or ARD (0)

## ARDJ

➤ ARDJ — *jobname* ➤

Specifies address space resource data reporting for a particular job. Specify the job you want to measure under **jobname**.

## ASD

➤ ASD —  $\left\{ \begin{array}{c} A \\ \text{class} \end{array} \right\} , \left\{ \begin{array}{c} I \\ \text{status} \end{array} \right\} , \left\{ \begin{array}{c} A \\ \text{boost} \end{array} \right\}$  ➤

Specifies address space state data reporting. For a description of the options, see the ARD command.

## ASDJ

➤ ASDJ — *jobname* ➤

Specifies address space state data reporting for a particular job. Specify the job you want to measure in **jobname**.

## ASRM

➤ ASRM —  $\left\{ \begin{array}{c} A \\ \text{class} \end{array} \right\} , \left\{ \begin{array}{c} I \\ \text{status} \end{array} \right\}$  ➤

Specifies address space SRM data reporting. For a description of the options, see the ARD command.

## ASRMJ

➤ ASRMJ — *jobname* ➤

Specifies address space SRM data reporting for a particular job. Specify the job you want to measure in **jobname**.




## CHANNEL

➡ CHANNEL ➡

Specifies channel path activity data reporting.

## DEV



Specifies data reporting for a table report on I/O device activity, where type is all devices in one class, or one or more specific device numbers, volume serial numbers, or storage groups. When you specify the DEV option, a Monitor I session must be measuring any device you request.

Parameter **type** can be one of the following:

- A device class:

### **DASD**

Direct access storage devices

### **TAPE**

Magnetic tape devices

### **COMM**

Communication equipment

### **CHRDR**

Character reader devices

### **UNITR**

Unit record devices

### **GRAPH**

Graphic devices

- One or more volume serial numbers:

```
{VOLSER}  ({aaaaaa          })
{V        } ({aaaaaa,bbbbbb:zzzzz})
{          } ({aaaaaa,bbbbbb,. .  })
```

VOLSER requests specific DASD or tape devices, where aaaaaa, bbbbbb, and zzzzzz each represent a volume serial number. You can specify a single volume, in the format aaaaaa, a list of volumes, in the format aaaaaa,bbbbbb,...., or a range of volumes, in the format bbbbbb:zzzzz where aaaaaa is the first and bbbbbb is the last volume. Your entry cannot exceed 32 characters, including commas and colons. When you specify a range, use a colon as a separator to indicate that the report is to include of all volumes from aaaaaa up to and including zzzzzz.

- One or more device numbers:

```
{NUMBER}  ({[s]aaaa          })
{N        } ({[s]aaaa,[t]bbbb:[u]zzzz})/NONMBR
{          } ({[s]aaaa,[t]bbbb,...  })
```

NUMBER requests specific device numbers, where aaaa, bbbb, and zzzz each represent hexadecimal 4-digit device numbers and s, t, and u each represent an optional 1-digit subchannel set ID. You can omit leading zeros. If the subchannel set ID is omitted data reporting for devices configured to any subchannel set is requested. You can specify any combination of :

- a single device number, in the format [s]aaaa
- a list of device numbers, in the format [s]aaaa,[t]bbbb

- or a range of numbers in the format [t]bbbb:[u]zzzz, where [t]bbbb is your first number and [u]zzzz is your last number

You can not exceed 32 characters, including commas and colons. When you specify a range of numbers, use a colon as a separator to indicate that the report is to consist of all numbers from [t]bbbb up to and including [u]zzzz.

- One or more storage group names:


```
{SG} { {aaaaaaaa,bbbbbbbb, . . . } }
{S } { {aaaaaaaa,bbbbbbbb:zzzzzzzz} }
```

SG requests specific storage group names, where aaaaaaaa, bbbbbbbb, and zzzzzzzz each represent 1 to 8 character names, found in SMF type 74 and type 79 records for each DASD device managed by the system-managed storage. You can specify any combination of a single storage group name, in the format aaaaaaaa, a list of names, in the format aaaaaaaa,bbbbbbbb,...., or a range of names, in the format bbbbbbbb:zzzzzzzz. Your entry can not exceed 32 characters, including commas and colons. RMF reports the devices in sequence by device number within the storage groups.

### Example for a display session or a background session:

- To request a Device Activity report for all magnetic tape devices, specify:  
DEV TAPE or DEV (TAPE)
- To request a Device Activity report for volumes P50002, P50003, P50004, and P50007, specify:  
DEV V(P50002:P50004,P50007) or DEV (V(P50002:P50004,P50007))
- To request a Device Activity report for the storage groups MANF13, MANF14, MANF15, MANF16, MANF17, MANF18 MANF19, and MANF20, specify:  
DEV SG(MANF13:MANF20) or DEV (SG(MANF13:MANF20))
- To request all storage groups, specify:  
DEV SG or DEV (SG)

## DEVV



Specifies data reporting for a row report on a specific direct access device (in contrast to the DEV option which allows you to report on more than one device) where:

### VOLSER or V

to request I/O device activity for the specific volume identified by the volume serial number xxxxxx.

### NUMBER or N

To request I/O device activity for the specific device identified by a hexadecimal device number dddd and an optional subchannel set ID s. You can omit leading zeros. If the subchannel set id is omitted data reporting for device dddd configured to subchannel set 0 is requested.


When you specify DEVV, a Monitor I session must be measuring the device you request. A storage group name is reported for any device that is assigned to one.

### Example for a display session or background session:

- To request a Device Activity report for tape device number 1580 in subchannel set 0, specify:  
DEVV N(1580) or DEVV (N(1580)) or DEVV (N(01580))
- To request a Device Activity report for direct access device DASD01, specify:

DEVV V(DASD01) or DEVV(V(DASD01))


## HFS



Specifies reporting of statistics of hierarchical file system of UNIX System services.

**hfsname** is the name of the file system for which the statistics data are to be obtained.

## ILOCK



Services of the **IMS/VS Resource Lock Manager (IRLM)** are used by IMS to serialize application program requests for data base records to ensure that two programs do not access the same record for update at the same time.

The ILOCK report enables you to identify locking situations that are caused by serialization effects when sharing data among several IMS instances in a sysplex.

To display all blocker and waiters, you have to call the ILOCK command with the parameter ALL, otherwise TOP BLOCKERS will be shown, only.

There is no data gathering component for this report. Instead, the retrieval of the IRLM data from the RMF SMF data buffer is done by the reporter. To have the data available in the SMF data buffer (SMF record type 79 subtype 15), it is necessary to specify this option explicitly, for example:

```
S RMF,,, (SMFBUF(RECTYPE(70:78,79(15))))
```

For details, see [Controlling the SMF buffer](#) in *z/OS Data Gatherer User's Guide*.

Data collection is initiated by the operator who enters at the console the **runtimeo-exit** for one system in the sysplex:

```
F ir1mid,RUNTIMEO
```


The command will be propagated automatically to all other systems.

When the SMF records are eventually written by the IRLMs in the data sharing group, the reporter can fetch these SMF records out of the RMF SMF data buffer.

As a consequence, you have to ask the operator to issue this command if you get informed that there is no data available for the report.

**Note:** Access to the SMF data buffer requires appropriate security authorization. Refer to [“Controlling access to RMF data for the sysplex data services”](#) on page 18 for details.

## IOQUEUE



Requests reporting on I/O queuing. If you specify IOQUEUE, a Monitor I session must be measuring any I/O queuing activity. Parameter **type** can be any one of the following:

- A device class:

**DASD**

Direct access storage devices

**TAPE**

Magnetic tape devices

**COMM**

Communication equipment

**CHRRDR**

Character reader devices

**UNITR**

Unit record devices

**GRAPH**

Graphic devices

- One or more logical control unit (LCU) numbers:


```
{NUMBER} {aaaa,bbbb:zzzz}
{N}      {aaaa,bbbb,...}
```

NUMBER requests specific logical control unit numbers, where aaaa, bbbb, and zzzz each represent hexadecimal logical control unit numbers. Leading zeroes can be omitted. You can specify any combination of a single number, a list of numbers, or a range of numbers, as long as your entry does not exceed 32 characters, including commas and colons. When you specify a range of numbers, use a colon as a separator to indicate that the report is to consist of all numbers from bbbb up to and including zzzz.

**Note:** When your system is running as a guest under VM, RMF cannot gather data for it. In this case, the IOQUEUE report is not available.

**Example for a display session or background session:**

- To request an I/O Queuing Activity report for LCUs representing all magnetic tape devices, specify:  
IOQUEUE TAPE or IOQUEUE (TAPE)
- To request an I/O Queuing Activity report for LCU numbers D, E, F, 4E, and 55, specify:  
IOQUEUE N(D:F,4E,55) or IOQUEUE (N(D:F,4E,55))

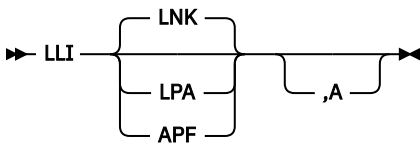**LLI**

This report provides different program library listing. All operands are optional, and have the following meanings:

**LNK**

List the link library information. This is the default operand, and takes effect if neither LNK, LPA nor APF is specified. The libraries that will be reported on are those whose names are specified in the LNKLISTxx Parmlib members.

**LPA**

List information for libraries defined to the link pack area.

**APF**

List information about authorized programs defined in the link library.

,A

All the information on the selected libraries is to be listed, including the device number, device type and volume serial numbers of the devices where they reside.

It is advisable to specify this operand only when you really want to have the device information listed, because the services used to retrieve this information are expensive in terms of performance.

## OPT

➤ OPT ➤

Invokes a report about the active OPT PARMLIB member and the settings of all OPT parameters.

## PGSP

➤ PGSP ➤

Specifies page data set activity reporting.


A Monitor I session monitoring page activity must be active when you specify the PGSP option.

## SDS

➤ SDS ➤

Requests an RMF Sysplex Data Server activity report to be generated. This report can be generated only if the RMF address space has already been started.

## SENQ

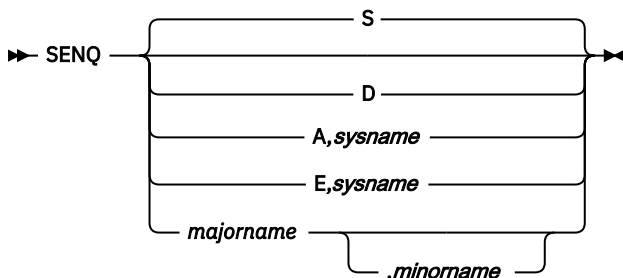

Specifies reporting of enqueue contention activity. The operands describe the type of data you require. You can specify only one operand. The meaning of each operand field is:

### S

Specifies a summary report. For each resource that had contention activity, the summary report includes the scope of the resource, the number of tasks that own the resource, the number of tasks waiting for exclusive use of the resource, and the number of tasks waiting for shared use of the resource. If you specify SENQ without operands, S is the default for the reporting routine. For the data gathering routine, the default is D.

### D

Specifies a detail report. For each resource that had enqueue contention, the detail report includes the scope of the resource, the name and address space identifier of each job owning or waiting for the resource, and the type and status of each job's request for the resource.

### A,sysname

Specifies a report that includes all resources that a specific system holds in a global resource serialization complex, where *sysname* indicates the system for which the report is requested. Use this report when attempting to recover an inactive processor in a global resource serialization complex.

You can request this report from an active processor in the complex and determine from the report the resources that the inactive processor held.

### **E,sysname**

Specifies a report that includes all exclusively-owned resources that a specific system held in a global resource serialization complex, where *sysname* indicates the system for which the report is requested. This report is useful when attempting to recover an inactive processor in a global resource serialization complex. You can request this report from an active processor in the complex and determine from the report the resources that the inactive processor held.

### **majorname[,minorname]**

Specifies a detail report for a specific resource that had contention. The **majorname** field, which corresponds to the **qname** field in the ENQ and DEQ macro instructions, contains the one to eight character major name of a serially-reusable resource. Optionally, the major name is followed by a comma and a minor name. The **minorname** field, which corresponds to the **rname** field in the ENQ and DEQ macro instructions, contains the minor name of the resource.

The maximum length of the field is 32 characters, including the comma. Because the major name is 1 to 8 characters, the minor name can be from 1 to 30 characters, depending on the length of the major name. If you want a report on a minor name, but the **majorname,minorname** operand exceeds 32 characters, you must specify only the major name. RMF then collects data for all resources grouped under the major name.


RMF treats the single character A, D, E, or S as a request for a specific type of report, such as a summary report or a detail report. Therefore, do not use A or E as a major name; do not use S or D as a major name unless you also specify a minor name.

**Note:** If you intend to run a Postprocessor detail or summary report, keep in mind that if you specify a resource by name or by system on the SENQ option, RMF collects data only for the specified resources. The Postprocessor formats a report containing only the specified resources. For example, if the session option is SENQ(SYSDW), and the Postprocessor option is SENQ(D), the Postprocessor formats a detail report for SYSDW only. Also, if the session option identified a specific resource by name and the Postprocessor option identifies a different specific resource, RMF issues a message to tell you that no data is currently available to meet your selection criteria.

### **Examples for a display session or background session:**

- To obtain a summary report for all resources that have contention, enter:  
SEnQ
- To obtain a detail report for all resources that have contention, enter:  
SEnQ D or SENQ (D)
- To obtain a report for all resources that system C303 hold in a global resource serialization complex, enter:  
SEnQ A,C303 or SENQ (A,C303)
- To obtain a detail report for all resources grouped under the major name of SYSCTLG, enter:  
SEnQ SYSCTLG or SENQ (SYSCTLG)
- To obtain a detail report for all resources with the major name of SYSI and the minor name of OPENUADS, enter:  
SEnQ SYSI,OPENUADS or SENQ (SYSI,OPENUADS)

### **SENQR**



Specifies reporting of reserve activity. The operands describe the type of data you require. Only one operand can be specified. The meaning of each operand field is:

### **ALLVSER**

requests data describing all reserve requests. If you specify SENQR without operands, ALLVSER is the default.

### **volser**

requests data describing the reserve requests for a particular device, where **volser** is the one to six character volume serial number of the volume.

**Note:** If you identify a specific device by specifying a volume serial number on the SENQR session option, RMF collects data only for the device identified. In this case, no data on other devices is available to the Postprocessor, and the Postprocessor cannot produce a reserve activity report for all devices. If, for example, the session option is SENQR(TSO200) and the Postprocessor option is SENQR(ALLVSER), the Postprocessor report includes data only for the device on which the volume TSO200 is mounted. Also, if the session option identifies a specific device and the Postprocessor option identifies a different specific device, RMF issues a message to inform you that no data is currently available to meet your selection criteria.

## **Examples for a display session:**

- To obtain a report on reserve activity for all devices, enter:

```
SENQR ALLVSER or SENQR
```

- To obtain a reserve activity report for the device on which the volume TSO200 is mounted, enter:

```
SENQR TSO200
```

## **Examples for a background session:**

- To obtain reserve activity data for all devices, enter:

```
SENQR(ALLVSER) or SENQR
```

- To obtain reserve activity data for the device on which the volume TSO200 is mounted, enter:

```
SENQR(TSO200)
```

## **SPAG**

➡ SPAG ➡

Specifies reporting of paging activity.

## **SRCS**

➡ SRCS ➡

Specifies reporting of central storage/processor/SRM activity.

## **USER**

➡ USER ➡

Specifies that user-specified activity is to be reported. Your installation must supply a corresponding data-gathering module and data-reporting module before USER can take effect. See *z/OS Data Gatherer Programmer's Guide* and *z/OS Resource Measurement Facility Programmer's Guide* for more information.

## Conflicting session options

After you enter the START session command from the operator console to start a background session, RMF processes the session options in a certain order (see [How RMF processes session options](#) in *z/OS Data Gatherer User's Guide*). Some options cannot be used concurrently, and may cause conflicts. Should any conflicts occur, RMF detects the mutually-exclusive options during input merge and selects compatible values for these options. Messages notify the operator of the selections made. The possible conflicts are:

Conflict	Problem	RMF resolution
NOREPORT and NORECORD specified	No way for installation to obtain measurement data	Change NOREPORT to REPORT (DEFER)
STOP value specified is less than SINTV	Indicates session termination before obtaining any data	Set STOP value equal to SINTV value
REPORT(DEFER) and NOSTOP specified	SYSOUT becomes cluttered with unprinted reports	Change NOSTOP to STOP set equal to SINTV value

**Tip:** You can view data from other systems using the ISPF interface for Monitor III. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Monitor III data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

In addition, when a user initiates a reporter session on a system within a sysplex that does not run on the highest RMF level available, Monitor III generates an information message ERB955I. This message is intended to assist users in preventing reporting issues and ensuring the smooth functioning of the system.

**Tip:** You can view data from other systems using the ISPF interface for Postprocessor. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Postprocessor data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

**Note:** When z/OS V2R5 or a later version is used, the value reported for the EXCP and EXCPRT is zero (0).



---

## Chapter 10. Long-term reporting with the Postprocessor

This information unit deals with the Postprocessor, which generates reports from data gathered by the RMF monitors.

It describes:

- the Postprocessor capabilities
- how to prepare SMF records for processing
- how to start the Postprocessor
- the Postprocessor data sets
- all available options

You can use the Postprocessor to combine data from one, several, or all of the systems in the sysplex in one report. There are two prerequisites for this:

- Data must be gathered on all systems
- The gatherers on all systems must be synchronized

*Recommendation:* Specify option **SYNC(SMF)** for all gatherer sessions.

**Tip:** You can view data from other systems using the ISPF interface for Postprocessor. You must use an RMF reporter version equal to or later than the latest Data gatherer version, which is utilized for data collection to avoid problems while reporting Postprocessor data.

For instance, you can utilize an RMF reporter version from z/OS 3.1 for data collection with an Data gatherer from z/OS V2R5, but not vice versa.

---

### Postprocessor reporting

You can use the Postprocessor to create various reports based on SMF data. In addition, you can create records for further processing with spreadsheet applications on the workstation.

- Interval and duration reports:

Use the options REPORTS and SYSRPTS to get single-system and sysplex reports with a specified or a default measurement interval (interval reports). With the DINTV control statement (see “DINTV” on page 140) you can create duration reports combining data from several measurement intervals into one report interval. In “REPORTS” on page 147 and “SYSRPTS” on page 156, you find a description of all options that you can select to get the desired reports.

- Summary report:

With the option SUMMARY, you get a Summary report providing key performance data for a single system.

- Overview report:

The OVW option offers the capability of tailoring summary-like reports according to your requirements. You can create your own single-system and sysplex reports that show exactly the information you need for your performance management tasks. The tables in “Overview and exception conditions” on page 161 provide information about all data that is available for overview processing, related to the SMF data which is the source for these values. Because of compatibility reasons, you also can use option EXCEPT for single-system reports.

Furthermore, in *z/OS Resource Measurement Facility Report Analysis* you find the relationship for each report field in a Postprocessor report to a name you can specify as data field in an Overview report.

- Overview records:

In the same way, as you can create Overview reports, you can create Overview records, just by specifying an additional option OVERVIEW(RECORD). You can download the records to the workstation for further processing in spreadsheets, or you can use the Spreadsheet Reporter to create and submit Postprocessor jobs without logging on to the host system. In addition, several spreadsheets are available to create a wide range of reports. See [Chapter 14, “RMF Spreadsheet Reporter,”](#) on page 235 for a detailed description.

- Exception report:

For exception reporting, you can use the same names as described for overview reporting. The difference is that you specify thresholds for these values as criterion whether the data will be reported or not.

## Preparing SMF records for postprocessing

The Postprocessor generates reports based on data gathered in SMF records by the following data gatherer functions:

- RMF Monitor I, Monitor II, Monitor III — gathering SMF records type 70 - 79
- HTTP Server — gathering SMF records type 103
- Lotus Domino Server — gathering SMF records type 108

Because SMF produces VSAM data sets or SMF log streams, but the Postprocessor cannot read these formats, you must copy the SMF records into sequential data sets. You should do this by using the IFASMFDP program for SMF data sets or the IFASMF DL program for SMF log streams. For more information about IFASMFDP or IFASMF DL see [z/OS MVS System Management Facilities \(SMF\)](#). Using other utilities to copy SMF records often results in truncated or unusable records. The input data sets to the Postprocessor should not be compressed.

**Note:** If you have a sysplex with processors running in different time zones or if you use optimized coupling facility hardware data collection, make sure to review “[Sysplex reporting across time zones](#)” on page 129 or “[Optimized coupling facility hardware data](#)” on page 130, respectively.

**Sorting is required:** The SMF records **must** be sorted by RMF interval start date and interval start time in the data set. If you want to combine SMF records from several data sets, you must sort the records together to ensure correct reports.

RMF provides two SORT exits (ERBPPE15 and ERBPPE35) that should be used when running the SORT program. Use the sample job supplied with RMF in SYS1.SAMPLIB(ERBSAMPP) for sorting Postprocessor input:

### Example:

```
//ERBSAMPP JOB job information,REGION=0M
//RMFSORT EXEC PGM=JCL
//SORTIN DD DISP=SHR,DSN=<input_smfdata_system1>
// DD DISP=SHR,DSN=<input_smfdata_system2>
// :
// :
// DD DISP=SHR,DSN=<input_smfdata_systemN>
//SORTOUT DD DISP=disp,DSN=<sorted_smfdata>,...
//SORTWK01 DD DISP=(NEW,DELETE),UNIT=SYSDA,SPACE=(CYL,(10))
//SORTWK02 DD DISP=(NEW,DELETE),UNIT=SYSDA,SPACE=(CYL,(10))
//SORTWK03 DD DISP=(NEW,DELETE),UNIT=SYSDA,SPACE=(CYL,(10))
//SYSPRINT DD SYSOUT=*
//SYSOUT DD SYSOUT=*
//SYSIN DD *
SORT FIELDS=(11,4,CH,A,7,4,CH,A,15,4,CH,A),EQUALS
MODS E15=(ERBPPE15,36000,,N),E35=(ERBPPE35,3000,,N)
```

You can then start the Postprocessor as described in “[Starting the Postprocessor](#)” on page 130. If you want to start the Postprocessor with JCL, you can use the statements shown in the example under “[Starting with JCL](#)” on page 131 as a second step in the sort job.

## Sysplex considerations

You must be aware of the versions of the z/OS Data Gatherer when SMF records are collected and the RMF version when processing the SMF records. When processing SMF records, ensure that the RMF version of the Postprocessor is at least equal to or higher than the highest gatherer version used to collect the data.

## Sysplex reporting across time zones

If you have a sysplex with several processors running in different time zones, this results in different time stamps in the SMF records. Therefore, the Postprocessor does not recognize that these records belong to the same interval when creating a sysplex report. You can solve this problem by calling program ERBCHGMT which updates the time stamps during Postprocessor processing.

A sample job supplied with RMF in SYS1.SAMPLIB(ERBGMTTP) for updating the Postprocessor input is available.

ERBGMTTP contains the following job steps:

1. SMFDUMP extracts the SMF records from the input data sets and makes sure that the output file has the correct DCB attributes.

If you want to process SMF records from SMF log streams, use the IFASMFDL program instead of IFASMFDL for SMF data sets.

If you want to process SMF records from the SMF data buffer, use the RMF-supplied program ERBAPPL.

2. CHGGMT changes the GMT offset in the input data sets to a common value. The parameter in the PARM field of program ERBCHGMT determines the GMT offset (in minutes) for the output data set.

Examples:

- PARM='+0' creates GMT time in all time stamps in the Postprocessor.
  - PARM='-300' creates GMT time minus 5 hours (Eastern time US, Canada)
  - PARM='+60' creates GMT time plus 1 hour (Middle European winter time)
3. RMFSORT sorts the modified input data set(s) by RMF date and time. This step is required.
  4. RMFPP invokes the Postprocessor.

```

//ERBGMTTPP JOB job information,REGION=0M
/**
/** DUMP SMF DATASET(S)
/**
//SMFDUMP EXEC PGM=IFASMFDP
//IDD1 DD DISP=SHR,DSN=<input_smfdata_system1>
//IDD2 DD DISP=SHR,DSN=<input_smfdata_system2>
//
//IDDN DD DISP=SHR,DSN=<input_smfdata_systemN>
//SMFDATA DD DISP=(NEW,PASS),SPACE=(CYL,(10,10),RLSE),
// UNIT=SYSDA,DCB=(RECFM=VBS,LRECL=32760,BLKSIZE=0)
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
        INDD(IDD1,OPTIONS(DUMP))
        INDD(IDD2,OPTIONS(DUMP))
        :
        INDD(IDDN,OPTIONS(DUMP))
        OUTDD(SMFDATA,TYPE(70:79,103,108))

/**
/** UPDATE GMT OFFSET
/**
//CHGGMT EXEC PGM=ERBCHGMT,PARM='-300'
//SMFDATA DD DISP=(OLD,DELETE),DSN=*.SMFDUMP.SMFDATA
//SMFCHGMT DD DISP=(NEW,PASS),SPACE=(CYL,(10,10),RLSE),
// UNIT=SYSDA,DCB=(RECFM=VBS,LRECL=32760,BLKSIZE=0)
//SYSPRINT DD SYSOUT=*
/**
/** SORT THE SMF RECORDS
/**
//RMFSORT EXEC PGM=SORT
//SORTIN DD DISP=(OLD,DELETE),DSN=*.CHGGMT.SMFCHGMT
.
.
//SYSIN DD *
        SORT FIELDS=(11,4,CH,A,7,4,CH,A,15,4,CH,A),EQUALS
        MODS E15=(ERBPPE15,36000,,N),E35=(ERBPPE35,3000,,N)
/**
/** RMF POSTPROCESSING
/**
//RMFPP EXEC PGM=ERBRMFPP
//MFPPIN DD DISP=(OLD,DELETE),DSN=*.RMFSORT.SORTOUT
.

```

```
//SMFDUMP EXEC PGM=ERBAPPL,PARM='*/70:79,103,108'
//SMFDATA DD DISP=(NEW,PASS),UNIT=SYSDA,SPACE=(CYL,(10,10))
//ERBLIST DD DUMMY
```

## Optimized coupling facility hardware data

To include optimized coupling facility hardware statistics in your Postprocessor reports, you must include SMF records from all data gathering systems, or at a minimum, the data gathering system that contains the coupling facility information. For more information about optimized collection, see [Controlling sysplex-wide optimized coupling facility hardware data collection \(CFOPT\)](#) in *z/OS Data Gatherer User's Guide*.

## Starting the Postprocessor

**ERB111I RMF IS NOT ENABLED TO RUN ON THIS SYSTEM**

The Postprocessor executes as a background job. You can start the batch job from ISPF by choosing **Postprocessor** in the **RMF - Performance Management** menu.

The Postprocessor must have access to the system data set SYS1.SCEERUN, which contains run-time modules for the Language Environment. If you have specified this data set in the LINKLST of your system, you need take no further action in this respect (see [“Ensure linkage to language environment”](#) on page 14.) Just follow the instructions described in this information unit.

If SYS1.SCEERUN is not in the LINKLST, you must specify it as the STEPLIB of the job you submit to start the Postprocessor.

The SMF records that the Postprocessor uses as input can be in:

- SMF data sets

If you include an MFPINPUT DD statement in the start-up job, the records from the associated data set are used.

- an SMF buffer in each system of the sysplex

If you omit the MFPINPUT DD statement, the Postprocessor uses the Sysplex Data Services to access the SMF buffers.

**Note:** This access requires the appropriate access authorization, please refer to [“Controlling access to RMF data for the sysplex data services”](#) on page 18 for details.

You can use the HTTP API of the Distributed Data Server to request one or more of the Postprocessor reports available in XML output format. For a detailed description of the syntax of such requests, see [Accessing performance data using the RMF Distributed Data Server in z/OS Resource Measurement Facility Programmer's Guide](#). As another option, you can also view Postprocessor reports in a web browser. For more information, see [“How to view XML reports in a browser”](#) on page 233.

You can produce and view Postprocessor reports in XML output format. For more information, see [Chapter 13, “How to work with Postprocessor XML reports,”](#) on page 233.

If you need to access Postprocessor reports in XML format, you can make use of the HTTP API provided by the Distributed Data Server. With this API, you can request one or multiple reports as per your requirements. For more information, see [“Producing and viewing XML reports with the HTTP API of the DDS”](#) on page 233.

The Spreadsheet Reporter provides the option to generate chosen Postprocessor reports in XML format. For more information, see [“Producing and viewing XML reports with the Spreadsheet Reporter”](#) on page 233.

## Starting with JCL

To start processing from an SMF data set, use this sample JCL:

```
//EXAMPLE JOB job information,REGION=0M
//POST EXEC PGM=ERBRMFPP
//MFPINPUT DD <sorted SMF records>
//SYSIN DD *
          control statements
/*
```

Figure 38. JCL example for starting the Postprocessor

Provide the SMF record data to be postprocessed in the data set specified on the MFPINPUT DD statement. Because RMF can generate spanned SMF records, this DD statement must contain DCB parameters if the input is an unlabeled tape. The DCB parameters are as follows:

```
RECFM=VBS,LRECL=32756,BLKSIZE=xxx
```

If the input is on a labelled tape or DASD, do not specify any DCB parameters.

The SMF records must be sorted. If this has not already been done, you can combine the sort step from the example from [Figure 37 on page 130](#) with the Postprocessor start step shown in [Figure 38 on page](#)

131 in a two-step job. Use the SORTOUT data set from the SORT step as the MFPINPUT data set for the ERBRMFPP step.

To start processing from the SMF buffers, use this sample JCL:

```
//EXAMPLE JOB job information,REGION=0M
//POST EXEC PGM=ERBRMFPP
//SYSIN DD *
control statements
/*
```

### Example:

For information about control statements, see [“How to use control statements” on page 138](#) and [“Examples of control statements” on page 157](#).

When you specify control statements::

- You can specify the control statements in any order
- Specify data only in columns 1 to 72
- Do not continue statements over two or more lines. Repeat a control statement until all required options are specified

## Starting from ISPF

When you select "Postprocessor" in the RMF Performance Management menu, you get the Postprocessor Setup panel. This ISPF Postprocessor interface consists of a series of panels presented in sequence. Here you can specify the parameters mentioned in [“Starting with JCL” on page 131](#) as input on the panels.

### Postprocessor Setup panel

```
RMF - Postprocessor Setup
Command ==>

Input Data      ==> DATASET  DATASET, SDS (Sysplex Data Server Buffers)
                  or SMFLOG (SMF Log Streams)
Output Data     ==> YES      YES or NO (NO to route output to SYSOUT)
Report Profile  ==> _____
Edit generated JCL ==> NO_    YES or NO

Job Statement Information:
==> //uidP      JOB (ACCOUNT),'PGMRNAME',CLASS=A,REGION=32M
==> //*
==> //*
==> //*

Complete this panel and press ENTER to continue, or END to exit.
To return to RMF Primary Menu without saving input, enter CANCEL.
```

Figure 39. Postprocessor - Setup Panel

The panel accepts this information:

- **Input Data.** Use this part of the panel to indicate the type of input data that should be used for the report. Specify:
  - DATASET - to display the Postprocessor Input panel for SMF data sets (see [Figure 40 on page 134](#)) where you may enter up to 14 SMF data set names
  - SMFLOG - to display the Postprocessor Input panel for SMF log streams where you may enter up to 14 SMF log stream names.
  - SDS - to have the report generated using Sysplex Data Services to access the SMF buffers
- **Output Data.** If you specify NO, then all output will be routed to SYSOUT. You can define your own output data sets by specifying YES, this leads you to the Postprocessor Output panel (see [Figure 41 on page 134](#)).

If you plan to let the Postprocessor create Overview records, you have to specify YES to define the appropriate data set.

- **Report Profile.** This is the name of the data set containing the Postprocessor control statements that define the report details, namely:

- EXCEPT
- EXRPTS
- OVW
- REPORTS
- SYSRPTS

It is used as SYSIN on the ERBRMFPP step of the Postprocessor call. Therefore, the DCB parameters have to be as follows:

```
RECFM=FB,LRECL=80,BLKSIZE=xxx
```

The options that are generated from the Postprocessor Options panel (see [Figure 42 on page 135](#)) are added to the control statements that you define in your profile data set. The values from the Option panel are handled with first priority if there is an overlap in both definitions. Note that the values in the profile data set must not contain JCL delimiter characters.

**Example:** If you have defined the Postprocessor control statements in your data set userid.RMF.SYSIN(DAILYREP), then you set

```
Report Profile ==> rmf.sysin(dailyrep)
```

The specification of all data sets is made following the standard TSO naming conventions.

- **Edit generated JCL.** Use this field to indicate whether or not you would like to edit the JCL for this report before submitting it.

If you enter YES, your JCL is displayed in edit mode after the Postprocessor Options panel. When in edit mode, you may either:

- Make any necessary changes, then press END to submit the job and return to the Postprocessor Setup panel.
- Enter CANCEL to cancel the job without saving changes and return to the Postprocessor Setup panel.

- **Job Statement Information.** Here you enter the information that is needed for the JOB statement of the batch job that is to start the Postprocessor. RMF generates the other job-control statements on the basis of your entries.

## Postprocessor input: SMF data sets or log streams

If you specified DATASET or SMFLOG as input type in the Postprocessor setup, RMF displays the Postprocessor Input panel. [Figure 40 on page 134](#) shows an example of an input panel for SMF data sets. If you specified SMFLOG as input type in the Postprocessor setup, the Postprocessor Input panel prompts you for the log stream names instead of SMF data sets.

```

RMF - Postprocessor Input
Command ==>

  SMF Data Sets      ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----
                    ==> -----

  Sort Input Data    ==> YES      YES or NO

Press ENTER to continue. To return to previous panel, press END.
To return to the Postprocessor Setup Menu, enter CANCEL.

```

Figure 40. Postprocessor Input for SMF Data Sets

For both types of SMF input, you can specify whether the input data is to be sorted or not. It is mandatory to pass sorted SMF records to the Postprocessor, therefore, you can bypass sorting only if you provide sorted records as input.

## Postprocessor output data sets

```

RMF - Postprocessor Output
Command ==>

Overview record data set:

  DD-Name      Data Set Name
  ==> PPOVWREC  ==> -----

Report and message data sets:

  ==> -----  ==> -----
  ==> -----  ==> -----
  ==> -----  ==> -----
  ==> -----  ==> -----
  ==> -----  ==> -----
  ==> -----  ==> -----

Complete this panel and press ENTER to continue.
To return to previous panel, press END.
To return to the Postprocessor Setup Menu, enter CANCEL.

```

Figure 41. Postprocessor - Output Data Sets

This panel allows you to specify output data sets.

The definition of the ddname PPOVWREC is mandatory if you request Overview records for further processing.

In addition, you can allocate existing data sets to the various report and message files that are created by the Postprocessor. For details about output data set allocation, please refer to [“Defining output data sets” on page 135](#).

**Example:** Please assume that the Postprocessor is requested to create one Overview and one Summary report, and also Overview records, then you can route this output to your own existing data sets userid.OVERVIEW.RECORD, userid.OVERVIEW.LIST, and userid.SUMMARY.LIST by specifying:

```

==> PPOVWREC      ==> overview.record
==> PPORP001      ==> overview.list
==> PPSUM001      ==> summary.list

```



If you want in addition, that all interval reports should be combined into data set userid.REPORTS.LIST, than you can specify:

```
====> PPRPTS      ====> reports.list
```

## Postprocessor Options panel

When you have completed the Postprocessor Setup panel with input, profile and job control data, you will see the Postprocessor Options panel that allows you to specify report options:

```
RMF - Postprocessor Options

Reporting (DATE) Start ===> 01 . 01 / 1958 End ===> 12 . 31 / 2057 yy.ddd
                        or Start ===> 01 / 01 / 1958 End ===> 12 / 31 / 2057 mm/dd/yyyy
Duration (DINTV)      ===> 00 : 00
Exception (ETOD) Start ===> 00 : 00 End ===> 24 : 00 hh:mm
Interval (RTOD) Start ===> 00 : 00 End ===> 24 : 00 hh:mm
Summary (STOD) Start ===> 00 : 00 End ===> 24 : 00 hh:mm

Summary (SUMMARY)     ===> INT,TOT NO, INT, TOT, or TOT,INT
Overview (OVERVIEW)   ===> _____ RECORD, REPORT (or both)

DELTA    ===> NO_ YES or NO
EXITS    ===> NO_ YES or NO SESSION ===> __ Session ID Monitor II
SYSOUT   ===> A_ Sysout Class SYSID ===> ____ System identifier

To (edit and) submit Postprocessor job, press ENTER.
To return to previous panel, press END.
To return to the Postprocessor Setup Menu, enter CANCEL.

Command ===>
```

Figure 42. Postprocessor Options panel

Here you can enter:

- The start and end dates of the reporting period
- The time value for the duration report
- The time ranges for the reports which require them
- The scope of the Summary report
- The output type of the Overview report
- Values for miscellaneous options, with a prompt text to remind you of the valid format for each

From your entered data, RMF generates job control statements. If you have requested to edit the generated JCL, you will enter edit mode when pressing ENTER, otherwise the job will be submitted.

You can use the following commands on this panel:

### RESET

Reset all parameters to the default values

### SAVE

Save all values you have entered (if you do not want to submit the job)

## Defining output data sets

RMF dynamically allocates all Postprocessor message and report data sets to SYSOUT. You can route output data to permanent data sets rather than to SYSOUT by allocating the data sets in the JCL of the Postprocessor job. The report data sets for Monitor I, OMVS, and XCF interval reports and duration reports use the ddnames MFRnnnnn and MFEnnnnn. The ddnames of these and the other report data sets and the message data set that the Postprocessor uses are:

Table 18. Postprocessor ddnames - text output

ddname	Contents	Allocations	Notes
<b>MFE#####</b>	Report output after a recoverable abnormal end	One ddname for one data set to be allocated for each of the intervals contained in the input data.	RMF uses this data set to re-allocate report data sets after a recoverable ABEND.  ##### is a decimal number from 00001 to 99999; successively generated. For example, if a session has 15 intervals, ddnames are MFE00001 through MFE00015.
<b>MFPMSGDS</b>	Message output	One MFPMSGDS data set is allocated each time the Postprocessor is executed.	To change the SYSOUT class parameter for this data set, you must preallocate the data set. You cannot change it in the RMF options.
<b>MFR#####</b>	Report output	One ddname for one data set to be allocated for each of the intervals contained in the input data.	##### is a decimal number from 00001 to 99999; successively generated. For example, if a session has 15 intervals, ddnames are MFR00001 through MFR00015.  For creating one output data set, use ddname PPRPTS.
<b>MF#####</b>	Exception interval report data	One ddname for one data set to be allocated for each of the intervals included in the exception report.	##### is a decimal number from 00001 to 99999. The first interval is assigned the ddname MF000001. The second MF000002, and each subsequent interval is assigned a ddname in ascending numerical order. If no exception interval reports are produced in a given interval, the data set for that interval is empty.  For creating one output data set, use ddname PPRPTS.
<b>PPEXT###</b>	Exception report output	One ddname for one data set to be allocated for each system included in the input data.	### is a decimal number from 001 to 999. The first system encountered is assigned to ddname PPEXT001, and each subsequent system is assigned a ddname in ascending numerical order.
<b>PPORP###</b>	Overview report output	One ddname for one data set to be allocated for each of the systems included in the input data.	### is a decimal number from 001 to 999. The first system encountered is assigned to ddname PPORP001, and each subsequent system is assigned a ddname in ascending numerical order.
<b>PPRPTS</b>	Combined interval report	One ddname for one data set to be allocated to contain all reports of all intervals included in the input data.	There is no dynamic allocation of this ddname. You must define it explicitly if you want to get all interval reports into one data set or output class. You should not use the subparameter DEFER for this ddname.  If you define this ddname, no MFR##### files will be created.
<b>PPSUM###</b>	Summary report output	One ddname for one data set to be allocated for each of the systems included in the input data.	### is a decimal number from 001 to 999. The first system encountered is assigned the ddname PPSUM001, and each subsequent system is assigned a ddname in ascending numerical order.
<b>PPXRPTS</b>	Combined exception report	One ddname for one data set to contain all exception reports for all intervals contained in the input data.	There is no dynamic allocation of this ddname. You must define it explicitly if you want to get all exception reports into one data set or output class. You should not use the subparameter DEFER for this ddname.  If you define this ddname, no MF##### files will be created.
<b>PPXSRPTS</b>	Sysplex report output	One ddname for one data set to be allocated to contain all sysplex reports included in the input data.	All sysplex reports are written to this data set.
<b>RMFP#####</b>	Monitor II session interval report output	One ddname is generated and one data set is created for each report for each session-identifier included in the reporting.	#### is a decimal number from 0001 to 9999. When the Postprocessor is to generate reports for more than one system, a separate data set is allocated for each report for each system. When operands for a Monitor II session are not specified on the REPORTS 1 statement, the Postprocessor uses the operands in the SMF record, and a separate data set is allocated each time the operands change.

**Note:**

1. If you omit the DCB characteristics for the mentioned message and report data sets, the characteristics used are:

```
DCB=(RECFM=VBA,LRECL=137,BLKSIZE=1693)
```

If you omit the data set control block (DCB) characteristics for a data set allocated to the PPXRPTS ddname of the Postprocessor job, the following characteristics are used:

```
RECFM=VBA, LRECL=1028
```

For BLKSIZE, the optimal block size as determined by the system is used.

If you change the DCB characteristics, you cannot change the record format; you must specify RECFM=VBA.

2. Please consider that the number of dynamically allocated data sets is limited to 1635.

Table 19. Postprocessor ddname - Overview record output			
ddname	Contents	Allocations	Note
PPOVWREC	Overview record output	One ddname for one data set to be allocated.	<b>Not</b> created automatically. The records in this data set can be used for other applications, for example, for conversion to spreadsheet.

**Note:** Define this data set explicitly in the JCL for the Postprocessor. Use these data set characteristics:

```
DCB=(RECFM=VB,LRECL=32756,BLKSIZE=32760)
```

Besides text reports, the Postprocessor can generate certain reports in XML format. The XML format is generated by specifying the following Postprocessor ddnames for the output data.

Table 20. Postprocessor ddnames - XML output			
ddname	Contents	Allocations	Notes
XPOVWRPT	Combined Overview report in XML format	One ddname for one data set to contain all overview reports for each system included in the input data.	There is no dynamic allocation of this ddname. You must define it explicitly if you want to get all overview reports in XML format into one data set or output class. If you define this ddname, no PPORPnnn files are created.
XPRPTS	Combined single system report in XML format	One ddname for one data set to contain all single system reports for each interval included in the input data.	There is no dynamic allocation of this ddname. You must define it explicitly if you want to get all reports in XML format into one data set or output class. If you define this ddname, no MFRnnnnn files are created. If you define this ddname and PPRPTS, no XML output in file XPRPTS is created.
XPXSRPTS	Combined sysplex-wide report in XML format	One ddname for one data set to contain all sysplex reports for each interval included in the input data.	There is no dynamic allocation of this ddname. You must define it explicitly if you want to get all reports in XML format into one data set or output class. If you define this ddname, no MFRnnnnn files are created. If you define this ddname and PPXSRPTS, no XML output in file XPXSRPTS is created.

**Note:**

1. If the XML output is to be routed to permanent data sets rather than to SYSOUT, define the data set with RECFM=VB and LRECL between 256 and 8192.
2. For a complete list of Postprocessor reports which you can obtain as XML output in addition to the **Overview** report, refer to information unit [Long-term overview reporting with the Postprocessor in the z/OS Resource Measurement Facility Report Analysis](#).

Any others than the listed reports requested on the REPORTS and/or SYSRPTS control statement are ignored.

## How the Postprocessor processes control statements

The Postprocessor verifies the control statements and builds a list of options that control the session. If you omit a statement, RMF substitutes the default value, if there is one, or ignores the option. A statement containing a syntax error causes the Postprocessor to terminate, in most cases.

In some cases, an error in a control statement does not cause the Postprocessor to end. RMF notes the condition, issues a warning message to the output message data set, and continues building an option list for the session. When processing is complete, the Postprocessor issues a message to the output message data set indicating the options in effect.

The option list consists of the options you have entered on control statements and any options for which the default values were used. Each option listed is followed by the input source from which the Postprocessor obtained the option. The possible sources are:

- **SYSIN** -- the option was specified on a control statement for the Postprocessor.
- **DEFAULT** -- the option was taken from the control statement defaults.

When RMF detects an invalid value and substitutes a default value, a warning message is issued, and **DEFAULT** appears in the option list.

## Defining the reporting period

You can control the length of the reporting period with:

1. Control statements (**DATE**, **RTOD**, **ETOD**, and **STOD**) that indicate a specific range of dates and specific ranges of times.
2. The SMF record data set. The control statement defaults for the reporting period include all dates and all times in the SMF record data set. If you omit control statements, the Postprocessor generates reports for all dates and times included in the SMF record data set.

## Postprocessor completion

When the Postprocessor has generated all requested reports, it issues a return code and ends the session. Any messages are available in the preallocated **MFPMSGDS** data set.

Among the messages issued, there may be some with the prefixes **CEE** and **EDC**. These are Language Environment messages issued by routines that the Postprocessor uses. See *z/OS Resource Measurement Facility Messages and Codes* for details.

The return codes from the Postprocessor are:

### Code

#### Meaning

**0**

Normal completion -- reports generated as requested

**4**

Normal completion -- no RMF input records found or no RMF input records found that meet the user requirements specified in the control statements

**8**

Error -- see accompanying RMF message

**12**

Terminating error -- see accompanying RMF message

## How to use control statements

---

This topic describes purpose and syntax of the control statements that you can use to create Postprocessor reports. [Table 21 on page 139](#) gives a summary of the available control statements. It also indicates which control statements are required and which you can omit to accept a default value.

Supply the control statements after the SYSIN DD statement in the job you submit to start the Postprocessor.

Table 21. Postprocessor Control Statement Summary							
Processor Control Statement	Interval Report	Duration Report	Summary Report	Exception Report	Overview Report	Notes	See
DATE	*	*	*	*	*	1	<a href="#">“DATE” on page 139</a>
DELTA	*					1	<a href="#">“DELTA” on page 140</a>
DINTV		*				2,3	<a href="#">“DINTV” on page 140</a>
ETOD				*	*	1	<a href="#">“ETOD” on page 143</a>
EXCEPT				*	*	2	<a href="#">“EXCEPT” on page 143</a>
EXITS	*	*	*	*	*	1	<a href="#">“EXITS” on page 145</a>
EXRPTS				*		2	<a href="#">“EXRPTS” on page 145</a>
OVERVIEW					*	2	<a href="#">“OVERVIEW” on page 146</a>
OVW					*	2	<a href="#">“OVW” on page 147</a>
REPORTS	*	*				2	<a href="#">“REPORTS” on page 147</a>
RTOD	*	*				1	<a href="#">“RTOD” on page 153</a>
SESSION	*					1	<a href="#">“SESSION” on page 154</a>
STOD			*			1	<a href="#">“STOD” on page 154</a>
SUMMARY			*			1	<a href="#">“SUMMARY” on page 155</a>
SYSID	*	*	*	*	*	1	<a href="#">“SYSID” on page 155</a>
SYSOUT	*	*	*	*	*	1	<a href="#">“SYSOUT” on page 155</a>
SYSRPTS	*	*				2	<a href="#">“SYSRPTS” on page 156</a>
<b>Note:</b> <ol style="list-style-type: none"> <li>1. If the default value is acceptable, you need not specify the control statement explicitly.</li> <li>2. You must specify the control statement explicitly.</li> <li>3. You cannot request duration reports concurrently with interval reports; each type of report requires a separate Postprocessor session. However, you can request duration reports concurrently with exception generated interval reports and summary and exception reports concurrently with either duration or interval reports.</li> </ol>							

The remainder of this topic describes the control statements in alphabetical order.

## DATE

The DATE control statement specifies the start and end date of the reporting period for all reports.

The syntax of the statement is:

```
DATE(yyddd,yyddd)
or
DATE(mmddyyyy,mmddyyyy)
```

where:

- yy is the last two digits of the year.
- ddd is the day of the year

or

- mm is the month (01 to 12)
- dd is the day of the month
- yyyy is the year in full-century form, for example, 2021

RMF supports a sliding window which covers the time frame:

#### **Current Year - 50 through Current Year + 49**

This sliding window will be used to define the correct value of the century, if not defined explicitly. Write the dates in the full format with leading zeroes. Do not mix the two formats in one control statement. The first date is the starting date, and the second date is the ending date. Specify the dates in chronological order.

The default value is in the four-digit year format and ensures that all dates found in the input data set are reported.

If the entire reporting period falls within one calendar day, you specify the same date twice.

**Example:** To request reports for data collected on June 7, 2021, specify

```
DATE(06072021,06072021)
```

## **DELTA**

The DELTA control statement specifies whether certain fields in Monitor II background session reports are to reflect total values or, after the first report, changed delta values. The fields that are affected by delta mode are described for each report in [z/OS Resource Measurement Facility Report Analysis](#). The syntax of the statement is:

```
DELTA/NODELTA
```

DELTA indicates that the affected fields are to reflect changed delta values, that is, the reports are generated in delta mode. NODELTA indicates that the affected fields are to reflect total values. NODELTA is the default.

## **DINTV**

The DINTV control statement specifies that the Postprocessor is to generate duration reports and indicates the length of the duration interval. The Postprocessor uses the value specified with this control statement also for processing **Overview** and **Exception** reports. This allows you to produce trend reports over long time periods.

The duration interval is the length of time each report can cover and should be a multiple of the measurement interval. The syntax of the statement is:

```
DINTV(hhmm)
```

where hh denotes the hours and mm denotes the minutes. The maximum is 9960 which is equivalent to 100 hours.

**Note:**

1. Before z/OS V1.8 RMF, exception/overview duration processing was not implemented. If a user specified Postprocessor reports, RMF used the options specified with the REPORTS control statement as a filter to select the SMF records for producing these reports.

Starting with z/OS V1.8, exception/overview duration processing is supported. If exception/overview duration reporting is used together with normal Postprocessor reports in one job step, the RMF Postprocessor selects all SMF records for producing both the exception/overview reports as well as the normal reports. This leads to uncommon behavior: For example, if a user specifies REPORTS(DEVICE(TAPE)), RMF may additionally produce unwanted DEVICE(DASD) reports.

Therefore it is not recommended to use REPORTS control statements if you request exception/overview duration reports in the same job.


2. For duration reports, it is recommended to specify not only the reporting interval but also the date, even if the SMF input data contains only records for those days you want to report on.

The duration interval can be the same length as, or shorter than, the reporting period. If it is shorter, there will be several duration intervals in a reporting period. [Figure 43 on page 142](#) illustrates how the duration interval relates to the reporting period. Assume a reporting period that covers the twelve hours between 8:00 AM and 8:00 PM over a range of three days. As the figure shows, specifying DINTV(1200) causes the Postprocessor to generate three duration reports, each covering twelve hours of system activity. Specifying DINTV(0600) causes the Postprocessor to generate six duration reports, each covering six hours of system activity. You could also choose a duration interval that does not break the reporting period into equal blocks of time. As the figure shows, specifying DINTV(1000), indicating a duration interval of ten hours, causes the Postprocessor to generate the following reports:


1. 8:00 AM to 6:00 PM on the first day of the reporting period.
2. 6:00 PM to 8:00 PM on the first day of the reporting period, and 8:00 AM to 4:00 PM on the second day.
3. 4:00 PM to 8:00 PM on the second day of the reporting period, and 8:00 AM to 2:00 PM on the third day.
4. 2:00 PM to 8:00 PM on the third day of the reporting period.

In this case, if you wanted to use the reports to compare system performance over the same hours on each day of the reporting period, it would be difficult because each report covers a different time range and some span two days and include a twelve-hour gap when no reporting was done.


## Reporting Period

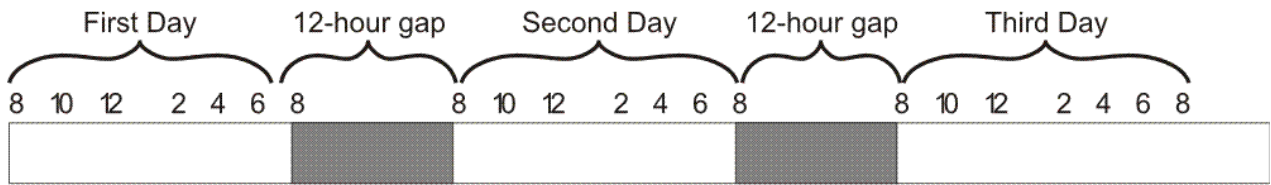

## Duration Interval of Twelve Hours - DINTV (1200)

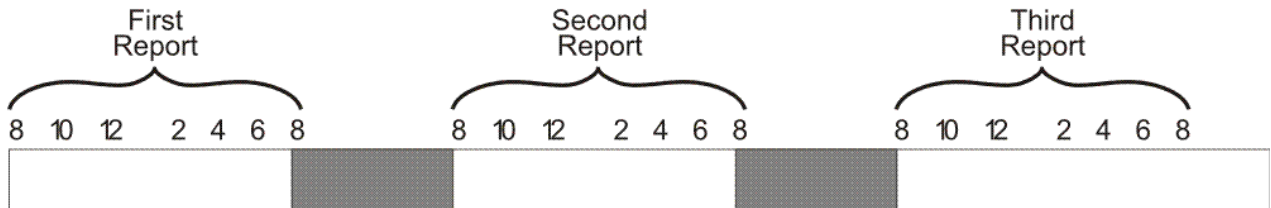

## Duration Interval of Six Hours - DINTV (0600)

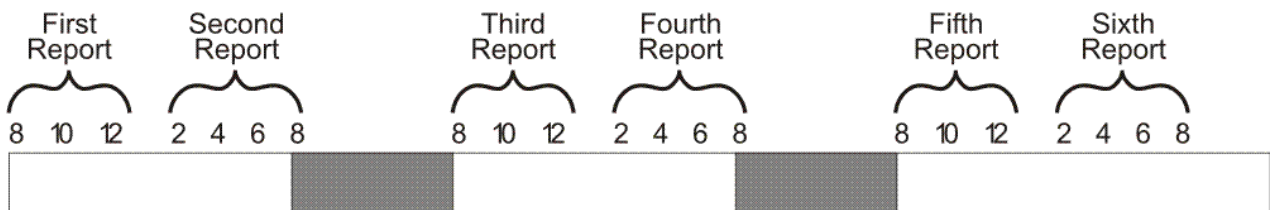

## Duration Interval of Ten Hours - DINTV (1000)

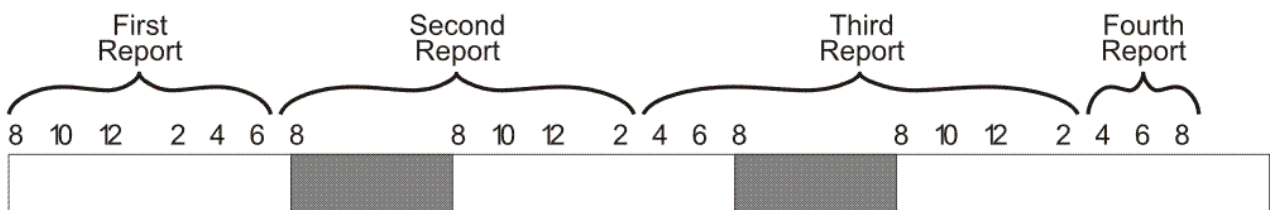


Figure 43. Relationship between Duration Interval and Reporting Period

The syntax of the control statement allows a maximum duration interval of 99 hours and 60 minutes.

For most effective reporting, the duration interval should relate to the length of the reporting period.

The actual length of time included in the resulting duration report depends on the time within the duration interval when data was actually collected.

**Example:** Request a duration report for channel path activity that has a duration interval of 12 hours (from 8:00 AM to 8:00 PM) on June 7, 2021:

```
DATE (06072021,06072021)
RTOD (0800,2000)
```



```
DINTV(1200)  
REPORTS(CHAN)
```

However, if channel path activity measurement did not begin until 10:00 AM, and ended at 6:00 PM, the duration report covers the time from 10:00 AM to 6:00 PM. The start time of the first measurement interval and the time when the last interval ended appear in the heading of the report.

**Midpoint Processing:** Postprocessor duration reporting can put data into the incorrect duration interval when the time stamp in the input record differs from the expected time. For example, if your installation uses 15-minutes intervals and specifies RTOD(0900,1000) and DINTV(0100), the time stamp for the 10:00 to 10:15 interval might indicate that the interval began at 09:59:59.997. In this case, the 10:00 record would be reported in the 9:00 to 10:00 duration interval and is one hour and 15 minutes long.

To avoid this problem, the Postprocessor checks whether the midpoint of each interval falls between the duration interval to ensure that a record will not be used unless at least half of the data belongs to the interval.

Therefore, you should specify RTOD(0900,1000) and **not** RTOD(0859,1000) to get the correct duration report.

This note also applies to Postprocessor interval, exception, and summary reporting.

## ETOD

The ETOD control statement specifies the starting time and ending time of the reporting period for an Exception or Overview report for each day in the reporting period.

The syntax of the statement is:

```
ETOD(hhmm,hhmm)
```

where hh denotes the hours and mm denotes the minutes.

When the ETOD statement is omitted, the default value is ETOD(0000,2400); that is, all times are reported. Thus, you would use this control statement when you want a reporting period for an Exception report that is different from the default value.

Because the range of values allowed is from 0000 to 2400, it is not possible to define a reporting period that consists of a single block of time spanning more than one calendar day. Thus, you cannot define a reporting period that, for example, runs from 12 noon on one day to 12 noon on the next day. However, you can define a reporting period that consists of the same block of time over several days. For example, to produce an Exception report using data collected from 8:00 AM to 1:00 PM for the week beginning on January 3, 2021 and ending on January 9, 2021, the required DATE and ETOD statements are:

### Example:

```
DATE(01032021,01092021)  
ETOD(0800,1300)
```

## EXCEPT

The EXCEPT control statement defines a condition that RMF is to test for an exceptional value. The definition consists of a condition (which is a system indicator that RMF recognizes by name), a threshold value for the condition, and an operator that establishes the relation between the condition and the threshold value. RMF compares the threshold value for the condition with the contents of the appropriate SMF record field. If the condition exceeds the threshold, RMF recognizes that an exception has occurred. The conditions that RMF can recognize and test for exceptional values are listed in [“Overview and exception conditions” on page 161](#).

An exception can consist of one or multiple conditions. If you group conditions into a single exception, all conditions must exceed their threshold values to let RMF recognize that the exception has occurred.

If you specify an OVERVIEW control statement (see [“OVERVIEW”](#) on page 146) together with EXCEPT control statements, RMF produces an Overview report based on the EXCEPT control statements, but no Exception report.

By supplying an EXRPTS control statement for the exception, you can also cause RMF to generate one or more interval reports when the exception occurs.

Only one condition and threshold can be specified in a single control statement, however, you can specify multiple EXCEPT control statements. The syntax of the EXCEPT statement is:

```
EXCEPT([control-statement-name] (condition-name[(qualifier)] ,{LE} ,{GE} ,threshold-value))
```

### **control-statement-name**

Specifies a one to eight-character name, starting with an alphabetic character, that has three uses:

- First, it provides a means of grouping multiple conditions to form a single exception. You group conditions by coding the same control-statement-name on each separate EXCEPT statement that defines each one of the conditions that form the exception. When conditions are grouped, all conditions must be satisfied in order for RMF to recognize the exception.
- Second, the control-statement-name associates the exception with the interval reports, if any, that RMF is to generate when the exception occurs. The EXRPTS statement defines these reports. For more information, see the EXRPTS control statement.

When Exception reports are generated, exceptions are listed in chronological order by control-statement-name. The control-statement-names are listed in alphabetical order. Choosing a meaningful control-statement-name makes it easier to recognize an exception.

- Third, the control-statement-name is used in an Overview report as the header for the column with the corresponding exception data. In this case, the control-statement-name is mandatory, and must be unique for each exception.

### **condition-name**

Specifies the name of the condition that RMF is to test for an exceptional value. All valid condition names are listed in the tables in [“Overview and exception conditions”](#) on page 161, which also show the record types that contain the data that RMF compares with the threshold for each condition. RMF performs the test by comparing the contents of the appropriate field in an SMF record with the threshold value. Thus, RMF can recognize an exception only when the required SMF record was produced during the reporting period.

### **qualifier**

Specifies an optional qualifier that can limit the scope of the condition identified by condition-name. The tables in [“Overview and exception conditions”](#) on page 161 also list the available qualifiers.

### **LE or GE**

Specifies the operator RMF is to use to determine if the exception has occurred.

LE indicates that any value in the SMF record that is less than or equal to the threshold value causes an exception.

GE indicates that any value in the SMF record that is greater than or equal to the threshold value causes an exception.

### **threshold-value**

Specifies the value that RMF compares to a computed value from the appropriate SMF record fields. You can specify the value as:

- a whole number – where the value can be a one to six digit integer.
- a fraction – up to six digits can appear before and up to three digits can appear after the decimal point. However, the total number of digits specified cannot exceed nine, including the decimal point.
- percentage – where the maximum percentage that can be specified is 100 percent. The value can be expressed as a whole integer or as a fraction. You can specify a percentage only with those conditions that indicate a percent value.

When the SMF record exceeds the threshold value, as indicated by the LE or GE operand, RMF flags the condition for reporting. For each interval, only one line is printed for each exception regardless of the number of times the threshold is exceeded.

**Note:** For information on exception/overview duration reporting, refer to [“DINTV” on page 140](#).

#### Examples:

- The Postprocessor is to generate a line in the Exception report for each interval when the total busy percent value for channel path 1 is greater than or equal to ten percent. Use the following control statement:

```
EXCEPT((CHTBSY(01),GE,10))
```

The absence of a control-statement-name indicates that this is a single condition exception and that no interval reports are generated.

- The Postprocessor is to generate a Channel Path Activity report for each interval when the I/O service rate for service class TSO is higher than or equal to 100 service units per second, and the device percent utilized value for device 06D8 is greater than or equal to 3. Use the following control statements:

```
EXCEPT(EXCP1(IOSRV(S.TSO),GE,100))  
EXCEPT(EXCP1(DVUTL(06D8),GE,3))
```

Note that the control-statement-name EXCP1 is used to group the two conditions into one exception. When RMF recognizes both conditions, RMF writes a line for each condition in the Exception report.

## EXITS

The EXITS control statement specifies whether or not a user exit routine is to be executed during the Postprocessor session. The syntax of the statement is:

```
EXITS/NOEXITS
```

When EXITS is specified, a user exit routine is executed. See *z/OS Resource Measurement Facility Programmer's Guide* for information about how to code a user exit routine for the Postprocessor.

The default NOEXITS indicates that no user exit routine is to be executed.

## EXRPTS

The EXRPTS control statement is required when you want the Postprocessor to generate interval reports when a particular exception occurs. Each report specified must be separated from any other reports by a comma. No continuation statements are permitted. However, you can use multiple EXRPTS statements. The syntax of the statement is:

```
EXRPTS (control-statement-name(report,report,...))
```

#### control-statement-name

Specifies a one to eight-character name starting with an alphabetic character that associates one or more EXCEPT statements with the EXRPTS statement. The EXCEPT statement defines the exception to RMF and the EXRPTS statement defines the action to be performed by RMF.

#### report

Specifies any of the reports based on measurements from Monitor I or Monitor III that is acceptable on the REPORTS control statement. The following key-words can be specified for report. For their meaning, see [“REPORTS” on page 147](#):

```
ALL  
CACHE(option,option,...)|NOCACHE  
CHAN|NOCHAN  
CPU|NOCPU  
CRYPTO|NOCRYPTO  
DEVICE(option,option,...)|NODEVICE  
ENQ|NOENQ
```

```

ESS|NOESS
FCD|NOFCD
HFS|NOHFS
IOQ|NOIOQ
OMVS|NOOMVS
PAGESP|NOPAGESP
PAGING|NOPAGING
TRACE|NOTRACE
VSTOR(option,list)|NOVSTOR
XCF|NOXCF

```

**Note:** The EXRPTS control statement can not be used for reports that are only available in XML output format. Hence, for example, no Postprocessor **Serialization Delay** report can be generated, because the keyword SDELAY is not supported in the EXRPTS control statement.

**Example:** The Postprocessor is to generate a Channel Path Activity report for each interval when the I/O service rate for service class TSO is higher than or equal to 100 service units per second. Use the following control statements:

```

EXCEPT(CHNRPT(IOSRV(S.TSO),GE,100))
EXRPTS(CHNRPT(CHAN))

```

## OVERVIEW

The OVERVIEW control statement can be used together with the OVW and the EXCEPT control statement to specify Overview processing.

The syntax of the statement is:

```
OVERVIEW(type[, type])
```

**type** specifies the output destination and can be:

### REPORT

Requesting a report to be written.

### RECORD

Requesting data to be written to a data set.

You can specify both types on one OVERVIEW control statement.

### OVERVIEW in context with OVW

If you specify OVW control statements (see [“OVW” on page 147](#)), then OVERVIEW has the default value of REPORT and is required only for creating records, either as OVERVIEW(RECORD) or OVERVIEW(REPORT,RECORD).

### OVERVIEW in context with EXCEPT

If you specify EXCEPT control statements (see [“EXCEPT” on page 143](#)), then OVERVIEW defines whether Overview reports or Overview records should be created. There is no default OVERVIEW option, and if OVERVIEW is missing, an Exception report will be created.

### OVERVIEW in context with OVW and EXCEPT

It is recommended **not** to specify OVW and EXCEPT statements together. If you do so nevertheless, overview data is created using both types of statements, and you must ensure not to use duplicate control statement names.

There is no automatic allocation of the output data set for the Overview records. You have to define the data set explicitly in your JCL (see [“Defining output data sets” on page 135](#)) as

```
//PPOVWREC DD DSNAME=data.set.name, ...
```

or in the Postprocessor Output Data Set panel (see [“Postprocessor output data sets” on page 134](#)).

The data set should have these characteristics:

```
DCB=(RECFM=VB,LRECL=32756,BLKSIZE=32760)
```

You find a description of the records in [z/OS Resource Measurement Facility Report Analysis](#).

## OVW

You can use the OVW control statement to create Overview reports and Overview records. Depending on the condition names, the SMF data, and the optional parameters SYSTEMS|NOSYSTEMS, you get single-system and sysplex reports or records.

**Note:** There is a limitation of 253 OVW control statements for one step of the Postprocessor.

The OVW syntax is:

```
OVW(control-statement-name(condition-name(qualifier))[,SYSTEMS])  
or  
OVW(control-statement-name(condition-name(qualifier))[,NOSYSTEMS])
```

If in the past you have performed overview processing with EXCEPT control statements, you should exchange them to OVW control statements because OVW statements enable you to create sysplex reports. The OVW syntax just requires a control statement name, but no threshold, as required for the EXCEPT control statement.

Refer to “EXCEPT” on page 143 for an explanation of the parameters control-statement-name and condition-name(qualifier).

**Note:** For information on exception/overview duration reporting, refer to “DINTV” on page 140.

### SYSTEMS

You get a single-system report for each system of the sysplex, and you get an additional sysplex report for all sysplex-related overview conditions (based on the records for the CF, SDEVICE, and WLMGL reports). This optional parameter (which is the default) is valid only in combination with sysplex-related overview conditions, but is tolerated for single-system overview conditions.

### NOSYSTEMS

Only sysplex-wide overview data is generated.

You find a list of all condition names in “Overview and exception conditions” on page 161.

**Example:** You want to get the sysplex-wide response times for all TSO users running in service class TSOSERV, and you have defined three service class periods. You want to get the data for all intervals between 10:00 AM and 2:00 PM, and you want to create a report as well as records.

You specify the following control statements:

```
ETOD(1000,1400)  
OVERVIEW(REPORT,RECORD)  
OVW(RTIMEP1(RTIMETOT(S.TSOSERV.1)),NOSYSTEMS)  
OVW(RTIMEP2(RTIMETOT(S.TSOSERV.2)),NOSYSTEMS)  
OVW(RTIMEP3(RTIMETOT(S.TSOSERV.3)),NOSYSTEMS)
```

Note that you specify your own appropriate control-statement-names (in our example RTIMEP1, ... , RTIMEP3) that appear as column headings for the desired measurements in the resulting report or record.

## REPORTS

The REPORTS control statement specifies the reports to be generated by the Postprocessor for a single system. In combination with the control statement DINTV, duration reports are generated. Otherwise, interval reports are generated.

**Note:** No duration reports are available for enqueue activity (ENQ), tracing activity (TRACE), and serialization delay (SDELAY), as well as for all reports based on Monitor II data. This applies also when specifying ALL together with DINTV.

Each report specified as an option of the REPORTS control statement must be separated from any other reports by a comma. No continuation statements are permitted. However, you can specify multiple REPORTS control statements. The syntax of the REPORTS control statement is:

```
REPORTS(report[,report...])
```

where the **report** option can be any of the reports listed here and described in detail in the following:

ALL	FCD() NOFCD
ARD() NOARD	HFS NOHFS
ARDJ() NOARDJ	HTTP NOHTTP
ASD() NOASD	IOQ NOIOQ
ASDJ() NOASDJ	IOQUEUE NOIOQUEUE
ASRM() NOASRM	OMVS NOOMVS
ASRMJ() NOASRMJ	PAGESP NOPAGESP
CACHE() NOCACHE	PAGING NOPAGING
CHAN NOCHAN	PCIE NOPCIE
CHANNEL NOCHANNEL	PGSP NOPGSP
CPU NOCPU	SDELAY NOSDELAY
CRYPTO NOCRYPTO	SENQ() NOSENQ
DEV() NODEV	SENQR() NOSENQR
DEVICE() NODEVICE	SPAG NOSPAG
DEVV() NODEVV	SRCS NOSRCS
DOMINO NODOMINO	TRACE NOTRACE
EADM NOEADM	VSTOR() NOVSTOR
ENQ NOENQ	XCF NOXCF
ESS() NOESS	

### Examples:

```
REPORTS(CPU)
REPORTS(CPU,CRYPTO)
REPORTS(CPU,CRYPTO,DEVICE(COMM,DASD))
```

### ALL

Indicates that all of the listed reports are to be generated, if gathered data is available. Any user-supplied Monitor II background session reports are also included when ALL is specified. ALL can be combined with explicit specifications of other options.

### Examples:

```
REPORTS(ALL,NOENQ,DEVICE(NOUNITR,NOCOMM))
```

All of the reports are generated, with the exception of enqueue activity and device activity for unit record devices and communication equipment.

```
REPORTS(NOCPU)
or
REPORTS(ALL,NOCPU)
```

The Postprocessor generates all reports except for the CPU Activity report.

```
REPORTS(ALL,CPU)
or
REPORTS(ALL)
```

The Postprocessor generates all reports.

**ARD[(class,status,,boost)] | NOARD**

Specifies the Monitor II Address Space Resource Data report, where suboptions **class**, **status**, and **boost** specify the selection conditions for the address spaces to be included. For detailed information refer to [Table 17 on page 115](#).

**ARDJ(jobname) | NOARDJ**

Specifies the Monitor II Address Space Resource Data by jobname report, where suboption **jobname** identifies a specific job for the report. If you specify ARDJ for the Postprocessor, make sure you have specified the Monitor II ARDJ report command. You cannot run a Postprocessor ARDJ report with data collected by the Monitor II ARD report command. For detailed information refer to [Table 17 on page 115](#).

**ASD[(class,status,,boost)] | NOASD**

Specifies the Monitor II Address Space State Data report. Suboptions **class**, **status**, and **boost** are the same as for ARD. For detailed information refer to [Table 17 on page 115](#).

**ASDJ(jobname) | NOASDJ**

Specifies the Monitor II Address Space State Data by jobname report, where **jobname** identifies a specific job for the report. If you specify ASDJ for the Postprocessor, make sure you have specified the Monitor II ASDJ option. You cannot run a Postprocessor ASDJ report with data collected by the Monitor II ASD option. For detailed information refer to [Table 17 on page 115](#).

**ASRM[(class,status)] | NOASRM**

Specifies the Monitor II Address Space SRM Data report. Suboptions **class** and **status** are the same as for ARD. For detailed information refer to [Table 17 on page 115](#).

**ASRMJ(jobname) | NOASRMJ**

Specifies the Monitor II Address Space SRM Data by jobname report, where **jobname** identifies a specific job for the report. If you specify ASRMJ for the Postprocessor, make sure you have specified the Monitor II ASRMJ option. You cannot run a Postprocessor ASRMJ report with data collected by the Monitor II ASRM option. For detailed information refer to [Table 17 on page 115](#).

**CACHE([SSID(list)][,EXSSID(list)][,DEVICE|SUBSYS][,SUMMARY ]) | NOCACHE**

Specifies the Monitor I Cache Subsystem Activity report.

**SSID(list)**

Specifies an unlimited list of storage subsystem identifiers (SSIDs), identifying the control units to be included in the report. Each element in the list can be:

- A single SSID
- A range of SSIDs, defined by the lowest and the highest SSID, separated by a colon.

**EXSSID(list)**

Causes the Postprocessor to suppress reports for the control unit or control units with the SSIDs specified. You can specify an unlimited number of elements in the list using the same syntax as for the SSID option.

If EXSSID is not specified, RMF reports on all control units in the SSID option list, or, if the SSID option has not been specified, all control units are reported on.

**DEVICE|SUBSYS**

Specify **DEVICE** to create a report on device level and additionally a report on subsystem level for each reported control unit.

Specify **SUBSYS** to create reports on subsystem level only.

**SUMMARY**

Specify **SUMMARY** to create a Summary report. You can specify this option in addition to the other options. If **SUMMARY** is the only parameter, you just get the Summary report.

**CHAN | NOCHAN**

Specifies the Monitor I Channel Path Activity report.

**CHANNEL | NOCHANNEL**

Specifies the Monitor II Channel Path Activity report. For detailed information refer to [Table 17 on page 115](#).

**CPU | NOCPU**

Specifies the Monitor I CPU Activity report.

**CRYPTO | NOCRYPTO**

Specifies the Monitor I Crypto Hardware Activity report.

**DEV [(type)] | NODEV**

Specifies the Monitor II table report for I/O device activity. You can request device activity by specifying all devices in one class, or one or more specific device numbers, volume serial numbers, or storage groups. For detailed information refer to [Table 17 on page 115](#).

**DEVICE(suboption1[,suboption2,...]) | NODEVICE**

Specifies the Monitor I Device Activity reports. You can request device activity by specifying all devices within one or more classes, and, optionally, one or more specific devices.

You can specify any of the suboptions listed below.

**Note:** The default values for the Postprocessor are listed below. They are different from the Monitor I session default values.

- A device number in the form NMBR(nmbr1,nmbr2) where nmbr1 and nmbr2 are four- or five-digit hexadecimal numbers in the format [s]dddd. The first digit s represents an optional subchannel set ID. If the subchannel set ID is omitted data reporting for devices 0dddd, 1dddd, 2dddd, and 3ddd is requested.

- Any of the following classes:

**CHRDR|NOCHRDR**

Character reader devices

**COMM|NOCOMM**

Communications equipment

**DASD|NODASD**

Direct access storage devices

**GRAPH|NOGRAPH**

Graphics devices

**TAPE|NOTAPE**

Magnetic tape devices

**UNITR|NOUNITR**

Unit record devices

- Storage groups in the form SG (aaa,bbb) where aaa and bbb are 1 to 8 character names. The report will be sorted by device number within storage group.

When you omit DEVICE and specify ALL, the device classes defaults underscored above are included in the report. When you specify DEVICE, you must include a list of either device classes, numbers, or both.

When you specify a device class in the **option** field, the reports generated depend on whether you have used the negative value or the positive value of the option. If you use a negative option, you get the device reports with the exception of the option or options you specify. For example, DEVICE(NOTAPE) causes the Postprocessor to generate all Device Activity reports except the report on magnetic tape devices. If you use a positive option, you will get only the device report corresponding to that option. For example, DEVICE(TAPE) causes the Postprocessor to generate the Device Activity report for magnetic tape devices; no other Device Activity reports are printed.

The NMBR field indicates that RMF is to report on the specific devices identified. The numbers can be expressed as a single device or as a range of devices. A range is indicated by specifying the first and last device numbers separated by a colon. Each single number or range is separated by a comma. For example, to request device reporting for direct access devices 2180, 2183, 2184, 2185, and 2188 physically configured to any subchannel set as well as all magnetic tape devices and communication equipment, you would specify:

```
REPORTS(DEVICE(COMM,TAPE,DASD,NMBR(2180,2183:2185,2188)))
```



RMF reports on the storage groups you specify in the SG field. You can select one storage group name or a range of storage groups. To select a range of storage groups, specify NODASD, and the first name and the last name with a colon between them. For example to select the range of storage groups from PROC01 to PROC05, specify:

```
REPORTS (DEVICE (NODASD,SG (PROC01:PROC05)))
```

To select one storage group, for example, PROC02, specify:

```
REPORTS (DEVICE (NODASD,SG (PROC02)))
```

#### **DEVV(id) | NODEVV**

Specifies the Monitor II row report for device activity, where **id** is either a specific VOLSER or device number. For detailed information refer to [Table 17 on page 115](#).

#### **DOMINO | NODOMINO**

Specifies the Monitor I Lotus Domino Server report.

#### **EADM|NOEADM**

Specifies the Monitor I EADM Activity report.

#### **ENQ | NOENQ**

Specifies the Monitor I Enqueue Activity report. The level of enqueue activity reporting depends on the level selected at the time the data was gathered. There is no ENQ duration report.

#### **ESS | NOESS**

Specifies the Monitor I ESS Enterprise Disk Systems report (link statistics, extent pool and rank statistics).

#### **FCD[(option,option,...)] | NOFCD**

Specifies the Monitor I FICON® Director Activity report, where *option* can be one of the following:

##### **NMBR(list)**

Specifies a list of FICON directors to be included into the report identified by their hexadecimal switch device numbers. If NMBR is not specified, all FICON directors are selected excluded those specified by the EXNMBR option.

##### **EXNMBR(list)**

Specifies a list of FICON directors to be excluded from the report identified by their hexadecimal switch device numbers. If EXNMBR is not specified, all FICON directors in the NMBR option list are selected, or, if NMBR has not been specified, all FICON directors are selected.

#### **HFS | NOHFS**

Specifies the Monitor I HFS Statistics report.

#### **HTTP | NOHTTP**

Specifies the Monitor I HTTP Server report.

**Note:** The Monitor I HTTP Server report is available only for the IBM HTTP Server (IHS) powered by Domino, which is no longer supported in z/OS V2R2. SMF type 103 records created on a prior release of z/OS can still be used to generate a RMF Postprocessor HTTP report.

#### **IOQ | NOIOQ**

Specifies the Monitor I I/O Queuing Activity report.

#### **IOQUEUE(type) | NOIOQUEUE**

Specifies the Monitor II I/O Queuing Activity report. For detailed information refer to [Table 17 on page 115](#).

#### **OMVS | NOOMVS**

Specifies the Monitor I OMVS Kernel Activity report.

#### **PAGESP | NOPAGESP**

Specifies the Monitor I Page Data Set Activity report.

#### **PAGING | NOPAGING**

Specifies the Monitor I Paging Activity report.

**PCIE | NOPCIE**

Specifies the Monitor I PCIE Activity Report.

**PGSP | NOPGSP**

Specifies the Monitor II Page Data Set Activity report.

**SDELAY | NOSDELAY**

Specifies the Monitor I Serialization Delay Report.

**SENQ | SENQ(suboption) | NOSENQ**

Specifies the Monitor II System Enqueue Contention report. The operands describe the type of data you require:

**S**

Summary report

**D**

Detail report

**A,sysname**

Report with all resources

**E,sysname**

Report with exclusively-owned resources

**majorname[,minorname]**

Report for a specific resource

Specifying SENQ is equivalent with SENQ(S). You can specify only one operand. For detailed information refer to [Table 17 on page 115](#).

**Note:**

1. If the session option specified a resource or group of resources by name, the report includes data for only those resources.
2. RMF treats the single character A, D, E or S as a request for the report. Therefore, A or E cannot be used as a major name; S or D cannot be used as a major name unless a minor name is also specified.
3. If the session option identified a different resource or group of resources, RMF issues a message to tell you that no data was available to meet your selection conditions.

**SENQR | SENQR(option) | NOSENQR**

Specifies the Monitor II System Enqueue Reserve report, where **option** describes the type of data you require:

**ALLVSR**

Report on all volumes

**volser**

Report on a specific volume

Specifying SENQR is equivalent with SENQR(ALLVSR). For detailed information refer to [Table 17 on page 115](#).

**Note:** If the session option identified a different specific device, RMF issues a message to tell you that no data was available to meet your selection conditions.

**SPAG | NOSPAG**

Specifies the Monitor II Paging Activity report. For detailed information refer to [Table 17 on page 115](#).

**SRCS | NOSRCS**

Specifies the Monitor II Central Storage/Processor/SRM report. For detailed information refer to [Table 17 on page 115](#).

**TRACE | NOTRACE**

Specifies the Monitor I Trace Activity report. There is no TRACE duration report.

### **user-report[(operands)]**

Specifies a user-supplied Monitor II session report, where **user-report** is the name of the option used to collect data for the report and **operands** are any operands your installation established when the report was designed. When your report has operands but you do not specify any operands on the REPORTS control statement, the Postprocessor uses the menu default, if present, for any omitted operand. When there is no menu default, the Postprocessor takes the operand in effect when the data was collected.

See *z/OS Resource Measurement Facility Programmer's Guide* for a description of how to add a user-supplied report to the Postprocessor. After you have performed the steps that make your report available to the Postprocessor, your report will be printed when you specify the name of the report or ALL on the REPORTS control statement.

### **VSTOR | VSTOR(operands) | NOVSTOR**

Specifies the Monitor I Virtual Storage Activity report. The operands describe the type of data you require:

#### **S**

Summary report

#### **D [,jobname1,jobname2,...]**

Summary and detail report (for specified jobs)

#### **jobname1 [,jobname2,jobname3,...]**

Summary report for specified job(s)

RMF can produce common storage summary and detail reports and private area summary and detail reports. When you specify S, either explicitly or by default, RMF produces summary reports; when you specify D, RMF produces both summary reports and detail reports.

The Monitor I session gathers private area data only when you specify a jobname on the VSTOR option during the session. The Postprocessor, however, reports any private area data that it finds in the input records. Thus, it is not necessary to identify specific jobnames for the Postprocessor. (If you identify a specific jobname, the Postprocessor produces a private area report for that job only, and only if private area data for it exists in the input records.) It is a good practice to omit specific jobnames on the Postprocessor control statements. This practice enables you to use the same Postprocessor control statement to obtain common storage report(s) or to obtain both common storage report(s) and private area report(s) when data exists for private area report(s).

If you specify VSTOR without any operands, RMF produces a summary report for common storage. Examples of other possible combinations are:

- REPORTS(VSTOR(D)) produces a summary and detail report for common storage. The Postprocessor also produces a summary and detail report for any private area data in the input records.
- REPORTS(VSTOR(D,VTAM)) produces a summary and detail report for common storage and a summary and detail report for the private area of the VTAM address space. The Postprocessor does not produce reports for any other private area data in the input records.
- REPORTS(VSTOR(MYJOB)) produces a summary report for common storage and a summary report for the private area of the MYJOB address space. The Postprocessor does not produce reports for any other private area data in the input records.

### **XCF | NOXCF**

Specifies whether the XCF Activity report is to be generated. RMF produces an XCF usage by system, XCF usage by member, and XCF path statistics sections.

## **RTOD**

The RTOD control statement specifies the starting time and ending time of the reporting period for interval or duration reporting for each day included in the reporting period. The syntax of the statement is:

```
RTOD (hhmm, hhmm)
```

where **hh** is the hour and **mm** is the minute on a 24-hour clock. Times must be specified in full, including leading zeroes.

The first time specifies the beginning of the reporting period and the second time specifies the end of the reporting period. The second time must be later than the first, or a syntax error occurs. When the RTOD statement is omitted, the default value is RTOD(0000,2400); that is, all times are reported.

**Note:** Because the range of values allowed is from 0000 to 2400, it is not possible to define a reporting period that consists of a single block of time that spans more than one calendar day. For example, you cannot define a reporting period that runs from 12 noon on one day to 12 noon on the next day. However, you can define a reporting period that consists of the same block of time over several days.

**Example:** For example, to produce interval reports including data collected every morning from 8:00 AM to 1:00 PM for the week beginning on January 3, 2021, and ending on January 9, 2021, the required DATE and RTOD statements would be:

```
DATE(01032021,01092021)
RTOD(0800,1300)
```

## SESSION

The SESSION control statement specifies the particular Monitor II background session that created the SMF records to be included in the reports. The syntax of the statement is:

```
SESSION(session-id)
```

where **session-id** is the two-character alphanumeric session identifier of the particular session. If you explicitly specify SESSION, you must supply a session identifier. Only one session-id may be reported on during a Postprocessor session.

When you omit the SESSION statement, all SMF records that fall within the reporting period and are pertinent to the types of reports specified on the REPORTS statement are included in the reports, regardless of the session that created them.

## STOD

The STOD control statement specifies the starting time and ending time of the reporting period for a Summary report for each day in the reporting period.

The syntax of the statement is:

```
STOD(hhmm,hhmm)
```

where **hh** is the hour and **mm** is the minute on a 24-hour clock. The first time specifies the beginning of the reporting period and the second time specifies the end of the reporting period. The second time must be later than the first, or a syntax error occurs.

When the STOD statement is omitted, the default value is STOD(0000,2400); that is, all times are reported. Thus, you would use this control statement when you want a reporting period for a Summary report that is different from the default value.

Because the range of values allowed is from 0000 to 2400, it is not possible to define a reporting period that consists of a single block of time that spans more than one calendar day. Thus, you cannot define a reporting period that, for example, runs from 12 noon on one day to 12 noon on the next day. However, you can define a reporting period that consists of the same block of time over several days. For example, to produce a Summary report using data collected from 8:00 AM to 1:00 PM for the week beginning on January 3, 2021, and ending on January 9, 2021, the required DATE and STOD statements would be:

**Example:**

```
DATE(01032021,01092021)
STOD(0800,1300)
```

## SUMMARY

The SUMMARY control statement specifies whether a Summary report is to be produced and indicates the type of summary data that you require. The syntax of the statement is:

```
SUMMARY (type) | NOSUMMARY
```

where **type** can be either or both of the following:

### INT

Indicating that one interval summary line is to be produced for each measurement interval that falls within the reporting period.

### TOT

Indicating that one total summary data line is to be produced for all the measurement intervals that fall within the reporting period.

When both are specified, INT and TOT can appear in any order. When you explicitly specify SUMMARY, you must specify the type of summary data that you require. Specifying SUMMARY without **type** causes a syntax error. When you omit the SUMMARY statement, the default is SUMMARY(INT,TOT). That is, a Summary report is produced, and the report includes both interval summary data lines and a total summary data line.

When a Summary report consists of more than one page, the headings are repeated for each page. When total summary data is requested, a total summary line is generated for the intervals on each page, and the last page of the report contains a total summary data line that reflects the contents of all pages in the report.

## SYSID

The SYSID control statement specifies the one- to four-character system identifier of the single system about which reports are to be generated. It is ignored for SYSRPTS options. The syntax of the statement is:

```
SYSID(cccc)
```

where **cccc** can be any four alphanumeric and/or special characters that specify the SMF system identifier. When you explicitly specify SYSID, you must supply the system identifier. You can only specify one SYSID control statement per Postprocessor session. Specifying the SYSID control statement causes the Postprocessor to include in the reporting all pertinent SMF records that have a matching system identifier. Omitting SYSID causes the Postprocessor to include in the reporting all SMF records, for all system identifiers. When more than one system identifier is encountered, the Postprocessor produces separate reports for each system encountered. IBM recommends that you do not mix records from different processors with the same system identifier. If you do mix records, the current duration interval for the I/O Queuing duration report will be shortened which will cause the remaining I/O Queuing records from the original duration interval to be skipped.

## SYSOUT

The SYSOUT control statement specifies the SYSOUT class for all formatted report output. The syntax of the statement is:

```
SYSOUT(class)
```

where **class** is the desired SYSOUT class. When you explicitly specify SYSOUT, you must indicate a SYSOUT class. When you omit the SYSOUT statement, the default is SYSOUT class A. The SYSOUT class for Postprocessor messages is not affected by the SYSOUT control statement. The message SYSOUT class can be changed by preallocating MFPMMSGDS.

## SYSRPTS

The SYSRPTS control statement specifies the sysplex report options for a Postprocessor report.

**Note:** To get sysplex reports, you have to ensure that data gathering for all systems in the sysplex is synchronized.

*Recommendation:* Specify the Monitor I option **SYNC(SMF)** for all systems.

You also need to ensure that data from multiple systems is sorted **together** according the information in [“Preparing SMF records for postprocessing”](#) on page 128.

The syntax of the statement is:

```
SYSRPTS(option[,option]...[,option])
```

where **option** can be the following:

### **ALL**

Specifies the following options: CF - SDEVICE(DASD) - WLMGL(WGPER)

### **CF | NOCF**

Specifies the Coupling Facility Activity report.

To obtain an entire Coupling Facility Activity report, ensure that you supply the Postprocessor with a complete set of SMF 74 subtype 4 records from all systems in the sysplex.

### **SDEVICE(suboption[,suboption]...[,suboption]) | NOSDEVICE**

Specifies whether the Postprocessor should generate Shared Device Activity reports or not.

**suboption** can be:

#### **DASD | NODASD**

Specifies the DASD Shared Device Activity report

#### **TAPE | NOTAPE**

Specifies the Magnetic Tape Shared Device Activity report

#### **NMBR(list)**

Specifies a list of devices to be included into the report. You can specify as many device numbers as you like. Each element in the list can be:

- A four or five-digit device number in the format [s]dddd. The first digit s represents an optional subchannel set ID. If the subchannel set ID is omitted data reporting for devices 0dddd, 1dddd, 2dddd, and 3ddd is requested.
- A range of device numbers defined by the lowest and the highest number, separated by a colon. For example, 1234:1243 or 11234:11243

If the devices belong to the class you specified with the DASD or TAPE option, the NMBR option has no effect. If they belong to the other class, they are reported on *in addition to* the devices of the class you specified.

#### **EXNMBR(list)**

Causes the Postprocessor to suppress reports for the device or devices with the device numbers specified. You can specify as many device numbers as you like. Each element in the list can be:

- A four or five-digit device number in the format [s]dddd. The first digit s represents an optional subchannel set ID. If the subchannel set ID is omitted device activity reporting is suppressed for devices 0dddd, 1dddd, 2dddd, and 3dddd.
- A range of device numbers defined by the lowest and the highest number, separated by a colon. For example, 1234:1243 or 11234:11243

The specified devices are excluded from the set of devices you specified with the DASD, TAPE and NMBR options.

The EXNMBR option has no effect for devices that have not been included in the DASD, TAPE or NMBR options.

**WLMGL(suboption[,suboption]...[,suboption]) | NOWLMGL**

Specifies whether the Workload Activity report is to be generated.

**suboption** can have the values listed below. These specify conditions by which the Postprocessor selects the information to be reported.

In the suboptions, **namelist** can be a list of names, or a single name. If you omit **namelist**, the Postprocessor reports on all names that exist for the appropriate condition.

You can specify "wild cards" for names of workload groups, service classes and report classes. A wild card consists of a character string followed immediately by an asterisk (\*). Reports are generated for all groups or classes whose names start with the specified character string. For example, specifying **WG1\*** would produce reports on **WG1MINE**, **WG1YOURS**, **WG1HIS**, **WG1HERS**, and so on.

**POLICY[(namelist)]|NOPOLICY**

Specify policy names in **namelist**. For each policy specified, the Postprocessor issues a summary report.

**RCLASS[(namelist)]|NORCLASS**

Specify names of report classes or tenant report classes or both in **namelist**. The Postprocessor issues reports of the specified classes.

**RCPER[(namelist)]|NORCPER**

Specify names of report classes or tenant report classes or both in **namelist**. The Postprocessor issues a report for each report class period defined for the specified report classes.

**RTD|NORTD**

Specifies whether the Response Time Distribution section should be displayed in WLMGL Service/Report Class Period reports. This suboption can only be specified together with suboptions **SCPER** or **RCPER**; otherwise, it is ignored.

**SCLASS[(namelist)]|NOSCLASS**

Specify service class names in **namelist**. For each service class, the Postprocessor issues a summary report.

**SCPER[(namelist)]|NOSCPER**

Specify service class names in **namelist**. The Postprocessor issues a report for each service class period defined for the specified service classes. The report includes subsystem states, general execution delays, and a response-time-distribution chart.

**SYSNAM[(namelist)]**

Specify system names in **namelist**. The Postprocessor combines data from all the specified systems in one report. If this option is omitted, which is the default, the data from all systems is combined in one report.

**WGPEN[(namelist)]|NOWGPEN**

Specify workload group names in **namelist**. For each workload group you specify, the Postprocessor reports on the associated service classes and their service-class periods.

**WGROUP[(namelist)]|NOWGROUP**

Specify workload group names. For each workload group specified, the Postprocessor issues a summary report.

## Examples of control statements

The examples in this section show various uses of the Postprocessor. All the examples include the **DATE** statement to illustrate how the value specified for **DATE** relates to the value specified for **RTOD**, **ETOD**, or **STOD** to define the reporting period. During actual execution of the Postprocessor, your installation might find it more useful to control the dates included in the reports by controlling the contents of the input data set and omitting the **DATE** statement. Because the default for the **DATE** statement is a reporting period that encompasses all dates included in the SMF records in the input data set, omitting the **DATE** statement enables you to establish a set of control statements that can be used on a regular schedule without modification.

**Note:** Because the EXITS, SYSID, and SYSOUT statements are omitted and their defaults taken in the following examples, no user exits are entered, all systems are included in the reports, and any report and message output is sent to SYSOUT class A.

## Single-system report

The Postprocessor is to generate all single-system interval reports except tracing. The reporting period runs from 8:00 AM to 12 noon for the five days from June 6, 2021 to June 10, 2021. Use the following control statements:

### Example:

```
DATE(06062021,06102021)
REPORTS(ALL,NOTRACE)
RTOD(0800,1200)
NOSUMMARY
```

## Duration report

The Postprocessor is to generate duration reports for CPU activity, channel path activity, and I/O device activity for magnetic tape devices, direct access devices, and communications equipment. The reporting period is the twelve-hour period from 6:00 AM to 6:00 PM on June 24, 2021. The duration interval is six hours, causing two duration reports to be produced for each specified activity. Use the following control statements:

### Example:

```
DATE(06242021,06242021)
DINTV(0600)
REPORTS(CPU,CHAN)
REPORTS(DEVICE(TAPE,DASD,COMM))
RTOD(0600,1800)
NOSUMMARY
```

**Note:** For information on exception/overview duration reporting, refer to [“DINTV” on page 140](#).

## Sysplex report

The Postprocessor is to generate sysplex reports. The reporting period runs from 8:00 AM to 6:00 PM for the five days from June 6, 2021 to June 10, 2021. Use the following control statements:

### Example:

```
DATE(06062021,06102021)
RTOD(0800,1800)
NOSUMMARY
```

Create a Coupling Facility Activity report:

### Example:

```
SYSRPTS(CF)
```

Create a Workload Activity reports and assume that all CICS applications run in the three workload groups CICSProd, CICS TEST, and CICSADMN. Get the Workload Group report for all groups:

### Example:

```
SYSRPTS(WLMGL(WGROUP(CICS*)))
```

Get detailed data for service class TSOPROD by requesting the Service Class Period report:

### Example:

```
SYSRPTS(WLMGL(WGPER(TSOPROD)))
```



Get duration reports for two-hour intervals for the Policy Summary report. Assume that only one policy was active during the range to be reported, therefore no policy-name parameter is required.

**Example:**

```
DINTV(0200)
SYSRPTS(WLMGL(POLICY))
```

Get a Shared DASD Activity report for all DASDs in the address range 0700 — 071F and 1220 — 123F (the example assumes that only DASD devices are configured in these ranges):

**Example:**

```
SYSRPTS(SDEVICE(NMBR(0700:071F,1220:123F)))
```

## Exception report

The reporting period is the eight-hour interval from 8:00 AM to 4:00 PM for the week beginning June 13, 2021 and ending June 17, 2021:

**Example:**

```
DATE(06132021,06172021)
ETOD(0800,1600)
```

A line in the **Exception report** when the percent device utilization for device 06D8 is greater than or equal to 3.

A **Channel Path Activity report** and a Device Activity report for the DASD device class if this condition is met:

**Example:**

```
EXCEPT(IORATE(DVUTL(06D8),GE,3))
EXRPTS(IORATE(CHAN,DEVICE(DASD)))
```

A line in the **Exception report** if the total busy percent value for channel path 01 is greater than or equal to ten percent:

**Example:**

```
EXCEPT(CHANEX01(CHTBSY(01),GE,10))
```

A line in the **Exception report** if the percent busy for CPU 0 is less than or equal to 80 percent busy and the average number of TSO users is greater than ten:

**Example:**

```
EXCEPT(USERWORK(CPUBSY(0),LE,80))
EXCEPT(USERWORK(AVGTSO,GE,10))
```

## Overview report

The **Overview report** requires that you specify the output format, either as record or report. If you want to get records for further spreadsheet processing and to get a report to be printed, you can specify:

**Example:**

```
OVERVIEW(RECORD,REPORT)
```

You want to get an overview of the TSO activity in your sysplex for all intervals between 10:00 AM and 2:00 PM. The following control statements assume that all TSO users run in service class TSOSERV and that you have defined three service class periods.

You specify the following control statements:

**Example:** You use the ETOD statement to specify the time range:

```
ETOD(1000,1400)
```

The exception-condition name TOTSRV specifies the total service units, the qualifier S.TSOSERV refers to service class TSOSERV, and suboption NOSYSTEMS defines sysplex reporting:

```
OVW(SERVUNIT(TOTSRV(S.TSOSERV)),NOSYSTEMS)
```

The exception-condition name RTIMETOT specifies the average response time:

```
OVW(RTIMEP1(RTIMETOT(S.TSOSERV.1)),NOSYSTEMS)
OVW(RTIMEP2(RTIMETOT(S.TSOSERV.2)),NOSYSTEMS)
OVW(RTIMEP3(RTIMETOT(S.TSOSERV.3)),NOSYSTEMS)
```

With the exception-condition name PI, you specify the performance index:

```
OVW(PIP1(PI(S.TSOSERV.1)),NOSYSTEMS)
OVW(PIP2(PI(S.TSOSERV.2)),NOSYSTEMS)
```

The exception-condition name TRANS specifies the transaction rate:

```
OVW(TRXP1(TRANS(S.TSOSERV.1)),NOSYSTEMS)
OVW(TRXP2(TRANS(S.TSOSERV.2)),NOSYSTEMS)
OVW(TRXP3(TRANS(S.TSOSERV.3)),NOSYSTEMS)
```

## Cache report

You may want to start with the Cache Summary report which provides a summary of all subsystems and a list of volumes that need special attention. Probably, you would select an interval with a very high I/O activity on your system. If this is during night shift between 8:00 PM and 10:00 PM on May 13, 2021, then you define

**Example:**

```
DATE(05132021,05132021)
RTOD(2000,2200)
REPORTS(CACHE(SUMMARY))
```

With this information, you can continue by either getting reports with some more details, or by creating an Overview report for the most interesting subsystems and devices.

You get a Subsystem Activity report for the SSIDs 0044 and 0058 with:

**Example:**

```
REPORTS(CACHE(SSID(0044,0058)))
```

If you see from the list of the top-20 devices that the volumes DATA01 with device number 06F3, DB2PRD with device number 0722, and CICS14 with device number 0734 have the highest cache miss rates in the reported interval, you can create an Overview report with several details for a longer period, for example, for two complete days:

**Example:**

```
DATE(05132021,05142021)
OVERVIEW(RECORD,REPORT)
OVW(DATA01A(CADRT(06F3)))
OVW(DATA01B(CADRH(06F3)))
OVW(DATA01C(CADSTG(06F3)))
OVW(DB2PRDA(CADRT(0722)))
OVW(DB2PRDB(CADRH(0722)))
OVW(DB2PRDC(CADSTG(0722)))
OVW(CICS14A(CADRT(0734)))
OVW(CICS14B(CADRH(0734)))
OVW(CICS14C(CADSTG(0734)))
```

In this example, the Overview report will provide values about the total I/O rate, the read cache hit rate, and the DASD staging I/O rate. Refer to [“OVW” on page 147](#) for more information about the syntax of the OVW statement.

## Overview and exception conditions

The following tables show the condition names that RMF recognizes on OVW and EXCEPT control statements, grouped by SMF record type.

### CPU Activity - SMF record type 70-1

One of the following qualifiers is possible:

#### cluster

Name of the sysplex or cluster

#### coreid

A processor identifier (one or two hexadecimal digits) that either identifies a logical core (when LOADxx PROCVIEW CORE is in effect) or a logical processor (when LOADxx PROCVIEW CPU is in effect).

If the qualifier is omitted, the values represent the average of all logical processors or cores.

#### cpuid

A processor identifier which must be in the format *cpuid*[.*threadid*]

*cpuid* is a processor identifier (one or two hexadecimal digits) that either identifies a logical core (when LOADxx PROCVIEW CORE is in effect) or a logical processor (when LOADxx PROCVIEW CPU is in effect).

*threadid* is an optional thread identifier (0 or 1) that identifies a thread that is executing on the logical core designated by *cpuid*. It is ignored when LOADxx PROCVIEW CPU is in effect. If LOADxx PROCVIEW CORE is in effect and *threadid* is omitted, the values represent the average of all threads executing on the logical core.

Examples: 0A, 3F.0, A.1

If the qualifier is omitted, the values represent the average of all logical processors or cores.

#### lpar

Logical partition name

#### group

Group of logical partitions managed towards a common group capacity limit

#### trg

Tenant resource group name

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1				
Condition	Condition Name	Qualifier	Source	Algorithm
Percent general purpose processor busy	CPUBSY	coreid	SMF70WAT SMF70INT SMF70ONT SMF70PDT	Refer to the field description of “TIME % LPAR BUSY” in the RMF Postprocessor CPU Activity report
Percent zAAP busy	CPUIBSY, AAPBSY	coreid	SMF70WAT SMF70INT SMF70ONT SMF70PDT SMF70_LPAR_BUSY	Same as for CPUBSY but applied to zAAPs
Percent zIIP busy	IIPBSY	coreid	SMF70WAT SMF70INT SMF70ONT SMF70PDT SMF70_LPAR_BUSY	Same as for CPUBSY but applied to zIIPs

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Percent MVS busy for general purpose processors	MVSBSY	cpuid	Same as for CPUBSY	Same as for CPUBSY
Percent MVS busy for zAAPs	MVSIBSY, AAPMBSY	cpuid	Same as for MVSBSY	Same as for MVSBSY, but applied to zAAPs
Percent MVS busy for zIIPs	IIPMBSY	cpuid	Same as for MVSBSY	Same as for MVSBSY, but applied to zIIPs
Maximum number of batch users	MXBATCH	none	SMF70BMM	Value or comparison
Maximum number of started tasks	MXSTC	none	SMF70SMM	Value or comparison
Maximum number of TSO users	MXTSO	none	SMF70TMM	Value or comparison
Maximum number of APPC/MVS transaction scheduler (ASCH) users	MXASCH	none	SMF70PMM	Value or comparison
Average number of batch jobs	AVGBATCH	none	SMF70BTT SMF70SAM	BTT/SAM
Average number of started tasks	AVGSTC	none	SMF70STT SMF70SAM	STT/SAM
Average number of TSO users	AVGTSO	none	SMF70TTT SMF70SAM	TTT/SAM
Average number of APPC/MVS transaction scheduler (ASCH) users	AVGASCH	none	SMF70PTT SMF70SAM	PTT/SAM
Average number of in and ready users	AVGIARDY	none	SMF70RTT SMF70SAM	RTT/SAM
Average number of out and ready users	AVGOARDY	none	SMF70OTT SMF70SAM	OTT/SAM
Maximum number of OMVS address spaces	MXOMVS	none	SMF70XMM	Value or comparison
Average number of OMVS address spaces	AVGOMVS	none	SMF70XTT SMF70SAM	XTT/SAM
Average number of general purpose processors online during the reporting interval	NUMPROC	none	SMF70ONT SMF70INT	Sum(ONT) / INT
Number of logical zAAP processors or threads online at the end of the reporting interval	NUMIFA, NUMAAP	none	SMF70IFA	Value or comparison
Number of logical zIIP processors or threads online at the end of the reporting interval	NUMIIP	none	SMF70SUP	Value or comparison
Percentage of the reporting interval during which at least one job could not be dispatched	OCPU1	none	SMF70Q01 SMF70Q02 ... SMF70Q12 SMF70SAM	(Q01+Q02+...+Q12)/SAM x 100
Percentage of the reporting interval during which at least two jobs could not be dispatched	OCPU2	none	SMF70Q02 ... SMF70Q12 SMF70SAM	(Q02+Q03+...+Q12)/SAM x 100
Percentage of the reporting interval during which at least three jobs could not be dispatched	OCPU3	none	SMF70Q03 ... SMF70Q12 SMF70SAM	(Q03+Q04+...+Q12)/SAM x 100
Percentage of the reporting interval during which at least four jobs could not be dispatched	OCPU4	none	SMF70Q04 ... SMF70Q12 SMF70SAM	(Q04+Q05+...+Q12)/SAM x 100

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Percentage of the reporting interval during which more than five jobs could not be dispatched	OCPU5	none	SMF70Q05 ... SMF70Q12 SMF70SAM	$(Q05+Q06+...+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than ten jobs could not be dispatched	OCPU10	none	SMF70Q06 ... SMF70Q12 SMF70SAM	$(Q06+Q07+...+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than 15 jobs could not be dispatched	OCPU15	none	SMF70Q07 ... SMF70Q12 SMF70SAM	$(Q07+Q08+...+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than 20 jobs could not be dispatched	OCPU20	none	SMF70Q08 ... SMF70Q12 SMF70SAM	$(Q08+Q09+...+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than 30 jobs could not be dispatched	OCPU30	none	SMF70Q09 ... SMF70Q12 SMF70SAM	$(Q09+Q10+Q11+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than 40 jobs could not be dispatched	OCPU40	none	SMF70Q10 SMF70Q11 SMF70Q12 SMF70SAM	$(Q10+Q11+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than 60 jobs could not be dispatched	OCPU60	none	SMF70Q11 SMF70Q12 SMF70SAM	$(Q11+Q12)/SAM \times 100$
Percentage of the reporting interval during which more than 80 jobs could not be dispatched	OCPU80	none	SMF70Q12 SMF70SAM	$Q12 / SAM \times 100$
Average number of logical ready users	AVGULRDY	none	SMF70LTT	$LTT/SAM$
Average number of logical wait users	AVGULWT	none	SMF70ATT	$ATT/SAM$
Average number of in users	AVGUIN	none	SMF70ITT	$ITT/SAM$
Online time percentage of general purpose processors	CONTPER	coreid	SMF70ONT SMF70INT	$(ONT/INT) \times 100$
Defined weighting for the cluster	WDEFC	cluster	SMF70BPS	Value or comparison
Defined weighting of the partition for general purpose processors	WDEFL	lpar	SMF70BPS	Value or comparison
Defined weighting of the partition for zAAPs	WDEFLAAP	lpar	SMF70BPS	Value or comparison
Defined weighting of the partition for zIIPs	WDEFLIIP	lpar	SMF70BPS	Value or comparison
Actual weighting of the partition for general purpose processors	WACTL	lpar	SMF70ACS SMF70DSA	$ACS / DSA$
Minimum weighting of the partition	WMINL	lpar	SMF70MIS	Value or comparison
Minimum weighting percentage of the partition	WMIPL	lpar	SMF70NSI SMF70DSA	$(NSI/DSA) \times 100$
Maximum weighting of the partition	WMAXL	lpar	SMF70MAS	Value or comparison
Maximum weighting percentage of the partition	WMAPL	lpar	SMF70NSA SMF70DSA	$(NSA/DSA) \times 100$
Number of defined logical processors or cores for the cluster	NLDEFC	cluster	SMF70BDN	Value or comparison
Number of defined logical processors or cores for the partition	NLDEFL	lpar	SMF70BDN	Value or comparison

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Number of defined general purpose processors for the partition	NLDEFLCP	lpar	SMF70BDN	Value or comparison
Number of defined logical zAAP processors or cores for the partition	NLDEFLAP	lpar	SMF70BDN	Value or comparison
Number of defined logical zIIP processors or cores for the partition	NLDEFLIP	lpar	SMF70BDN	Value or comparison
Number of actual logical processors or cores for the partition	NLACTL	lpar	SMF70ONT SMF70INT	Sum(ONT) / INT
Number of actual general purpose processors for the partition	NLACTLCP	lpar	SMF70ONT SMF70INT	Sum(ONT) / INT
Number of actual logical zAAP processors or cores for the partition	NLACTLAP	lpar	SMF70ONT SMF70INT	Sum(ONT) / INT
Number of actual logical zIIP processors or cores for the partition	NLACTLIP	lpar	SMF70ONT SMF70INT	Sum(ONT) / INT
Logical processor busy percentage for general purpose processors for the partition	LBUSYL	lpar	SMF70PDT SMF70ONT	Sum(PDT) / ONT
Logical processor/core busy percentage for zAAPs for the partition	LBUSYLAP	lpar	SMF70PDT SMF70ONT	Sum(PDT) / ONT
Logical processor/core busy percentage for zIIPs for the partition	LBUSYLIP	lpar	SMF70PDT SMF70ONT	Sum(PDT) / ONT
Physical processor busy percentage for general purpose processors for the partition	PBUSYL	lpar	SMF70PDT SMF70INT	Sum(PDT) / INT
Physical processor busy percentage for zAAPs for the partition	PBUSYLAP	lpar	SMF70PDT SMF70INT	Sum(PDT) / INT
Physical processor busy percentage for zIIPs for the partition	PBUSYLIP	lpar	SMF70PDT SMF70INT	Sum(PDT) / INT
Logical processor/core average busy percentage for the cluster	LBUSYC	cluster	SMF70PDT SMF70ONT	Sum(PDT) / ONT
Physical processor average busy percentage for the cluster	PBUSYC	cluster	SMF70PDT SMF70INT	Sum(PDT) / INT
Defined capacity limit in units of MSU	LDEFMSU	lpar	SMF70MSU	Value or comparison
Actual number of consumed MSUs	LACTMSU	lpar	SMF70EDT SMF70CPA_actual SMF70CPA_scaling_factor SMF70INT	$(\text{Sum EDT}) * 3600 * 16 * \text{CPA\_scaling\_factor} / (\text{CPA\_actual} * \text{INT} * 1000000)$
Percentage of WLM capping of the partition	WCAPPER	lpar	SMF70NSW SMF70DSA	$(\text{NSW} / \text{DSA}) * 100$
Actual MSU consumption for the capacity group	GCMSUACT	group	SMF70EDT SMF70CPA_actual SMF70CPA_scaling_factor SMF70INT	$\text{Sum}(\text{Sum(EDT)} * 3600 * 16 * \text{CPA\_scaling\_factor} / (\text{CPA\_actual} * \text{INT} * 1000000))$
Group weight	GCWEIGHT	group	SMF70PFL SMF70BPS SMF70ACS	Sum(BPS) if PFL(Bit 3) is set for all partitions in capacity group, otherwise Sum(ACS)
Minimum entitlement	MINENT	lpar	SMF70PFL SMF70BPS SMF70ACS SMF70GMU SMF70MSU	MIN(MSU, GMU*BPS/Sum(BPS)) if PFL(Bit 3) is set for all partitions in capacity group, otherwise MIN(MSU, GMU*ACS/Sum(ACS))

Table 22. CPU Activity - Conditions Based on SMF Record Type 70–1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Maximum entitlement	MAXENT	lpar	SMF70GMU SMF70MSU	MIN(GMU,MSU)
Number of TCB dispatches on general purpose processors per second	CPTCB	cpuid	SMF70TCB SMF70INT	Sum(TCB) / INT
Number of TCB dispatches on zAAPs per second	AAPTCB	cpuid	SMF70TCB SMF70INT	Same as CPTCB but applied to zAAPs
Number of TCB dispatches on zIIPs per second	IIPTCB	cpuid	SMF70TCB SMF70INT	Same as CPTCB but applied to zIIPs
Number of SRB dispatches on general purpose processors per second	CPSRB	cpuid	SMF70SRB SMF70INT	Sum(SRB) / INT
Number of SRB dispatches on zAAPs per second	AAPSRB	cpuid	SMF70SRB SMF70INT	Same as CPSRB but applied to zAAPs
Number of SRB dispatches on zIIPs per second	IIPSRB	cpuid	SMF70SRB SMF70INT	Same as CPSRB but applied to zIIPs
Number of I/Os requested by general purpose processors per second	CPNIO	cpuid	SMF70NIO SMF70INT	Sum(NIO) / INT
Number of I/Os requested by zAAPs per second	AAPNIO	cpuid	SMF70NIO SMF70INT	Same as CPNIO but applied to zAAPs
Number of I/Os requested by zIIPs per second	IIPNIO	cpuid	SMF70NIO SMF70INT	Same as CPNIO but applied to zIIPs
Number of CPs with high HiperDispatch share for partition	HDCPHIGH	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=3 and CIX=1
Number of logical zAAP processors or cores with high HiperDispatch share for partition	HDAPHIGH	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=3 and CIX=3
Number of logical zIIP processors or cores with high HiperDispatch share for partition	HDIPHIGH	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=3 and CIX=6
Number of CPs with medium HiperDispatch share for partition	HDCPMED	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=2 and CIX=1
Number of logical zAAP processors or cores with medium HiperDispatch share for partition	HDAPMED	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=2 and CIX=3
Number of logical zIIP processors or cores with medium HiperDispatch share for partition	HDIPMED	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=2 and CIX=6
Number of CPs with low HiperDispatch share for partition	HDCPLow	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=1 and CIX=1
Number of logical zAAP processors or cores with low HiperDispatch share for partition	HDAPLOW	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=1 and CIX=3
Number of logical zIIP processors or cores with low HiperDispatch share for partition	HDIPLOW	lpar	SMF70POI SMF70CIX	Number of logical processors with POI=1 and CIX=6
The percentage of time that the general purpose processor was parked.	CPARKPER	cpuid	SMF70PAT SMF70INT	(PAT/INT) * 100
Maximum number of in-ready work units for general purpose processors	MXWUCP	none	SMF70CMM	Value or comparison
Maximum number of in-ready work units for zAAPs	MXWUAAP	none	SMF70DMM	Value or comparison
Maximum number of in-ready work units for zIIPs	MXWUIIP	none	SMF70EMM	Value or comparison

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Average number of in-ready work units for general purpose processors	AVGWUCP	none	SMF70CTT SMF70SRM	CTT / SRM
Average number of in-ready work units for zAAPs	AVGWUAAP	none	SMF70DTT SMF70SRM	DTT / SRM
Average number of in-ready work units for zIIPs	AVGWUIIP	none	SMF70ETT SMF70SRM	ETT / SRM
Mean time to wait for general purpose processors in microseconds	MTTWCP	cpuid	SMF70EDT SMF70WTD	EDT / WTD or EDT (if WTD=0)
Mean time to wait for zAAPs in microseconds	MTTWAAP	cpuid	SMF70EDT SMF70WTD	same as MTTWCP, but applied to zAAPs
Mean time to wait for zIIPs in microseconds	MTTWIIP	cpuid	SMF70EDT SMF70WTD	same as MTTWCP, but applied to zIIPs
Percentage of the reporting interval during which at least one work unit could not be dispatched	WCPU1	none	SMF70U01 ... SMF70U15 SMF70SRM	(U01+...+U15) / SRM x 100
Percentage of the reporting interval during which at least two work units could not be dispatched	WCPU2	none	SMF70U02 ... SMF70U15 SMF70SRM	(U02+...+U15) / SRM x 100
Percentage of the reporting interval during which at least three work units could not be dispatched	WCPU3	none	SMF70U03 ... SMF70U15 SMF70SRM	(U03+...+U15) / SRM x 100
Percentage of the reporting interval during which at least four work units could not be dispatched	WCPU4	none	SMF70U04 ... SMF70U15 SMF70SRM	(U04+...+U15) / SRM x 100
Percentage of the reporting interval during which at least five work units could not be dispatched	WCPU5	none	SMF70U05 ... SMF70U15 SMF70SRM	(U05+...+U15) / SRM x 100
Percentage of the reporting interval during which at least ten work units could not be dispatched	WCPU10	none	SMF70U06 ... SMF70U15 SMF70SRM	(U06+...+U15) / SRM x 100
Percentage of the reporting interval during which at least 15 work units could not be dispatched	WCPU15	none	SMF70U07 ... SMF70U15 SMF70SRM	(U07+...+U15) / SRM x 100
Percentage of the reporting interval during which at least 20 work units could not be dispatched	WCPU20	none	SMF70U08 ... SMF70U15 SMF70SRM	(U08+...+U15) / SRM x 100
Percentage of the reporting interval during which at least 30 work units could not be dispatched	WCPU30	none	SMF70U09 ... SMF70U15 SMF70SRM	(U09+...+U15) / SRM x 100
Percentage of the reporting interval during which at least 40 work units could not be dispatched	WCPU40	none	SMF70U10 ... SMF70U15 SMF70SRM	(U10+...+U15) / SRM x 100



Table 22. CPU Activity - Conditions Based on SMF Record Type 70–1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Percentage of the reporting interval during which at least 60 work units could not be dispatched	WCPU60	none	SMF70U11 ... SMF70U15 SMF70SRM	$(U11+...+U15) / SRM \times 100$
Percentage of the reporting interval during which at least 80 work units could not be dispatched	WCPU80	none	SMF70U13 SMF70U12 ... SMF70U15 SMF70SRM	$(U12+...+U15) / SRM \times 100$
Percentage of the reporting interval during which at least 100 work units could not be dispatched	WCPU100	none	SMF70U13 ... SMF70U15 SMF70SRM	$(U13+...+U15) / SRM \times 100$
Percentage of the reporting interval during which at least 120 work units could not be dispatched	WCPU120	none	SMF70U14 SMF70U15 SMF70SRM	$(U14+U15) / SRM \times 100$
Percentage of the reporting interval during which at least 150 work units could not be dispatched	WCPU150	none	SMF70U15 SMF70SRM	$U15 / SRM \times 100$
Nominal processor capacity available to the CPC	NOMCAPAC	none	SMF70NCR	Value or comparison
Effective capacity percentage	EFFCAPAC	none	SMF70MCR SMF70NCR	$(MCR / NCR) * 100$
Long-term average of CPU service (millions of service units) at the end of the reporting interval	LACS	none	SMF70LAC	Value or comparison
Available long-term average of CPU service (millions of service units) that would be allowed by the limit of the capacity group, but is not used by its members.	GCMSUAV	none	SMF70GAU	Value or comparison
The percentage of times PR/SM issued a warning-track interruption to a general purpose processor and z/OS was able to return it to PR/SM within the grace period	WTRKCP	cpuid	SMF70WTS SMF70WTU	$WTS / (WTS + WTU)$
The percentage of times PR/SM issued a warning-track interruption to a zAAP and z/OS was able to return it to PR/SM within the grace period	WTRKAAP	cpuid	SMF70WTS SMF70WTU	Same as WTRKCP but applied to zAAP
The percentage of times PR/SM issued a warning-track interruption to a zIIP and z/OS was able to return it to PR/SM within the grace period	WTRKIIP	cpuid	SMF70WTS SMF70WTU	Same as WTRKCP but applied to zIIP
Time in milliseconds that a general purpose processor was yielded to PR/SM due to warning-track processing	WTRKTCP	cpuid	SMF70WTI	Value or comparison
Time in milliseconds that a zAAP was yielded to PR/SM due to warning-track processing	WTRKTAAP	cpuid	SMF70WTI	Value or comparison
Time in milliseconds that a zIIP was yielded to PR/SM due to warning-track processing	WTRKIIP	cpuid	SMF70WTI	Value or comparison
Initial Capping for general purpose processors	INICAP	lpar	SMF70VPF	1 if VPF(Bit 3) is set, otherwise 0
Absolute physical hardware capacity limit in numbers of CPUs for general purpose processors	LIMCPU	lpar	SMF70HW_Cap_Limit	$HW\_Cap\_Limit/100$
Percent multithreading core productivity for zIIPs	IIPPROD	coreid	SMF70_PROD	$PROD / 1024$

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Percent multithreading core utilization for zIIPs	IIPUTIL	coreid	SMF70_PROD SMF70PDT SMF70ONT SMF70_LPAR_BUSY	PROD / 1024 multiplied by value of Overview Condition IIPBSY
Absolute physical hardware group capping limit in numbers of CPUs for general purpose processors	HGCCP	group	SMF70HWGr_Cap_Limit	HWGr_Cap_Limit/100
Absolute physical hardware group capping limit in numbers of CPUs for zIIP processors	HGCIIP	group	SMF70HWGr_Cap_Limit	Same as HGCCP, but applied to zIIPs
Absolute physical hardware group capping limit in numbers of CPUs for ICF processors	HGCICF	group	SMF70HWGr_Cap_Limit	Same as HGCCP, but applied to ICFs
Absolute physical hardware group capping limit in numbers of CPUs for IFL processors	HGCIFL	group	SMF70HWGr_Cap_Limit	Same as HGCCP, but applied to IFLs
Long-term average of CPU service (millions of service units) consumed by transactions classified with reporting attribute MOBILE	LACSM	None	SMF70LACM	Value or comparison
Long-term average of CPU service (millions of service units) consumed by transactions classified with reporting attribute CATEGORYA	LACSA	None	SMF70LACA	Value or comparison
Long-term average of CPU service (millions of service units) consumed by transactions classified with reporting attribute CATEGORYB	LACSB	None	SMF70LACB	Value or comparison
Long-term average of CPU service (millions of service units) consumed by DFSMS data set encryption	LACSCR	None	SMF70LACCR	Value or comparison
Long-term average of CPU service (millions of service units) consumed by a tenant resource group	TRGLACS	trg	SMF70_TRG_LAC	Value or comparison
Service units on general purpose processors consumed by a tenant resource group per second	TRGCP	trg	SMF70_TRG_SUCP SMF70INT	TRG_SUCP *1000 / INT
Service units on zAAPs consumed by a tenant resource group per second	TRGAAP	trg	SMF70_TRG_SUIFA SMF70INT	TRG_SUIFA *1000 / INT
Service units on zIIPs consumed by a tenant resource group per second	TRGIIP	trg	SMF70_TRG_SUSUP SMF70INT	TRG_SUSUP *1000 / INT
General purpose processor consumption in terms of 1/100 of a CP	TRGCPN	trg	SMF70_TRG_SUCP SMF70ADJ SMF70INT	(TRG_SUCP *ADJ) / (INT*160000)
zAAP processor consumption in terms of 1/100 of a CP	TRGAAPN	trg	SMF70_TRG_SUIFA SMF70ADJ SMF70INT	(TRG_SUIFA *ADJ) / (INT*160000)
zIIP processor consumption in terms of 1/100 of a CP	TRGIIPN	trg	SMF70_TRG_SUSUP SMF70ADJ SMF70INT	(TRG_SUSUP *ADJ) / (INT*160000)
Memory consumption in megabytes	TRGMEM	trg	SMF70_TRG_MEM SMF70_TRG_M_CNT	TR_MEM / (TRG_M_CNT * 256)
The total energy consumed during the interval by the Central Processor Complex (CPC), containing all available resources that can be utilized for workloads. The values are represented in watt-seconds.	CPCTOTE	None	SMF70INT SMF70_CPCTotalPower SMF70_PowerReadCount	CPCTotalPower / PowerReadCount / 1000000 * INT
The energy consumption of the CPC over a one-minute interval. The values are represented in watt-seconds.	CPCMINE	None	SMF70_CPCTotalPower SMF70_PowerReadCount	CPCTotalPower / PowerReadCount / 1000000 * 60

Table 22. CPU Activity - Conditions Based on SMF Record Type 70-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
The portion of the CPC's total energy associated with resources that are in a standby or reserved state. The values are represented in watt-seconds.	CPCUNAE	None	SMF70INT SMF70_CPCUnassResPower SMF70_PowerReadCount	$\text{CPCUnassResPower} / \text{PowerReadCount} / 1000000 * \text{INT}$
The amount of energy consumed by the infrastructure related components within the CPC during the interval. The values are represented in watt-seconds.	CPCINFE	None	SMF70INT SMF70_CPCInfraPower SMF70_PowerReadCount	$\text{CPCInfraPower} / \text{PowerReadCount} / 1000000 * \text{INT}$
The average power recorded by the CPC over the interval. The values are represented in watts.	CPCAVGP	None	SMF70_CPCTotalPower SMF70_PowerReadCount	$\text{CPCTotalPower} / \text{PowerReadCount} / 1000000$
The total energy consumed by a specific Logical Partition (LPAR) during the interval. The values are represented in watt-seconds.	LPARTOTE	None	SMF70INT SMF70_CPUPower SMF70_StoragePower SMF70_IOPower SMF70_PowerReadCount	$(\text{CPUPower} + \text{StoragePower} + \text{IOPower}) / \text{PowerReadCount} / 1000000 * \text{INT}$
The energy consumption of a specific LPAR over a one-minute interval. The values are represented in watt-seconds.	LPARMINE	None	SMF70_CPUPower SMF70_StoragePower SMF70_IOPower SMF70_PowerReadCount	$(\text{CPUPower} + \text{StoragePower} + \text{IOPower}) / \text{PowerReadCount} / 1000000 * 60$
The amount of energy consumed by CPU resources allocated to the LPAR, determining its processing capabilities for executing applications and tasks. The values are represented in watt-seconds.	LPARCPUE	None	SMF70INT SMF70_CPUPower SMF70_PowerReadCount	$\text{CPUPower} / \text{PowerReadCount} / 1000000 * \text{INT}$
The amount of energy consumed by memory resources allocated to the LPAR. The values are represented in watt-seconds.	LPARMEME	None	SMF70INT SMF70_StoragePower SMF70_PowerReadCount	$\text{StoragePower} / \text{PowerReadCount} / 1000000 * \text{INT}$
The amount of energy consumed by Input/Output operations within the LPAR. The values are represented in watt-seconds.	LPARIOE	None	SMF70INT SMF70_IOPower SMF70_PowerReadCount	$\text{IOPower} / \text{PowerReadCount} / 1000000 * \text{INT}$
The average power recorded for a specific LPAR over a specific time. The values are represented in watts.	LPARAVGP	None	SMF70_CPUPower SMF70_StoragePower SMF70_IOPower SMF70_PowerReadCount	$(\text{CPUPower} + \text{StoragePower} + \text{IOPower}) / \text{PowerReadCount} / 1000000$

## Crypto Hardware Activity - SMF record type 70-2

The following table shows the new condition names that RMF recognizes in OVW and EXCEPT control statements based on SMF record 70.2.

One of the following qualifiers is possible:

### ccid

A cryptographic coprocessor identifier in the format *ccid*[*LPAR*]

*ccid* – is a cryptographic coprocessor index (one or two decimal digits). If the qualifier is omitted, performance data is reported for coprocessor index 0.

### caid

A cryptographic accelerator identifier in the format *caid*[*LPAR*]

*caid* – is a cryptographic accelerator index (one or two decimal digits). If the qualifier is omitted, performance data is reported for accelerator index 0.

**pkid**

A cryptographic PKCS11 coprocessor identifier in the format *pkid*[*LPAR*]

*pkid* - is a cryptographic PKCS11 coprocessor index (one or two decimal digits). If the qualifier is omitted, performance data is reported for coprocessor index 0.

*LPAR* – is an optional keyword. If the keyword *LPAR* is specified, performance data is reported for the home *LPAR*. If the qualifier is omitted, performance data is reported for the *CPC*.

Table 23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2				
Condition	Condition Name	Qualifier	Source	Algorithm
Cryptographic coprocessor total rate	CRYCTR	ccid	R7023C0 SMF70INT	3C0 / INT
Cryptographic coprocessor total utilization	CRYCTU	ccid	R7023T0 R7023SF SMF70INT	$3T0 * 3SF * 100 / INT$
Cryptographic coprocessor total avg execution time	CRYCTE	ccid	R7023C0 R7023T0 R7023SF	$3T0 * 3SF / 3C0$
Cryptographic coprocessor key-gen rate	CRYCKR	ccid	R7023C1 SMF70INT	3C1 / INT
Cryptographic accelerator 1024bit-ME rate	CRYAM1R	caid	R7021MEC SMF70INT	Sum(1MEC) / INT
Cryptographic accelerator 1024bit-ME utilization	CRYAM1U	caid	R7024EN R7021MET R7024SF SMF70INT	$Sum(1MET) * 4SF * 100 / (INT * 4EN)$
Cryptographic accelerator 1024bit-ME avg execution time	CRYAM1E	caid	R7021MEC R7021MET R7024SF	$Sum(1MET) * 4SF / Sum(1MEC)$
Cryptographic accelerator 2048bit-ME rate	CRYAM2R	caid	R7022MEC SMF70INT	Sum(2MEC) / INT
Cryptographic accelerator 2048bit-ME utilization	CRYAM2U	caid	R7024EN R7022MET R7024SF SMF70INT	$Sum(2MET) * 4SF * 100 / (INT * 4EN)$
Cryptographic accelerator 2048bit-ME avg execution time	CRYAM2E	caid	R7022MEC R7022MET R7024SF	$Sum(2MET) * 4SF / Sum(2MEC)$
Cryptographic accelerator 4096bit-ME rate	CRYAM3R	caid	R7023MEC SMF70INT	Sum(3MEC) / INT
Cryptographic accelerator 4096bit-ME utilization	CRYAM3U	caid	R7024EN R7023MET R7024SF SMF70INT	$Sum(3MET) * 4SF * 100 / (INT * 4EN)$
Cryptographic accelerator 4096bit-ME avg execution time	CRYAM3E	caid	R7023MEC R7023MET R7024SF	$Sum(3MET) * 4SF / Sum(3MEC)$
Cryptographic accelerator 1024bit-CRT rate	CRYAC1R	caid	R7021CRC SMF70INT	Sum(1CRC) / INT
Cryptographic accelerator 1024bit-CRT utilization	CRYAC1U	caid	R7021CRT R7024EN R7024SF SMF70INT	$Sum(1CRT) * 4SF * 100 / (INT * 4EN)$

Table 23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
Cryptographic accelerator 1024bit-CRT avg execution time	CRYAC1E	caid	R7021CRC R7021CRT R7024SF	$\text{Sum}(1\text{CRT}) * 4\text{SF} / \text{Sum}(1\text{CRC})$
Cryptographic accelerator 2048bit-CRT rate	CRYAC2R	caid	R7022CRC SMF70INT	$\text{Sum}(2\text{CRC}) / \text{INT}$
Cryptographic accelerator 2048bit-CRT utilization	CRYAC2U	caid	R7022CRT R7024EN R7024SF SMF70INT	$\text{Sum}(2\text{CRT}) * 4\text{SF} * 100 / (\text{INT} * 4\text{EN})$
Cryptographic accelerator 2048bit-CRT avg execution time	CRYAC2E	caid	R7022CRC R7022CRT R7024SF	$\text{Sum}(2\text{CRT}) * 4\text{SF} / \text{Sum}(2\text{CRC})$
Cryptographic accelerator 4096bit-CRT rate	CRYAC3R	caid	R7023CRC SMF70INT	$\text{Sum}(3\text{CRC}) / \text{INT}$
Cryptographic accelerator 4096bit-CRT utilization	CRYAC3U	caid	R7023CRT R7024EN R7024SF SMF70INT	$\text{Sum}(3\text{CRT}) * 4\text{SF} * 100 / (\text{INT} * 4\text{EN})$
Cryptographic accelerator 4096bit-CRT avg execution time	CRYAC3E	caid	R7023CRC R7023CRT R7024SF	$\text{Sum}(3\text{CRT}) * 4\text{SF} / \text{Sum}(3\text{CRC})$
Single DES encryption rate	CRYISDER	none	R702SNEC SMF70INT	$\text{SNEC} / \text{INT}$
Single DES encryption size	CRYISDES	none	R702SNEB R702SNEC	$\text{SNEB} / \text{SNEC}$
Single DES number of instructions used to encipher the data	CRYISDEI	none	R702SNEI	
Triple DES encryption rate	CRYITDER	none	R702TNEC SMF70INT	$\text{TNEC} / \text{INT}$
Triple DES encryption size	CRYITDES	none	R702TNEB R702TNEC	$\text{TNEB} / \text{TNEC}$
Triple DES number of instructions used to encipher the data	CRYITDEI	none	TNEI	
Single DES decryption rate	CRYISDDR	none	R702SNDC SMF70INT	$\text{SNDC} / \text{INT}$
Single DES decryption size	CRYISDDS	none	R702SNDB R702SNDC	$\text{SNDB} / \text{SNDC}$
Single DES number of instructions used to decipher the data	CRYISDDI	none	R702SNDI	
Triple DES decryption rate	CRYITDDR	none	R702TNDC SMF70INT	$\text{TNDC} / \text{INT}$
Triple DES decryption size	CRYITDDS	none	R702TNDB R702TNDC	$\text{TNDB} / \text{TNDC}$
Triple DES number of instructions used to decipher the data	CRYITDDI	none	R702TNDI	
Rate of AES encryption service calls sent to a coprocessor	CRYIAER	none	R702AESC SMF70INT	$\text{AESC} / \text{INT}$
Rate of AES decryption service calls sent to a coprocessor	CRYIADR	none	R702ASDC SMF70INT	$\text{ASDC} / \text{INT}$
Average number of bytes processed per AES encryption service call handled by a coprocessor	CRYIAES	none	R702AESB R702AESC	$\text{AESB} / \text{AESC}$

Table 23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
Average number of bytes processed per AES decryption service call handled by a coprocessor	CRYIADS	none	R702ASDB R702ASDC	ASDB / ASDC
Average number of times the coprocessor was called to complete the AES encryption service calls	CRYIAEO	none	R702AESI R702AESC	AESI / AESC
Average number of times the coprocessor was called to complete the AES decryption service calls	CRYIADO	none	R702ASDI R702ASDC	ASDI / ASDC
MAC generation rate	CRYIMGR	none	R702NMGC SMF70INT	NMGC / INT
MAC generation size	CRYIMGS	none	R702NMGB R702NMGC	NMGB / NMGC
Number of instructions used to MAC generate	CRYIMGI	none	R702NMGI	
MAC verify rate	CRYIMVR	none	R702NMVC SMF70INT	NMVC / INT
MAC verify size	CRYIMVS	none	R702NMVB R702NMVC	NMVB / NMVC
Number of instructions used to MAC verify	CRYIMVI	none	R702NMVI	
Hashing rate using the SHA-1 algorithm	CRYIHAR	none	R702NHAC SMF70INT	NHAC / INT
Hashing size using the SHA-1 algorithm	CRYIHAS	none	R702NHAB R702NHAC	NHAB / NHAC
Number of instructions used to hash data with the SHA-1 algorithm	CRYIHAI	none	R702NHAI	Value or comparison
Hashing rate using the SHA-224 or the SHA-256 algorithm	CRYIH2R	none	R702NH2C SMF70INT	NH2C / INT
Hashing size using the SHA-224 or the SHA-256 algorithm	CRYIH2S	none	R702NH2B R702NH2C	NH2B / NH2C
Number of instructions used to hash data with the SHA-224 or the SHA-256 algorithm	CRYIH2I	none	R702NH2I	Value or comparison
Hashing rate using the SHA-384 or the SHA-512 algorithm	CRYIH5R	none	R702NH5C SMF70INT	NH5C / INT
Hashing size using the SHA-384 or the SHA-512 algorithm	CRYIH5S	none	R702NH5B R702NH5C	NH5B / NH5C
PIN translation rate	CRYIPTR	none	R702NPTC SMF70INT	NPTC / INT
PIN verify rate	CRYIPVR	none	R702NPVC SMF70INT	NPVC / INT
AES MAC generation rate	CRYIAMGR	none	R702AMGC SMF70INT	AMGC/INT
AES MAC generation size	CRYIAMGS	none	R702AMGB R702AMGC	AMGB / AMGC
Number of instructions used to generate AES MACs	CRYIAMGI	none	R702AMGI	Value or comparison
AES MAC verify rate	CRYIAMVR	none	R702AMVC SMF70INT	AMVC/INT
AES MAC verify size	CRYIAMVS	none	R702AMVB R702AMVC	AMVB/AMVC
Number of instructions used to verify AES MACs	CRYIAMVI	none	R702AMVI	Value or comparison
RSA digital signature generation rate	CRYIDRGR	none	R702DRGC SMF70INT	DRGC/INT

Table 23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
RSA digital signature verify rate	CRYIDRVR	none	R702DRVC SMF70INT	DRVC/INT
ECC digital signature generation rate	CRYIDEGR	none	R702DEGC SMF70INT	DEGC/INT
ECC digital signature verify rate	CRYIDRVR	none	R702DEVC SMF70INT	DEVC/INT
FPE encipher rate	CRYIFPER	none	R702FPEC SMF70INT	FPEC / INT
FPE encipher size	CRYIFPES	none	R702FPEB R702FPEC	FPEB / FPEC
Number of instructions used to encipher data using FPE	CRYIFPEI	none	R702FPEI	Value or comparison
FPE decipher rate	CRYIFPDR	none	R702FPDC SMF70INT	FPDC / INT
FPE decipher size	CRYIFPDS	none	R702FPDB R702FPDC	FPDB / FPDC
Number of instructions used to decipher data using FPE	CRYIFPDI	none	R702FPDI	Value or comparison
FPE translate rate	CRYIFPTR	none	R702FPTC SMF70INT	FPTC / INT
FPE translate size	CRYIFPTS	none	R702FPTB R702FPTC	FPTB / FPTC
Number of instructions used to translate data using FPE	CRYIFPTI	none	R702FPTI	Value or comparison
QSA digital signature generation rate	CRYIDQGR	none	R702DQGC SMF70INT	DQGC/INT
QSA digital signature verify rate	CRYIDQVR	none	R702DQVC SMF70INT	DQVC/INT
FFX encipher rate	CRYIFXER	none	R702FXEC SMF70INT	FXEC / INT
FFX encipher size	CRYIFXES	none	R702FXEB R702FPEC	FXEB / FXEC
Number of instructions used to encipher data using FFX	CRYIFXEI	none	R702FXEI	Value or comparison
FFX decipher rate	CRYIFXDR	none	R702FXDC SMF70INT	FXDC / INT
FFX decipher size	CRYIFXDS	none	R702FXDB R702FXDC	FXDB / FXDC
Number of instructions used to decipher data using FFX	CRYIFXDI	none	R702FXDI	Value or comparison
FFX translate rate	CRYIFXTR	none	R702FXTC SMF70INT	FXTC / INT
FFX translate size	CRYIFXTS	none	R702FXTB R702FXTC	FXTB / FXTC
Number of instructions used to translate data using FFX	CRYIFXTI		R702FXTI	Value or comparison
Cryptographic PKCS11 coprocessor total rate	CRYPTR	pkid	R7025SAC R7025FAC R7025SPC R7025SCC R7025AGC SMF70INT	(5SAC+5FAC+ 5SPC+ 5SCC+5AGC)/INT

Table 23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
Cryptographic PKCS11 coprocessor total utilization	CRYPTU	pkid	R7025FAT R7025AGT R7025SAT R7025SPT R7025SCT R7025SF SMF70INT	$(5SAT+5FAT+5SPT+5SCT+5AGT)*5SF*100/INT$
Cryptographic PKCS11 coprocessor total average execution time (in milliseconds)	CRYPTE	pkid	R7025SAC R7025FAC R7025SPC R7025SCC R7025AGC R7025SAT R7025FAT R7025SPT R7025SCT R7025AGT SMF70INT	$(5SAT+5FAT+5SPT+5SCT+5AGT)*5SF*1000/$ $(5SAC+5FAC+5SPC+5SCC+5AGC)$
Rate of operations executed by slow asymmetric-key functions	CRYP SAR	pkid	R7025SAC SMF70INT	$5SAC/INT$
Utilization of operations executed by slow asymmetric-key functions	CRYP SAU	pkid	R7025SAT R7025SF SMF70INT	$5SAT*5SF*100/INT$
Average execution time of operations executed by slow asymmetric-key functions (in milliseconds)	CRYP SAE	pkid	R7025SAC R7025SAT R7025SF	$5SAT*5SF*1000/5SAC$
Rate of operations executed by fast asymmetric-key functions	CRYP FAR	pkid	R7025FAC SMF70INT	$5FAC/INT$
Utilization of operations executed by fast asymmetric-key functions	CRYP FAU	pkid	R7025FAT R7025SF SMF70INT	$5FAT*5SF*100/INT$
Average execution time of operations executed by fast asymmetric-key functions (in milliseconds)	CRYP FAE	pkid	R7025FAC R7025FAT R7025SF	$5FAT*5SF*1000/5FAC$
Rate of operations executed by symmetric-key functions that return partial or incremental results	CRYP SPR	pkid	R7025SPC SMF70INT	$5SPC/INT$
Utilization of operations executed by symmetric-key functions that return partial or incremental results	CRYP SPU	pkid	R7025SPT R7025SF SMF70INT	$5SPT*5SF*100/INT$
Average execution time of operations executed by symmetric-key functions that return partial or incremental results (in milliseconds)	CRYP SPE	pkid	R7025SPC R7025SPT R7025SF	$5SPT*5SF*1000/5SPC$
Rate of operations executed by symmetric-key functions that return a complete or final result	CRYP SCR	pkid	R7025SCC SMF70INT	$5SCC/INT$
Utilization of operations executed by symmetric-key functions that return a complete or final result	CRYP SCU	pkid	R7025SCT R7025SF SMF70INT	$5SCT*5SF*100/INT$
Average execution time of operations executed by symmetric-key functions that return a complete or final result (in milliseconds)	CRYP SCE	pkid	R7025SCC R7025SCT R7025SF	$5SCT*5SF*1000/5SCC$
Rate of operations executed by asymmetric-key generation function	CRYPAGR	pkid	R7025AGC SMF70INT	$5AGC/INT$
Utilization of operations executed by asymmetric-key generation function	CRYPAGU	pkid	R7025AGT R7025SF SMF70INT	$5AGT*5SF*100/INT$



Table 23. Crypto Hardware Activity - Conditions Based on SMF Record Type 70–2 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Average execution time of operations executed by asymmetric-key generation function (in milliseconds)	CRYPAGE	pkid	R7025AGC R7025AGT R7025SF	5AGT*5SF*1000/5AGC

## Paging Activity - SMF record type 71

Table 24. Paging Activity - Conditions Based on SMF Record Type 71				
Condition	Condition Name	Qualifier	Source	Algorithm
Size of central storage (K)	STORAGE	none	SMF71TFC SMF71FIN	TFC+FIN
Total number of pages per second	TPAGRT	none	SMF71PIN SMF71POT SMF71SIN SMF71SOT SMF71VIN SMF71VOT SMF71BLP SMF71INT SMF71HOT SMF71HIN	(PIN+POT+SIN+SOT +VIN+VOT+BLP +HOT+HIN)/INT
Number of page faults per second	PAGERT	none	SMF71PIN SMF71INT	PIN/INT
Demand paging per second	DPAGRT	none	SMF71PIN SMF71POT SMF71INT	(PIN+POT)/INT
Percent successful swap-out	PLSWAPOU	none	SMF71TOT(k) SMF71AXD(k) SMF71ESD(k) SMF71LES(k) SMF71LAX(k)	(TOT(k)-AXD(k)- ESD(k)-LES(k)- LAX(k))*100 / (TOT(k)-AXD(k)- ESD(k))
Maximum number of SQA fixed frames	MXSQA	none	SMF71MXQ	Value or comparison
Average number of SQA fixed frames	AVGSQA	none	SMF71AVQ	Value or comparison
Maximum number of CSA / RUCSA fixed-frames	MXCSAF	none	SMF71MXC	Value or comparison
Average number of CSA / RUCSA fixed frames	AVGCSAF	none	SMF71AVC	Value or comparison
Maximum number of central storage CSA / RUCSA frames	MXCSAT	none	SMF71MXP	Value or comparison
Average number of central storage CSA / RUCSA frames	AVGCSAT	none	SMF71AVP	Value or comparison
Maximum number of VIO allocated local page data set slots	MAXVIOF	none	SMF71MXV	Value or comparison
Average number of VIO allocated local page data set slots	AVGVIOF	none	SMF71LVV	Value or comparison
Page move rate	PGMVRT	none	SMF71PMV SMF71INT	PMV/INT
Average high unreferenced interval count for central storage frames	AVGHUIC	none	SMF71UAC	Value or comparison
Maximum high unreferenced interval count for central storage frames	MXHUIC	none	SMF71UHC	Value or comparison
Page movement rate to expanded storage	PTES	none	SMF71PES	PES/INT
Minimum number of available CS frames	CSTORAVM	none	SMF71CAM	Value or comparison
Maximum number of available CS frames	CSTORAVX	none	SMF71CAX	Value or comparison
Average number of available CS frames	CSTORAVA	none	SMF71CAA	Value or comparison
Minimum number of low-impact CS frames	CSTORLIM	none	SMF71CLM	Value or comparison
Maximum number of low-impact CS frames	CSTORLIX	none	SMF71CLX	Value or comparison
Average number of low-impact CS frames	CSTORLIA	none	SMF71CLA	Value or comparison
Minimum number of medium-impact CS frames	CSTORMIM	none	SMF71CMM	Value or comparison
Maximum number of medium-impact CS frames	CSTORMIX	none	SMF71CMX	Value or comparison
Average number of medium-impact CS frames	CSTORMIA	none	SMF71CMA	Value or comparison
Minimum number of high-impact CS frames	CSTORHIM	none	SMF71CHM	Value or comparison
Maximum number of high-impact CS frames	CSTORHIX	none	SMF71CHX	Value or comparison

Table 24. Paging Activity - Conditions Based on SMF Record Type 71 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Average number of high-impact CS frames	CSTORHIA	none	SMF71CHA	Value or comparison
Minimum number of VIO pages in central storage	RSVIOM	none	SMF71MVI	Value or comparison
Maximum number of VIO pages in central storage	RSVIOX	none	SMF71XVI	Value or comparison
Average number of VIO pages in central storage	RSVIOA	none	SMF71AVI	Value or comparison
Minimum number of hiperspace pages in central storage	RSHSPM	none	SMF71MHI	Value or comparison
Maximum number of hiperspace pages in central storage	RSHSPX	none	SMF71XHI	Value or comparison
Average number of hiperspace pages in central storage	RSHSPA	none	SMF71AHI	Value or comparison
Number of VIO pages written to central storage	RSVIOW	none	SMF71VWS	Value or comparison
Number of VIO pages read from central storage	RSVIOR	none	SMF71VRS	Value or comparison
Number of hiperspace pages written to central storage	RSHSPW	none	SMF71HWS	Value or comparison
Number of hiperspace pages read from central storage	RSHSPR	none	SMF71HRS	Value or comparison
Minimum number of pages fixed between 16MB and 2GB	FXBETWM	none	SMF71MFB	Value or comparison
Maximum number of pages fixed between 16MB and 2GB	FXBETWX	none	SMF71XFB	Value or comparison
Average number of pages fixed between 16MB and 2GB	FXBETWA	none	SMF71AFB	Value or comparison
Average number of shared pages in the system	SHRPT	none	SMF71AGT	Value or comparison
Average number of shared pages in central storage	SHRPC	none	SMF71AGC	Value or comparison
Average number of shared page groups in auxiliary storage (DASD)	SHRPA	none	SMF71AGA	Value or comparison
Average number of shared pages fixed in central storage	SHRPF	none	SMF71AGF	Value or comparison
Average number of shared pages fixed below 16 MB	SHRPB	none	SMF71AGB	Value or comparison
Number of page-ins from Auxiliary Storage for shared pages	SHRPI	none	SMF71ASI	Value or comparison
Number of page-outs to Auxiliary Storage for shared pages	SHRPO	none	SMF71ASO	Value or comparison
Average number of pages in the system used by shared memory objects	SHRPTH	none	SMF71PTH	Value or comparison
Average number of shared pages in Central Storage with a virtual storage address above the bar including high virtual DAT	SHRPCH	none	SMF71PCH	Value or comparison
Average number of shared pages in Auxiliary Storage with a virtual storage address above the 2GB bar	SHRPAH	none	SMF71PAH	Value or comparison
Peak number of shared pages used by shared memory objects	SHRPBLG	none	SMF71BLG	Value or comparison
Number of page-ins from Auxiliary Storage for shared pages with a virtual storage address above the bar	SHRPIH	none	SMF71PIH	Value or comparison
Number of page-outs to Auxiliary Storage for shared pages with a virtual storage address above the bar	SHRPOH	none	SMF71POH	Value or comparison
Average number of memory objects allocated in the high virtual common storage of the system	CMOA	none	SMF71COA	Value or comparison
Average number of memory objects allocated in the high virtual shared storage of the system	SMOA	none	SMF71SOA	Value or comparison

Table 24. Paging Activity - Conditions Based on SMF Record Type 71 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Average number of shared memory objects that are allocated in the system and can be backed in 1 MB frames	SMO1MA	none	SMF71S2A	Value or comparison
Average number of fixed memory objects that are allocated in the system and can be backed in 1 MB frames	LMOA	none	SMF71LOA	Value or comparison
Average number of 1 MB pages fixed in central storage	LFRA	none	SMF71LRA	Value or comparison
Average number of pages from high virtual common storage that is backed in central storage (in units of 4 KB)	CFRA	none	SMF71CRA	Value or comparison
Average number of high virtual common memory 1 MB pages that are backed in central storage	CFR1MA	none	SMF71C3A	Value or comparison
Average number of fixed pages from high virtual common storage that is backed in central storage (in units of 4 KB)	CFFRA	none	SMF71CFA	Value or comparison
Average number of high virtual common memory 1 MB pages that are fixed in central storage	CFFR1MA	none	SMF71C2A	Value or comparison
Average number of pages from high virtual shared storage that is backed in central storage (in units of 4 KB)	SFRA	none	SMF71SRA	Value or comparison
Average number of high virtual shared memory 4K pages that are backed in central storage	SFR4KA	none	SMF71S3A	Value or comparison
Average number of 1 MB pages used for shared memory objects that are backed in central storage	SFR1MA	none	SMF71S4A	Value or comparison
Average number of auxiliary storage slots that are used for high virtual common pages backed on DASD	CAUXSA	none	SMF71CSA	Value or comparison
Total number of logical swaps	LSWAPTOT	none	SMF71TLS	Value or comparison
Average maximum number of 1 MB frames that can be used by fixed 1 MB pages.	LFFRTA	none	SMF71L1A	Value or comparison
Average number of 1 MB frames that are in-use and are no longer available for fixed 1 MB pages.	LFFRUA	none	SMF71L3A	Value or comparison
Average number of available 1 MB frames that can be used by fixed 1 MB pages.	LFFRNUA	none	SMF71L7A	Value or comparison
Average number of 1 MB frames that are in-use by pageable 1 MB pages.	LPFRPA	none	SMF71PLA	Value or comparison
Average total number of high virtual shared storage page	SFRTA	none	SMF71S1A	Value or comparison
Average number of auxiliary storage slots used for high virtual shared pages that are backed on DASD	SAUXSA	none	SMF71S5A	Value or comparison
Average number of auxiliary storage slots used for high virtual shared pages that are backed on SCM storage	SAUXSSA	none	SMF71S6A	Value or comparison
Average total number of high virtual common storage pages	CFRTA	none	SMF71C1A	Value or comparison
Average number of auxiliary storage slots used for high virtual common memory pages that are backed on SCM storage	CAUXSSA	none	SMF71C4A	Value or comparison
Average number of shared page groups backed on SCM storage	SHRPASCM	none	SMF71S7A	Value or comparison
Average number of fixed 2 GB memory objects that are allocated in the system	GMOA	none	SMF71GOA	Value or comparison
Average number of 2 GB frames in the Large Frame Area that are in-use by fixed memory objects	GFFRUA	none	SMF71GUA	Value or comparison
Average number of 2 GB frames in the Large Frame Area that are not in-use	GFFRNUA	none	SMF71GAA	Value or comparison

Table 24. Paging Activity - Conditions Based on SMF Record Type 71 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Average maximum number of 2 GB frames that can be used by fixed 2 GB pages.	GFFRTA	none	SMF71GFA	Value or comparison
Average total number of 1 MB frames in central storage.	LTFRTA	none	SMF71L8A	Value or comparison
Average number of available 1 MB frames in central storage.	LTFRAA	none	SMF71L9A	Value or comparison
Average number of 1 MB frames that are in-use by memory objects.	LTFRUA	none	SMF71L10A	Value or comparison
Average number of address spaces using dedicated memory.	DMJOBSA	none	SMF71_DMemNumberOfJobsUsingDmem_A	Value or comparison
Average amount of online and offline dedicated memory in 2G units, including dedicated memory used by the system.	GDMTA	none	SMF71_DMemTotal2G_A	Value or comparison
Average amount of online dedicated memory in 2G units, including dedicated memory used by the system.	GDMTOA	none	SMF71_DMemTotalOnline2G_A	Value or comparison
Average amount of available dedicated memory in 2G units that can be used by address spaces.	GDMAA	none	SMF71_DMemAvailable2G_A	Value or comparison
Average amount of requested dedicated memory in 2G units over all address spaces.	GDMRA	none	SMF71_DMemRequested2G_A	Value or comparison
Average minimum amount of requested dedicated memory in 2G units over all address spaces.	GDMMRA	none	SMF71_DMemMinRequested2G_A	Value or comparison
Average amount of assigned dedicated memory over all address spaces.	GDMSA	none	SMF71_DMemAssigned2G_A	Value or comparison
Average amount of dedicated memory used as 2G frames over all address spaces.	GDMUA	none	SMF71_DMemInUseAs2G_A	Value or comparison
Average amount of dedicated memory used as 1M fixed frames over all address spaces.	LFDMUA	none	SMF71_DMemInUseAs1MFixed_A	Value or comparison
Average amount of dedicated memory used as 1M pageable frames over all address spaces.	LPDMUA	none	SMF71_DMemInUseAs1MPageable_A	Value or comparison
Average amount of dedicated memory used as 4K frames over all address spaces.	DMUA	none	SMF71_DMemInUseAs4K_A	Value or comparison
Average number of frames in 4K units backing DAT tables (system use).	DMUDA	none	SMF71_DMemInUseAsDATTables4K_A	Value or comparison

## Workload Activity - SMF record type 72-3

The following table is valid only for overview processing, not for exception reporting. Depending on the OVW suboption SYSTEMS|NOSYSTEMS, reports or records will be created for each single system in addition to sysplex reporting.

**Note:** When transaction processor usage is reported to WLM through IWM4RPT or IWM4MNTE services, the consumed service units are accounted to the transaction service or report classes, and deducted from the region's service and report classes. If the number of transactions is very small and a single transaction reports high processor times, it is possible that processor times can become negative. In such a case, RMF does not calculate the service rate, application execution time, and the used percentage of processor time.

One qualifier is possible:

### type

This qualifier can have one of the following values:

- S.scname.period    Service class period
- S.scname            Service class
- R.rcname.period    Report class period or tenant report class period

- R.rcname Report class or tenant report class
- W.wname Workload
- POLICY Policy

#### period

This qualifier can have one of the following values:

- S.scname.period Service class period
- R.rcname.period Report class period or tenant report class period

#### class

This qualifier can have one of the following values:

- S.scname Service class
- R.rcname Report class or tenant report class

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3				
Condition	Condition Name	Qualifier	Source	Algorithm
Total service per second	TOTSRV	type	R723CSRV Interval	Sum(R723CSRV) / Interval
I/O service per second	IOSRV	type	R723CIOCI Interval	Sum(R723CIOCI) / Interval
CPU service per second	CPUSRV	type	R723CCPU Interval	Sum(R723CCPU) / Interval
SRB service per second	SRBSRV	type	R723CSRB Interval	Sum(R723CSRB) / Interval
Storage service per second	MSOSRV	type	R723CMISO Interval	Sum(R723CMISO) / Interval
Ended transactions per second	TRANS	type	R723CRCP Interval	Sum(R723CRCP) / Interval
Transaction execution time (in seconds)	RTIME	type	R723CXETX R723CRCP	Sum(R723CXETX) / Sum(R723CRCP)
Number swaps per transaction	SPERTRA	type	R723CSWC R723CRCP	Sum(R723CSWC) / Sum(R723CRCP)
Absorption rate	ABSRPTN	type	R723CSRV R723CTRR	Sum(R723CSRV) / Sum(R723CTRR)
Transaction service rate	TRXSERV	type	R723CSRV R723CTAT	Sum(R723CSRV) / Sum(R723CTAT)
Execution velocity	EXVEL	period	R723CTOU R723CTOT	Sum(R723CTOU) / (Sum(R723CTOU) + Sum(R723CTOT)) * 100
TCB seconds	TCBSEC	type	R723CCPU R723MCPU R723MADJ	Sum((R723CCPU * R723MADJ) / (1600 * R723MCPU))
SRB seconds	SRBSEC	type	R723CSRB R723MSRB R723MADJ	Sum((R723CSRB * R723MADJ) / (1600 * R723MSRB))
Region Control Task (RCT) seconds	RCTSEC	type	R723CRCT	Sum(R723CRCT)
I/O interrupt (IIT) seconds	IITSEC	type	R723CIIT	Sum(R723CIIT)
Hiperspace service (HST) seconds	HSTSEC	type	R723CHST	Sum(R723CHST)
Application execution time on general purpose processors in seconds	APPLSEC	type	R723CCPU R723CSRB R723CRCT R723CIIT R723CHST R723MCPU R723MSRB R723MADJ R723CIFA R723CSUP R723NFFI R723NFFS	Sum((R723CCPU * R723MADJ) / (1600 * R723MCPU) + (R723CSRB * R723MADJ) / (1600 * R723MSRB) + (R723CRCT + R723CIIT + R723CHST) - ((R723CIFA * R723MADJ) / (1600 * R723MCPU) * R723NFFI / 256) - ((R723CSUP * R723MADJ) / (1600 * R723MCPU) * R723NFFS / 256)))

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
Percentage of processor time used by task and preemptable-class SRB work	TCBPER	type	R723CCPU R723CIFA R723CSUP R723NFFI R723NFFS R723MCF R723MCFI R723MCFs R723MCPU R723MADJ Interval	$\text{Sum}(((R723CCPU - R723CIFA * R723NFFI / 256 - R723CSUP * R723NFFS / 256) / (R723MCF / 1024) + R723CIFA / (R723MCFI / 1024) + R723CSUP / (R723MCFs / 1024)) * R723MADJ) / (1600 * R723MCPU)) / \text{Interval} * 100$
Percentage of processor time used by non-preemptable SRB work	SRBPER	type	R723CSRB R723MSRB R723MADJ R723MCF Interval	$\text{Sum}((R723CSRB * R723MADJ) / (1600 * R723MCPU)) * 100 / (\text{Interval} * (R723MCF / 1024))$
Percentage of general purpose processor time used	APPLPER	type	R723CCPU R723CSRB R723CRCT R723CIIT R723CHST R723MCPU R723MSRB R723MADJ R723CIFA R723CSUP R723NFFI R723NFFS R723MCF Interval	$\text{Sum}((R723CCPU * R723MADJ) / (1600 * R723MCPU) + (R723CSRB * R723MADJ) / (1600 * R723MSRB) + (R723CRCT + R723CIIT + R723CHST) - ((R723CIFA * R723MADJ) / (1600 * R723MCPU) * R723NFFI / 256) - ((R723CSUP * R723MADJ) / (1600 * R723MCPU) * R723NFFS / 256))) / (\text{Interval} * (R723MCF / 1024)) * 100$
Page-in rate from auxiliary storage	SINGLE	type	R723CPIR R723CTRR R723CIEA	$\text{Sum}(R723CPIR) / \text{Sum}(R723CTRR - R723CIEA)$
Block page-in rate from auxiliary storage	BLOCK	type	R723CBPI R723CTRR R723CIEA	$\text{Sum}(R723CBPI) / \text{Sum}(R723CTRR - R723CIEA)$
Page-in rate from expanded storage	EXPSNGL	type	R723CPIE R723CTRR R723CIEA	$\text{Sum}(R723CPIE) / \text{Sum}(R723CTRR - R723CIEA)$
Block page-in rate from expanded storage	EXPBLK	type	R723CBPE R723CTRR R723CIEA	$\text{Sum}(R723CBPE) / \text{Sum}(R723CTRR - R723CIEA)$
Hiperspace page-in rate	HSP	type	R723CHPI R723CTRR R723CIEA	$\text{Sum}(R723CHPI) / \text{Sum}(R723CTRR - R723CIEA)$
ESO-hiperspace read miss rate	HSPMISS	type	R723CCRM R723CTRR R723CIEA	$\text{Sum}(R723CCRM) / \text{Sum}(R723CTRR - R723CIEA)$
Shared storage page-in rate from auxiliary storage	SHARED	type	R723CSPA R723CTRR R723CIEA	$\text{Sum}(R723CSPA) / \text{Sum}(R723CTRR - R723CIEA)$
Shared storage page-in rate from expanded storage	EXPSHR	type	R723CSPE R723CTRR R723CIEA	$\text{Sum}(R723CSPE) / \text{Sum}(R723CTRR - R723CIEA)$
Number of EXCPs <b>Note:</b> When z/OS V2R5 or a later version is used, the value reported for the EXCP and EXCPRT is zero (0).	EXCP	type	R723CIOC R723MIOC	$\text{Sum}(R723CIOC) / \text{Sum}(R723MIOC)$
EXCP rate <b>Note:</b> When z/OS V2R5 or a later version is used, the value reported for the EXCP and EXCPRT is zero (0).	EXCPRT	type	R723CIOC R723MIOC Interval	$\text{Sum}(R723CIOC) / \text{Sum}(R723MIOC) / \text{Interval}$
CS frames of all swapped-in transactions	STOCEN	type	R723CPRS R723CERS Interval	$(\text{Sum}(R723CPRS) - \text{Sum}(R723CERS)) / \text{Interval}$

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
ES frames of all swapped-in transactions	STOEXP	type	R723CERS Interval	Sum(R723CERS) / Interval
Shared frames of all swapped-in transactions	STOSHR	type	R723CSRS Interval	Sum(R723CSRS) / Interval
Total frames of all swapped-in transactions	STOTOT	type	R723CPRS Interval	Sum(R723CPRS) / Interval
Ended transactions	TRANSTOT	type	R723CRCP Interval	Sum(R723CRCP)
Average number of swapped-in transactions	TRANSMPL	type	R723CTRR Interval	Sum(R723CTRR) / Interval
Average number of active transactions	TRANSAVG	type	R723CTAT Interval	Sum(R723CTAT) / Interval
Transaction response time (in seconds)	RTIMETOT	type	R723CTETX R723CRCP	Sum(R723CTETX) / Sum(R723CRCP)
Transaction queue time (in seconds)	RTIMEQUE	type	R723CQDTX R723CRCP	Sum(R723CQDTX) / Sum(R723CRCP)
Transaction ineligible queue time (in seconds)	TRANSIQT	type	R723CIQTX R723CRCP	Sum(R723CIQTX) / Sum(R723CRCP)
Transaction r/s affinity delay time (in seconds)	TRANSADT	type	R723CADTX R723CRCP	Sum(R723CADTX) / Sum(R723CRCP)
Transaction JCL conversion time (in seconds)	TRANSCVT	type	R723CCVTX R723CRCP	Sum(R723CCVTX) / Sum(R723CRCP)
Transaction total response time (in milliseconds)	TRXMRTT	type	R723CTETX R723CRCP	Sum(R723CTETX) / Sum(R723CRCP)
Transaction execution time (in milliseconds)	TRXMRTX	type	R723CXETX R723CRCP	Sum(R723CXETX) / Sum(R723CRCP)
Transaction queue time (in milliseconds)	TRXMQUE	type	R723CQDTX R723CRCP	Sum(R723CQDTX) / Sum(R723CRCP)
Transaction ineligible queue time (in milliseconds)	TRXMIQT	type	R723CIQTX R723CRCP	Sum(R723CIQTX) / Sum(R723CRCP)
Transaction r/s affinity delay time (in milliseconds)	TRXMADT	type	R723CADTX R723CRCP	Sum(R723CADTX) / Sum(R723CRCP)
Transaction JCL conversion time (in milliseconds)	TRXMCVT	type	R723CCVTX R723CRCP	Sum(R723CCVTX) / Sum(R723CRCP)
Start subchannel rate	SSCHRT	type	R723CIRC Interval	Sum(R723CIRC) / Interval
Average DASD response time	RESP	type	R723CICT R723CIWT R723CIDT R723CIOT R723CIRC	Sum(R723CIRC + R723CIWT + R723CIDT + R723CIOT) / Sum(R723CIRC)
Average DASD connect time	CONN	type	R723CICT R723CIRC	Sum(R723CICT) / Sum(R723CIRC)
Average DASD disconnect time	DISC	type	R723CIDT R723CIRC	Sum(R723CIDT) / Sum(R723CIRC)
Average DASD pending time	QPEND	type	R723CIWT R723CIRC	Sum(R723CIWT) / Sum(R723CIRC)
Average DASD IOS queue time	IOSQ	type	R723CIOT R723CIRC	Sum(R723CIOT) / Sum(R723CIRC)
Performance index	PI	period	R723CTOU R723CTOT R723CTET R723CRCP R723CVAL R723CPCT	Depending on goal definition <a href="#">See z/OS Resource Measurement Facility Report Analysis</a> for the calculation rules.
CPU Using %	CPUUSGP	period	R723CCUS R723CTSA	Sum(R723CCUS) / Sum(R723CTSA) * 100
CPU Delay %	CPUDLYP	period	R723CCDE R723CTSA	Sum(R723CCDE) / Sum(R723CTSA) * 100

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Crypto Using %	CRYUSGP	period	R723APD R723APU R723CTSA	$\text{Sum}(\text{R723APU}) / \text{Sum}(\text{R723CTSA} + \text{R723APU} + \text{R723APD})$
Crypto AP Using %	APUSGP	period	R723APD R723APU R723CTSA	$\text{Sum}(\text{R723APU}) / \text{Sum}(\text{R723CTSA} + \text{R723APU} + \text{R723APD})$
Crypto Delay %	CRYDLYP	period	R723APD R723APU R723CTSA R723FQD	$\text{Sum}(\text{R723APD} + \text{R723FQD}) / \text{Sum}(\text{R723CTSA} + \text{R723APU} + \text{R723APD})$
Crypto AP Delay %	APDLYP	period	R723APD R723APU R723CTSA	$\text{Sum}(\text{R723APD}) / \text{Sum}(\text{R723CTSA} + \text{R723APU} + \text{R723APD})$
Crypto FQ Delay %	FQDLYP	period	R723APD R723APU R723CTSA R723FQD	$\text{Sum}(\text{R723FQD}) / \text{Sum}(\text{R723CTSA} + \text{R723APU} + \text{R723APD})$
Resource contention Using %	RCUSGP	period	R723RCOU	$\text{Sum}(\text{R723RCOU}) / \text{Sum}(\text{R723CTSA} + \text{R723RCOD} + \text{R723RCOU}) * 100$
Resource contention Delay %	RCDLYP	period	R723RCOD	$\text{Sum}(\text{R723RCOD}) / \text{Sum}(\text{R723CTSA} + \text{R723RCOD} + \text{R723RCOU}) * 100$
I/O Using %	IOUSGP	period	R723CIOU R723CTSA	$\text{Sum}(\text{R723CIOU}) / \text{Sum}(\text{R723CTSA}) * 100$
I/O Delay %	IODLYP	period	R723CIOD R723CTSA	$\text{Sum}(\text{R723CIOD}) / \text{Sum}(\text{R723CTSA}) * 100$
Swap-in delay %	SWINP	period	R723CSWI R723CTSA	$\text{Sum}(\text{R723CSWI}) / \text{Sum}(\text{R723CTSA}) * 100$
MPL delay %	MPLP	period	R723CMPL R723CTSA	$\text{Sum}(\text{R723CMPL}) / \text{Sum}(\text{R723CTSA}) * 100$
Queue %	QUEUEP	period	R723CQ R723CTSA	$\text{Sum}(\text{R723CQ}) / \text{Sum}(\text{R723CTSA}) * 100$
Capping %	CAPP	period	R723CCCA R723CTSA	$\text{Sum}(\text{R723CCCA}) / \text{Sum}(\text{R723CTSA}) * 100$
Storage %	STOP	period	R723CAPR R723CACO R723CAXM R723CVIO R723CHSP R723CCHS R723CTSA	$\text{Sum}(\text{R723CAPR} + \text{R723CACO} + \text{R723CAXM} + \text{R723CVIO} + \text{R723CHSP} + \text{R723CCHS}) / \text{Sum}(\text{R723CTSA}) * 100$
Server delay %	SERVP	period	R723CSPV R723CSVI R723CSHS R723CSMP R723CSSW R723CTSA	$\text{Sum}(\text{R723CSPV} + \text{R723CSVI} + \text{R723CSHS} + \text{R723CSMP} + \text{R723CSSW}) / \text{Sum}(\text{R723CTSA}) * 100$
Idle %	IDLEP	period	R723CIDL R723CTSA	$\text{Sum}(\text{R723CIDL}) / \text{Sum}(\text{R723CTSA}) * 100$
Unknown %	UNKP	period	R723CUNK R723CTSA	$\text{Sum}(\text{R723CUNK}) / \text{Sum}(\text{R723CTSA}) * 100$
Average number of independent enclaves during the interval (contained in TRANSAVG)	ENCAVG	type	R723CIEA	$\text{Sum}(\text{R723CIEA}) / \text{Interval}$
Average number of foreign enclaves during the interval	ENCREM	type	R723CFEA	$\text{Sum}(\text{R723CFEA}) / \text{Interval}$
Average number of multi-system enclaves during the interval	ENCMS	type	R723CXEA	$\text{Sum}(\text{R723CXEA}) / \text{Interval}$
zAAP service per second	AAPSRV	type	R723CIFA Interval	$\text{Sum}(\text{R723CIFA}) / \text{Interval}$
zAAP on CP service per second	AAPCSRVS	type	R723CIFC Interval	$\text{Sum}(\text{R723CIFC}) / \text{Interval}$



Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
zAAP service time in seconds	IFASEC, AAPSEC	type	R723CIFA R723MADJ R723MCPU	$\text{Sum}((R723CIFA * R723MADJ) / (1600 * R723MCPU))$
zAAP service time in seconds (normalized)	IFANSEC, AAPNSEC	type	R723CIFA R723MADJ R723MCPU R723NFFI	$\text{Sum}((R723CIFA * R723MADJ) / (1600 * R723MCPU)) * R723NFFI / 256$
zAAP on CP service time in seconds	IFACPSEC, AAPCPSEC	type	R723CIFC R723MADJ R723MCPU	$\text{Sum}((R723CIFC * R723MADJ) / (1600 * R723MCPU))$
Percentage of zAAP time used	APPLIFA, APPLAAP	type	R723CIFA R723MADJ R723MCP R723MCFI Interval	$\text{Sum}((R723CIFA * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCFI / 1024)) * 100$
Percentage of general purpose processor time used by zAAP eligible transactions	APPLIFCP, APPLAPCP	type	R723CIFC R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723CIFC * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCF / 1024)) * 100$
zAAP Using %	IFAUSGP, AAPUSGP	period	R723IFAU R723CTSA	$R723IFAU / R723CTSA * 100$
zAAP on CP Using %	IFCUSGP, APCUSGP	period	R723IFCU R723CTSA	$R723IFCU / R723CTSA * 100$
zAAP Delay %	IFADLYP, AAPDLYP	period	R723IFAD R723CTSA	$R723IFAD / R723CTSA * 100$
zIIP service per second	IIPSRV	type	R723CSUP Interval	$\text{Sum}(R723CSUP) / \text{Interval}$
zIIP on CP service per second	IIPCPSRV	type	R723CSUC Interval	$\text{Sum}(R723CSUC) / \text{Interval}$
zIIP service time in seconds	IIPSEC	type	R723CSUP R723MADJ R723MCPU	$\text{Sum}((R723CSUP * R723MADJ) / (1600 * R723MCPU))$
zIIP service time in seconds (normalized)	IIPNSEC	type	R723CSUP R723MADJ R723MCPU R723NFFS	$\text{Sum}((R723CSUP * R723MADJ) / (1600 * R723MCPU)) * R723NFFS / 256$
zIIP on CP service time in seconds	IIPCPSEC	type	R723CSUC R723MADJ R723MCPU	$\text{Sum}((R723CSUC * R723MADJ) / (1600 * R723MCPU))$
Percentage of zIIP time used	APPLIIP	type	R723CSUP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723CSUP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCF / 1024)) * 100$
Percentage of general purpose processor time used by zIIP eligible transactions	APPLIPCP	type	R723CSUC R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723CSUC * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCF / 1024)) * 100$
zIIP Using %	IIPUSGP	period	R723SUPU R723CTSA	$R723SUPU / R723CTSA * 100$
zIIP on CP Using %	IPCUSGP	period	R723SUCU R723CTSA	$R723SUCU / R723CTSA * 100$
zIIP Delay %	IIPDLYP	period	R723SUPD R723CTSA	$R723SUPD / R723CTSA * 100$
Total percentage of zCBP processor time used by transactions	CBPTXAPL	type	R723TSUCBP R723MADJ R723MCPU Interval	$\text{Sum}((R723TSUCBP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * 100)$

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Total percentage of general purpose processor time used by transactions eligible to run on zCBP processors	CBCTXAPL	type	R723TSUCBPCP R723MADJ R723MCPU Interval	$\text{Sum}((R723TSUCBPCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * 100)$
Total service per second consumed by transactions, executed on zCBP processors	CBPTXSRV	type	R723TSUCBP Interval	$\text{Sum}(R723TSUCBP) / \text{Interval}$
Total service per second consumed by transactions, eligible to run on zCBP but executed on general purpose processors	CBCTXSRV	type	R723TSUCBPCP Interval	$\text{Sum}(R723TSUCBPCP) / \text{Interval}$
Total application execution time consumed by transactions in seconds, executed on zCBP	CBPTXSEC	type	R723TSUCBP R723MADJ R723MCPU	$\text{Sum}((R723TSUCBP * R723MADJ) / (1600 * R723MCPU))$
Total application execution time consumed by transactions in seconds, eligible to run on zCBP but executed on general purpose processors	CBCTXSEC	type	R723TSUCBPCP R723MADJ R723MCPU	$\text{Sum}((R723TSUCBPCP * R723MADJ) / (1600 * R723MCPU))$
zCBP service per second	CBPSRV	type	R723CCBP Interval	$\text{Sum}(R723CCBP) / \text{Interval}$
zCBP on CP service per second	CBPCPSRV	type	R723CCBPC Interval	$\text{Sum}(R723CCBPC) / \text{Interval}$
zCBP service time in seconds	CBPSEC	type	R723CCBP R723MADJ R723MCPU	$\text{Sum}((R723CCBP * R723MADJ) / (1600 * R723MCPU))$
zCBP service time in seconds (normalized)	CBPNSEC	type	R723CCBP R723MADJ R723MCPU R723NFFCBP	$\text{Sum}((R723CCBP * R723MADJ) / (1600 * R723MCPU)) * R723NFFCBP / 256$
zCBP on CP service time in seconds	CBPCPSEC	type	R723CCBPC R723MADJ R723MCPU	$\text{Sum}((R723CCBPC * R723MADJ) / (1600 * R723MCPU))$
Percentage of zCBP time used	APPLCBP	type	R723CCBP R723MADJ R723MCP R723MCFI Interval	$\text{Sum}((R723CCBP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCFI / 1024)) * 100$
Percentage of general purpose processor time used by zCBP eligible transactions	APPLBCBP	type	R723CCBPC R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723CCBPC * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCF / 1024)) * 100$
zCBP Using %	CBPUSGP	period	R723CBPU R723CTSA	$R723CBPU / R723CTSA * 100$
zCBP on CP Using %	CBCUSGP	period	R723CBPCU R723CTSA	$R723CBPCU / R723CTSA * 100$
zCBP Delay %	CBPDLYP	period	R723CBPD R723CTSA	$R723CBPD / R723CTSA * 100$
Percentage of general purpose processor time (including normalized zIIP, zAAP and zCBP time) consumed while dispatching priority of work with low importance was temporarily raised to help blocked workloads	PROMPER	type	R723TPDP R723MCF Interval	$\text{Sum}(R723TPDP) / (\text{Interval} * (R723MCF / 1024)) * 100$
CPU time (in seconds) consumed while dispatching priority of work with low importance was temporarily raised to help blocked workloads	PROMSEC	type	R723TPDP	$\text{Sum}(R723TPDP)$

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Percentage of general purpose processor time (including normalized zIIP, zAAP and zCBP time) consumed while dispatching priority was temporarily raised by enqueue management because the work unit held a resource that other work needed	EPROMPER	type	R723ECTC R723MCF Interval	$\text{Sum}(\text{R723ECTC}) / (\text{Interval} * (\text{R723MCF} / 1024)) * 100$
CPU time (in seconds) consumed while dispatching priority was temporarily raised by enqueue management because the work unit held a resource that other work needed	EPROMSEC	type	R723ECTC	$\text{Sum}(\text{R723ECTC})$
Percentage of general purpose processor time (including normalized zIIP, zAAP and zCBP time) consumed while dispatching priority was temporarily raised by chronic resource contention management because the work unit held a resource that other work needed	CPROMPER	type	R723CPDP R723MCF Interval	$\text{Sum}(\text{R723CPDP}) / (\text{Interval} * (\text{R723MCF} / 1024)) * 100$
CPU time (in seconds) consumed while dispatching priority was temporarily raised by chronic resource contention management because the work unit held a resource that other work needed	CPROMSEC	type	R723CPDP	$\text{Sum}(\text{R723CPDP})$
Percentage of general purpose processor time (including normalized zIIP, zAAP and zCBP time) consumed while dispatching priority was temporarily raised to shorten the lock hold time for a local suspend lock held by the work unit. Only valid in HiperDispatch mode.	LPROMPER	type	R723LPDP R723MCF Interval	$\text{Sum}(\text{R723LPDP}) / (\text{Interval} * (\text{R723MCF} / 1024)) * 100$
CPU time (in seconds) consumed while dispatching priority was temporarily raised to shorten the lock hold time for a local suspend lock held by the work unit. Only valid in HiperDispatch mode.	LPROMSEC	type	R723LPDP	$\text{Sum}(\text{R723LPDP})$
Percentage of general purpose processor time (including normalized zIIP, zAAP and zCBP time) consumed while dispatching priority for a work unit was temporarily raised by the z/OS supervisor to a higher dispatching priority than assigned by WLM.	SPROMPER	type	R723SPDP R723MCF Interval	$\text{Sum}(\text{R723SPDP}) / (\text{Interval} * (\text{R723MCF} / 1024)) * 100$
CPU time (in seconds) consumed while dispatching priority for a work unit was temporarily raised by the z/OS supervisor to a higher dispatching priority than assigned by WLM.	SPROMSEC	type	R723SPDP	$\text{Sum}(\text{R723SPDP})$
Total service per second, consumed by transactions, executed on general purpose processors	TCPSRV	type	R723TSUCP Interval	$\text{Sum}(\text{R723TSUCP}) / \text{Interval}$
Total application execution time, consumed by transactions in seconds, executed on general purpose processors	TCPSEC	type	R723TSUCP R723MADJ R723MCPU	$\text{Sum}((\text{R723TSUCP} * \text{R723MADJ}) / (1600 * \text{R723MCPU}))$
Total percentage of general purpose processor time used by transactions	TAPPLCP	type	R723TSUCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((\text{R723TSUCP} * \text{R723MADJ}) / (1600 * \text{R723MCPU})) / (\text{Interval} * (\text{R723MCF} / 1024)) * 100$
Total service per second consumed by transactions, executed on specialty processors	TSPSRV	type	R723TSUSP Interval	$\text{Sum}(\text{R723TSUSP}) / \text{Interval}$
Total application execution time, consumed by transactions in seconds, executed on specialty processors	TSPSEC	type	R723TSUSP R723MADJ R723MCPU	$\text{Sum}((\text{R723TSUSP} * \text{R723MADJ}) / (1600 * \text{R723MCPU}))$

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Total percentage of specialty processor time used by transactions	TAPPLSP	type	R723TSUSP R723MADJ R723MCPU R723MCFS Interval	$\text{Sum}((R723TSUSP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCFS / 1024)) * 100$
Total service per second, consumed by transactions, eligible to run on specialty processors but executed on general purpose processors	TOCPSRV	type	R723TSUOCP Interval	$\text{Sum}(R723TSUOCP) / \text{Interval}$
Total application execution time, consumed by transactions in seconds, eligible to run on specialty processors but executed on general purpose processors	TOCPSEC	type	R723TSUOCP R723MADJ R723MCPU	$\text{Sum}((R723TSUOCP * R723MADJ) / (1600 * R723MCPU))$
Total percentage of general purpose processor time used by transactions, eligible to run on specialty processors	TAPPLOCP	type	R723TSUOCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723TSUOCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCF / 1024)) * 100$
Service per second, consumed by transactions classified with reporting attribute MOBILE, executed on general purpose processors	TMCPSRV	type	R723MSUCP Interval	$\text{Sum}(R723MSUCP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute MOBILE in seconds, executed on general purpose processors	TMCPSEC	type	R723MSUCP R723MADJ R723MCPU	$\text{Sum}((R723MSUCP * R723MADJ) / (1600 * R723MCPU))$
Percentage of general purpose processors used by transactions classified with reporting attribute MOBILE	MAPPLCP	type	R723MSUCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723MSUCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCF / 1024)) * 100$
Service per second, consumed by transactions classified with reporting attribute MOBILE, executed on specialty processors	TMSPSRV	type	R723MSUSP Interval	$\text{Sum}(R723MSUSP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute MOBILE in seconds, executed on specialty processors	TMSPSEC	type	R723MSUSP R723MADJ R723MCPU	$\text{Sum}((R723MSUSP * R723MADJ) / (1600 * R723MCPU))$
Percentage of specialty processor time used by transactions classified with reporting attribute MOBILE	MAPPLSP	type	R723MSUSP R723MADJ R723MCPU R723MCFS Interval	$\text{Sum}((R723MSUSP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * (R723MCFS / 1024)) * 100$
Service per second, consumed by transactions classified with reporting attribute MOBILE, eligible to run on specialty processors but executed on general purpose processors	TMOCPSRV	type	R723MSUOCP Interval	$\text{Sum}(R723MSUOCP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute MOBILE in seconds, eligible to run on specialty processors but executed on general purpose processors	TMOCPSEC	type	R723MSUOCP R723MADJ R723MCPU	$\text{Sum}((R723MSUOCP * R723MADJ) / (1600 * R723MCPU))$
Percentage of general purpose processor time used by transactions classified with reporting attribute MOBILE, eligible to run on specialty processors	MAPPLOCP	type	R723MSUOCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723MSUOCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * R723MCF / 1024)) * 100$
Service per second, consumed by transactions classified with reporting attribute CATEGORYA, executed on general purpose processors	TACPSRV	type	R723ASUCP Interval	$\text{Sum}(R723ASUCP) / \text{Interval}$

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Application execution time, consumed by transactions classified with reporting attribute CATEGORYA in seconds, executed on general purpose processors	TACPSEC	type	R723ASUCP R723MADJ R723MCPU	$\text{Sum}((R723ASUCP * R723MADJ) / (1600 * R723MCPU))$
Percentage of general purpose processors used by transactions classified with reporting attribute CATEGORYA	AAPPLCP	type	R723ASUCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723ASUCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * R723MCF / 1024) * 100$
Service per second, consumed by transactions classified with reporting attribute CATEGORYA, executed on specialty processors	TASPSRV	type	R723ASUSP Interval	$\text{Sum}(R723ASUSP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute CATEGORYA in seconds, executed on specialty processors	TASPSEC	type	R723ASUSP R723MADJ R723MCPU	$\text{Sum}((R723ASUSP * R723MADJ) / (1600 * R723MCPU))$
Percentage of specialty processor time used by transactions classified with reporting attribute CATEGORYA	AAPPLSP	type	R723ASUSP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723ASUSP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * R723MCF / 1024) * 100$
Service per second, consumed by transactions classified with reporting attribute CATEGORYA, eligible to run on specialty processors but executed on general purpose processors	TAOCPSRV	type	R723ASUOCP Interval	$\text{Sum}(R723ASUOCP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute CATEGORYA in seconds, eligible to run on specialty processors but executed on general purpose processors	TAOCPSEC	type	R723ASUOCP R723MADJ R723MCPU	$\text{Sum}((R723ASUOCP * R723MADJ) / (1600 * R723MCPU))$
Percentage of general purpose processor time used by transactions classified with reporting attribute CATEGORYA eligible to run on specialty processors	AAPPLOC	type	R723ASUOCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723ASUOCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * R723MCF / 1024) * 100$
Service per second, consumed by transactions classified with reporting attribute CATEGORYB, executed on general purpose processors	TBCPSRV	type	R723BSUCP Interval	$\text{Sum}(R723BSUCP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute CATEGORYB in seconds, executed on general purpose processors	TBCPSEC	type	R723BSUCP R723MADJ R723MCPU	$\text{Sum}((R723BSUCP * R723MADJ) / (1600 * R723MCPU))$
Percentage of general purpose processors used by transactions classified with reporting attribute CATEGORYB	BAPPLCP	type	R723BSUCP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723BSUCP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * R723MCF / 1024) * 100$
Service per second, consumed by transactions classified with reporting attribute CATEGORYB, executed on specialty processors	TBSPSRV	type	R723BSUSP Interval	$\text{Sum}(R723BSUSP) / \text{Interval}$
Application execution time, consumed by transactions classified with reporting attribute CATEGORYB in seconds, executed on specialty processors	TBSPSEC	type	R723BSUSP R723MADJ R723MCPU	$\text{Sum}((R723BSUSP * R723MADJ) / (1600 * R723MCPU))$
Percentage of specialty processor time used by transactions classified with reporting attribute CATEGORYB	BAPPLSP	type	R723BSUSP R723MADJ R723MCPU R723MCF Interval	$\text{Sum}((R723BSUSP * R723MADJ) / (1600 * R723MCPU)) / (\text{Interval} * R723MCF / 1024) * 100$
Service per second, consumed by transactions classified with reporting attribute CATEGORYB, eligible to run on specialty processors but executed on general purpose processors	TBOCPSRV	type	R723BSUOCP Interval	$\text{Sum}(R723BSUOCP) / \text{Interval}$

Table 25. Workload Activity (Goal Mode) - Conditions Based on SMF Record Type 72-3 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Application execution time, consumed by transactions classified with reporting attribute CATEGORYB in seconds, eligible to run on specialty processors but executed on general purpose processors	TBOCPSEC	type	R723BSUOCP R723MADJ R723MCPU	$\text{Sum}((\text{R723BSUOCP} * \text{R723MADJ}) / (1600 * \text{R723MCPU}))$
Ended transactions	ENCTRTOT	type	R723EncTrxNum, Interval	$\text{Sum}(\text{R723EncTrxNum})$
Ended transactions per second	ENCTRRTE	type	R723EncTrxNum, Interval	$\text{Sum}(\text{R723EncTrxNum}) / \text{Interval}$
Transaction execution time (in milliseconds)	ENCTRTEX	type	R723EncTrxEt, R723EncTrxNum	$\text{Sum}(\text{R723EncTrxEt}) / \text{Sum}(\text{R723EncTrxNum})$
Average Enclave Transactions	ENCTRAVG	type	R723EncTrxEt, Interval	$\text{Sum}(\text{R723EncTrxEt}) / \text{Interval}$
Enclave Delete Calls With Transactions Reported	ENCTRDEL	type	R723ExctTrxCalls	$\text{Sum}(\text{R723ExctTrxCalls})$
Average Enclave Transactions Per Enclave	ENCTRENC	type	R723EncTrxNum, R723ExctTrxCalls	$\text{Sum}(\text{R723EncTrxNum}) / \text{Sum}(\text{R723ExctTrxCalls})$
Processor average power	WLMPAVGP	class	R723TSUCP, SMF70_CPUPower, SMF70_NumPowerS amples	$\text{Sum\_plex\_systems}((\text{R723TSUCP} / \text{Sum\_system\_sClasses}(\text{R723TSUCP})) * (\text{SMF70\_CPUPower} / \text{SMF70\_NumPowerSamples} / 1,000,000))$
Processor Total Energy	WLMPOTTE	class	R723TSUCP, SMF70_CPUPower, SMF70_NumPowerS amples, Interval	$\text{Sum\_plex\_systems}((\text{R723TSUCP} / \text{Sum\_system\_sClasses}(\text{R723TSUCP})) * (\text{SMF70\_CPUPower} / \text{SMF70\_NumPowerSamples} / 1,000,000)) * \text{Interval}$
Processor energy per minute	WLMPMINE	class	R723TSUCP, SMF70_CPUPower, SMF70_NumPowerS amples	$\text{Sum\_plex\_systems}((\text{R723TSUCP} / \text{Sum\_system\_sClasses}(\text{R723TSUCP})) * (\text{SMF70\_CPUPower} / \text{SMF70\_NumPowerSamples} / 1,000,000)) * 60$

## Channel Path Activity - SMF record type 73

One qualifier is possible:

### **cpid**

A two-digit hexadecimal number that identifies a channel path.

### **cptype**

Channel path type (as contained in SMF73ACR) enclosed in quotes.

For overview processing, one qualifier is required. If it is omitted for exception reporting, the threshold applies to all channel paths in the SMF record.

For most conditions, there exist two condition names. The second in the list has always the prefix CHG (instead of CH for the first one — to be used with the qualifier **cpid**) and has to be used with the qualifier **cptype**. This condition can be used for channels that are under control of Dynamic Channel Path Management (DCM). All channels of the specified type will be accumulated and then processed. Therefore, the formulas for the algorithm contains summary values instead of single-channel values, for example:

$(\text{SMF73TUT} * 100) / \text{SMF73PTI} * 8$       see CHTBSY(cpid)  
 $(\text{Sum}(\text{SMF73TUT}) * 100) / \text{Sum}(\text{SMF73PTI} * 8)$       see CHGTBSY(cptype)

Table 26. Channel Path Activity - Conditions Based on SMF Record Type 73				
Condition	Condition Name	Qualifier	Source	Algorithm (depending on channel type)
For processors earlier than z990, use the following condition if CPMF is not available or for CPMF compatibility mode:				

Table 26. Channel Path Activity - Conditions Based on SMF Record Type 73 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm (depending on channel type)
Percent channel busy	CHPBSY CHGPBSY	cpid cptype	SMF73BSY SMF73SMP	(BSY*100)/SMP <b>Note:</b> In case of monitoring z990 hardware, both fields are zero.
Use the following conditions for CPMF extended mode:				
Channel total busy %	CHTBSY CHGTBSY	cpid cptype	SMF73TUT SMF73PTI or SMF73TUC SMF73MCU SMF73PTI	(TUT*100) / PTI*8 or (TUC*100) / (MCU*Int/10 <sup>6</sup> ) Int = PTI*1024
Channel partition busy %	CHLBSY CHGLBSY	cpid cptype	SMF73PUT SMF73PTI or SMF73PUC SMF73MCU SMF73PTI	(PUT*100) / PTI*8 or (PUC*100) / (MCU*Int/10 <sup>6</sup> )
Channel bus total %	CHBTOT CHGBTOT	cpid cptype	SMF73TBC SMF73MBC SMF73PTI	(TBC*100) / (MBC*Int/10 <sup>6</sup> )
Channel total read rate (MB/SEC)	CHTREAD CHGTREAD	cpid cptype	SMF73TRU SMF73US SMF73PTI	(TRU*US) / Int
Channel partition read rate (MB/SEC)	CHLREAD CHGLREAD	cpid cptype	SMF73PRU SMF73US SMF73PTI	(PRU*US) / Int
Channel total write rate (MB/SEC)	CHTWRITE CHGTWRIT	cpid cptype	SMF73TWU SMF73US SMF73PTI	(TWU*US) / Int
Channel partition write rate (MB/SEC)	CHLWRITE CHGLWRIT	cpid cptype	SMF73PWU SMF73US SMF73PTI	(PWU*US) / Int
Channel partition write rate for HiperSockets (B/SEC)	CHLWRITE	cpid	SMF73PDS, SMF73PDU, SMF73PTI	PDS*PDU / (Int/10 <sup>6</sup> )
Channel total write rate for HiperSockets (B/SEC)	CHTWRITE	cpid	SMF73TDS, SMF73TDU, SMF73PTI	TDS*TDU / (Int/10 <sup>6</sup> )
Number of native FICON operations per second.	CHFRATE	cpid	SMF73EOC	EOC / Int
Average number of native FICON operations that are concurrently active.	CHFACTV	cpid	SMF73EOS SMF73EOC	EOS / EOC
Number of deferred native FICON operations per second that could not be initiated by the channel due to the lack of available resources.	CHFDFER	cpid	SMF73EOD	EOD / Int
Number of zHPF (High Performance FICON) operations per second.	CHFXRATE	cpid	SMF73ETC	ETC / Int
Average number of zHPF operations that are concurrently active.	CHFXACTV	cpid	SMF73ETS SMF73ETC	ETS / ETC
Number of deferred zHPF operations per second that could not be initiated by the channel due to the lack of available resources.	CHFXDFER	cpid	SMF73ETD	ETD / Int
Channel partition message sent rate	CHLMSGST	cpid	SMF73PMS, SMF73PUM, SMF73PTI	PMS*PUM / (Int/10 <sup>6</sup> )
Channel total message sent rate	CHTMSGST	cpid	SMF73TMS, SMF73TUM, SMF73PTI	TMS*TUM / (Int/10 <sup>6</sup> )

Table 26. Channel Path Activity - Conditions Based on SMF Record Type 73 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm (depending on channel type)
Average Channel partition message size (in bytes)	CHLMSGSZ	cpid	SMF73PDS, SMF73PDU, SMF73PMS, SMF73PUM	PDS*PDU/ PMS*PUM
Average Channel Total message size (in bytes)	CHTMSGSZ	cpid	SMF73TDS, SMF73TDU, SMF73TMS, SMF73TUM	TDS*TDU/ TMS*TUM
Channel partition message failed rate	CHLMSGF	cpid	SMF73PUS, SMF73PTI	PUS/(Int/10 <sup>6</sup> )
Channel partition receive failed rate	CHLRECF	cpid	SMF73PUB, SMF73PTI	PUB/(Int/10 <sup>6</sup> )
Channel total receive failed rate	CHTRECF	cpid	SMF73TUB, SMF73PTI	TUB/(Int/10 <sup>6</sup> )

## Device Activity - SMF record type 74-1

One qualifier is required, otherwise a syntax error occurs and RMF will not process the condition.

### devnmbr

A hexadecimal device number [s]aaaa where s represents an optional 1-digit subchannel set ID. Leading zeros can be omitted. If the subchannel set ID is omitted, you will receive a value for the first matching 4-digit device number found in the SMF data (regardless of the subchannel set ID to which the device is physically configured). Examples: (012F) or (11800)

### volser

A one- to six-character volume serial number enclosed in quotes. Example: ('012345')

### stg grp

A one- to eight-character storage group name in parentheses, preceded by the keyword SG. Example: (SG(COMMON01))

### class

Any of the six valid device classes for Monitor I device activity measurements.

For OVW statements, only the qualifiers devnmbr and volser are valid. If you have selected a shared device in the sysplex, you will receive a value which reflects the sysplex view (not possible for DNOTRDY, DHPAVNM, DHPAVLSS, DVCAP, DARSR, DARSW, DRTSR, DRTSW, DTRSR and DTRSW).

All times reported are in milliseconds, unless otherwise noted.

Table 27. Device Activity - Conditions Based on SMF Record Type 74-1				
Condition	Condition Name	Qualifier	Source	Algorithm
Percent not ready (Asynchronous I/O)	DNOTRDY	devnmbr, volser, stg grp, or class	SMF74NRD SMF74SAM	(NRD*100)/SAM (no sysplex view)
Percent reserved (Asynchronous I/O)	DR	devnmbr, volser, stg grp, or class	SMF74RSV SMF74SAM	(RSV*100)/SAM
Percent mount pending (Asynchronous I/O)	DMTPEND	devnmbr, volser, stg grp, or class	SMF74MTP SMF74SAM	(MTP*100)/SAM
Percent device utilization (Asynchronous I/O)	DVUTL	devnmbr, volser, stg grp, or class	SMF74CNN SMF74DIS SMF74INT SMF74UTL SMF74SAM	((((CNN+DIS)/INT) + (UTL/SAM)) * 100
Device activity rate (Asynchronous I/O)	DART	devnmbr, volser, stg grp, or class	SMF74SSC SMF74INT	SSC/INT in seconds
Device read activity rate (Synchronous I/O)	DARSR	devnmbr, volser, stg grp, or class	SMF74SQR SMF74INT	SQR/INT in seconds



Table 27. Device Activity - Conditions Based on SMF Record Type 74-1 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Device write activity rate (Synchronous I/O)	DARSW	devnmbr, volser, stg grp, or class	SMF74SQW SMF74INT	SQW/INT in seconds
Average connect time (Asynchronous I/O)	DCTAVG	devnmbr, volser, stg grp, or class	SMF74CNN SMF74MEC	CNN/MEC
Average disconnect time (Asynchronous I/O)	DDTAVG	devnmbr, volser, stg grp, or class	SMF74DIS SMF74MEC	DIS/MEC
Average pending time (Asynchronous I/O)	DPTAVG	devnmbr, volser, stg grp, or class	SMF74PEN SMF74MEC	PEN/MEC
Average IOS queue time (Asynchronous I/O)	DQTAVG	devnmbr, volser, stg grp, or class	SMF74IOS SMF74SSC	IOS/SSC
Average response time (Asynchronous I/O)	DRTAVG	devnmbr, volser, stg grp, or class	SMF74ATV SMF74MEC SMF74SSC SMF74INT SMF74QUE SMF74SAM	(ATV/MEC)+(QUE/SAM) /(SSC/INT)
Average response time per successful read request (Synchronous I/O)	DRTSR	devnmbr, volser, stg grp, or class	SMF74SPR SMF74SQR	SPR / (SQR*2000)
Average response time per successful write request (Synchronous I/O)	DRTSW	devnmbr, volser, stg grp, or class	SMF74SPW SMF74SQW	SPW / (SQW*2000)
Read transfer rate in megabytes per second (Synchronous I/O)	DTRSR	devnmbr, volser, stg grp, or class	SMF74SBR SMF74INT	SBR/(INT in seconds*1000)
Write transfer rate in megabytes per second (Synchronous I/O)	DTRSW	devnmbr, volser, stg grp, or class	SMF74SBW SMF74INT	SBW/(INT in seconds*1000)
Average device busy delay time (Asynchronous I/O)	DBDL	devnmbr, volser, stg grp, or class	SMF74DVB SMF74MEC	DVB/MEC
Average command response time (Asynchronous I/O)	CMRDL	devnmbr	SMF74CMR SMF74MEC	CMR/MEC
Average number of HyperPAV devices (Asynchronous I/O)	DHPAVNM	devnmbr, volser, stg grp, or class	SMF74NUX SMF74PSM	NUX/PSM
Number of configured HyperPAV aliases for the LSS of the device (Asynchronous I/O)	DHPAVLSS	devnmbr, volser, stg grp, or class	SMF74HPC	HPC
DASD volume capacity (in cylinders) (Asynchronous I/O)	DVCAP	devnmbr, volser	SMF74CAP	CAP
Average interrupt delay time (Asynchronous I/O)	INTDL	devnmbr, volser, stg grp, or class	SMF74IDT SMF74MEC	IDT/MEC

## Coupling Facility Activity - SMF record type 74-4

Due to the structure of the Coupling Facility Activity report, the scope of the results of overview processing is different and is indicated in column **Scope**:

**S**

Overview column created only for each single system, not for sysplex

**X**

Overview column created only for sysplex, not for each single system

**B**

Overview column created for single systems as well as sysplex

There is no exception reporting for Coupling Facility records.

One qualifier is possible:

**struct**

Mandatory - Coupling Facility structure name.

**cfname**

Mandatory - Coupling Facility name.

Table 28. Coupling Facility Activity - Conditions Based on SMF Record Type 74-4

Condition	Condition Name	Qualifier	Source	Algorithm	Scope
Average service time of SYNC operations	SYNCST	struct	R744SSTM R744SSRC	$\text{Sum}(\text{R744SSTM}) / \text{Sum}(\text{R744SSRC})$	B
SYNC operation rate	SYNCRT	struct	R744SSRC Interval	$\text{Sum}(\text{R744SSRC}) / \text{Interval}$	B
Average service time of ASYNC operations	ASYNCSST	struct	R744SATM R744SARC	$\text{Sum}(\text{R744SATM}) / \text{Sum}(\text{R744SARC})$	B
Ended ASYNC operation rate	ASYNCRS	struct	R744SARC Interval	$\text{Sum}(\text{R744SARC}) / \text{Interval}$	B
Percentage of changed operations	CHNGDP	struct	R744SSRC R744SARC R744SSTA	$\text{Sum}(\text{R744SSTA}) / (\text{Sum}(\text{R744SSRC}) + \text{Sum}(\text{R744SARC})) * 100$	B
Changed operation rate	CHNGDRT	struct	R744SSTA Interval	$\text{Sum}(\text{R744SSTA}) / \text{Interval}$	B
Path busy rate	PBSY	cfname	R744FPBC Interval	$\text{Sum}(\text{R744FPBC}) / \text{Interval}$	S
Percent requests delayed due to subchannel contention	DREQP	cfname	R744SSRC R744SARC R744SSTA R744FSCC R744SQRC	$(\text{Sum}(\text{R744FSCC}) + \text{Sum}(\text{R744SQRC})) / (\text{Sum}(\text{R744SSRC}) + \text{R744SARC} + \text{R744SSTA}) * 100$	S
CF processor utilization	CFUTIL	cfname	R744PBSY R744PWAI	$\text{Sum}(\text{R744PBSY}) / (\text{Sum}(\text{R744PBSY}) + \text{Sum}(\text{R744PWAI})) * 100$ Summation over all processors ← unweighted average	X
Directory reclaims	DIRRCLM	struct	R744CDER	$\text{Sum}(\text{R744CDER})$	X
List/directory entry current to total ratio	LDECTR	struct	R744SLEL R744SLEM R744SDEC R744CDEC	$\text{R744SLEM} / \text{R744SLEL}$ (for List/Lock structure) $\text{R744CDEC} / \text{R744SDEC}$ (for Cache structure)	X
Data elements current to total ratio	DECTR	struct	R744SMAE R744SCUE R744SDEL R744CDAC	$\text{R744SCUE} / \text{R744SMAE}$ (for List/Lock structure) $\text{R744CDAC} / \text{R744SDEL}$ (for Cache structure)	X
Lock entries current to total ratio	LECTR	struct	R744SLTL R744SLTM	$(\text{R744SLTM} / \text{R744SLTL})$	X
Cache read request rate	CREADRT	struct	R744CRHC Interval	$\text{R744CRHC} / \text{Interval}$	X
Cache write request rate	CWRITER	struct	R744CWH0 R744CWH1 Interval	$(\text{R744CWH0} + \text{R744CWH1}) / \text{Interval}$	X
Cache castout rate	CCOUTRT	struct	R744CCOC Interval	$\text{R744CCOC} / \text{Interval}$	X
Cache cross invalidation rate	CXIRT	struct	R744CXDR R744CXFW R744CXNI R744CXRL R744CXCI Interval	$(\text{R744CXDR} + \text{R744CXFW} + \text{R744CXNI} + \text{R744CXRL} + \text{R744CXCI}) / \text{Interval}$	X
Total requests to lock structure or serialized list structure	LCKREQ	struct	R744STRC	$\text{Sum}(\text{R744STRC})$	B
Contention on lock structure	LCKCONT	struct	R744SCN	$\text{Sum}(\text{R744SCN})$	B
False contention on lock structure	LCKFCNT	struct	R744SFCN	$\text{Sum}(\text{R744SFCN})$	B
CF utilization percentage	STUTILP	struct	R744SETM R744PBSY	$\text{R744SETM} * 100 / \text{Sum}(\text{R744PBSY})$	X
Subchannel busy percentage	SUBCHBP	cfname	R744SSTM R744SATM R744FSCU	$(\text{SUM}(\text{R744SSTM}) + \text{SUM}(\text{R744SATM})) * 100 / \text{Interval} * \text{R744FSCU}$	S

Table 28. Coupling Facility Activity - Conditions Based on SMF Record Type 74-4 (continued)					
Condition	Condition Name	Qualifier	Source	Algorithm	Scope
Percentage of storage class memory in use	SCMIUP	struct	R744MIUS R744MSMA	$R744MIUS * 100 / R744MSMA$	X
Percentage of augmented space in use	AUGMIUP	struct	R744MIUA R744MEMA	$R744MIUA * 100 / R744MEMA$	X
SCM list entry current to total ratio	SCMLCTR	struct	R744MENL R744MEML	$R744MENL / R744MEML$	X
SCM list element current to total ratio	SCMLECTR	struct	R744MENE R744MEME	$R744MENE / R744MEME$	X
Average service time per SCM read operation	SCMRST	struct	R744MRST R744MRFC R744MRPC	$R744MRST / (R744MRFC + R744MRPC)$	X
Average service time per SCM write operation	SCMWST	struct	R744MWST R744MSWC	$R744MWST / R744MSWC$	X
SCM auxiliary enabled commands to total request ratio	SCMAUXR	struct	R744MAEC R744SSRC R744SARC	$R744MAEC / \text{Sum}(R744SSRC + R744SARC)$	X
SCM delayed faults to total request ratio	SCMDFR	struct	R744SOSA R744SSRC R744SARC	$\text{Sum}(R744SOSA) / \text{Sum}(R744SSRC + R744SARC)$	X

## Cache Activity - SMF record type 74-5

The following qualifiers are possible:

### ssid

SSID number

### devn

A hexadecimal device number [s]aaaa where s represents an optional 1-digit subchannel set ID. Leading zeros can be omitted. If the subchannel set ID is omitted, you will receive a value for the first matching 4-digit device number found in the SMF data (regardless of the subchannel set ID to which the device is physically configured).

### rrid

RAID rank identifier

To define a subsystem-related exception, you specify SSID(ssid)

To define a device-related exception, you specify SSID(ssid),DEVN(devn)

To define an exception for RAID rank data, you specify SSID(ssid),RRID(rrid)

For exception processing only:

The conditions CASSC, CADSC, and CASSNVS can be used only with the operator EQ, not with LE or GE.

Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5					
Condition	Condition Name	Qualifier	Source	Algorithm	
<b>Subsystem Status: Device Status:</b> CACHING	CASSC CADSC	SSID(ssid) DEVN(devn)	R745SOS R745DSDV	active = R745SOS all 3 bits zero active = R745DSDV, both bits zero	
<b>Subsystem Status:</b> NON-VOLATILE STORAGE	CASSNVS	SSID(ssid)	R745SVSS	active = Bit 0 to 4 zero	
<b>Subsystem Overview: Device Activity:</b> TOTAL I/O	CASTOT CADTOT	SSID(ssid) DEVN(devn)	R745DRCR R745DRSR R745DRNR R745DWRC R745DWSR R745DWNR R745DICL R745DBCR	Sum of these counts	

Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
<b>Subsystem Overview: Device Activity:</b> CACHE I/O	CASCTOT CADCTOT	SSID(ssid) DEVN(devn)	R745DRCR R745DRSR R745DRNR R745DWRC R745DWSR R745DWNR	Sum of these counts
<b>Subsystem Overview:</b> CACHE OFFLINE	CASCOFF	SSID(ssid)	R745DRCR R745DRSR R745DRNR R745DWRC R745DWSR R745DWNR R745DIDL R745DBCR	Sum of these counts
<b>Subsystem Overview: Device Activity:</b> TOTAL H/R	CASHRT CADHRT	SSID(ssid) DEVN(devn)	HITS = R745DCRH + R745DRSH + R745DNRH + R745DWCH + R745DWSH + R745DWNH TOTAL = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR + R745DIDL + R745DBCR	HITS / TOTAL
<b>Subsystem Overview: Device Activity:</b> CACHE H/R	CASHR CADHR	SSID(ssid) DEVN(devn)	HITS = R745DCRH + R745DRSH + R745DNRH + R745DWCH + R745DWSH + R745DWNH CACHE I/O = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR	HITS / CACHE I/O
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS RATE NORMAL	CASRN CADRN	SSID(ssid) DEVN(devn)	R745DRCR R745CINT	R745DRCR / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS RATE SEQUENTIAL	CASRS CADRS	SSID(ssid) DEVN(devn)	R745DRSR R745CINT	R745DRSR / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS RATE CFW DATA	CASRC CADRC	SSID(ssid) DEVN(devn)	R745DRNR R745CINT	R745DRNR / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS RATE TOTAL	CASRT CADRT	SSID(ssid) DEVN(devn)	R745CINT TOTAL = R745DRCR + R745DRSR + R745DRNR	TOTAL / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS HITS RATE NORMAL	CASRHN CADRHN	SSID(ssid) DEVN(devn)	R745DCRH R745CINT	R745DCRH / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS HITS RATE SEQUENTIAL	CASRHS CADRHS	SSID(ssid) DEVN(devn)	R745DRSH R745CINT	R745DRSH / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS HITS RATE CFW DATA	CASRHC CADRHC	SSID(ssid) DEVN(devn)	R745DNRH R745CINT	R745DNRH / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS HITS RATE TOTAL	CASRHT CADRHT	SSID(ssid) DEVN(devn)	R745CINT TOTAL = R745DCRH + R745DRSH + R745DNRH	TOTAL / R745CINT
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS H/R NORMAL	CASHRN CADHRN	SSID(ssid) DEVN(devn)	R745DCRH R745DRCR	R745DCRH / R745DRCR

Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS H/R SEQUENTIAL	CASRHRS CADRHR S	SSID(ssid) DEVN(devn)	R745DRSH R745DRSR	R745DRSH / R745DRSR
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS H/R CFW DATA	CASRHRC CADRHRC	SSID(ssid) DEVN(devn)	R745DNRH R745DRNR	R745DNRH / R745DRNR
<b>Subsystem Overview: Device Activity:</b> READ I/O REQUESTS H/R TOTAL	CASRHRT CADRHRT	SSID(ssid) DEVN(devn)	HITS = R745DCRH + R745DRSH + R745DNRH TOTAL = R745DRCR + R745DRSR + R745DRNR	HITS / TOTAL
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS RATE NORMAL	CASWN CADWN	SSID(ssid) DEVN(devn)	R745DWRC R745CINT	R745DWRC / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS RATE SEQUENTIAL	CASWS CADWS	SSID(ssid) DEVN(devn)	R745DWSR R745CINT	R745DWSR / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS RATE CFW DATA	CASWC CADWC	SSID(ssid) DEVN(devn)	R745DWNR R745CINT	R745DWNR / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS RATE TOTAL	CASWT CADWT	SSID(ssid) DEVN(devn)	R745CINT TOTAL = R745DWRC + R745DWSR + R745DWNR	TOTAL / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS FAST WRITE RATE NORMAL	CASWFN CADWFN	SSID(ssid) DEVN(devn)	R745DFWC R745CINT	R745DFWC / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS FAST WRITE RATE SEQUENTIAL	CASWFS CADWFS	SSID(ssid) DEVN(devn)	R745DFWS R745CINT	R745DFWS / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS FAST WRITE RATE CFW DATA	CASWFC CADWFC	SSID(ssid) DEVN(devn)	R745DWNR R745CINT	R745DWNR / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS FAST WRITE RATE TOTAL	CASWFT CADWFT	SSID(ssid) DEVN(devn)	R745CINT TOTAL = R745DFWC + R745DFWS + R745DWNR	TOTAL / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS HITS RATE NORMAL	CASWHN CADWHN	SSID(ssid) DEVN(devn)	R745DWCH R745CINT	R745DWCH / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS HITS RATE SEQUENTIAL	CASWHS CADWHS	SSID(ssid) DEVN(devn)	R745DWSH R745CINT	R745DWSH / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS HITS RATE CFW DATA	CASWHC CADWHC	SSID(ssid) DEVN(devn)	R745DWNH R745CINT	R745DWNH / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS HITS RATE TOTAL	CASWHT CADWHT	SSID(ssid) DEVN(devn)	R745CINT TOTAL = R745DWCH + R745DWSH + R745DWNH	TOTAL / R745CINT
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS H/R NORMAL	CASWHRN CADWHRN	SSID(ssid) DEVN(devn)	R745DWCH R745DWRC	R745DWCH / R745DWRC
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS H/R SEQUENTIAL	CASWHRS CADWHRS	SSID(ssid) DEVN(devn)	R745DWSH R745DWSR	R745DWSH / R745DWSR
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS H/R CFW DATA	CASWHRC CADWHRC	SSID(ssid) DEVN(devn)	R745DWNH R745DWNR	R745DWNH / R745DWNR

Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
<b>Subsystem Overview: Device Activity:</b> WRITE I/O REQUESTS H/R TOTAL	CASWHRT CADWHRT	SSID(ssid) DEVN(devn)	HITS = R745DWCH + R745DWSH + R745DWNH TOTAL = R745DWRC + R745DWSR + R745DWNR	HITS / TOTAL
<b>Subsystem Overview: Device Activity: %</b> READ NORMAL	CASRWN CADRWN	SSID(ssid) DEVN(devn)	R745DRCR R745DWRC	$R745DRCR * 100 / (R745DRCR + R745DWRC)$
<b>Subsystem Overview: Device Activity: %</b> READ SEQUENTIAL	CASRWS CADRWS	SSID(ssid) DEVN(devn)	R745DRSR R745DWSR	$R745DRSR * 100 / (R745DRSR + R745DWSR)$
<b>Subsystem Overview: Device Activity: %</b> READ CFW DATA	CASRWC CADRWC	SSID(ssid) DEVN(devn)	R745DRNR R745DWNR	$R745DRNR * 100 / (R745DRNR + R745DWNR)$
<b>Subsystem Overview: Device Activity: %</b> READ TOTAL	CASRWT CADRWT	SSID(ssid) DEVN(devn)	TOTAL_READ = R745DRCR + R745DRSR + R745DRNR TOTAL_WRITE = R745DWRC + R745DWSR + R745DWNR	$TOTAL\_READ * 100 / (TOTAL\_READ + TOTAL\_WRITE)$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES READ RATE NORMAL	CASMRN CADMRN	SSID(ssid) DEVN(devn)	R745DRCR R745DCRH R745CINT	$(R745DRCR - R745DCRH) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES READ RATE SEQUENTIAL	CASMRS CADMRS	SSID(ssid) DEVN(devn)	R745DRSR R745DRSH R745CINT	$(R745DRSR - R745DRSH) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES READ RATE CFW DATA	CASMRC CADMRC	SSID(ssid) DEVN(devn)	R745DRNR R745DNRH R745CINT	$(R745DRNR - R745DNRH) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES WRITE RATE NORMAL	CASMWN CADMWN	SSID(ssid) DEVN(devn)	R745DWRC R745DWCH R745CINT	$(R745DWRC - R745DWCH) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES WRITE RATE SEQUENTIAL	CASMWS CADMWS	SSID(ssid) DEVN(devn)	R745DWSR R745DWSH R745CINT	$(R745DWSR - R745DWSH) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES WRITE RATE CFW DATA	CASMWC CADMWC	SSID(ssid) DEVN(devn)	R745DWNR R745DWNH R745CINT	$(R745DWNR - R745DWNH) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES TRACKS RATE NORMAL	CASMTN CADMTN	SSID(ssid) DEVN(devn)	R745DNTD R745CINT	$R745DNTD / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES TRACKS RATE SEQUENTIAL	CASMTS CADMTS	SSID(ssid) DEVN(devn)	R745DTC R745CINT	$R745DTC / R745CINT$
<b>Subsystem Overview: Device Activity:</b> CACHE MISSES RATE TOTAL	CASMT CADMT	SSID(ssid) DEVN(devn)	R745CINT TOTAL = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR HITS = R745DCRH + R745DRSH + R745DNRH + R745DWCH + R745DWSH + R745DWNH	$(TOTAL - HITS) / R745CINT$
<b>Subsystem Overview: Device Activity:</b> MISC (Miscellaneous) DASD Fast Write operations delayed due to NVS storage constraints rate	CASDFWB CADDFWB	SSID(ssid) DEVN(devn)	R745DFWB R745CINT	$R745DFWB / R745CINT$
<b>Subsystem Overview: Device Activity:</b> MISC (Miscellaneous) Operations delayed due to cache space constraints rate	CASCFWB CADCFWB	SSID(ssid) DEVN(devn)	R745DFWR R745CINT	$R745DFWR / R745CINT$

Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
<b>Subsystem Overview: Device Activity:</b> MISC (Miscellaneous) DFW INHIBIT RATE	CASDFWI CADDFWI	SSID(ssid) DEVN(devn)	R745CINT TOTAL_ WRITES = R745DWRC + R745DWSR + R745DWNR FAST_ WRITES = R745DFWC + R745DFWS + R745DWNR	(TOTAL_WRITES - FAST_WRITES) / R745CINT
<b>Subsystem Overview: Device Activity:</b> MISC (Miscellaneous) ASYNC(TRKS) RATE	CASASYNC CADASYNC	SSID(ssid) DEVN(devn)	R745DCTD R745CINT	R745DCTD / R745CINT
<b>Subsystem Overview: Device Activity:</b> NON CACHE I/O ICL RATE	CASNCICL CADNCICL	SSID(ssid) DEVN(devn)	R745DICL R745CINT	R745DICL / R745CINT
<b>Subsystem Overview: Device Activity:</b> NON CACHE I/O BYPASS RATE	CASNCB CADNCB	SSID(ssid) DEVN(devn)	R745DBCR R745CINT	R745DBCR / R745CINT
<b>Subsystem Overview: Device Activity:</b> NON CACHE I/O TOTAL RATE	CASNCT CADNCT	SSID(ssid) DEVN(devn)	R745DICL R745DBCR R745CINT	(R745DICL + R745DBCR) / R745CINT
<b>Subsystem Overview: Device Activity:</b> Synch I/O Activity - Read Requests per Second	CASSRR CADSRR	SSID(ssid) DEVN(devn)	R7451SRR R745CINT	R7451SRR / R745CINT
<b>Subsystem Overview: Device Activity:</b> Synch I/O Activity - Read Hit Rate	CASSRH CADSRH	SSID(ssid) DEVN(devn)	R7451SRH R7451SRR	R7451SRH / R7451SRR
<b>Subsystem Overview: Device Activity:</b> Synch I/O Activity - Write Requests per Second	CASSWR CADSWR	SSID(ssid) DEVN(devn)	R7451SWR R745CINT	R7451SWR / R745CINT
<b>Subsystem Overview: Device Activity:</b> Synch I/O Activity - Write Hit Rate	CASSWH CADSWH	SSID(ssid) DEVN(devn)	R7451SWH R7451SWR	R7451SWH / R7451SWR
<b>Subsystem Overview: Device Activity:</b> Host Adapter Activity - Average number of bytes per read request (normal+sequential+CFW)	CASBRR CADBRR	SSID(ssid) DEVN(devn)	R7451CT1 R745DRCR R745DRSR R745DRNR	Sum(R7451CT1) / Sum(R745DRCR + R745DRSR + R745DRNR)
<b>Subsystem Overview: Device Activity:</b> Host Adapter Activity - Average number of bytes read per second	CASBRS CADBRS	SSID(ssid) DEVN(devn)	R7451CT1 R745CINT	Sum(R7451CT1) / R745CINT
<b>Subsystem Overview: Device Activity:</b> Host Adapter Activity - Average number of bytes per write request (normal+sequential+CFW)	CASBWR CADBWR	SSID(ssid) DEVN(devn)	R7451CT2 R745DRCR R745DRSR R745DRNR	Sum(R7451CT2) / Sum(R745DRCR + R745DRSR + R745DRNR)
<b>Subsystem Overview: Device Activity:</b> Host Adapter Activity - Average number of bytes written per second	CASBWS CADBWS	SSID(ssid) DEVN(devn)	R7451CT2 R745CINT	Sum(R7451CT2) / R745CINT
<b>Subsystem Overview: Device Activity:</b> Disk Activity - Response time in milliseconds per read request	CASDRRT CADDRRT	SSID(ssid) DEVN(devn)	R7452PRT R7452PRO	Sum(R7452PRT) / Sum(R7452PRO)
<b>Subsystem Overview: Device Activity:</b> Disk Activity - Average number of bytes per read request	CASDRBR CADDRBR	SSID(ssid) DEVN(devn)	R7452PBR R7452PRO	Sum(R7452PBR) / Sum(R7452PRO)
<b>Subsystem Overview: Device Activity:</b> Disk Activity - Average number of bytes read per second	CASDRBS CADDRBS	SSID(ssid) DEVN(devn)	R7452PBR R745CINT	Sum(R7452PBR) / R745CINT
<b>Subsystem Overview: Device Activity:</b> Disk Activity - Response time in milliseconds per write request	CASDWRT CADDWRT	SSID(ssid) DEVN(devn)	R7452PWT R7452PWO	Sum(R7452PWT) / Sum(R7452PWO)
<b>Subsystem Overview: Device Activity:</b> Disk Activity - Average number of bytes per write request	CASDWBR CADDWBR	SSID(ssid) DEVN(devn)	R7452PBW R7452PWO	Sum(R7452PBW) / Sum(R7452PWO)

Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5 (continued)

Condition	Condition Name	Qualifier	Source	Algorithm
<b>Subsystem Overview: Device Activity:</b> Disk Activity - Average number of bytes written per second	CASDWBS CADDWBS	SSID(ssid) DEVN(devn)	R7452PBW R745CINT	$\text{Sum}(\text{R7452PBW}) / \text{R745CINT}$
<b>Subsystem Overview: Device Activity:</b> CFW % of all requests	CASCFWP CADCFWP	SSID(ssid) DEVN(devn)	R745DWNR R745DRNR R745DRCR R745DRSR R745DRNR R745DWRC R745DWSR R745DWNR	$\text{Sum}(\text{R745DWNR} + \text{R745DRNR}) * 100 /$ $\text{Sum}(\text{R745DRCR} + \text{R745DRSR} + \text{R745DRNR}$ $+ \text{R745DWRC} + \text{R745DWSR} + \text{R745DWNR})$
<b>Device Overview *CACHE:</b> Sequential Stage Rate	CASCSTGS	SSID(ssid)	R745DWSR R745DWSH R745DRSR R745DRSH R745DWSR R745CINT	$\text{Sum}((\text{R745DWSR} - \text{R745DWSH}) +$ $(\text{R745DRSR} - \text{R745DRSH}) - \text{R745DWSR} +$ $\text{R745DFWS}) / \text{R745CINT}$
<b>Device Overview:</b> I/O RATE	CADT	DEVN(devn)	R745CINT TOTAL = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR + R745DICL + R745DBCR	TOTAL / R745CINT
<b>Device Overview:</b> DASD I/O RATE STAGE	CADSTG	DEVN(devn)	R745CINT TOTAL = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR HITS = R745DCRH + R745DRSH + R745DNRH + R745DWCH + R745DWSH + R745DWNH DFW_INHIBIT = R745DWRC + R745DWSR + R745DWNR - R745DFWC - R745DFWS - R745DWNR CFW_BYPASS = R745DFWR DFW_BYPASS = R745DFWB	$(\text{TOTAL} - \text{HITS} - \text{DFW\_INHIBIT} -$ $\text{CFW\_BYPASS} - \text{DFW\_BYPASS}) / \text{R745CINT}$
<b>Device Activity:</b> Sequential Stage Rate	CADSTGS	SSID(ssid) DEVN(devn)	R745DWSR R745DWSH R745DRSR R745DRSH R745DWSR R745CINT	$\text{Sum}((\text{R745DWSR} - \text{R745DWSH}) +$ $(\text{R745DRSR} - \text{R745DRSH}) - \text{R745DWSR} +$ $\text{R745DFWS}) / \text{R745CINT}$
RAID rank read request rate	CARRRT	SSID(ssid) RRID(rrid)	R7451RRQ R745CINT	$\text{R7451RRQ} / \text{R745CINT}$
Average number of megabytes read with an I/O request	CARRMB	SSID(ssid) RRID(rrid)	R7451SR R7451HSS R7451RRQ	$(\text{R7451SR} * \text{R7451HSS}) / \text{R7451RRQ}$
Average number of megabytes read per second	CARRMBS	SSID(ssid) RRID(rrid)	R7451SR R7451HSS R745CINT	$(\text{R7451SR} * \text{R7451HSS}) / \text{R745CINT}$
Average response time of a read request	CARRRTIM	SSID(ssid) RRID(rrid)	R7451RRT R7451RRQ	$\text{R7451RRT} / \text{R7451RRQ}$
RAID rank write request rate	CARWRT	SSID(ssid) RRID(rrid)	R7451WRQ R745CINT	$\text{R7451WRQ} / \text{R745CINT}$



Table 29. Cache Activity - Conditions Based on SMF Record Type 74-5 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Average number of megabytes written with an I/O request	CARWMB	SSID(ssid) RRID(rrid)	R7451SW R7451HSS R7451WRQ	$(R7451SW * R7451HSS) / R7451WRQ$
Average number of megabytes written per second	CARWMB5	SSID(ssid) RRID(rrid)	R7451SW R7451HSS R7451CINT	$(R7451SW * R7451HSS) / R7451CINT$
Average response time of a write request	CARWRTIM	SSID(ssid) RRID(rrid)	R7451WRT R7451WRQ	$R7451WRT / R7451WRQ$
zHPF read I/O rate	CASZHPFR CADZHPFR	SSID(ssid) DEVN(devn)	R7451CT5 R7451CINT	$Sum(R7451CT5) / R7451CINT$ $R7451CT5 / R7451CINT$
zHPF write I/O rate	CASZHPFW CADZHPFW	SSID(ssid) DEVN(devn)	R7451CT6 R7451CINT	$Sum(R7451CT6) / R7451CINT$ $R7451CT6 / R7451CINT$
Global Mirror Collisions Sidefile count	CASGMCSF CADGMCSF	SSID(ssid) DEVN(devn)	R7451GSF	$Sum(R7451GSF)$ $R7451GSF$
Global Mirror Collisions Send Synchronous count	CASGMCSS CADGMCSS	SSID(ssid) DEVN(devn)	R7451GSS	$Sum(R7451GSS)$ $R7451GSS$

Table 30. Cache Activity - Conditions Based on SMF Record Type 74-5					
Condition	Categorie	Condition Name	Qualifier	Source	Algorithm
<b>Device Overview:</b> % I/O (total)	*CACHE-OFF	CASCOIO	SSID(ssid)	TOTAL = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR + R745DIDL + R745DBCR COTOT = TOTAL for CACHE-OFF ALLTOT = TOTAL for ALL I/Os	$COTOT * 100 / ALLTOT$
<b>Device Overview:</b> I/O RATE (total)	*ALL *CACHE *CACHE-OFF	CASAT CASCT CASOT	SSID(ssid)	R745CINT TOTAL = R745DRCR + R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR + R745DIDL + R745DBCR	$TOTAL / R745CINT$
<b>Device Overview:</b> DASD I/O RATE STAGE	*ALL *CACHE	CASASTG CASCSTG	SSID(ssid)	R745CINT TOTAL = R745DRCR +  R745DRSR + R745DRNR + R745DWRC + R745DWSR + R745DWNR HITS = R745DCRH + R745DRSH + R745DNRH + R745DWCH + R745DWSH + R745DWNH DFW_INHIBIT = R745DWRC + R745DWSR + R745DWNR - R745DFWC - R745DFWS - R745DWNR CFW_BYPASS = R745DFWR DFW_BYPASS = R745DFWB	$(TOTAL - HITS - DFW\_INHIBIT -CFW\_BYPASS - DFW\_BYPASS) /R745CINT$
<b>Device Overview:</b> Sequential Stage Rate	*ALL *CACHE	CASASTGS CASCSTGS	SSID(ssid)	R745CINT R745DFWS TOTAL_SEQ = R745DWSR + R745DRSR HIT_SEQ = R745DWSH + R745DRSH	$Sum(TOTAL\_SEQ - HIT\_SEQ- R745DWSR + R745DFWS) /R745CINT$

## Ficon Director Activity - SMF record type 74-7

Following qualifiers are required:

**sdev**

Switch device number

**port**

Port address

Table 31. Ficon Director Activity - Conditions Based on SMF Record 74-7				
Condition	Condition Name	Qualifier	Source	Algorithm
Average frame pacing time	FDAFPT	SDEV(sdev) PORT(port)	R747PFPT R747PNFT	(PFPT * 2.5) / PNFT
Rate (in MBs/sec) of data received during the interval	FDMBREAD	SDEV(sdev) PORT(port)	R747PNWR	(PNWR / (250 * 1000)) / Interval
Rate (in MBs/sec) of data transmitted during the interval	FDMBWRT	SDEV(sdev) PORT(port)	R747PNWT	(PNWT / (250 * 1000)) / Interval
Number of errors	FDNERR	SDEV(sdev) PORT(port)	R747PNER	Value or comparison

## Enterprise Disk Systems Statistics - SMF record type 74-8

Following qualifiers are possible:

**sern**

serial number

**said**

system adapter ID

**xpid**

extent pool ID

**rrid**

RAID rank ID

**siid**

Synchronous I/O link interface ID

Table 32. ESS Link Statistics - Conditions Based on SMF Record 74-8				
Condition	Condition Name	Qualifier	Source	Algorithm
Transfer Rate ECKD Read	ESTRERD	SERN(sern), SAID(said)	R748LERB R748CINT	R748LERB / R748CINT
Transfer Rate SCSI Read	ESTRSRD	SERN(sern), SAID(said)	R748LSRB R748CINT	R748LSRB / R748CINT
Transfer Rate ECKD Write	ESTREWR	SERN(sern), SAID(said)	R748LEWB R748CINT	R748LEWB / R748CINT
Transfer Rate SCSI Write	ESTRSWR	SERN(sern), SAID(said)	R748LSWB R748CINT	R748LSWB / R748CINT
Packet Size ECKD Read	ESP SERD	SERN(sern), SAID(said)	R748LERB R748LERO	R748LERB / R748LERO
Packet Size SCSI Read	ESPSSRD	SERN(sern), SAID(said)	R748LSRB R748LSRO	R748LSRB / R748LSRO
Packet Size ECKD Write	ESPSEWR	SERN(sern), SAID(said)	R748LEWB R748LEWO	R748LEWB / R748LEWO
Packet Size SCSI Write	ESPSSWR	SERN(sern), SAID(said)	R748LSWB R748LSWO	R748LSWB / R748LSWO
Activity Rate ECKD Read	ESARERD	SERN(sern), SAID(said)	R748LERO R748CINT	R748LERO / R748CINT
Activity Rate SCSI Read	ESARSRD	SERN(sern), SAID(said)	R748LSRO R748CINT	R748LSRO / R748CINT

Table 32. ESS Link Statistics - Conditions Based on SMF Record 74-8 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Activity Rate ECKD Write	ESAREWR	SERN(sern), SAID(said)	R748LEWO R748CINT	R748LEWO / R748CINT
Activity Rate SCSI Write	ESARSWR	SERN(sern), SAID(said)	R748LSWO R748CINT	R748LSWO / R748CINT
Response Time ECKD Read	ESRTERD	SERN(sern), SAID(said)	R748LERT R748LERO	R748LERT / R748LERO
Response Time SCSI Read	ESRTSRD	SERN(sern), SAID(said)	R748LSRT R748LSRO	R748LSRT / R748LSRO
Response Time ECKD Write	ESRTEWR	SERN(sern), SAID(said)	R748LEWT R748LEWO	R748LEWT / R748LEWO
Response Time SCSI Write	ESRTSWR	SERN(sern), SAID(said)	R748LSWT R748LSWO	R748LSWT / R748LSWO
I/O Intensity ECKD Read	ESIOIERD	SERN(sern), SAID(said)	R748LERT R748CINT	R748LERT / R748CINT
I/O Intensity SCSI Read	ESIOISRD	SERN(sern), SAID(said)	R748LSRT R748CINT	R748LSRT / R748CINT
I/O Intensity ECKD Write	ESIOIEWR	SERN(sern), SAID(said)	R748LEWT R748CINT	R748LEWT / R748CINT
I/O Intensity SCSI Write	ESIOISWR	SERN(sern), SAID(said)	R748LSWT R748CINT	R748LSWT / R748CINT
I/O Intensity ECKD Total	ESIOIET	SERN(sern), SAID(said)	R748LERT R748LEWT R748CINT	(R748LERT + R748LEWT) / R748CINT
I/O Intensity SCSI Total	ESIOIST	SERN(sern), SAID(said)	R748LSWT R748CINT	(R748LSRT + R748LSWT) / R748CINT
Transfer Rate PPRC Send	ESTRPSD	SERN(sern), SAID(said)	R748LPST R748CINT	R748LPST / R748CINT
Transfer Rate PPRC Received	ESTRPRV	SERN(sern), SAID(said)	R748LPST R748CINT	R748LPST / R748CINT
Packet Size PPRC Send	ESPSPSD	SERN(sern), SAID(said)	R748LPST R748LPST	R748LPST / R748LPST
Packet Size PPRC Received	ESPSPRV	SERN(sern), SAID(said)	R748LPST R748LPST	R748LPST / R748LPST
Activity Rate PPRC Send	ESARPSD	SERN(sern), SAID(said)	R748LPST R748CINT	R748LPST / R748CINT
Activity Rate PPRC Received	ESARPRV	SERN(sern), SAID(said)	R748LPST R748CINT	R748LPST / R748CINT
Response Time PPRC Send	ESRTPSD	SERN(sern), SAID(said)	R748LPST R748LPST	R748LPST / R748LPST
Response Time PPRC Received	ESRTPRV	SERN(sern), SAID(said)	R748LPST R748LPST	R748LPST / R748LPST
I/O Intensity PPRC Send	ESIOIPSD	SERN(sern), SAID(said)	R748LPST R748CINT	R748LPST / R748CINT
I/O Intensity PPRC Received	ESIOIPRV	SERN(sern), SAID(said)	R748LPST R748CINT	R748LPST / R748CINT

Table 32. ESS Link Statistics - Conditions Based on SMF Record 74-8 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
I/O Intensity PPRC Total	ESIOIPT	SERN(sern), SAID(said)	R748LPST R748LPRT SMF74INT	(R748LPST + R748LPRT) / R748CINT
Number of FC link failures	ESLFLF	SERN(sern) SAID(said)	R748LFLF	Value or comparison
Number of FC synchronization failures	ESLFLY	SERN(sern) SAID(said)	R748LFLY	Value or comparison
Number of FC signal failures	ESLFLS	SERN(sern) SAID(said)	R748LFLS	Value or comparison
Number of FC primitive sequence errors	ESLFPQ	SERN(sern) SAID(said)	R748LFPQ	Value or comparison
Number of FC invalid transmission word errors	ESLFIT	SERN(sern) SAID(said)	R748LFIT	Value or comparison
Number of FC Cyclic Redundancy Check (CRC) errors	ESLFCR	SERN(sern) SAID(said)	R748LFCR	Value or comparison
Number of FC link recovery (LR) sent	ESLFLR1	SERN(sern) SAID(said)	R748LFR1	Value or comparison
Number of FC link recovery (LR) received	ESLFLR2	SERN(sern) SAID(said)	R748LFR2	Value or comparison
Number of FC illegal frame errors	ESLFIF	SERN(sern) SAID(said)	R748LFIF	Value or comparison
Number of FC out of order data errors	ESLFOD	SERN(sern) SAID(said)	R748LFOD	Value or comparison
Number of FC out of order ACK errors	ESLFOA	SERN(sern) SAID(said)	R748LFOA	Value or comparison
Number of FC duplicate frame errors	ESLFDF	SERN(sern) SAID(said)	R748LFDF	Value or comparison
Number of FC invalid offset failures	ESLFIO	SERN(sern) SAID(said)	R748LFIO	Value or comparison
Number of FC sequence timeout errors	ESLFTC	SERN(sern) SAID(said)	R748LFTC	Value or comparison
FC bit error rate	ESLFBC	SERN(sern) SAID(said)	R748LFBC	Value or comparison

Table 33. ESS Extent Pool Statistics - Conditions Based on SMF Record 74-8				
Criterion	Criterion Name	Qualifier	Source	Algorithm
Real Extent Pool Capacity	ESXRCAP	SERN(sern), XPID(xpid)	R748XRCP	Value or comparison
Number of Real Extents	ESXRNSG	SERN(sern), XPID(xpid)	R748XRNS	Value or comparison
Total physical capacity	ESXCTPC	SERN(sern), XPID(xpid)	R748XRCP	Value or comparison
Used physical capacity	ESXCUPC	SERN(sern), XPID(xpid)	R748XRCP	Value or comparison
Total logical capacity	ESXCTLC	SERN(sern), XPID(xpid)	R748XRCP	Value or comparison
Used logical capacity	ESXCULC	SERN(sern), XPID(xpid)	R748XRCP	Value or comparison
Compression ratio	ESXCRAT	SERN(sern), XPID(xpid)	R748XRCP	Value or comparison

Table 34. ESS Rank Statistics - Conditions Based on SMF Record 74-8				
Criterion	Criterion Name	Qualifier	Source	Algorithm
Read Operation Rate	ESRRROP	SERN(sern), RRID(rrid)	R748RRROP R748CINT	R748RRROP / R748CINT
Number of Bytes per Read Operation	ESRRBOP	SERN(sern), RRID(rrid)	R748RBYR R748RRROP	R748RBYR / R748RRROP
Average Bandwidth of Read Operation	ESRRBD	SERN(sern), RRID(rrid)	R748RBYR R748CINT	R748RBYR / R748CINT
Average Response Time of Read Operations	ESRRRT	SERN(sern), RRID(rrid)	R748RKRT R748RRROP	R748RKRT / R748RRROP
Write Operation Rate	ESRWOP	SERN(sern), RRID(rrid)	R748RWOP R748CINT	R748RWOP / R748CINT
Number of Bytes per Write Operation	ESRWBOP	SERN(sern), RRID(rrid)	R748RBYW R748RWOP	R748RBYW / R748RWOP
Average Bandwidth of Write Operations	ESRWBD	SERN(sern), RRID(rrid)	R748RBYW R748CINT	R748RBYW / R748CINT
Average Response Time of Write Operations	ESRWRT	SERN(sern), RRID(rrid)	R748RKWT R748RWOP	R748RKWT / R748RWOP

Table 35. ESS Synchronous I/O Link Statistics – Conditions Based on SMF Record 74-8				
Condition	Condition Name	Qualifier	Source	Algorithm
Synch I/O Cache Read Operations per Second	ESSOSCR	SERN(sern), SIID(siid)	R748SCRO R748CINT	R748SCRO/ R748CINT
Synch I/O Cache Write Operations per Second	ESSOSCW	SERN(sern), SIID(siid)	R748SCWO R748CINT	R748SCWO/ R748CINT
Synch I/O NVS Write Operations per Second	ESSOSNW	SERN(sern), SIID(siid)	R748SNWO R748CINT	R748SNWO/ R748CINT
Number of Bytes per Synch I/O Cache Read Operation	ESSBOCR	SERN(sern), SIID(siid)	R748SCBR R748SCRO	R748SCBR/R748SCRO
Number of Bytes per Synch I/O Cache Write Operation	ESSBOCW	SERN(sern), SIID(siid)	R748SCBW R748SCWO	R748SCBW/ R748SCWO
Number of Bytes per Synch I/O NVS Write Operation	ESSBONW	SERN(sern), SIID(siid)	R748SNBW R748SNWO	R748SNBW/ R748SNWO
Average Response Time per Synch I/O Cache Read Operation	ESSRTOCR	SERN(sern), SIID(siid)	R748SCRT R748SCRO	R748SCRT/R748SCRO
Average Response Time per Synch I/O Cache Write Operation	ESSRTOCW	SERN(sern), SIID(siid)	R748SCWT R748SCWO	R748SCWT/R748SCWO
Average Response Time per Synch I/O NVS Write Operation	ESSRTONW	SERN(sern), SIID(siid)	R748SNWT R748SNWO	R748SNWT/ R748SNWO
Percentage of Successful Synch I/O Cache Read Operations	ESSPSOCR	SERN(sern), SIID(siid)	R748SCRS R748SCRO	R748SCRS*100 / R748SCRO
Percentage of Successful Synch I/O Cache Write Operations	ESSPSOCW	SERN(sern), SIID(siid)	R748SCWS R748SCWO	R748SCWS*100 / R748SCWO
Percentage of Successful Synch I/O NVS Write Operations	ESSPSONW	SERN(sern), SIID(siid)	R748SNWS R748SNWO	R748SNWS*100 / R748SNWO

## PCIE Function Activity - SMF record type 74-9

Each Overview condition requires the specification of qualifier **pfid** that represents a PCIE function that is in status **Allocated**, **De-Allocate-Pending**, or **Re-Allocated** at the end of the reporting interval. For PCIE functions that are in another status, no overview report is generated.

### pfid

A four digit hexadecimal function ID for the PCIE function in the range of 0000 through FFFF.

Example: (000F)

Table 36. PCIE Function Activity - Conditions Based on SMF Record 74-9				
Condition	Condition Name	Qualifier	Source	Algorithm
Number of executed PCI Load operations per second (Hardware Accelerator, RoCE and ISM)	PCILOAD	pfid	R749LOOP R749ALLT	LOOP * 1000 / ALLT
Number of executed PCI Store operations per second (Hardware Accelerator, RoCE and ISM)	PCISTOR	pfid	R749STOP R749ALLT	STOP * 1000 / ALLT
Number of executed PCI Store Block operations per second (Hardware Accelerator, RoCE and ISM)	PCISTBL	pfid	R749SBOP R749ALLT	SBOP * 1000 / ALLT
Number of executed Refresh PCI Translation operations per second (Hardware Accelerator, RoCE and ISM)	PCIRPTR	pfid	R749RFOP R749ALLT	RFOP * 1000 / ALLT
Number of megabytes per second transferred by DMA reads from all defined DMA address spaces to the PCIE function (RoCE and HW Accelerator, on zEC12 and zBC12 hardware only)	PCIDMAR	pfid	R749DMAR R749ALLT	DMAR / (ALLT * 1000)
Number of megabytes per second transferred by DMA writes from the PCIE function to all defined DMA address spaces (RoCE and HW Accelerator, on zEC12 and zBC12 hardware only)	PCIDMAW	pfid	R749DMAW R749ALLT	DMAW / (ALLT * 1000)
Percentage of time this partition kept the PCIE function busy (Hardware Accelerator, Synchronous I/O)	FPGBUSY	pfid	R749FTET R749ALLT R749STPF	For Hardware Accelerator: FTET * 100 / (ALLT * 1000)  For Synchronous I/O: STPF * 100 / (ALLT * 1000)
Average time in micro-seconds the hardware accelerator took to process a request	FPGRTIM	pfid	R749FTET R749FRQC	FTET / FRQC
Average queue time in microseconds spent for a request (Hardware Accelerator)	FPGQTIM	pfid	R749FTQT R749FRQC	FTQT / FRQC
Number of megabytes per second transferred by DMA operations (Hardware Accelerator)	FPGBYTS	pfid	R749FDRD R749FDWR R749ALLT	(FDRD + FDWR) * 256 / (ALLT * 1000)
Average request size in kilobytes (Hardware Accelerator)	FPGBYTR	pfid	R749FDRD R749FDWR R749FRQC	(FDRD + FDWR) * 256 / (FRQC * 1000)
Number of compression requests per second (Hardware Accelerator)	FPGCORS	pfid	R7491DCT R749ALLT	1DCT * 1000 / ALLT
Number of megabytes compressed per second (Hardware Accelerator)	FPGCOBS	pfid	R7491DIB R749ALLT	1DIB / (ALLT * 1000)
Compression ratio (Hardware Accelerator)	FPGCORT	pfid	R7491DIB R7491DOB	1DIB / 1DOB
Number of decompression requests per second (Hardware Accelerator)	FPGDCRS	pfid	R7491ICT R749ALLT	1ICT * 1000 / ALLT
Number of megabytes decompressed per second (Hardware Accelerator)	FPGDCBS	pfid	R7491IIB R749ALLT	1IIB / (ALLT * 1000)

Table 36. PCIe Function Activity - Conditions Based on SMF Record 74-9 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Decompression ratio (Hardware Accelerator)	FPGDCRT	pfid	R7491IIB R7491IOB	1IIB / 1IOB
Buffer pool size (Hardware Accelerator)	FPGBPSZ	pfid	R7491BPS	1BPS
Average buffer pool utilization (Hardware Accelerator)	FGPBPRT	pfid	R7491BPC R7491BPS R7491DCT R7491ICT	1BPC / ((1DCT + 1ICT) * 1BPS)
Number of megabytes received per second (RoCE on z13 or later and Synchronous I/O)	PCIBYTR	pfid	R749DBYR R749SRBF R749ALLT	For RoCE: DBYR / (ALLT * 1000) For Synchronous I/O functions: SRBF / (ALLT * 1000)
Number of megabytes transmitted per second (RoCE on z13 or later, ISM and Synchronous I/O)	PCIBYTT	pfid	R749DBYT R749DBYX R749SWBF R749ALLT	For RoCE: DBYT / (ALLT * 1000) For ISM: DBYX / (ALLT * 1000) For Synchronous I/O functions: SWBF / (ALLT * 1000)
Number of packets received per second (RoCE on z13 and later only)	PCIPAKR	pfid	R749DPKR R749ALLT	DPKR * 1000 / ALLT
Number of packets transmitted per second (RoCE on z13 and later only)	PCIPAKT	pfid	R749DPKT R749ALLT	DPKT * 1000 / ALLT
Number of work units processed per second (zEDC on z13 and later only)	PCIWUP	pfid	R749DWUP R749ALLT	DWUP * 1000 / ALLT
PCI Function Utilization (zEDC on z13 and later only)	PCIUTIL	pfid	R749DWUP R749DWUM R749ALLT	DWUP * 100000 / (ALLT * DWUM)
Number of requests per second (Synchronous I/O)	SYNCTR	pfid	R749SSRF R749SLRF R749SRRF R749ALLT	(SSRF+SLRF+ SRRF) * 1000 / ALLT
Number of successful requests per second (Synchronous I/O)	SYNCSR	pfid	R749SSRF R749ALLT	SSRF * 1000 / ALLT

## EADM Activity - SMF record type 74-10

The following table displays the conditions based on SMF records 74-10 in the EADM activity report.

Condition	Condition Name	Qualifier	Source	Algorithm
Total number SSCH	EDMSTOT	none	R7410DSCT	R7410DSCT
SSCH rate per second	EDMSRT	none	R7410DSCT SMF74INT	R7410DSCT / SMF74INT
Avg function pending time in milliseconds	EDMAFPT	none	R7410DFPT R7410DNUM	R7410DFPT * 128 / (1000 * R7410DNUM)
Average IOP queue time in milliseconds	EDMAIQT	none	R7410DIQT R7410DNUM	R7410DIQT * 128 / (1000 * R7410DNUM)
Average initial command response time in milliseconds	EDMAICRT	none	R7410DCRT R7410DNUM	R7410DCRT * 128 / (1000 * R7410DNUM)
Compression request rate per second <b>Note:</b> from z15	EDMCORS	none	R7410DOCC SMF74INT	R7410DOCC / SMF74INT

Condition	Condition Name	Qualifier	Source	Algorithm
Compression throughput <b>Note:</b> from z15	EDMCOBS	none	R7410DISC SMF74INT	R7410DISC / SMF74INT
Compression ratio <b>Note:</b> from z15	EDMCORT	none	R7410DISC R7410DOSD	R7410DISC / R7410DOSD
Decompression request rate per second <b>Note:</b> from z15	EDMDCRS	none	R7410DOCD SMF74INT	R7410DOCD / SMF74INT
Decompression throughput <b>Note:</b> from z15	EDMDCBS	none	R7410DISD SMF74INT	R7410DISD / SMF74INT
Decompression ratio <b>Note:</b> from z15	EDMDCRT	none	R7410DISD R7410DOSD	R7410DISD / R7410DOSD

## Page Data Set Activity - SMF record type 75

One qualifier is possible:

### **pagename**

The name of a page data set.

For exception processing, the data set name is optional. If this qualifier is omitted, the threshold value applies to each page data set.

Table 37. Page Data Set Activity - Conditions Based on SMF Record Type 75				
Condition	Condition Name	Qualifier	Source	Algorithm
Percent busy-data set	PSBSY	pagename	SMF75USE SMF75SAM	(USE*100)/SAM
Page transfer time	PSPTT	pagename	SMF75REQ SMF75SAM SMF75PGX SMF75INT	((REQ*INT)/SAM)/PGX
Pages transfer rate	PSPT	pagename	SMF75INT SMF75PGX	PGX/INT
Page data set activity rate	PSART	pagename	SMF75INT SMF75SIO	SIO/INT
Average slots used	PSAVGSL	pagename	SMF75LVU	Value or comparison
Number of bad slots	PSBADS	pagename	SMF75BDS	Value or comparison

## Enqueue Activity - SMF record type 77

One qualifier is possible:

### **major/minor**

One- to eight-character major name of a resource, followed by a comma and a one- to forty-four character minor name.

**Note:** For conditions based on SMF Record Type 77, only interval reporting but no duration reporting is supported.

Table 38. Enqueue Activity - Conditions Based on SMF Record Type 77				
Condition	Condition Name	Qualifier	Source	Algorithm
Total enqueue contention time in seconds	ENQT	major/minor	SMF77WTT	Value or comparison
Number of enqueue contention events	ENQNE	major/minor	SMF77EVT	Value or comparison
Average contention time	ENQAVG	major/minor	SMF77WTT SMF77EVT	WTT/EVT
Maximum contention time	ENQMAX	major/minor	SMF77WTT	Value or comparison



Table 38. Enqueue Activity - Conditions Based on SMF Record Type 77 (continued)				
Condition	Condition Name	Qualifier	Source	Algorithm
Percent of status change events with no contention detail data	ENQPNOD	major/minor	SMF77CSC SMF77NOD	NOD*100 / CSC

## Virtual Storage Activity - SMF record type 78-2

If you use the conditions listed in [Table 39 on page 207](#) to define thresholds in EXCEPT statements, you must specify the values in Kbytes, for example, to define an SQA expansion condition with a threshold of 16384 bytes, specify:

```
EXCEPT (EXSQAE (SQAE , GE , 16) )
```

Table 39. Virtual Storage Activity - Conditions Based on SMF Record Type 78-2				
Condition	Condition Name	Qualifier	Source	Algorithm
Maximum amount of allocated CSA and RUCSA below the 16-megabyte line, in bytes	CSAA	none	R782CSAU	Value or comparison
Minimum size of largest free block within CSA or RUCSA, in bytes	CSAFB	none	R782CSLF	Value or comparison
Minimum number of free bytes in CSA and RUCSA below the 16-megabyte line	CSAFP	none	R782CSAF	Value or comparison
Maximum amount of allocated SQA below the 16-megabyte line, in bytes	SQAA	none	R782SQUAU	Value or comparison
Maximum amount of SQA expansion into CSA, in bytes	SQAE	none	R782SQEX	Value or comparison
Minimum size of largest free block - SQA, in bytes	SQAFB	none	R782SQLF	Value or comparison
Minimum number of free SQA bytes below the 16-megabyte line	SQAFP	none	R782SQUAF	Value or comparison

## I/O Queuing Activity - SMF record type 78-3

### amg

An eight-digit hexadecimal number that identifies a system alias management group.

This qualifier is required for the SuperPAV (IOxxxxxx) conditions.

### chpid

A two-digit hexadecimal number that identifies the channel path ID (CHPID).

### iopid

A two-digit hexadecimal number that identifies the I/O processor (IOP).

This qualifier is optional. If specified, RMF performs the exception checking just for the specified IOP identifier. If omitted, RMF loops through all IOP sections and uses the sum values for checking. In this case, the exception refers to the system wide value.

### lcuid

A four-digit hexadecimal number that identifies a logical control unit.

This qualifier is required for the First-transfer-ready-disabled inhibited ratio (IOTMDINH) condition.

For all other conditions, this qualifier is optional. If it is omitted, the threshold applies to all logical control units in the SMF record.

Qualifier IOCHPID is valid only in combination with IOAMG or IOLCU.

For the condition First-transfer-ready-disabled inhibited ratio (IOTMDINH), qualifiers IOLCU and IOCHPID are required, using in the following syntax:

```
(IOLCU(lcuid) , IOCHPID(chpid))
```

## Examples:

```
OVERVIEW(REPORT, RECORD)
OVW(IOTMDINH(IOTMDINH(IOLCU(0027), IOCHPID(30))))
```

```
OVW(IOCUB(IOCUB(IOAMG(00000002), IOCHPID(30))))
OVW(IOCUB(IOCUB(IOAMG(00000002))))
```

```
OVW(IXSAREQ(IXSAREQ(IOAMG(00000002))))
```

In the **Algorithm** column:

### MAX

Applies to exception operator GE, and specifies the sum of each channel path taken, where i represents channel path 0 to channel path 7.

### MIN

Applies to exception operator LE, and specifies the sum of each channel path taken, where i represents channel path 0 to channel path 7.

Table 40. I/O Queuing Activity - Conditions Based on SMF Record Type 78-3				
Condition	Condition name	Qualifier	Source	Algorithm
First-transfer-ready-disabled inhibited ratio	IOTMDINH	IOLCU(lcuid) IOCHPID(chpid)	R783CTMW R783CTRD	(R783CTMW-R783CTRD) / R783CTMW
I/O processor (IOP) queue activity rate	IOPAC	iopid	R783IQCT SMF78INT	IQCT/INT
I/O processor (IOP) initiative queue average queue length	IOPQL	iopid	R783IQCT R783IQSM	(IQSM - IQCT) / IQCT
Contention rate	IOCTR	lcuid IOAMG(amg)	R783QCT SMF78INT	QCT/INT
Average queue length of delayed I/O requests	IODLQ	lcuid IOAMG(amg)	R783QCT R783QSM	(QSM-QCT)/QCT
Channel path taken rate	IOART	lcuid IOAMG(amg) IOCHPID(chpid)	R783PT SMF78INT	(PTi)/INT
Percentage of requests caused by control unit busy	IOCUB	lcuid IOAMG(amg) IOCHPID(chpid)	R783DPB R783CUB R783PT	MAX (CUBi*100)/ (PT+CUB+DPB)i MIN (CUBi*100)/ (PT+CUB+DPB)i  When IOCHPID selected: CUBi*100/ (PT+CUB+DPB)i
Percentage of requests caused by director port busy	IODPB	lcuid IOAMG(amg) IOCHPID(chpid)	R783DPB R783CUB R783PT	MAX (DPBi*100)/ (PT+DPB+CUB)i MIN (DPBi*100)/ (PT+DPB+CUB)i  When IOCHPID selected: DPBi*100/ (PT+CUB+DPB)i
Percent I/O processor busy	IOPIPB	iopid	R783IIPB R783IIPI	(IIPB * 100) / (IIPB + IIPI)
Percent I/O processor busy with EADM compression / decompression	IOPECB	iopid	R783IECB R783IIPB R783IIPI	(IECB * 100) / (IIPB + IIPI)
Percent I/O processor busy with SCM	IOPSCB	iopid	R783ISCB R783IIPB R783IIPI	(ISCB * 100) / (IIPB + IIPI)
Percent I/O processor idle	IOPIPI	iopid	R783IIPB R783IIPI	(IIPI * 100) / (IIPB + IIPI)

Table 40. I/O Queuing Activity - Conditions Based on SMF Record Type 78-3 (continued)

Condition	Condition name	Qualifier	Source	Algorithm
Rate I/O functions started	IORIFS	iopid	R783IIFS SMF78INT	IIFS / INT
Rate processed I/O interrupts	IORPII	iopid	R783IPII SMF78INT	IPII / INT
Percent of I/O retries	IOPALB	iopid	R783ICHB R783IDPB R783ICUB R783IDVB R783IIFS	((Sum all retries) * 100) / (IIFS + Sum all retries)
Percent of I/O retries due to channel busy	IOPCHB	iopid	R783ICHB R783IDPB R783ICUB R783IDVB R783IIFS	(ICHB * 100) / (IIFS + Sum all retries)
Percent of I/O retries due to director port busy	IOPDPB	iopid	R783ICHB R783IDPB R783ICUB R783IDVB R783IIFS	(IDPB * 100) / (IIFS + Sum all retries)
Percent of I/O retries due to control unit busy	IOPCUB	iopid	R783ICHB R783IDPB R783ICUB R783IDVB R783IIFS	(ICUB * 100) / (IIFS + Sum all retries)
Percent of I/O retries due to device busy	IOPDVB	iopid	R783ICHB R783IDPB R783ICUB R783IDVB R783IIFS	(IDVB * 100) / (IIFS + Sum all retries)
Number of I/O retries per SSCH	IONALB	iopid	R783ICHB R783IDPB R783ICUB R783IDVB R783IIFS	(Sum all retries) / IIFS
Number of I/O retries per SSCH due to channel busy	IONCHB	iopid	R783ICHB R783IIFS	ICHB / IIFS
Number of I/O retries per SSCH due to director port busy	IONDPB	iopid	R783IDPB R783IIFS	IDPB / IIFS
Number of I/O retries per SSCH due to control unit busy	IONCUB	iopid	R783ICUB R783IIFS	ICUB / IIFS
Number of I/O retries per SSCH due to device busy	IONDVB	iopid	R783IDVB R783IIFS	IDVB / IIFS
Average control unit busy delay time	IOCBT	lcuid IOAMG(amg) IOCHPID(chpid)	R783CBT R783PT	Sum(CBT)/Sum(PT)
Average initial command response time	IOCMR	lcuid IOAMG(amg) IOCHPID(chpid)	R783CMR R783PT	Sum(CMR)/Sum(PT)
Average channel subsystem delay time	IOCSS	lcuid IOAMG(amg)	R783CSST R783PT	CSST/Sum(PT)
HyperPAV wait ratio	IOHWAIT	lcuid IOAMG(amg)	R783HNAI R783HTIO	HNAI/HTIO When IOAMG selected: (Sum(HNAI))/ (Sum(HTIO))

Table 40. I/O Queuing Activity - Conditions Based on SMF Record Type 78-3 (continued)

Condition	Condition name	Qualifier	Source	Algorithm
Maximum number of in-use HyperPAV aliases	IOHMAX	lcuid IOAMG(amg)	R783HAIU R783XHBC	HAIU+XHBC When IOAMG selected: Maximum over all LCUs of that AMG MAX(HAIU+XHBC)
Maximum number of in-use HyperPAV aliases for one device	IOHDMAX	lcuid IOAMG(amg)	R783HCAD	HCAD When IOAMG selected: Maximum over all LCUs of that AMG
The high watermark of queued I/O requests	IOHIOQC	lcuid IOAMG(amg)	R783HIOQ	HIOQ When IOAMG selected: Maximum over all LCUs of that AMG
Ratio of successful alias requests	IOXSAREQ	IOAMG(amg)	R783XAUC R783XANC	Sum(XAUC)/ Sum(XANC)
Ratio of unsuccessful alias requests in home LCU	IOXUAHRQ	IOAMG(amg)	R783XNHC R783XANC	Sum(XNHC)/ Sum(XANC)
Rate of aliases borrowed from peer LCUs	IOXABC	IOAMG(amg)	R783XABC SMF78INT	Sum(XABC)/INT
High water mark of concurrently borrowed aliases	IOXHCBA	IOAMG(amg)	R783XHBC	XHBC
Rate of aliases loaned to a peer LCU	IOXALC	IOAMG(amg)	R783XALC SMF78INT	Sum(XALC)/INT
High water mark of concurrently loaned aliases to a peer LCU	IOXHCLA	IOAMG(amg)	R783XHLC	XHLC
Average queue length when an alias was needed	IOXCQD	IOAMG(amg)	R783XCQD R783XANC	Sum(XCQD)/ Sum(XANC)
Average number of in-use aliases when an alias was needed	IOXIUAC	IOAMG(amg)	R783XCIU R783XANC	Sum(XCIU)/ Sum(XANC)

---

## Chapter 11. Cross platform monitoring with RMF XP

For installations running operating systems other than z/OS, RMF XP provides a solution to monitor the performance of heterogeneous environments. RMF XP supports the following operating systems:

- AIX on System p
- Linux on System x
- Linux on z Systems®

RMF XP has been tested for the following versions or distributions of the supported operating systems:

- Red Hat RHEL 5.6, 6.0, and 7.0
- SUSE SLES 11 and SLES 12
- AIX 6.1.0 and 7.1.0

Hence, with RMF XP, you can monitor operating systems that run in an IBM Z environment, including the IBM z BladeCenter Extension (zBX)

Additionally, RMF XP does not require any proprietary agent software on the monitored endpoints. It exploits the existing Common Information Model (CIM) instrumentation for the AIX and Linux operating systems. The CIM server, as well as the metric providers, are integral parts of the supported AIX and Linux distributions, and therefore no additional software needs to be installed. You just need to ensure that the CIM servers with their metric providers are properly set up and running on the monitored endpoints.

With regard to Linux, RMF XP can communicate with two different CIM server implementations, the Open Pegasus CIM server and the Small Footprint CIM Broker (SFCB).

The core component of RMF XP is the GPM4CIM server. Similar to the Distributed Data Server (DDS) for z/OS (also known as GPMSEVERE), the GPM4CIM started task receives HTTP requests and sends back responses as structured XML documents. Since the GPM4CIM started task runs in the z/OS Unix environment, at least one z/OS system is needed to utilize the RMF XP component.

As shown in [Figure 44 on page 212](#), the existing RMF DDS for z/OS (GPMSEVERE) remains unchanged and does not interfere with the RMF XP started task. Thus, RMF XP provides an additional RMF DDS flavour for the CIM instrumented operating systems AIX and Linux. For this reason the RMF XP started task is denoted as GPM4CIM.

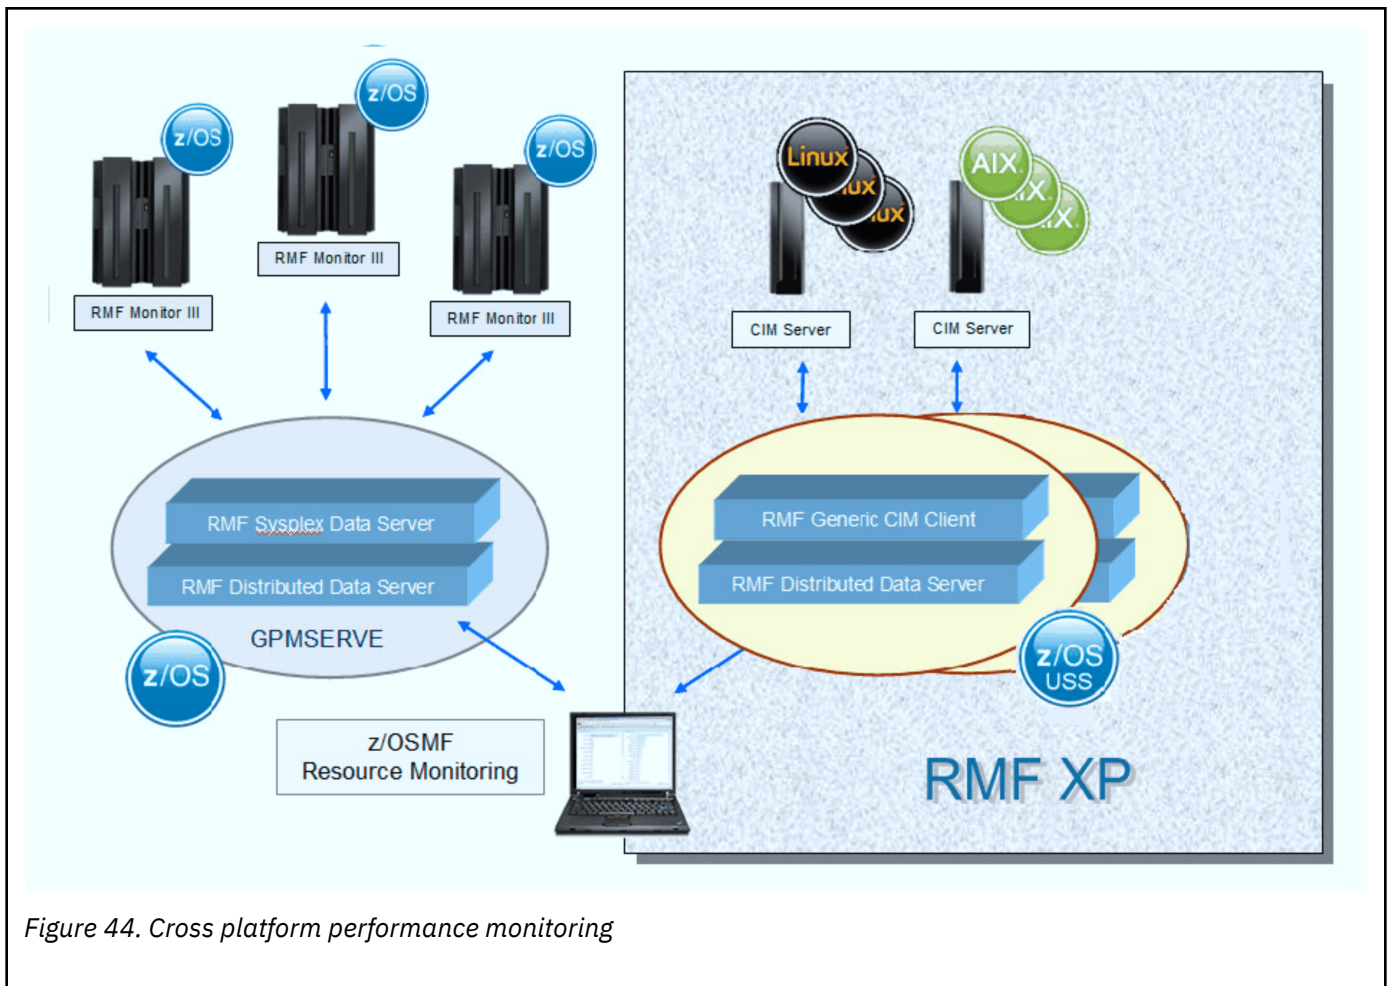


Figure 44. Cross platform performance monitoring

The left part of Figure 44 on page 212 shows the configuration in a z/OS environment and the right part shows the configuration in a mixed AIX and Linux environment. One instance of an RMF generic CIM client, which is a logical module of the GPM4CIM server, communicates with a CIM server residing on either a Linux or AIX system anywhere in the heterogeneous environment. In a mixed AIX and Linux environment, you need to start at least one specific GPM4CIM instance for each platform, as described in “Configuration files and parameters” on page 213.

You can exploit the RMF XP capabilities in the following ways:

- Users of the **Resource Monitoring** plug-in for the **IBM z/OS Management Facility (z/OSMF)** can define connections to GPM4CIM servers running in the z/OS Unix environment. Thus, you can display performance data from AIX and Linux systems in the same way as z/OS performance data (see also Chapter 16, “z/OS Management Facility - Resource Monitoring,” on page 297). Of course, you can also combine performance data from different platforms into a common view as required.
- Besides handling requests for z/OS performance data, the HTTP API of the DDS can serve requests for AIX and Linux performance data as well, as soon as a GPM4CIM instance is configured and active. The DDS returns the requested data as a structured XML document. See *z/OS Resource Measurement Facility Programmer's Guide* for the documentation of the DDS HTTP API.
- You can exploit the capability of RMF XP to monitor the long-term performance history of AIX and Linux systems. For this purpose, you request that performance data collected from the managed endpoints is written to SMF record type 104. Thus, RMF XP offers a standard method for detailed long-term performance analysis and capacity planning.

For information on how to request the collection of SMF record type 104 from the systems of all or selected supported platforms, refer to “How to use RMF XP for long-term performance analysis” on page 216.

## How to set up RMF XP

To start the GPM4CIM server from the console, RMF provides procedure GPM4CIM as a member in SYS1.PROCLIB, which you must modify according to your needs:

```
//GPM4CIM PROC OS=A
//*****
//* STEP 1 - Execute GPM4CIM *
//*****/
//STEP1 EXEC PGM=BPXBATCH,TIME=NOLIMIT,REGION=0M,
// PARM='PGM /usr/lpp/gpm/bin/gpm4cim cfg =/etc/gpm/gpm4 &OS..cfg'
//STDENV DD PATH='/etc/gpm/gpm4cim.env'
//STDOUT DD PATH='/var/gpm/logs/gpm4cim&OS..out',
// PATHOPTS=(OWRONLY,OCREAT,OTRUNC),
// PATHMODE=(SIRUSR,SIWUSR,SIRGRP)
//STDERR DD PATH='/var/gpm/logs/gpm4cim&OS..trc',
// PATHOPTS=(OWRONLY,OCREAT,OTRUNC),
// PATHMODE=(SIRUSR,SIWUSR,SIRGRP)
//*****
//* STEP 2 - Copy stdout back to joblog *
//*****/
//STEP2 EXEC PGM=BPXBATCH,
// PARM='PGM /bin/cat /var/gpm/logs/gpm4cim&OS..out'
//STDOUT DD SYSOUT=*
//STDERR DD SYSOUT=*
//*****
//* STEP 3 - Copy stderr back to joblog *
//*****/
//STEP3 EXEC PGM=BPXBATCH,
// PARM='PGM /bin/cat /var/gpm/logs/gpm4cim&OS..trc'
//STDOUT DD SYSOUT=*
//STDERR DD SYSOUT=*
//*****
// PEND
```

Figure 45. RMF XP startup member in SYS1.PROCLIB(GPM4CIM)

The procedure invokes the IBM-supplied BPXBATCH utility which passes control to the gpm4cim load module. This module is located in the HFS directory /usr/lpp/gpm/bin.

The **cfg** parameter in the PARM statement points to the GPM4CIM configuration file. Since one instance of GPM4CIM is needed per platform, no unique configuration file is used. You can supply different configuration files using the **OS** variable to denote the target platform:

- A** AIX on System p (as shown in the example from [Figure 45 on page 213](#))
- X** Linux on System x
- Z** Linux on System z

For the GPM4CIM procedure, the environment variables are kept in file **gpm4cim.env** which is specified with the STDENV ddname. Log and trace output is written to the files specified with the STDOUT and STDERR ddnames. If multiple instances of GPM4CIM are running simultaneously, you can specify individual output files by altering the file names in the PATH parameter.

## Configuration files and parameters

The GPM4CIM parameters are supplied with the platform specific configuration files /etc/gpm/gpm4[A|X|Z].cfg. This allows you to run one separate GPM4CIM instance per platform, which is required if you want to monitor AIX and Linux systems in a mixed environment.

Of course, you can also start multiple instances of GPM4CIM for the same platform. In this case, provide a dedicated copy of the configuration file per instance, for example, **gpm4a1.cfg** and **gpm4a2.cfg** and use these names in the GPM4CIM procedures ([Figure 45 on page 213](#)).

```

/*****
/*
/* Name:          gpm4A.cfg
/*
/* Description: Configuration for the RMF Distributed Data Server
/*
/*          USS/CIM (GPM4CIM)
/*
/*
/*****
CACHESLOTS(3)          /* Number of timestamps in CACHE
DEBUG_LEVEL(0)         /* No informational messages
SERVERHOST(*)          /* Don't bind to specific IP-Address
MAXSESSIONS_HTTP(20)   /* MaxNo of concurrent HTTP requests
HTTP_PORT(8805)        /* Port number for HTTP requests
HTTP_ALLOW(*)          /* Mask for hosts that are allowed
HTTP_NOAUTH()          /* No server can access without auth.
/*****
/* Declaration of Host Connections with CIM Instrumentation
/* =====
/* - INTERVAL is the monitoring interval length,
/*   value is given in seconds.
/* Example:  INTERVAL(900)
/* Default:   INTERVAL(300)
/*
/* - AIX_Complex is the name for the root resource.
/* Example:  AIX_COMPLEX(SAPPLEX)
/*
/* - AIX_IMAGE is the host name or IP-address of a
/*   CIM connection including the port number.
/* Example:  AIX_IMAGE(SAP1.US.IBM.COM:5988)
/*
/*****
INTERVAL(300)          /* Data monitoring interval (seconds)
RECORD(YES)            /* Collect SMF record type 104 data
AIX_COMPLEX(P6PLEX)    /* User defined name of CIM complex
/* AIX images following here
AIX_IMAGE(P6RMF1.DE.ABC.COM:5988)
AIX_IMAGE(P6RMF2.DE.ABC.COM:5988)
AIX_IMAGE(P6RMF3.DE.ABC.COM:5988)

```

Figure 46. GPM4CIM configuration file example for AIX

The parameters CACHESLOTS through HTTP\_NOAUTH are common parameters for both procedures, GPM4CIM and GPMSEVER, as described in “DDS options” on page 28.

The following parameters are specific for GPM4CIM only:

#### **AIX\_COMPLEX | LNX\_COMPLEX | LNZ\_COMPLEX**

Name for the root resource of the GPM4CIM instance. You can use your own name. This name appears as resource name for the resource type AIX\_SYSTEM\_COMPLEX for AIX, XLINUX\_SYSTEM\_COMPLEX for Linux on System x or ZLINUX\_SYSTEM\_COMPLEX for Linux on System z.

#### **AIX\_IMAGE | LNX\_IMAGE | LNZ\_IMAGE**

Host name or IP address of an image running the specified operating system, including the port number. Due to different resource models, all images within the same complex must run the same operating system.

#### **INTERVAL**

Length of the monitoring interval in seconds. Specify a value between 60 and 3600 seconds. The default is 300 seconds.

The interval parameter determines the frequency, with which RMF retrieves data from the monitored endpoints. It does not necessarily match the data collection interval of the CIM providers on this systems:

- For endpoints running the AIX operating system, GPM4CIM tries to synchronize the CIM provider interval with the GPM4CIM specified interval. This function requires AIX version 6.2.
- For endpoints running the Linux operating system, it is the administrator's responsibility to synchronize the interval start time and the interval length of the CIM providers with the GPM4CIM specified interval.



## RECORD(YES|NO)

Specifies whether or not measurement data is collected in SMF record type 104 as defined by the settings in the active SMFPRMxx parmlib member. The default is RECORD(NO). Therefore, if you want to collect SMF records with GPM4CIM, you need to specify RECORD(YES).

## GPM\_CIMTIMEOUT

Specify the connection timeout duration in seconds. If this parameter is not set, the system automatically defaults the value of **GPM\_CIMTIMEOUT** to 60 seconds.

## Post-installation steps

Before using RMF XP for the first time, you must run the *gpm4cim\_setup.sh* script. This script is located in the HFS directory */usr/lpp/gpm/bin*. If necessary, it allocates the */etc/gpm* and */var/gpm/logs* directories and copies the provided configuration files for all operating system types to the directory */etc/gpm*.

Also, you must adapt the configuration files to your environment before starting a GPM4CIM instance.

## Security setup

You can turn on or off RACF authentication for the communication between z/OSMF or other clients and the GPM4CIM server. In case authentication is required (depending on the HTTP\_NOAUTH parameter), z/OSMF supplies passtickets for the logon to the GPM4CIM started task. The client's credentials are then checked against RACF.

You can apply the information provided for GPMSEVERE in “Configuring Passticket support for the Distributed Data Server” on [page 17](#) to GPM4CIM accordingly. You need to use GPM4CIM as application name instead of GPMSEVERE.

If your installation requires secure communication between GPM4CIM and the CIM servers on the monitored endpoints, you can set up encryption. GPM4CIM does not provide encryption support explicitly, but you can exploit the z/OS Application Transparent Transport Layer Security (AT-TLS) in order to set up secure server-to-server communication. In this case you need to ensure that the CIM servers on the monitored endpoints are also configured for encryption. For more information about CIM servers running on IBM Z, refer to *z/OS Common Information Model User's Guide*. For information about CIM servers running on System p or System x, refer to the appropriate documentation.

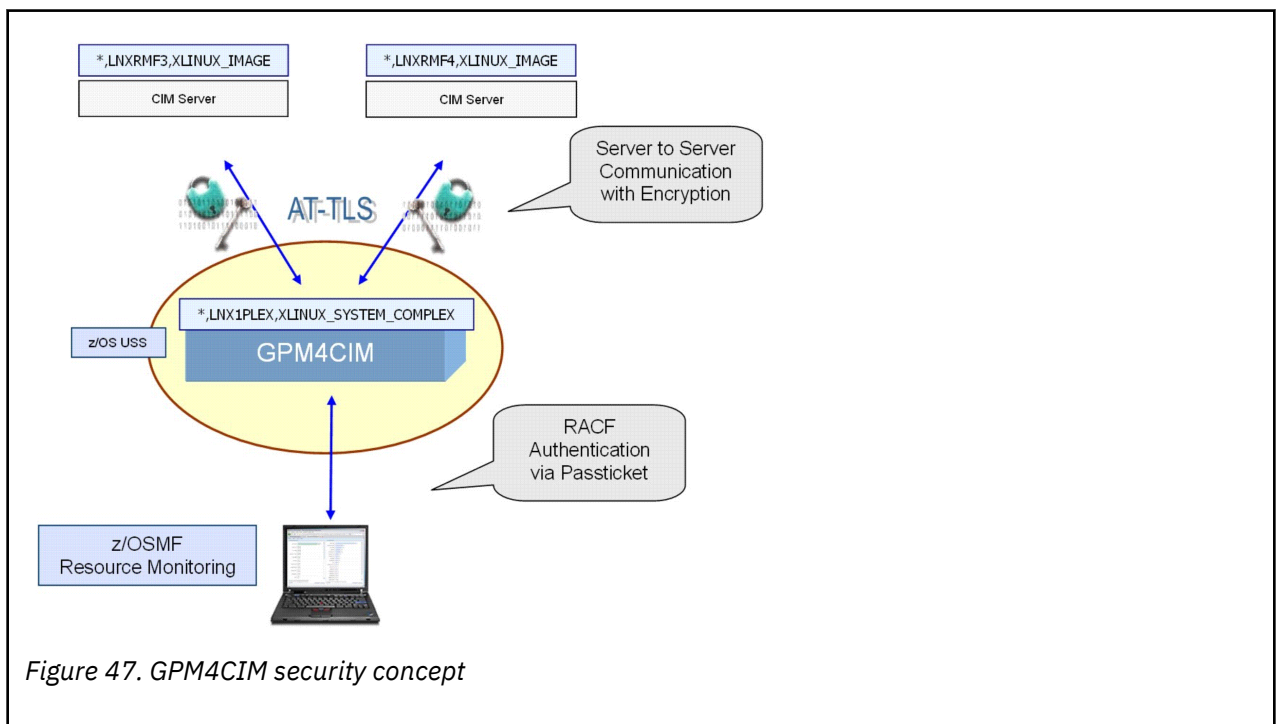


Figure 47. GPM4CIM security concept

## How to start GPM4CIM and assign userIDs

---

You can start the GPM4CIM server from the console as started task with the following command:

```
s gpm4cim[.identifier],os=A|X|Z
```

Since you can run multiple GPM4CIM instances simultaneously, it is recommended to assign an identifier which you can use for subsequent STOP or MODIFY commands.

You may already have created the userID GPMSEVERE as owner of the GPMSEVERE procedure. The GPM4CIM started task can be assigned to the same userID with the following command:

```
RDEFINE STARTED GPM4CIM.* STDATA(USER(GPMSEVERE) TRUSTED(YES))
```

The GPM4CIM server uses the RACF application name GPM4CIM. Check if the use of this application is protected by a profile in the active RACF Application class (APPL) as described in [“Ensure RACF access to the Distributed Data Server \(GPMSEVERE and GPM4CIM\)”](#) on page 16. If required, use the following command to grant user access:

### Security Server (RACF) Example

```
RDEFINE APPL GPM4CIM UACC(READ)
```

## How to use RMF XP for long-term performance analysis

---

To enable long-term performance analysis of AIX and Linux systems, you can turn on SMF recording for SMF record type 104. This record type provides one range of subtypes for each supported platform. One specific subtype is used to keep the data for one individual CIM metric category according to the CIM data model on the affected platform. The CIM metric category, in return, is mapped to the resource models used by RMF XP on the supported platforms as described in *z/OS Resource Measurement Facility Programmer's Guide*.

An overview of the available subtype ranges is presented in this topic. For detailed information about the mapping of CIM metric categories to RMF XP resource types, see *z/OS MVS System Management Facilities (SMF)*.

### AIX on System p performance data: subtype 1-12

#### Subtype 1

AIX\_ActiveMemoryExpansionMetrics

#### Subtype 2

AIX\_ProcessorMetrics

#### Subtype 3

AIX\_ComputerSystemMetrics

#### Subtype 4

AIX\_DiskMetrics

#### Subtype 5

AIX\_NetworkPortMetrics

#### Subtype 6

AIX\_FileSystemMetrics

#### Subtype 7

AIX\_MemoryMetrics

#### Subtype 8

AIX\_OperatingSystemMetrics

#### Subtype 9

AIX\_ProcessMetrics

**Subtype 10**

AIX\_SharedEthernetAdapterMetrics

**Subtype 11**

AIX\_ActiveMemorySharingMetrics

**Subtype 12**

AIX\_VirtualTargetDeviceMetrics

**Linux on System x performance data: subtype 20-31****Subtype 20**

Linux\_IPProtocolEndpointMetrics

**Subtype 21**

Linux\_LocalFileSystemMetrics

**Subtype 22**

Linux\_NetworkPortMetrics

**Subtype 23**

Linux\_OperatingSystemMetrics

**Subtype 24**

Linux\_ProcessorMetrics

**Subtype 25**

Linux\_UnixProcessMetrics

**Subtype 26**

Linux\_StorageMetrics

**Subtype 30**

Linux\_KVMMetrics

**Subtype 31**

Linux\_XenMetrics

**Linux on System z performance data: subtype 40-53****Subtype 40**

Linux\_IPProtocolEndpointMetrics

**Subtype 41**

Linux\_LocalFileSystemMetrics

**Subtype 42**

Linux\_NetworkPortMetrics

**Subtype 43**

Linux\_OperatingSystemMetrics

**Subtype 44**

Linux\_ProcessorMetrics

**Subtype 45**

Linux\_UnixProcessMetrics

**Subtype 46**

Linux\_StorageMetrics

**Subtype 50**

Linux\_zCECMetrics

**Subtype 51**

Linux\_zLPARMetrics

**Subtype 52**

Linux\_zChannelMetrics

## How to request SMF record type 104 collection

At least one instance of RMF XP (GPM4CIM) must be running to perform data collection for a certain supported operating system. Different instances of RMF XP for different target operating systems can run either on the same or on different z/OS system(s). The z/OS system(s) must have an active connection to the monitored endpoints with a properly configured CIM server up and running as previously described. The collected SMF records provide image control sections to allow exploiters of the SMF records to associate the performance data with the appropriate systems.

To request measurement data collection from GPM4CIM into SMF record type 104, you must perform both of the following steps:

1. Using option TYPE, define the appropriate settings for SMF record type 104 in the active SMF parmlib member SMFPRMxx, for example:

```
SYS(TYPE(104(1:12)))      /* for AIX on System p */
SYS(TYPE(104))            /* for all platforms */
```

See [“Defining SMF record writing” on page 32](#) or *z/OS MVS Initialization and Tuning Reference* for more details.

2. In your GPM4CIM configuration file, specify RECORD(YES) to indicate that SMF 104 type is to be collected as defined in the active SMFPRMxx parmlib member. The default RECORD(NO) suppresses any SMF record writing by GPM4CIM.

You can dynamically change GPM4CIM's SMF record collection as defined in the configuration file by the following commands:

### **f gpm4cim,record**

If record type 104 or selected subtypes are specified in the active SMF parmlib member SMFPRMxx, this command switches on the according SMF recording starting with the next interval.

### **f gpm4cim,norecord**

This command switches off any active SMF recording starting with the next interval.

For information on how to print or view the SMF type 104 records, see [Printing SMF records in z/OS Data Gatherer Programmer's Guide](#).

The written SMF records can also be made available via the services of the RMF Sysplex Data Server (ERBDSQRY/ERBDSQ64 and ERBDSREC/ERBDSR64), as described in [RMF sysplex data services in z/OS Data Gatherer Programmer's Guide](#). For this purpose, you must specify SMF record type 104, optionally reduced to required subtypes, with the SMFBUF parameter in one of the following ways:

- In the cataloged RMF procedure, use the SMFBUF parameter in the PARM option, for example:

```
//IEFPROC EXEC PGM=ERBMFMFC,REGION=256M,
//          PARM='SMFBUF(SPACE(40M),RECTYPE(70:79,104))'
```

- In the START command for the RMF control session, use the SMFBUF parameter to override the specifications in the RMF procedure, for example:

```
S RMF,,,SMFBUF(RECTYPE(70:78,79(1:15),104(1:12))) /* for AIX on System p */
S RMF,,,SMFBUF(RECTYPE(70:78,104(20:31)))          /* for Linux on System x */
S RMF,,,SMFBUF(RECTYPE(70:79,104(40:53)))          /* for Linux on System z */
```

- In the MODIFY command for the RMF control session, use the SMFBUF parameter to override the specifications on the START command or in the cataloged RMF procedure.

For detailed information on how to specify the SMFBUF parameter, see [Controlling the SMF buffer in z/OS Data Gatherer User's Guide](#).

## How to authorize GPM4CIM to write SMF record type 104

To write SMF record type 104, the GPM4CIM started task needs at least READ access to the BPX.SMF profile of the FACILITY class, specified with your security authorization facility (SAF) product. The following is an example for RACF, where GPMSEVERE is the user ID which is assigned to the GPM4CIM started task (see also “How to start GPM4CIM and assign userIDs” on page 216):

```
RDEFINE FACILITY BPX.SMF UACC(NONE)
PERMIT BPX.SMF CLASS(FACILITY) ID(GPMSEVERE) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

## Diagnostic aids

The GPM4CIM started task writes diagnostic information into a log and into a trace file. The log file is written unconditionally and contains information about the supplied options and the GPM4CIM started task's basic activity (see Figure 48 on page 219). When the GPM4CIM started task is stopped, the log file entries are copied from file `/var/gpm/logs/gpm4cim[A|X|Z].out` to the file specified with the STDERR ddname. Specifying a `DEBUG_LEVEL > 0` in the configuration file prints additional information about the requests served by GPM4CIM into the log file.

An example for log file entries is shown in Figure 48 on page 219.

```
(01) 02/25 110544 DDSRV: RMF-DDS-Server GPM4CIM/ZOSV1R13 started.
(01) 02/25 110544 DDSRV: Functionality Level=3.000
(01) 02/25 110544 DDSRV: Reading CFG file /etc/gpm/gpm4X.cfg.
(01) 02/25 110544 DDSRV: Summary of options in effect:
(01) 02/25 110544     CACHESLOTS(6)
(01) 02/25 110544     SERVERHOST(*)
(01) 02/25 110544     DEBUG_LEVEL(3)
(01) 02/25 110544     HTTP_PORT(8806)
(01) 02/25 110544     MAXSESSIONS_HTTP(20)
(01) 02/25 110544     HTTP_ALLOW(*)
(01) 02/25 110544     HTTP_NOAUTH()
(01) 02/25 110544     LNX_COMPLEX(SAPPLEX)
(01) 02/25 110544     LNX_IMAGE(SAP1)
(01) 02/25 110544     LNX_IMAGE(SAP2)
(01) 02/25 110544     LNX_IMAGE(SAP3)
(01) 02/25 110544     INTERVAL(60)
(01) 02/25 110544     RECORD(NO)
(01) 02/25 110544 DDSRV: OS-Type='XLINUX' OS-Version='SP7.1.1'.
(01) 02/25 110544 DDSRV: User='GPM4CIM' Process/Jobname='GPM4CIM'
ProcessId=6711008.
(01) 02/25 110544 DDSRV: System Id='SAP1' Sysplex='SAPPLEX' GoalMode=1.
(01) 02/25 110544 DDSRV: TCP/IP local host name=sap1.us.ibm.com.
(01) 02/25 110544 DDSRV: TCP/IP IP Address=9.152.87.80.
(01) 02/25 110544 DDSRV: Size of first cache slot=0 (rounded to 65536) Bytes.
(01) 02/25 110544 DDSRV: Timezone='GMT-01:00:00'
(01) 02/25 110544 DDSRV: Result ctime_r()=Fri Feb 25 11:05:44 2011
(04) 02/25 110544 DDCON: GPM260I RMF Distributed Data Server for CIM ready for
commands
```

Figure 48. Log file entries during GPM4CIM processing

If you require more detailed information about GPM4CIM activity, you can activate a trace by means of the following directive:

```
ICLUI_TRACETO=STDERR
```

This directive can be specified within the environment file `/etc/gpm/gpm4cim.env`.

When you stop GPM4CIM, the trace file entries are copied from file `/var/gpm/logs/gpm4cim[A|X|Z].trc` to the file specified with the STDERR ddname.



## Chapter 12. Batch reporting with Monitor III

Monitor III is a short-term, real-time data collector for problem determination, workflow delay monitoring and goal attainment supervision. The RMF Monitor III batch reporter enables you to use this data to generate Write to Operator (WTO) messages when RMF-monitored metrics exceed certain thresholds.

This section describes how RMF Monitor III batch reporter works and how to set up your implementation.

**Tip:** After you have used RMF Monitor III batch reporter to generate the WTO messages, you can use the messages as triggers for appropriate action. This can be accomplished, for example, by using the z/OS Message Processing Facility (parmlib member MPFLSTxx). For more information, see *z/OS MVS Initialization and Tuning Reference*.

### Monitor III batch reporter components

RMF Monitor III batch reporter uses a number of components, which are described in the following table and referenced throughout this section. These components are copied to the appropriate libraries during SMP/E installation of RMF.

Table 41. RMF Monitor III batch reporter components		
Member name	Name	Description
JCL procedure (in SYS1.PROCLIB)		
RMFM3B	RMF Monitor III batch reporter	This procedure runs the RMF Monitor III reports in batch mode. It is required for exception handling based on Monitor III metrics.  <b>Note:</b> You must verify or adapt the library names according to your environment.
Module (in SYS1.SERBLNKE)		
ERBCSWTO	RMF WTO support	This module allows Write to Operator (WTO) messages to be issued from a REXX procedure. It is used by the RMF-provided sample report exits to write messages to the console when one or more Monitor III exceptions have occurred.
REXX procedures (in RMF CLIST library SYS1.SERBCLS)		
ERBM3B	Monitor III reporter batch control	This procedure provides Monitor III background control. It sets the prefix according to the HLQ input parameter, calls procedure ERB3RP3I for phase driver table setup and passes control to the RMF Monitor III reporter initialization module.
ERBM3BW	Monitor III RMFM3B table switch	This example procedure, which is for use with the Workflow/Exceptions (WFEX) report, provides the following functions: <ul style="list-style-type: none"><li>• Initializes the Monitor III reporter environment</li><li>• Invokes the Workflow/Exceptions (WFEX) report</li><li>• Lets you define your exception criteria</li><li>• Lets you specify your session options, for example, the hardcopy output data set</li><li>• Creates the table clones (on exit)</li></ul>

Table 41. RMF Monitor III batch reporter components (continued)

Member name	Name	Description
ERB3RP3I	Monitor III reporter phase 3 installer	This procedure installs the generic phase 3 exit ERB3RPH3 automatically in the phase driver table. It reads the standard phase driver table from the RMF library, sets up the entries for ERB3RPH3 and copies the modified phase driver table to the RMF Monitor III user table library.
ERB3RPH3	Monitor III reporter generic phase 3 exit	This procedure is the generic Monitor III reporter phase 3 exit. It checks the available report type and calls the corresponding report exit handler for further processing of the Monitor III reporter data tables.
Sample report exits (in RMF CLIST library SYS1.SERBCLS)		
ERBR3WFX	Monitor III reporter WFEX phase 3 sample exit	<p>This procedure acts as the phase 3 exit of the RMF Monitor III Workflow/Exceptions (WFEX) report. The following actions are provided:</p> <ul style="list-style-type: none"> <li>• Subroutine Wfex_Handler_1</li> </ul> <p>Whenever a new report is produced, this function checks whether exceptions have occurred or not. If they have, it calls module ERBCSWTO and issues a predefined message.</p> <ul style="list-style-type: none"> <li>• Subroutine Wfex_Handler_2</li> </ul> <p>This function loops through the WFEX exception table and scans for the exception reasons "OPERMessage" and "Not avail". These exceptions are considered to be of minor severity and are skipped.</p> <p>If exceptions remain, the Wfex_Handler_2 generates a WTO which contains the exception name, the reason, and the actual counter information.</p> <ul style="list-style-type: none"> <li>• Subroutine Wfex_Handler_3</li> </ul> <p>This function tracks specific, predefined exceptions, and issues individual WTO messages with individual message IDs when the defined thresholds are exceeded.</p>

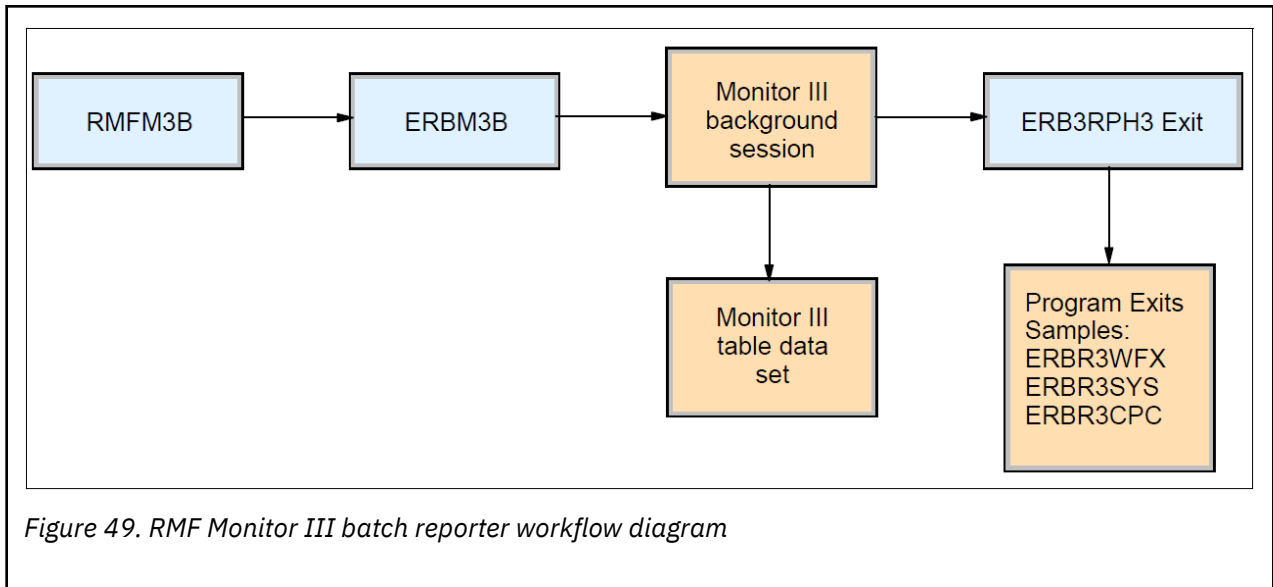


Table 41. RMF Monitor III batch reporter components (continued)

Member name	Name	Description
ERBR3SYS	Monitor III reporter SYSINFO phase 3 sample exit	<p>This procedure acts as the phase 3 exit of the RMF Monitor III System Information (SYSINFO) report. This procedure processes the data tables when the SYSINFO report has been requested. The following actions are provided:</p> <ul style="list-style-type: none"> <li>• Subroutine Sysinfo_Handler_1: This sample illustrates the access to the header data of the RMF Monitor III reports. All values are easily available through the VGET service. Depending on an internally defined threshold, a WTO will be generated. In this case, the threshold is <math>TCB+SRB &gt; 90\%</math>.</li> <li>• Subroutine Sysinfo_Handler_2: The second sample opens and scans the SYSINFO data table ERBSYST3. If a specific instance is found and its threshold is exceeded, a WTO is issued.</li> </ul>
ERBR3CPC	Monitor III reporter CPC phase 3 sample exit	<p>This procedure acts as the phase 3 exit of the RMF Monitor III CPC Capacity (CPC) report. It processes the data tables when the CPC report is requested, and issues a WTO message if necessary. The following actions are provided:</p> <ul style="list-style-type: none"> <li>• Subroutine Cpc_Handler_1: This function checks whether WLM initiated capping (soft cap) is currently active. If yes, it issues a console message which displays the current capping percentage. If no, it issues a console message which displays the remaining time until the potential soft cap starts.</li> <li>• Subroutine Cpc_Handler_2: This function checks the MSU consumption of all LPARs against a user-specified threshold. It issues a console message with the actual MSU consumption for the LPARs that are exceeding the limit.</li> </ul>

## Monitor III batch reporter processing workflow

The Monitor III Batch reporter is used to provide exception-initiated monitoring for Monitor III metrics. The following figure shows the processing workflow.



The flow of actions is as follows:

1. The JCL RMFM3B in SYS1.PROCLIB invokes the REXX EXEC ERBM3B in SYS1.SERBCLS, which controls the Monitor III background session. RMFM3B passes the report parameter to ERBM3B that specifies the report that is used by the Monitor III background session for the exception reporting.
2. ERBM3B passes the control to the Monitor III background session.
3. The Monitor III background session calls the specified report in background mode. The Monitor III background session uses the Monitor III table data set that holds reporter session information, like WFEX options or Monitor III report range.

**Note:** To allocate the Monitor III table data set that holds the report settings, RMF provides the REXX EXEC ERBM3BWV in SYS1.SERBCLS.

4. The generic Monitor III reporter phase 3 exit ERB3RPH3 in SYS1.SERBCLS calls the corresponding report exit handler for further processing of the Monitor III reporter data tables.

RMF provides three sample program exits in the SYS1.SERBCLS:

- ERBR3WFX is the sample exit for the Workflow/Exceptions (WFEX) report. It checks for exceptions in the WFEX report, and issues any exceptions found as WTO messages.
- ERBR3SYS is the sample exit for the System Information (SYSINFO) report. It processes the data tables when the SYSINFO report is requested, and issues WTO messages when thresholds are exceeded.
- ERBR3CPC is the sample exit for the CPC Capacity (CPC) report. It processes the data tables when the CPC report is requested, and issues a WTO message if necessary.

**Note:** For more information about the available Monitor III reporter tables, see the *z/OS Resource Measurement Facility Programmer's Guide*.

## How to use the RMF Monitor III batch reporter

This procedure describes how to set up and use the RMF Monitor III batch reporter.

Review the following information before using the RMF Monitor III batch reporter:

- The components for RMF Monitor III batch reporter are copied to the appropriate libraries during SMP/E installation of RMF. For a list of these components, see [“Monitor III batch reporter components” on page 221](#).
- In order to use the RMF Monitor III batch reporter, the following address spaces must be active:
  - RMF, which is the root data gatherer address space

- RMFGAT, which is the Monitor III data gatherer
- RMFM3B, which is the Monitor III batch reporter. (Starting this address space is addressed in this task.)

**Note:** Only one report type can be specified per RMFM3B instance. If you need multiple report types, you can create corresponding RMFM3B clones.

- The Monitor III Workflow/Exceptions report is used for generating exceptions in this procedure. For more information about this report, see *z/OS Resource Measurement Facility Report Analysis*.

You can use the RMF Monitor III batch reporter to generate a console message when an RMF-monitored metric exceeds a certain threshold. The exceptions can occur in any RMF Monitor III report; however, a phase 3 exit must exist for the report. RMF provides sample phase 3 exits for the following reports:

- Monitor III Workflow/Exceptions (WFEX). (This exit is used as the example in this procedure.)
- Monitor III System Information (SYSINFO)
- Monitor III CPC Capacity (CPC)

The report type is specified in the procedure RMFM3B.

**Note:** For information about creating an exit for another report type, see [“How to use your own report exits” on page 229](#).

The RMF Monitor III batch reporter procedure RMFM3B works with the standard RMF and ISPF libraries (default prefix SYS1). Two additional libraries must be set up before RMFM3B can be activated:

- A library containing any customized procedures to control the threshold processing (*hlq.RMFM3B.SERBCLS*)
- A library containing the Monitor III option table clones (*hlq.RMFM3B.ISPTABLE*). Procedure ERBM3BW is provided as an example for the cloning process.

**Note:** It is recommended to work with cloned reporting tables. Otherwise, the tables must be shared between TSO and batch sessions.

You must modify RMFM3B according to your environment, either by modifying the procedure or supplying the needed input as startup parameters. For example, the HLQ of the RMF and ISPF libraries, the report type, and the HLQ of the Monitor III table data set.

Using the Monitor III batch reporter, whenever an exception occurs, a corresponding WTO message is written to the console. You can modify your exception criteria using report options.

The batch report session creates one Monitor III report for each interval (MINTIME). The report output is written either to SYSOUT or to an exclusive data set, which can be specified with the Monitor III session options.

**Note:** Only one report type can be specified per RMFM3B instance. If you need multiple report types, you can create corresponding RMFM3B clones.

The following procedure describes how to set up and use the RMF Monitor III batch reporter. The Monitor III Workflow/Exceptions (WFEX) report is used as an example.

1. Allocate a library *hlq.RMFM3B.SERBCLS* (like *SYS1.SERBCLS*) for the customized procedures.
2. Ensure the appropriate RACF authorization for RMFM3B, which is defined to run as a started task.

**Note:** Due to internal dependencies, the name of this task cannot be changed.

This task needs access authority to your data sets, which can be gained, for example, by the following commands:

```
RDEF STARTED RMF*. * STDATA(USER(hlq) GROUP(hlqgrp))
SETR REFRESH GENCMD(*) GENERIC(*) RACLIST(STARTED)
```

3. Customize your batch reporter settings, which includes defining your exceptions criteria, setting your session options and creating your Monitor III table data set, as follows:
  - a) Execute REXX EXEC ERBM3BW in SYS1. SERBCLS:

```
exec 'sys1.serbcls(ERBM3BW)'
```

This procedure initializes the Monitor III reporter environment and invokes the Monitor III Workflow/Exceptions (WFEX) report.

- b) Type **RO** (=Report Options) in the command line to display the WFEX Report Options panel, where you can select and define your exception criteria.

**Note:** For more information defining exception criteria, see [“How to customize exceptions”](#) on page 226.

- c) Type **SO** (=Session Options) in the command line to display the RMF Session Options panel, where you can review and change your global session options for your batch-driven reporting. For example, you might consider specifying an exclusive data set for your hardcopy output or adjusting the length of your reporting intervals (=MINTIME).
- d) Exit the session by pressing F3 several times.

On exit, your specifications are saved to the table data set *hlq.RMFM3B.ISPTABLE*. This is the same data set that will be used by the RMFM3B started task.

4. Update the JCL procedure RMFM3B in SYS1.PROCLIB according to your environment, as follows:

- HLQ of the RMF libraries. For example, for SYS1.SERBLNKE:

```
RMF=SYS1
```

- HLQ of the ISPF libraries. For example, for ISP.SISPEXEC:

```
ISPF=ISP
```

- Report type. Using the sample report exits, the available values are WFEX, SYSINFO and CPC. For example, for the WFEX report:

```
REPORT=WFEX
```

- HLQ of the Monitor III table data set. For example, for *hlq.RMFM3B.ISPTABLE*:

```
HLQ=hlq
```

5. Start the procedure RMFM3B in SYS1.PROCLIB with the following console command:

```
S RMFM3B,HLQ=hlq
```

RMF WTO exception message generation begins.

## How to customize exceptions

Use this procedure to customize exceptions.

Review the following information:

- The Monitor III Workflow/Exceptions report is used for generating exceptions as an example in this procedure. For more information about this report, see *z/OS Resource Measurement Facility Report Analysis*.
- This task references procedure ERBM3BW. For more information about this component and other related components, see [“Monitor III batch reporter components”](#) on page 221.

Without special preparation, RMF Monitor III batch reporter will monitor the system on the basis of exceptions that are generated by the Monitor III Workflow/Exceptions (WFEX) automatic customization. If you want to define other exceptions, you must perform a few steps, as described in this procedure.

As part of this customization, you must create a new data set with ISPF tables by calling procedure ERBM3BW. This procedure performs similar steps to those in the following example. It assumes that:

- You are working with TSO user ID TSO1

- You have selected qualifier BAT1 for your data sets

All exception handling of the WFEX report will be done under control of the WFEX exception handler ERBR3WFX. By default, it issues the following WTO message:

```
RMF101I
```

1. Rename your current Monitor III table data set:

```
ren RMFZR21.isptable rmftmp.isptable
```

2. Start an RMF session. This results in the creation of a new table data set:

```
rmf ERB0TABL dataset 'TS01.RMFZR21.ISPTABLE' has been created.
```

3. Start the Monitor III session and call the Workflow/Exceptions report WFEX, and you get the following report with the standard exceptions:

```

RMF 3.1 Workflow/Exceptions                               Line 1 of 19
Command ==> _                                           Scroll ==> HALF
Samples: 100      System: L96S   Date: 04/25/2023   Time: 15.31.40   Range: 100   Sec

----- Speed (Workflow) -----
Name      Speed of 100 = Maximum, 0 = Stopped      Average CPU Util: 37 %
Users Active      Speed      Name      Users Active      Speed
*SYSTEM    222      16      16      *DEV      24      1      74
ALL TS0     57      2      93      *MASTER*   1      0      80
ALL STC    134      2      23      TSOPROD    57      2      93
ALL BATCH   30     12      2      BTCHPROD   30     12      2
ALL ASCH     1      0      No work
ALL OMVS     0      0      Not avail
*PROC      96      2      99

----- Exceptions -----
Name      Reason      Critical val. Possible cause or action
ALL BATCH OPER-Message 12.1 users Awaiting reply to operator request 37.
*SYSTEM   OPER-Message 13.9 users Awaiting reply to operator request 90.
BBRU#488  OPER-Message 98.0 % delay Awaiting reply to operator request 78.
BCCSNET   OPER-Message 100.0 % delay Awaiting reply to operator request 15.
BEBR#489  OPER-Message 92.0 % delay Awaiting reply to operator request 37.
BGFI#48A  OPER-Message 76.0 % delay Awaiting reply to operator request 12.
BJHA#48C  OPER-Message 98.0 % delay Awaiting reply to operator request 60.
BJMO#977  OPER-Message 100.0 % delay Awaiting reply to operator request 95.
BJOE#970  OPER-Message 68.0 % delay Awaiting reply to operator request 29.
BPSM#975  OPER-Message 100.0 % delay Awaiting reply to operator request 99.
BRUG#484  OPER-Message 98.0 % delay Awaiting reply to operator request 25.
BUAB#974  OPER-Message 83.0 % delay Awaiting reply to operator request 86.

```

4. After entering the command **RO**, you get the Report Options panel:

```

RMF WFEX Report Options: Action Panel
Command ==> _
Line 1 of 23
Scroll ==> HALF

Enter Action Code in the Action Column. To exit press END.
Action Codes: Select (S) Copy (C) Move (M) Before (B)
               Add (AD) Delete (D) Move Block (MM) After (A)

Action  Class  Qualifier Indicator Label  Row  Position
---      -
---  Only Add (AD) and After (A) are valid on this line.
---  SYSTEM                WF          1      1
---  TSO                   WF          1      2
---  STC                   WF          1      3
---  BATCH      ALL        WF          1      4
---  ASCH                   WF          1      5
---  OMVS                   WF          1      6
---  PROC                   WF          1      7
---  DEV      ALL          WF          2      1
---  JOB      *MASTER*     WF          2      2
---  SRVCLS    TSOPROD     WF          2      3
---  SRVCLS    BTCHPROD     WF          2      4
---  SYSTEM                EX-ANY
---  JOB                   EX-UNAVAIL
---  STOR                   EX-AVG
---  STOR                   EX-AVG
---  STOR                   EX-AVG      *STOR

```

5. Now, you can delete the exceptions you do not need (command **D**), and you can define new exceptions (command **AD**). This leads you to this definition panel:

```

RMF WFEX Report Options: Definition and Criteria
Command ==> _

Enter or edit information below. To view a list of criteria name values,
place the cursor in a blank "Name" field and press ENTER.
Exception will be displayed if all criteria of one color in a set are met.

Class      ==> _____ For example: SYSTEM, BATCH, JOB, DEV, STC, SRVCLS
Qualifier  ==> _____ For example: Jobname, volume serial, job class
Indicator  ==> _____ WF, EX-ANY, EX-AVG, EX-GROUP or EX-UNAVAIL
Label      ==> _____ Label for workflow monitor or exception line
Alert      ==> _____ Alerting signal: BLINK, BEEP, BOTH, NONE
Text       ==> _____ Leave blank for default

Criteria set 1      Criteria set 2      Criteria set 3
Name  <>  Yel  Red  Name  <>  Yel  Red  Name  <>  Yel  Red
-----
-----  --  ----  ----  or  -----  --  ----  ----  or  -----  --  ----  ----
-----  --  ----  ----  -----  --  ----  ----  -----  --  ----  ----
-----  --  ----  ----  -----  --  ----  ----  -----  --  ----  ----
-----  --  ----  ----  -----  --  ----  ----  -----  --  ----  ----
-----  --  ----  ----  -----  --  ----  ----  -----  --  ----  ----
-----  --  ----  ----  -----  --  ----  ----  -----  --  ----  ----

```

6. When you have completed all definitions, you can leave the RMF monitoring session, and rename the data set correctly:

```

ren RMFZR21.isptable 'bat1.rmfm3b.isptable'
ren rmftmp.isptable RMFZR21.isptable

```

This ensures that your Monitor III batch session can run with the definitions in data set BAT1.RMF3B.ISPTABLE.

All exception handling of the WFEX report will be done under control of the WFEX exception handler ERBR3WFX. By default, it issues the following WTO message:

```
RMF101I
```

## How to modify RMF sample report exits

This task describes how to modify the alternate subroutines or exception threshold values in the RMF sample report exits.

RMF provides the following sample phase 3 report exits (in RMF CLIST library SYS1.SERBCLS):

- ERBR3WFX - Monitor III Workflow/Exceptions (WFEX) report
- ERBR3SYS - Monitor III System Information (SYSINFO) report
- ERBR3CPC - Monitor III CPC Capacity (CPC) report

These sample exits define default threshold values and provide multiple actions that can occur when an exception occurs. For more information about these exits, see [Table 41 on page 221](#).

You can customize your implementation to use different thresholds and to define which actions to occur.

To use alternate subroutines or customize thresholds, do the following:

- a) If not done already, create new data set *hlq.RMFM3B.SERBCLS* like *SYS1.SERBCLS*.
- b) Copy the sample exit from *SYS1.SERBCLS* to new data set *hlq.RMFM3B.SERBCLS*.
- c) To activate an alternate action, activate the alternate subroutine within the sample report exit.
- d) To customize thresholds, update the threshold value directly in the sample report exit.

When you start ERBM3B, you will see the updated information.

## How to use your own report exits

---

This topic provides information about using custom phase 3 report exits.

You can use the RMF Monitor III batch reporter to generate a console message when an RMF-monitored metric exceeds a certain threshold. The exceptions can occur in any RMF Monitor III report; however, a phase 3 exit must exist for the report. RMF provides the following sample phase 3 report exits (in RMF CLIST library *SYS1.SERBCLS*):

- ERBR3WFX - Monitor III Workflow/Exceptions (WFEX) report
- ERBR3SYS - Monitor III System Information (SYSINFO) report
- ERBR3CPC - Monitor III CPC Capacity (CPC) report

To use exceptions from another Monitor III report to generate WTOs, you must create a custom phase 3 exit for the report.

To create a report exit for a report type, you must add one line of code to *ERB3RPH3* where the control is passed to your custom report exit module. This module should reside in your procedure library *hlq.RMFM3B.SERBCLS*. It is recommended that you copy one of the RMF-supplied exit modules and use it as a pattern.

## Setup and usage considerations

---

### Exception handling for all Monitor III report data

This powerful function is inherent in the design of the RMFM3B procedure and the exit *ERB3RPH3*. For any desired report, an RMFM3B instance can be activated at the same time:

```
s rmfm3b.u1_wf,hlq=user_1,report=wfex
s rmfm3b.u1_si,hlq=user_1,report=sysinfo
```

This makes all report data available for processing by the individual phase 3 exits, for example, *ERBR3SYS* for *SYSINFO* report. This can be an efficient solution, especially in two cases:

- A specific counter that is not implemented in the Monitor III workflow exceptions should be tracked and should cause an exception.
- A threshold for the counter has been set by the *WFEX* options, but this active threshold value does not fit the current needs and should be temporarily deactivated in favor of another value.

## Example

Your WFEX option threshold for the critical TCB+SRB time is set to 90 %. For a specific reason, a WTO message should be issued when the value exceeds 80 %, but you want to achieve this without editing the WFEX options.

### Action

Set the `tcbsrb_limit` value in procedure `ERBR3SYS` to 80%, and start an `RMFM3B` instance with the parameter `report=sysinfo`.

## User-defined exception-initiated monitoring

You can use the RMF Monitor III batch reporter to trigger other activities based on exception events other than WTO messages.

In procedure `ERBR3WFX`, modify the statement:

```
SELECT PGM(ERBCSWTO) PARM(wtomsg)
```

with the name of your own module (for example, `FRMFUSR`):

```
SELECT PGM(FRMFUSR) PARM(data)
```

## The automated approach

You can easily improve the efficiency of monitoring with RMF Monitor III batch reporter by combining some of the recommendations above.

Also you can combine some of the RMF Monitor III batch reporter features with your existing automated operations environment.

A suitable candidate for this is the `RMFM3B` task in conjunction with the `ERBR3WFX Wfex_Handler_3` procedure.

If you enhance this procedure to a table-driven function (this table can be a triplet of `MSGID-EXCEPTION-THRESHOLD` items), you can keep track of all exception situations that are considered to force an intervention.

Obvious as it might seem, this offers the possibility of making your systems management environment more powerful with remarkably little effort.



---

## Part 6. Analysis on the workstation

In addition to host-based reporting functions in RMF, there are other components available that offer reporting capabilities on the workstation.

The **RMF Spreadsheet Reporter** assists you in converting Postprocessor listings and Overview records into spreadsheets. The spreadsheet applications are shipped with RMF, and must be downloaded to your workstation before you can start. With the Spreadsheet Reporter, you can convert Postprocessor listings and Overview records to spreadsheets. This enables you to handle RMF data using techniques familiar to every spreadsheet user. In addition, the Spreadsheet Reporter provides sample macros to help you presenting and analyzing performance data at a glance.

**RMF PM** allows you to monitor the performance of your z/OS host from a workstation through a TCP/IP interface to one or more sysplexes. You logon to any sysplex and you can monitor the resources in the corresponding sysplex.

**IBM z/OS Management Facility (z/OSMF)** is a web-browser based management console for z/OS. The **z/OSMF Resource Monitoring** plug-in allows cross-sysplex performance monitoring from a single point of control. From the z/OSMF task tree, you can select the following subtasks:

- The **Sysplex Status task** provides an enterprise-wide health check of all z/OS sysplexes.
- For further analysis, the **Monitoring Desktops task** can graphically display RMF Monitor III as well as AIX or Linux metrics by means of customizable views.



---

## Chapter 13. How to work with Postprocessor XML reports

RMF offers a set of components and features that assist you in comfortably producing and/or viewing your Postprocessor reports that you have requested in XML output format:

- “Producing and viewing XML reports with the Spreadsheet Reporter” on page 233
- “Producing and viewing XML reports with the HTTP API of the DDS” on page 233

---

### Producing and viewing XML reports with the Spreadsheet Reporter

The Spreadsheet Reporter offers an option to produce selected Postprocessor reports in XML output format. Refer to [Table 43 on page 253](#) for supported reports. For these reports, the Spreadsheet Reporter also offers an action for viewing them in a web browser. For more information, refer to [Chapter 14, “RMF Spreadsheet Reporter,” on page 235](#).

---

### Producing and viewing XML reports with the HTTP API of the DDS

You can also use the HTTP API of the Distributed Data Server to request one or more of the Postprocessor reports available in XML output format. For a detailed description of the syntax of such requests, see [Accessing performance data using the RMF Distributed Data Server in z/OS Resource Measurement Facility Programmer's Guide](#).

---

### How to view XML reports in a browser

When you load a Postprocessor XML report into a browser, you see the report sections collapsed. To view all sections and subsections, use the **Expand all sections** button (the plus signs) in the upper right corner. The sections expand, and the plus signs change to minus signs as shown in [Figure 50 on page 234](#). To expand a single section, click on the arrow left to the section name.

Postprocessor XML reports provide a capability to sort tabular data wherever suitable. When you move the cursor over a column header, and the column contains sortable data, then you can click on the header to obtain the data sorted in either ascending or descending order as shown in the expanded **I/O Processor (IOP) Data** section in the **I/O Queuing Activity Report** sample of [Figure 50 on page 234](#).

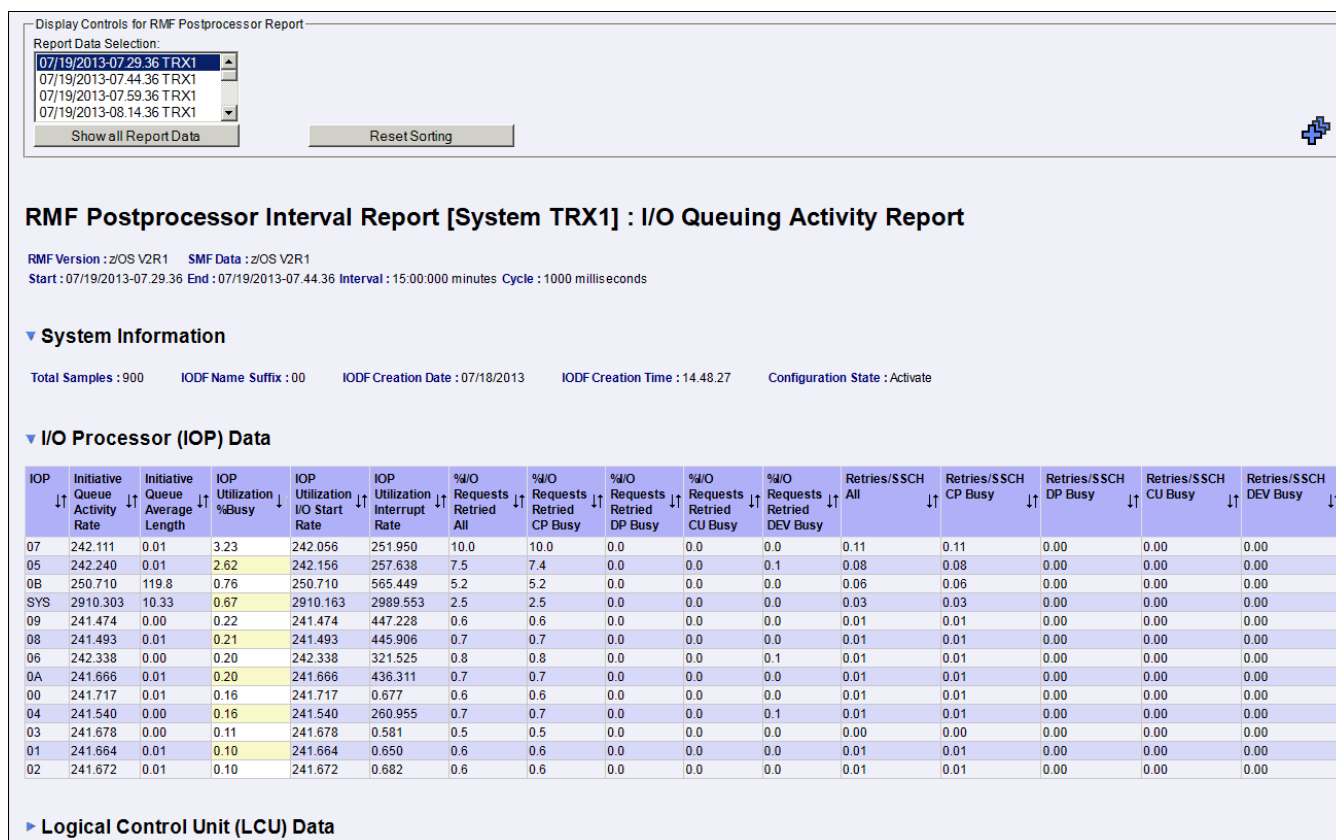


Figure 50. Sortable data in Postprocessor reports in XML format

---

## Chapter 14. RMF Spreadsheet Reporter

This information unit covers the following topics:

- [“Concepts of performance analysis with the RMF Spreadsheet Reporter” on page 235](#)
- [“Installing the Spreadsheet Reporter” on page 238](#)
- [“How to use the RMF Spreadsheet Reporter” on page 239](#)
- [“How to create Working Sets in batch mode” on page 254](#)
- [“Using RMF spreadsheet macros” on page 257](#)

### Concepts of performance analysis with the RMF Spreadsheet Reporter

---

The RMF Spreadsheet Reporter is the powerful workstation solution for graphical presentation of RMF Postprocessor data. Use it to convert your RMF data to spreadsheet format and generate representative charts for all performance relevant areas.

The RMF Spreadsheet Reporter offers the following features:

- ease of use - manage the related resources by means of an Explorer-like GUI
- fast path to graphical presentation - prepare the SMF data in one single step
- batch mode - generate the input files for the spreadsheets without any GUI interaction

Performance data derived from SMF records is the basis for z/OS performance analysis and capacity planning. The basic idea of the RMF Spreadsheet Reporter is to exploit the graphical presentation facilities of a workstation for these purposes: it extracts performance measurements from SMF records, produces Postprocessor Report Listings and Overview Records and converts this Postprocessor output into spreadsheets. Thus, the Spreadsheet Reporter offers a complete solution of enhanced graphical presentation of RMF measurement data.

The Spreadsheet Reporter also provides several sample spreadsheet macros to help you in viewing and analyzing performance data at a glance.

#### DISCLAIMER OF WARRANTIES

All spreadsheet macros are sample code created by IBM. These macros are provided to you solely for the purpose of assisting you in the development of your applications and to demonstrate what can be done with RMF performance data.

Support for these macros is not available. In addition, there is no guarantee that the spreadsheet macros will work on your system or with your spreadsheet application. Nevertheless, enhancements and possible fixes for the spreadsheet macros may become available in the future. Updates to the macros are shipped in the Spreadsheet Reporter as part of the z/OS deliveries.

### Get more out of Postprocessor reports with the Spreadsheet Reporter

RMF Postprocessor reports are the preferred media to analyze SMF data for long-term reporting. However, these are tabular report listings, and it can be cumbersome to analyze their content or retrieve exactly the required performance information. With the Spreadsheet Reporter, you can easily convert these reports to spreadsheet format, and use spreadsheet macros for graphical presentation. Graphical charts are a comfortable medium for performance analysis and also significantly improve the capability of long-term and trend reporting of RMF data.

Besides **Report Listings**, RMF provides two flexible mechanisms to prepare long-term Postprocessor performance data for trend analysis: **Overview Reports** and **Overview Records**. They offer the capability

to retrieve **selective** metrics from your system - in contrast to Postprocessor reports, which contain a predefined set of metrics in each report.

## Concepts of Overview Reports and Overview Records

As mentioned above, Overview Reports and Overview Records are used for long-term performance analysis. Both are generated from overview control statements which specify the performance metrics that you want to examine. The Spreadsheet Reporter provides several macros that generate these statements for you, so that you do not need to know about their syntax.

**Overview Reports** have the same layout as the Summary report. However, in deviation to the Summary report, the Overview Report does not have a fixed layout, but the overview control statements specified for the Postprocessor define which metrics should be included in the report. This gives you a high flexibility because you can retrieve nearly all fields of the single-system and sysplex reports with the help of these statements. Thus, the Overview Report provides selected performance data and summarizes system activity for each interval within the reporting period.

With Postprocessor statement OVERVIEW(REPORT) you specify that you want to generate an Overview Report. Overview Reports provide a readable, tabular format of performance measurement data.

**Overview Records** are designed for further processing with spreadsheet macros. With the statement OVERVIEW(RECORD) you specify that you want to generate Overview Records (instead of an Overview Report).

Also you can use Overview Records with your own applications to process RMF data. For this purpose, you find a description of the Overview Record structure in [z/OS Resource Measurement Facility Report Analysis](#).

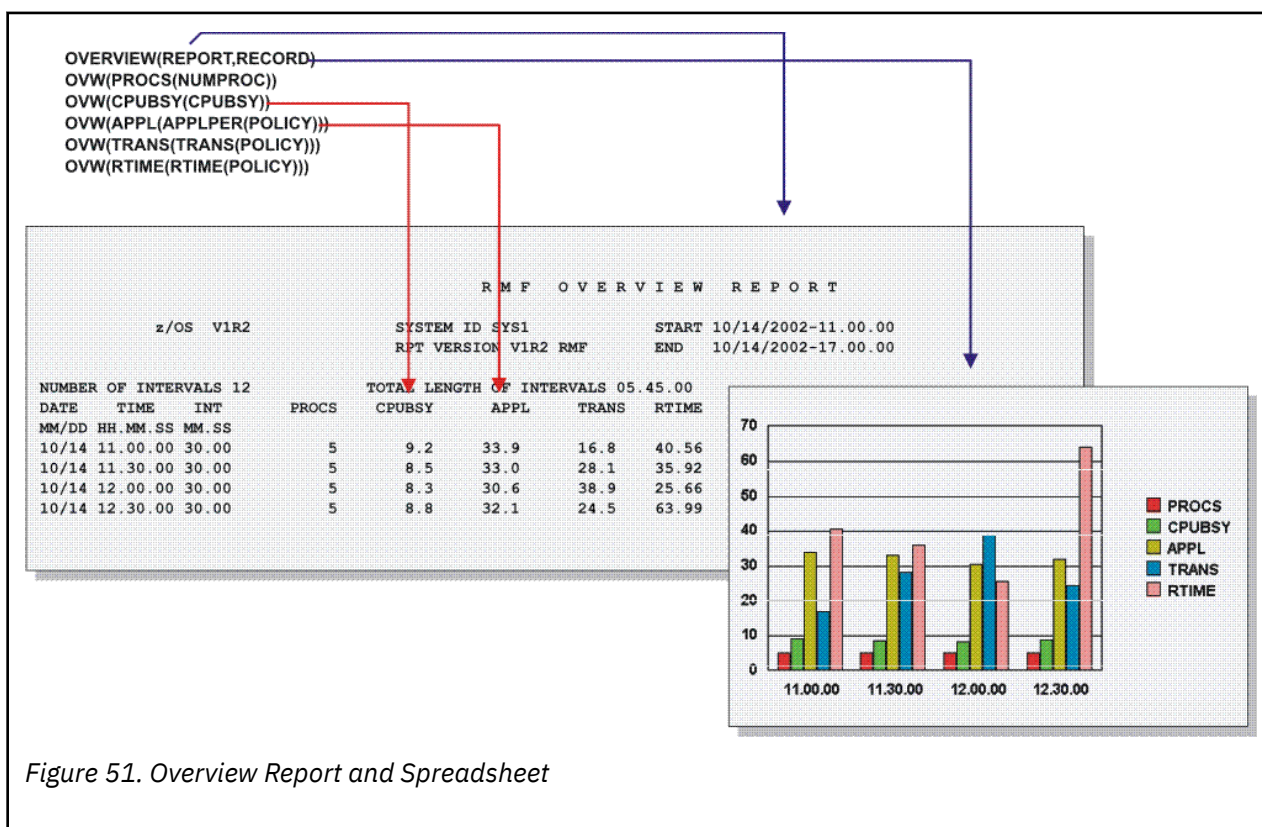


Figure 51. Overview Report and Spreadsheet

Figure 51 on page 236 shows how the same metrics retrieved by a common set of overview control statements are presented in an Overview Report as well as in a spreadsheet. For example, with the overview control statement OVW(CPUBSY(CPUBSY)) you specify that you want to retrieve the percentage of time the logical processors were busy. This value is reported as LPAR BUSY TIME PERC in the CPU Activity report for each reported interval.

## The Spreadsheet Reporter's resource-oriented concept

The Spreadsheet Reporter uses a resource-oriented concept. In the main dialog, the resources are grouped into **remote** and **local** resources.

- **Remote:**

- SMF Dump Data
- Report Listings
- Overview Records

- **Local:**

- Report Listings
- Overview Records
- Working Sets
- Spreadsheets

XML Reports are available as local or remote Report Listings.

Remote resources are located on the host system, local resources are located on your workstation. All actions that you perform with resources are described in [“How to work with Resources” on page 243](#).

With the Spreadsheet Reporter, it is possible to convert Postprocessor output (Report Listings or Overview Records) to a data format that you can feed into spreadsheet macros for graphical presentation.

1. You define a host system to the Spreadsheet Reporter to enable the data transfer between the host and the workstation.
2. On your workstation, you create a remote resource of type **SMF Dump Data**. This designates an SMF data set on the host.
3. From this resource, you create a **Working Set** on your workstation. You can complete this step with one single action, because the Spreadsheet Reporter automatically performs the involved data preparation tasks as shown in [Figure 52 on page 238](#):
  - **Collect:** To create Report Listings or Overview Records, a Postprocessor job is generated and submitted on the host system.
  - **Download:** This remote Postprocessor output is downloaded to your workstation.
  - **Generate:** To generate a Working Set from the downloaded Report Listings or Overview Records, the extraction and conversion of the relevant data is performed.

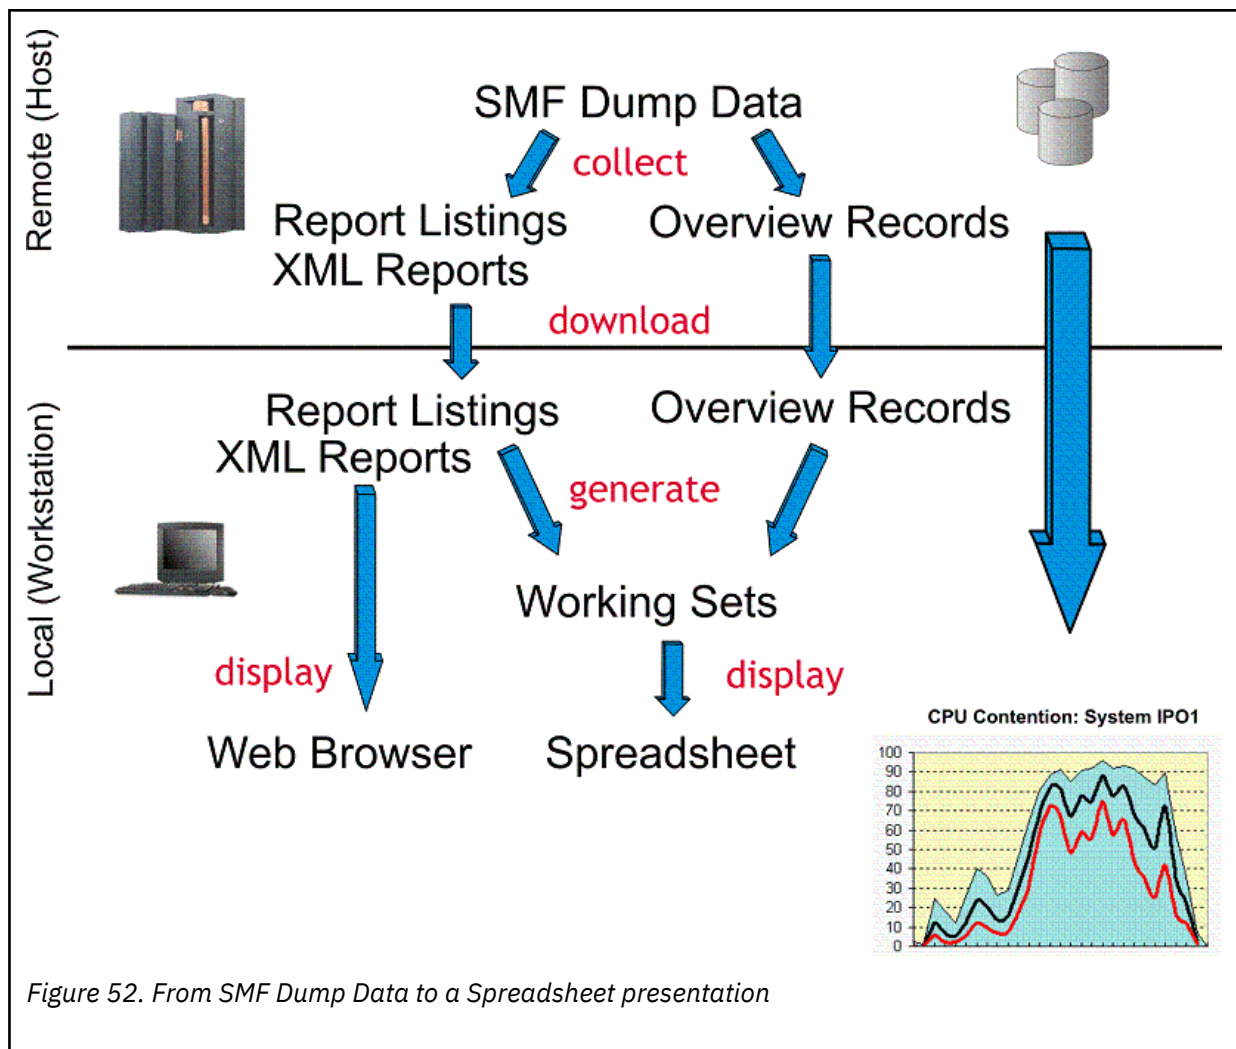


Figure 52. From SMF Dump Data to a Spreadsheet presentation

4. You select a **Spreadsheet** which you feed with the created Working Set. Thus you receive a graphical display of the performance data captured in the original SMF Dump Data.

You can also create a Working Set step by step: for example, you can initiate the Postprocessor data collection and the download at one time and generate the Working Set later.

**Note:**

1. The RMF Spreadsheet Reporter also provides a collection of procedures that allow you to generate Working Sets in batch mode without any GUI interaction. For more information refer to ["How to create Working Sets in batch mode"](#) on page 254.
2. The RMF Spreadsheet Reporter also provides a set of reports in XML format. You can view these XML reports in a web browser.

## Installing the Spreadsheet Reporter

You must install the Spreadsheet Reporter with each new release of RMF to cover all changes in Postprocessor reports.

You must have the following requirements to install the Spreadsheet Reporter:

- A computer with Windows 10 or Windows 11 operating system.

**Note:** On a multiuser operating system, each user who wants to work with the Spreadsheet Reporter must install it separately.

- Microsoft Excel (Excel 2013 or later).



- Administrator rights of the workstation where you install the Spreadsheet Reporter.

The Spreadsheet Reporter is part of the RMF product. The deliverable includes:

- The Spreadsheet Reporter application files.
- Spreadsheet Macros for Microsoft Excel.
- A sample RMF Report Listing.

The installation utility of Spreadsheet Reporter is available as ERB9R2SW member of the host distribution library SERBPWSV. You can also find the latest version of Spreadsheet Reporter in the [GitHub](#) repository.

1. Download the ERB9R2SW member as binary file `erb9r2sw-v.r.m.msi`. Alternatively, you can download the Spreadsheet Reporter from the [GitHub](#) repository.

Where *v.r.m* is the version, revision, and modification number of RMF Spreadsheet Reporter.

2. Install the MSI package using the Windows Installer, either by double-clicking on the MSI package file or by issuing the following command:

```
msiexec /package erb9r2sw.msi
```

The Windows Installer guides you through the installation.

3. Specify the directory where you want to install the Spreadsheet Reporter.

The default location is: `C:\Program Files\RMF\RMF Spreadsheet Reporter`

4. Specify the resource directory, that is the drive and folder where the Spreadsheet Reporter places the resources, such as Report Listings, macros or Working Sets.

You may accept the default location or specify another location.

**Note:** The amount of disk space required can significantly differ depending on how the product is utilized. The total disk space needed depends upon the number and size of listings, records, and working sets. Upon initial installation, the product occupies approximately 100MB of disk space for the Application Data Directory. However, the disk space requirements can reach multiple gigabytes for users who utilize the product extensively. Therefore, it is recommended that users assess their disk space requirements based on their usage patterns to ensure adequate storage capacity.

The Spreadsheet Reporter is installed into program group *IBM RMF Performance Management*.

## How to use the RMF Spreadsheet Reporter

The Spreadsheet Reporter uses a resource oriented concept. Starting from the main dialog, you maintain the **systems** from which you retrieve the performance measurements, and the **resources**.

A typical usage scenario for the Spreadsheet Reporter is to run a Postprocessor job on the host, download the resulting Postprocessor data set (Report Listing or Overview Records) to the workstation, and convert it into a Working Set. The Working Set now contains your individual performance measurement data. Now you start a spreadsheet macro for graphical performance analysis and you feed the macro with the generated selected Working Set. This is the fast path for graphical presentation of RMF performance data.

As you can perform most of the transitions between the resource types in all variations, you may use the Spreadsheet Reporter also as a remote Postprocessor execution and download utility. For example, you may initiate the execution of a Postprocessor job from your workstation and store the Report Listing output on the host without downloading. Using **File ---> Transfer**, you can download RMF Postprocessor data sets later.

If you use the RMF Spreadsheet Reporter for the first time, you need to define one or more systems from which you want to retrieve performance measurements. If no system is defined, the Spreadsheet Reporter issues the following message:

If you do not want to define a system now, you can still continue to work with local resources. How to define systems is described in [“How to work with Systems”](#) on page 248.

## Spreadsheet Reporter resources

The Spreadsheet Reporter resources introduced in [“The Spreadsheet Reporter's resource-oriented concept”](#) on page 237 are described in the following sections.

### SMF Dump Data

RMF writes performance measurement data into SMF records, from which the Postprocessor extracts the reports or metrics by producing Report Listings or Overview Records. **SMF data** from two sources can be used as input to the Postprocessor:

- SMF records from SMF dump data sets: SMF dump data is usually stored in generation data groups (GDGs). With the Spreadsheet Reporter, these data sets can be defined as remote resources of type **SMF Dump Data**.
- SMF records from the **RMF Sysplex Data Server's SMF buffer**: This is a wrap-around buffer, used by RMF to store copies of SMF records written to the SMF dump data sets.

When you create Working Sets, Report Listings, XML Reports, or Overview Records, you determine which type of SMF data the Postprocessor should use: If you do not select any **SMF Dump Data** resource, then the Postprocessor automatically extracts the requested data from the **RMF Sysplex Data Server's SMF buffer**.

### Report Listings

A Report Listing is the result of a Postprocessor batch job submitted on the host system, with SMF data specified as input.

There are two methods to create a resource of type **Report Listing** from SMF data:

- Using **Create ---> Report Listing...** generates and submits a Postprocessor job. The Postprocessor collects the data from SMF and produces a Report Listing on the host (remote). You have the choice to additionally transfer it to your workstation (local). Local Report Listings are stored with file extension '.lis', for example: SYSF.D128.T135719.lis.

For the Postprocessor report types listed in [Table 43 on page 253](#), the Spreadsheet Reporter can generate Report Listings with a file extension .xml which you can view in a web browser. For more information see [“How to specify Postprocessor report types”](#) on page 252 and [“How to view local Report Listings”](#) on page 245.

- Using **Create ---> Working Set...** directly converts the SMF data into spreadsheet format, optionally storing the intermediate Postprocessor Report Listing as local and remote resources.

The default names for Report Listings consist of four parts:

- TSO high level qualifier for remote listings or system name for local listings
- prefix D + julian day
- prefix T + time in HHMMSS
- 'LISTING' for remote data sets or 'lis' or 'xml' for local copies

#### Examples:

```
IBMUSER.D203.T104615.LISTING (remote)
SYSF.D203.T104615.lis (local)
```

### Overview Records

Overview Records are the result of a Postprocessor batch job submitted on the host system.

There are two methods to create a resource of type **Overview Records** from SMF data:

- Using **Create ---> Overview Record...** generates and submits a Postprocessor job. The Postprocessor collects the data from SMF and produces an Overview Record data set on the host (remote). You have

the choice to additionally transfer it to your workstation (local). Local Overview Records are stored with file extension '.rec', for example: SYSF.D128.T135719.rec.

- Using **Create ---> Working Set...**, you can also create and store an intermediate data set containing Overview Records. In this case, you need to select option **Create Overview Records** in the **Options** dialog (see [“How to specify processing options and report types”](#) on page 251). This causes the Postprocessor to create a resource of type **Overview Records** instead of an Overview Report.

In both cases you need to attach a file with overview control statements to the current system (see [“How to use overview control statements”](#) on page 249).

The default names for data sets containing Overview Records consist of the following parts:

- TSO high level qualifier for remote data sets or system name for local copies
- prefix D + julian day
- prefix T + time in HHMMSS
- 'OVWREC' for remote data sets or 'rec' for local copies

#### Examples:

```
IBMUSER.D199.T131456.OVWREC (remote)
SYSF.D199.T131456.rec (local)
```

## Working Sets

Working Sets are used as input to a spreadsheet macro. The RMF Spreadsheet Reporter can create a Working Set from:

- SMF Dump Data
- Report Listings (local and remote).
- Overview Records (local and remote).

When creating a Working Set directly from **SMF Dump Data**, you must be aware for which spreadsheet macro you want to use it, because certain spreadsheet macros require as input a Working Set derived from a Report Listing, while other spreadsheets require a Working Set derived from Overview Records. How to produce either type of a Working Set is described in [“How to create Working Sets”](#) on page 246.

The default names for Working Sets comprise the following parts:

- type indicator: 'Rpt' (created from a Report Listing) or 'Ovw' (created from Overview Records)
- system name
- prefix D + julian day
- prefix T + time in HHMMSS

#### Examples:

```
Rpt.SYSF.D203.T103840
```

```
Ovw.SYSA.D143.T144210
```

To use a Working Set for graphical analysis with a spreadsheet macro, you can invoke a **Spreadsheet** from the Spreadsheet Reporter dialog. The spreadsheet macro lets you then select a Working Set to be processed.

## Spreadsheets

You use spreadsheet macros for the final presentation of the SMF data. The Spreadsheet Reporter extracts measurement data from SMF dump data and finally converts it into a Working Set which then contains your individual performance data. Just load and view your performance data by feeding the spreadsheet macros with a selected Working Set.

The Spreadsheet Reporter provides several sample spreadsheet macros to help you in viewing and analyzing performance data at a glance. Examples of available spreadsheets are **Workload Activity Trend Report** or **DASD Activity Report**.

Certain spreadsheet macros require as input a Working Set derived from a Report Listing (**Report Working Set**), while other spreadsheets require a Working Set derived from Overview Records (**Overview Working Set**).

“How to create Working Sets” on page 246 provides information about which spreadsheet macro requires which type of Working Set.

If you want to write your own spreadsheet macros, you can use the registry entry

```
HKEY_CURRENT_USER -> SOFTWARE -> VB and VBA Program Settings ->
RMF Spreadsheet Reporter -> JEnvironment -> path
```

to access the Spreadsheet Reporter working set directory, for example,

```
C:\Documents and Settings\Administrator\Application Data\RMF\
RMF Spreadsheet Reporter\WorkingSets
```

To view this registry entry, open the **Windows Registry Editor** by typing regedit into a command prompt.

In previous versions of the RMF Spreadsheet Reporter, the registry entry

```
HKEY_CURRENT_USER -> SOFTWARE -> VB and VBA Program Settings ->
RMF Spreadsheet Reporter -> Environment -> path
```

was used to store the working set directory.

## Spreadsheet Reporter main dialog

After invoking the Spreadsheet Reporter using the program folder **IBM RMF Performance Management - RMF Spreadsheet Reporter**, the **IBM RMF Spreadsheet Reporter Java TM Technology Edition** dialog is displayed.

The main dialog consists of a split panel:

- The **navigation pane** (on the left): Here you navigate to resources and systems that you want to manage.

Clicking on the **Resources** tab shows you all resource types. You can open a resource type folder containing the corresponding resources. Existing resources are then displayed on the **view pane** (right hand side).

The resources are organized as a tree containing **remote** and **local** resources.

Clicking on the **Systems** tab opens a folder, **All Systems**. All defined z/OS host systems are displayed in the **view pane**.

If you want to access remote resources, you must first select the system where these resources reside. Otherwise, the list will be empty.

- The **view pane** (on the right): Here you see available resources or systems. You can select resources or systems and initiate actions (for example, create a Working Set from a Report Listing) or maintain them (for example, modify properties or add/delete systems or resources).

**Example:** The folder for the remote resource type **SMF Dump Data** is opened. In the **view pane** you see a list of SMF data sets residing on system **SYSF**. These data sets have been defined to the Spreadsheet Reporter earlier with the New SMF Dump Data dialog (see “How to create SMF Dump Data” on page 243).

### Note:

1. The currently selected system (in our example, **SYSF**) is shown in the title bar of the main dialog.
2. While using the RMF Spreadsheet Reporter, you may always press F1 to get help.
3. To reach the context menu for a list of resources or systems, use **Alt+A** from free space.

4. To reach the context menu for a single list element, select this element and use **Alt+A**.

## Menu bar

Each menu bar item offers a pull-down choice to trigger the RMF Spreadsheet Reporter actions. The most frequent and important actions can also be started from the icons in the tool bar. Positioning the cursor over an icon displays a fly-over text indicating the provided action.

The pull-down choices of all menu bar items are described in detail in the Spreadsheet Reporter's online help. Here is an overview of the Spreadsheet Reporter actions that you can trigger:

### File

offers actions to print Report Listings or to transfer remote resources to your workstation.

### Define

offers dialogs to define:

- a new System
- new SMF Dump Data
- a new remote Report Listing
- a new remote Overview Record

### View

offers choices to display a Java™ or Windows look and feel of the Spreadsheet Reporter.

### Settings

offers dialogs to specify:

- general processing options
- Postprocessor report types which you want to include in the Report Listings
- start and end times of the reporting periods
- duration periods.

### Create

offers actions to generate Report Listings, Overview Records or Working Sets. The **Create** actions are related to the currently selected resources, so that only actions valid in a given context are selectable.

### Messages

offers entry points to access all types of messages resulting from running the remote RMF Postprocessor jobs.

## How to work with Resources

Before you can work with **remote** resources, you need to select a system under the **Systems** tab in the **navigation pane**. The system name is then added to the title bar. It changes if you select another system or disappears if no system is selected at all.

You can work with **local** resources without an existing system definition.

To display available resources, click on the **Resources** tab in the **navigation pane** and then click on a resource type. The existing resources appear in the **view pane**. For example, the folder of resource type **SMF Dump Data** is opened and the **view pane** shows a list with the contained data sets.

If you right-click into the **view pane's** free space, a pop-up menu with action **New** appears. With this action, you add a new resource. If you right-click a selected resource from the list, the pop-up menu appears with applicable actions for this resource, for example, **Rename** or **Delete**.

## How to create SMF Dump Data

Creating resources of type **SMF Dump Data** consists of adding the name of a remote SMF data set to the **view pane**. This name is just the pointer to the SMF data set which remains located on the host.

To create an **SMF Dump Data** resource, perform the following steps starting from the main dialog:

1. Select a system.
2. Click the **Resources** tab in the **navigation pane** and select resource type **SMF Dump Data**.
3. Right-click in the free space of the **view pane**.
4. In the pop-up menu, choice **New** is enabled. Clicking on this choice opens the **New SMF Dump Data** dialog, where you enter the fully qualified name (without quotes) of an existing host data set.
5. Press the **OK** button to add the new name to the list.

## How to create Report Listings

You have two possibilities to create a new Report Listing:

- Create a Report Listing from **SMF Dump Data** using the appropriate **Create...** dialog. This method is described in the following.
- Add a new list element to the **view pane** for an existing remote Report Listing using the appropriate **New...** dialog (see [“How to add remote resources”](#) on page 248).

To create a Report Listing, you have two choices:

- On the **navigation pane**, open resource type **SMF Dump Data** to select one or more remote SMF data sets as input to the **Create...** dialog.
- If you do not select an SMF data set, the Postprocessor accesses the RMF Sysplex Data Server's SMF buffer on the current system.

If you now open the **Create** menu, you see the item **Report Listing...** enabled. Clicking on this item opens the **Create Report Listing** dialog. With this dialog you can generate a Postprocessor job and start it on the remote system. The created Report Listing contains the reports selected in the **Options** dialog (see [“How to specify Postprocessor report types”](#) on page 252) and covers the time range specified in the **Intervals** dialog.

In the **RMF Postprocessor Data Sets** group box from the **Create Report Listing** dialog, you specify whether to download the generated Report Listing:

- To download the Report Listing to the workstation, accept or specify a local data set name in the **Local** entry field.
- If you delete the name in the **Local** entry field, the Report Listing is created only on the host system with the data set name specified in the **Remote** entry field.

With multiple SMF input data sets selected and an optional local file name specified, the **Run** button starts the following processing:

1. The data set with the name **IBMUSER.D254.T162349.LISTING** shown in the **Remote** entry field is allocated on the host system. This suggested name indicates the current date and time (see also [“Report Listings”](#) on page 240 for naming conventions). You may accept or overwrite this name.
2. A job that uses the specified SMF data sets as input is created and sent to the host. For the job creation, the Spreadsheet Reporter uses a job skeleton that is stored in the installation directory in subdirectory `\Connect\rmfpp1.jcl`. If you need additional parameters or records (for example, a `//STEPLIB` record), you can modify the skeleton according to your requirements.

**Note:** The Spreadsheet Reporter uses the `rmfpp1.jcl` job skeleton also for the creation of Overview Records, Working Sets, and XML reports.

The generated reports are stored as a Report Listing in the allocated remote data set from step [“1”](#) on page 244.

3. This remote data set is transferred to your workstation with the file name suggested in the **Local** entry field (which you may overwrite). Thus, you create a new Report Listing both as remote and local resource. You can use the local resource to create a Working Set later.

Use **File ---> Transfer ...** to create a local Report Listing from a remote Report Listing (that is, downloading an RMF Postprocessor data set containing a Report Listing).

If you receive a Report Listing, for example by mail attachment, you may want to import this listing locally to the RMF Spreadsheet Reporter for further processing. You must store this data set with file extension **.lis** or **.xml** in subdirectory '**...\RmfListings**' of that directory that you specified during installation as the resource directory. The default is:

```
C:\Documents and Settings\Administrator\Application Data\RMF\
RMF Spreadsheet Reporter\RmfListings
```

Then you can convert this Report Listing to a Working Set to use it in a spreadsheet macro, or if it is an XML type listing, view it in a web browser for further analysis.

### **How to create XML reports**

XML reports are a special type of Report Listings. If you want to receive XML reports for viewing in a web browser, you need to select option **Use XML Report Format** in the **Options** dialog. Then the Spreadsheet Reporter generates a local Report Listing with extension **.xml** for those reports that you selected from the available Postprocessor report types, which are listed in [Table 43 on page 253](#)). The generated local XML Report Listing contains Postprocessor output in XML format for the selected reports. You can view the reports in a web browser as described in [“How to view local Report Listings” on page 245](#). An appropriate XSLT style sheet which transforms the XML to HTML is provided with the Spreadsheet Reporter.

### **How to view local Report Listings**

There are two ways to view local Report Listings. Either double-click on a local Report Listing in the **view pane** or select an entry, click the right mouse button and then select **View** from the pop-up menu:

- Report Listings with extension **.lis** are opened in a text view.
- Report Listings with extension **.xml** are opened in a web browser.

### **How to create Overview Records**

You have two possibilities to create a new Overview Record:

- Create an Overview Record from **SMF Dump Data** using the appropriate **Create ...** dialog. This method is described in the following.

**Note:** You need to attach a file with overview control statements to the system on which you want to generate Overview Records from an SMF input data set. For information about this process, see [“How to use overview control statements” on page 249](#). Also you must activate option **Create Overview Records** from the **Options** dialog (see [“How to specify processing options and report types” on page 251](#)).

- Add a new list element to the **view pane** for an existing remote Overview Record using the appropriate **New ...** dialog (see [“How to add remote resources” on page 248](#)).

To create an Overview Record, you have two choices:

- On the **view pane**, open resource type **SMF Dump Data** to select one or more remote SMF data sets as input to the **Create...** dialog.
- If you do not select an SMF data set, the Postprocessor accesses the RMF Sysplex Data Server's SMF buffer on the current system.

The created Overview Records cover the time range specified in the **Intervals** dialog.

If you now open the **Create** menu, you see the item **Overview Record...** enabled. Clicking on this item opens the **Create Overview Record** dialog. With this dialog you generate a Postprocessor job and start it on the remote system. The created Overview Records are built according to the overview control statements contained in the attached file.

In the **RMF Postprocessor Data Sets** group box from the **Create Overview Records** dialog, you specify whether to download the generated Overview Records:

- To download the Overview Records to the workstation, accept or specify a local data set name in the **Local** entry field.



- If you delete the name in the **Local** entry field, the Overview Record is created only on the host system with the data set name specified in the **Remote** entry field.

With multiple SMF input data sets selected and an optional local file name specified, the **Run** button starts the following processing:

1. The data set with the name **IBMUSER.D254.T165807.OVWREC** shown in the **Remote** entry field is allocated on the host system. This suggested name indicates the current date and time (see also [“Overview Records” on page 240](#) for naming conventions). You may accept or overwrite this name.
2. A job that uses the specified SMF data sets as input is created and sent to the host. The job extracts the metrics as specified in the attached file with overview control statements. The extracted overview data is stored as Overview Records in the allocated remote data set from step “1” on page 246. If you did not attach a file with overview control statements to the current system, you receive a message stating that Overview Records cannot be created.
3. This remote data set is transferred to your workstation with the file name that you specified in the **Local** entry field (which you may overwrite). Thus, you create a new Overview Record file both as remote and local resource. You can use the local resource to create a Working Set later.

Use **File ---> Transfer ...** to create a local Overview Record from a remote Overview Record (that is, download an RMF Postprocessor data set containing Overview Records).

If you receive Overview Records, for example by mail attachment, you may want to import this data set locally to the RMF Spreadsheet Reporter for further processing. You must store this data set with file extension '.rec' in subdirectory '...\RmfRecords' of that directory that you specified during installation as the resource directory. The default is:

```
C:\Documents and Settings\Administrator\Application Data\RMF\
  RMF Spreadsheet Reporter\RmfRecords
```

Then you can convert this Overview Record to a Working Set to use it in a spreadsheet macro for further analysis.

## How to create Working Sets

You can create a new Working Set from resources of the following types:

- SMF Dump Data
- Report Listing (local and remote, however, not from XML type listings)
- Overview Records (local and remote).

To generate a Working Set from one of these resources, first select the resource type to display the list of available resources. Then, from the list in the **view pane**, select the resource that you want to process.

If you now open the **Create** menu, you see that the choice **Working Set...** is enabled. Click that choice to open the **Create Working Set** dialog. The layout of this dialog depends on the resource type that you want to process.

The most comprehensive dialog appears if you want to create a new Working Set from **SMF Dump Data**. Then, the dialog reflects all processing steps: run the Postprocessor job on the host, transfer the Report Listing or Overview Record to the workstation, and finally generate the Working Set. During this process, the Spreadsheet Reporter creates the corresponding intermediate Postprocessor data sets. The dialog consists of three group boxes:

- the **SMF Dump Input Data** box reflects the **Collect** step: it shows the selected SMF input data sets. This box is empty if you did not select an SMF input data set, but decided to collect data from the RMF Sysplex Data Server's SMF buffer. In either case, a Postprocessor job is created and submitted that generates Report Listings or Overview Records.
- the **RMF Postprocessor Data Sets** box reflects the **Download** step: it proposes a name for the remote Report Listing or Overview Record and for its local copy after download. You may overwrite both names and specify your own ones.



- the **New Working Set** group box reflects the **Generate** step: it proposes a name for the Working Set and shows the location where the Working Set is to be stored. You may overtype the proposed Working Set name. The Spreadsheet Reporter keeps name and location consistent. Therefore you cannot edit the **Location** entry field.

If you want to create a Working Set from a remote Report Listing or a remote Overview Record, then the dialog has a simplified layout:

- The **SMF Dump Input Data** box is missing, because the **Collect** step has already been performed.
- The **RMF Postprocessor Data Sets** box and the **New Working Set** box have the same functions as described previously.

If you want to create a Working Set from SMF data, you must consider which spreadsheet macro you want to use for further analysis of this Working Set, because certain spreadsheet macros require as input a Working Set derived from a Report Listing (**Report Working Set**), while other spreadsheets require a Working Set derived from Overview Records (**Overview Working Set**).

The following spreadsheet macros require a Report Working Set as input:

- Cache Subsystem Report
- Coupling Facility Trend Report
- Crypto Hardware Activity Trend Report
- DASD Activity Report
- I/O Subsystem Report
- LPAR Trend Report
- Open RMF Report Spreadsheets
- Summary Report
- Tape Mount Report
- Workload Activity Trend Report
- XCF Trend Report

The following spreadsheet macros require an Overview Working Set as input:

- Cache Subsystem Overview Report
- Channel Overview Report
- Device Overview Report
- Open RMF Overview Spreadsheets
- LPAR Overview Report
- System Overview Report
- Workload Overview Report

## How to create Spreadsheets

On the **navigation pane**, you select the local resource type **Spreadsheets** to display a list of available spreadsheet macros in the **view pane**. Now double-click on a spreadsheet from that list.

By double-clicking a spreadsheet, or by selecting **Start** from its context menu, you can open a spreadsheet that presents a graphical view of a report or Overview Record, for example, the **LPAR Overview Report** spreadsheet.

Once you have opened the spreadsheet, you are ready to feed in the data from a Working Set. A dialog lets you select the Working Set and the reporting intervals contained in this Working Set.

For information on how to use the spreadsheet dialogs, either refer to the spreadsheets' online helps or to [“Spreadsheet usage examples”](#) on page 265.

## How to add remote resources

Remote Report Listings and Overview Records are automatically created as intermediate resources during Working Set creation.

Additionally, you may want to define existing remote Report Listings/XML Reports and Overview Records to the Spreadsheet Reporter. Use the same procedure as described for the creation of SMF Dump Data (see [“How to create SMF Dump Data”](#) on page 243). Either the **New Report Listing** or the **New Overview Record** dialog is invoked where you enter the fully qualified name (without quotes) of an existing host data set.

A second method to add remote resources is to select **Define ---> Remote Report Listing...** or **Define ---> Remote Overview Record....**

## How to work with Systems

To manage the systems, click the **Systems** tab in the main dialog to display all defined systems in the **view pane**

### How to create Systems

Right-click in the free space of the **view pane** with the systems currently defined. From the context menu, click **New** to start the **Define new System** dialog. After you specified all required values for the parameters, click **OK** to add the new system to the current list.

The **FTP Mode** field has two options, Active and Passive, that you can choose depending on your requirements.

Choosing the Active option is less secure than selecting the Passive option, as it requires the server to establish a port to the client. On the other hand, by choosing the Passive option, the server eliminates the need to open any ports to the client, making it a more secure choice.

The **FTP Mode** is set to Active by default. However, when transferring files using FTP, you can choose Passive in the **FTP Mode** field, as Active mode may not work behind some firewalls. This is because some firewalls might block incoming connections on random ports, which can cause issues when using Active mode. Therefore, Passive mode is the safer and more reliable option for FTP transfers, as it allows data to be transferred securely without any risk of being blocked by firewalls.

Alternatively, while defining the systems, you can approach the network administrator who initially set up the network and FTP server to request which mode to use for secure and efficient file transfer.

The **OVW** button opens a standard file dialog. Browse for a file containing overview control statements that you can attach to the current system. The file name is then displayed in the entry field. For information about the purpose of this file, read [“How to use overview control statements”](#) on page 249.

#### Note:

1. If you do not know your systems's hostname, you may retrieve this hostname and the system's TCP/IP address with the TSO command **hometest**.
2. The Spreadsheet Reporter uses an FTP connection to the host, with default port 21. To change this port, for example because of security restrictions, specify the port which you want to use with the hostname, appended with a ':'. For example, to use port 2001, specify your hostname using the following pattern: `boesysf.boeblingen.de.ibm.com:2001`
3. Some of the parameters that you define for a system are used for Postprocessor job creation. Another source for the job creation is a job skeleton that is stored in the installation directory in subdirectory `\Connect\rmfpp1.jcl`. If you need additional parameters or records (for example, a `//STEPLIB` record), you can modify the skeleton according to your requirements.

## How to maintain Systems

If you want to maintain a system, right-click this system to display its context menu to see the following choices enabled:

- Rename
- Delete
- Properties


To view or change a system's properties, select **Properties** to display the **System Properties** dialog. This dialog is identical to the **Define new System** dialog, except that you cannot change the **System ID**.

## How to use overview control statements


The dialogs **Define new System** and **System Properties** contain the **OVW** push button used to attach a file containing overview control statements to the current system.

Attaching such a file to a system is optional. If this file is attached, the contained overview control statements are processed in the following ways:

- You use action **Create ---> Report Listing...** from **SMF Dump Data**. Then the overview control statements are used to create a Report Listing containing a tabular Overview Report (suitable for reading, but not suitable for processing with a spreadsheet). This is the recommended way to create an Overview Report.

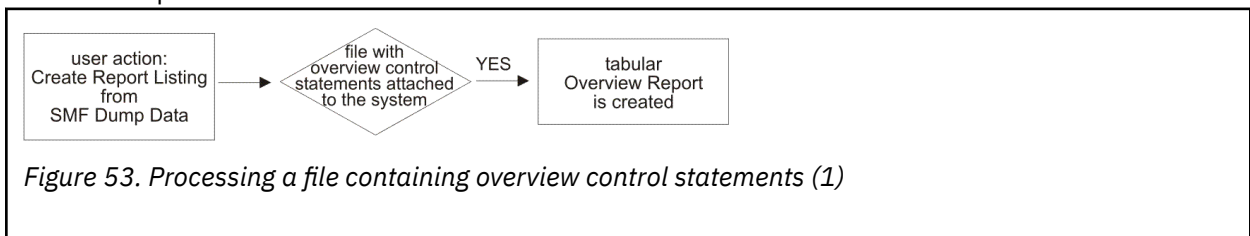

- You use action **Create ---> Working Set...** from **SMF Dump Data**. Then you should select general option **Create Overview Records** in the **Options** dialog. The overview control statements are used to create an Overview Records resource which is needed as input to an Overview Working Set. If option **Create Overview Records** is **not** selected, the Spreadsheet Reporter creates a Report Listing containing a tabular Overview Report according to the overview control statements. The Spreadsheet Reporter issues a message to indicate, that the Working Set could not be created from this Report Listing.

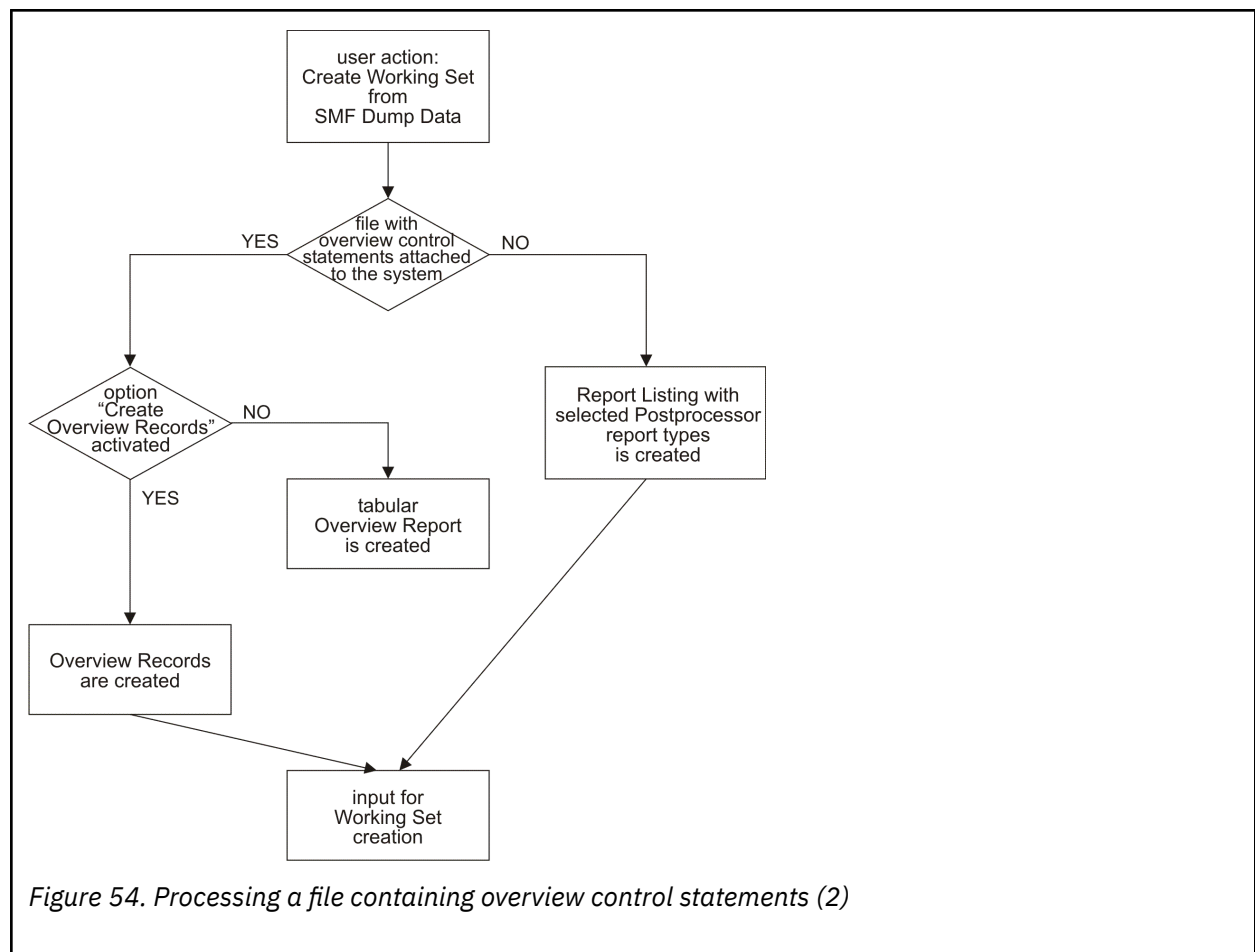

- You use action **Create ---> Overview Record...** from **SMF Dump Data**. This action is **not** possible without an attached file with overview control statements.

If **no** file containing overview control statements is attached to the system, and you want to create a Working Set in one step from **SMF Dump Data**, then the Spreadsheet Reporter will produce a Report Working Set containing the Postprocessor report types selected in the **Options** dialog.

If you want to create a Working Set from Report Listings or Overview Records, then the existence of an attached file is not checked, because the decision whether the Working Set should contain overview or report information has already been made.

**Note:** If you want to work with multiple sets of overview control statements for the same system, you can define multiple copies of the same system with a **different System ID**, a different file attachment, but with the **same Hostname**. This enables you to work with fixed attachments instead of changing the system properties all the time.

You can use the following spreadsheet macros to create a file containing overview control statements:

- Use the macro **Create Overview Control Statements** to produce overview control statements for all spreadsheet macros requiring an Overview Working Set.
- Use the **DASD Activity Report** macro to produce overview control statements for the **Device Overview Report** macro.
- Use the **Cache Subsystem Report** macro to produce overview control statements for the **Cache Subsystem Overview Report** macro.
- Use the **Workload Activity Trend Report** macro to produce overview control statements for the Workload Overview Report macro.

The advantage of the macros **Cache Subsystem Report** or **DASD Activity Report** is that they derive a list of identifiers from the loaded Working Set, for example, volume names when using the **DASD Activity Report**. You can select identifiers from this list, for example, the volumes with the highest activity.

## How to specify settings for the RMF Spreadsheet Reporter

With the RMF Spreadsheet Reporter you define the following settings:

- processing options
- report types
- reporting periods
- duration intervals

### How to specify processing options and report types

Select **Settings ---> Options** to invoke the **Options** dialog. Clicking on either the **General** or **Reports** tab, you start the following tasks:

- Specify general processing options
- Specify RMF Postprocessor report types

**Note:** The specified options and report types are active for all defined systems.

### How to specify general processing options

**Settings > Options > General** starts the **Options** dialog and select the options that you want to be active:

The options have the following meaning:

Dialog option	Description
<b>Create Overview Records</b>	Select this option to create Overview Records using the overview control statements contained in a file that is attached to the current system.  If a file with overview control statement is attached to the current system, but this option is not selected, then a readable Postprocessor Overview Report is generated according to the overview control statements contained in this file. However, you cannot process this report with spreadsheets.  If no file containing overview control statements is attached, then this option is ignored and the Working Set is generated with the selected RMF Postprocessor report types.
<b>Delete Postprocessor Datasets after Download</b>	<b>Remote</b> Report Listings or Overview Records on the host are deleted after a successful download to the workstation.
<b>Ignore specified Duration Period</b>	No DINTV control statement is generated from the interval options so that no duration reports will be created (see <a href="#">“How to specify reporting periods and duration intervals”</a> on page 254).
<b>Ignore specified Interval Time</b>	No RTOD control statement is generated from the interval options. The default from 00:00 to 24:00 is used (see <a href="#">“How to specify reporting periods and duration intervals”</a> on page 254).
<b>Save Password with System Profile</b>	The password that you specified for a system in dialogs <b>Define new System</b> or <b>System Properties</b> is saved but not encrypted. Otherwise you are prompted for the password for all actions that require a host logon.

Dialog option	Description
<b>Scratch Overview Records after Conversion</b>	The Spreadsheet Reporter deletes <b>local</b> Overview Records (*.rec files) after Working Set generation.
<b>Scratch Report Listings after Conversion</b>	The Spreadsheet Reporter deletes <b>local</b> Report Listings (*.lis files) after Working Set generation.
<b>Scratch extracted OVW Files after Conversion</b>	The Spreadsheet Reporter deletes <b>local</b> .OVW files after generating Working Sets from Overview Records.
<b>Scratch extracted RPT Files after Conversion</b>	The Spreadsheet Reporter deletes <b>local</b> .RPT files after generating Working Sets from Report Listings.
<b>Sort SMF Datasets</b>	You can specify whether the SMF data should be sorted. To ensure correct reports, the records in an SMF data set must be sorted by interval start date and interval start time.
<b>Use XML Report Format</b>	The Spreadsheet Reporter generates local Report Listings with extension <b>.xml</b> for certain Postprocessor report types. You can view these reports in a web browser.

## How to specify Postprocessor report types

The Spreadsheet Reporter supports a subset of Postprocessor reports for use in a spreadsheet.

<i>Table 42. Supported reports for spreadsheets</i>	
Supported Reports	Postprocessor Options
Cache Subsystem Activity Report	REPORTS(CACHE(SUBSYS))
Channel Path Activity	REPORTS(CHAN)
Coupling Facility Activity	SYSRPTS(CF)
Crypto Hardware Activity	REPORTS(CRYPTO)
CPU Activity	REPORTS(CPU)
DASD Device Activity	REPORTS(DEVICE(DASD))
Partition Data	REPORTS(CPU)
I/O Queuing Activity	REPORTS(IOQ)
Summary Report	SUMMARY(INT)
Tape Device Activity	REPORTS(DEVICE(TAPE))
Workload Activity (Report Classes)	SYSRPTS(WLMGL(WGROUP, RCLASS,RCPER,POLICY))
Workload Activity (Service Classes)	SYSRPTS(WLMGL(SCPER, SCLASS,WGROUP,POLICY))
XCF Activity	REPORTS(XCF)

In addition, the Spreadsheet Reporter supports a selection of Postprocessor reports for viewing in a web browser.

Table 43. Supported reports for web browser display

Supported Reports	Postprocessor Options
Cache Subsystem Activity	REPORTS(CACHE(SUBSYS))
Channel Path Activity	REPORTS(CHAN)
Coupling Facility Activity	SYSRPTS(CF)
CPU Activity	REPORTS(CPU)
Cross-System Coupling Facility Activity	REPORTS(XCF)
Crypto Hardware Activity	REPORTS(CRYPTO)
DASD Device Activity	REPORTS(DEVICE(DASD))
EADM Activity	REPORTS(EADM)
Enqueue Activity	REPORTS(ENQ)
Enterprise Disk Systems	REPORTS(ESS)
FICON Director Activity	REPORTS(FCD)
Hierarchical File System Statistics	REPORTS(HFS)
I/O Queuing Activity	REPORTS(IOQ)
OMVS Kernel Activity	REPORTS(OMVS)
Paging Activity	REPORTS(PAGING)
Partition Data	REPORTS(CPU)
Page Data Set Activity	REPORTS(PAGESP)
PCIE Activity	REPORTS(PCIE)
Serialization Delay	REPORTS(SDELAY)
Shared DASD Device Activity	SYSRPTS(SDEVICE(DASD))
Shared TAPE Device Activity	SYSRPTS(SDEVICE(TAPE))
TAPE Device Activity	REPORTS(DEVICE(TAPE))
Virtual Storage Activity	REPORTS(VSTOR)
Workload Activity (Report Classes)	SYSRPTS(WLMGL(WGROUP, RCLASS,RCPER,POLICY))
Workload Activity (Service Classes)	SYSRPTS(WLMGL(SCPER, SCLASS,WGROUP,POLICY))

**Settings > Options > Reports** starts a dialog, where you select Postprocessor report types supported by the Spreadsheet Reporter. At least one report type must be selected. The selected report types are considered by the RMF Spreadsheet Reporter in the following cases:

- You decide to create Report Listings.
- You decide to create a Working Set from SMF Dump Data without a file with overview control statements attached to the current system (see [“How to use overview control statements”](#) on page 249).

If you selected option **Use XML Report Format** in the **Options** dialog, then **Settings > Options > Reports** starts the dialog shown listing the reports as shown in Table 43 on page 253, where you select Postprocessor report types supported in XML format. At least one report type must be selected.

## How to specify reporting periods and duration intervals

**Settings ---> Intervals...** opens the **Intervals** dialog. Use this dialog to specify the start and end time for data collection. The input from this dialog is converted to the corresponding DATE and RTOD control statements.

By means of the **Duration** sliders you can generate a DINTV control statement to produce duration reports.

For more information about DATE, RTOD and DINTV refer to [Chapter 10, “Long-term reporting with the Postprocessor,”](#) on page 127.

**Note:** The specified intervals and duration periods are active for all defined systems.

## How to create Working Sets in batch mode

The RMF Spreadsheet Reporter provides a collection of procedures that allow you to generate Working Sets in batch mode without any GUI interaction. They are located in the installation directory. The default is:

```
C:\Program Files\RMF\RMF Spreadsheet Reporter
```

To have write access to the program files directory, run the procedures with administration privileges.

## Using the Jclgen.bat procedure

The **Jclgen.bat** procedure generates the JCL for a job to run the Postprocessor on the host. It contains the variables listed in [Table 44 on page 254](#). Use an editor to modify their values according to your needs.

Table 44. Variables in Jclgen.bat		
Variable	Meaning	Examples
in	specifies the input file for the JCL generation. The default file rmfpp1.jcl is a job skeleton delivered with the RMF Spreadsheet Reporter. In this skeleton, parameters specified in brackets (like <b>&lt;parameter_name&gt;</b> ) are overwritten with the variable values specified in <b>Jclgen.bat</b> .	set in=%workpath%\rmfpp1.jcl
out	specifies the name of the output file holding the generated JCL.	set out=%workpath%\rmfpp2.jcl
acct	specifies the account ID, for example your department number.	set acct=D3248
class	specifies the job class.	set class=A
date	specifies the date of the reporting period.	set date=DATE(01011990,12312050)
time	specifies the time of the duration interval.	set time=RTOD(0000,2400)
hlq	specifies the data set high level qualifier required for the allocation of data sets.	set hlq=IBMUUSER set hlq=D3248.IBMUSER
user	specifies the TSO user ID of the user submitting the job.	set user=IBMUUSER



Table 44. Variables in Jclgen.bat (continued)		
Variable	Meaning	Examples
ppdsn	specifies the Postprocessor output data set for the Report Listing or Overview Records.	set ppdsn=CPU.REPORT.LISTING  If the high level qualifier is D3248.IBMUSER, then the output data set is D3248.IBMUSER.CPU.REPORT.LISTING
sysin	Before you run this procedure, decide whether you want to produce Overview Records or a Report Listing. This parameter specifies the required input file containing Postprocessor control statements.  The RMF Spreadsheet Reporter offers two sample input files. You may take these as a template and edit them according to your needs. They are located in subdirectory ...\\Work of the installation directory: <ul style="list-style-type: none"> <li>• <b>sysinovw.txt</b> - as a sample input file for Overview Records</li> <li>• <b>sysinrpt.txt</b> - as a sample input file for Report Listings</li> </ul>	set sysin=%workpath%\\sysinrpt.txt
mfpinput	specifies the file containing the names of the required SMF data sets. Not relevant if Jclgen.bat is invoked with option <i>buffer</i> .	set mfpinput=%workpath%\\mfpinput.txt

**Invocation:** jclgen option

where **option** can be one of the following:

**sort**

sorts the SMF data sets. If you use this option, the *mfpinput* parameter in *Jclgen.bat* points to a file containing the names of the required SMF data sets.

**nosort**

does not sort the SMF data sets. As with option **sort**, specify the names of the required SMF data sets with the *mfpinput* parameter.

**buffer**

takes the SMF data from the RMF Sysplex Data Server's SMF buffer.

**Example:** To generate a Postprocessor job that takes the SMF data from the RMF Sysplex Data Server's SMF buffer, use the following command:

```
jclgen buffer
```

## Using the Collect.bat procedure

The **Collect.bat** procedure performs the complete SMF data collection as well as the download to the workstation. That is, it submits the job on the host and downloads the resulting Postprocessor output (Report Listing or Overview Record) to the workstation. **Collect.bat** contains the same variables as **Jclgen.bat**, plus the following ones:

Table 45. Additional variables in Collect.bat

Variable	Meaning	Examples
log	specifies the file containing messages from the JES subsystem.	set log=%workpath%\jes.joblog
ppfile	specifies the file containing the Postprocessor output after the download to the workstation (either a Report Listing or Overview Records). This file is input either to <b>CreateRptWset.bat</b> (with parameter <i>listing</i> ) or to <b>CreateOvwWset.bat</b> (with parameter <i>ovwrec</i> ).	set ppfile=%workpath%\sysname.date.time.ppdata
msg	specifies the file containing messages from the Postprocessor.	set msg=%workpath%\rmfpp.msg
passive	specifies the FTP connection type used by the Spreadsheet Reporter. For a passive FTP connection, specify -p. The default is an active FTP connection.	set passive=-p
ssl	specifies the FTP security mode. To use an FTP with SSL encryption, specify -s. The default is an FTP without explicit security.	set ssl=-s

**Invocation:** collect hostname password type

where:

**hostname**

is the name of the host where you want to connect to

**password**

is the password for the TSO user specified with variable *user*

**type**

specifies the type of Postprocessor output: use **-r** if you want to collect data for a Report Listing or **-o** for an Overview Record.

**Example:** To produce a Report Listing, use the following command:

```
collect myhost mypasswd -r
```

If FTP errors occurred during file transmission, the corresponding messages are written into the file ...\\Work\\ftp.log in the installation directory.

## Using the CreateRptWSet.bat procedure

This procedure generates a Working Set from an existing local Report Listing:

**Invocation:** CreateRptWSet listing dir name

where:

**listing**

is the path and filename of the Report Listing

**dir**

is the Working Set directory

**name**

is the Working Set name.

**Example:** To convert a Report Listing called *C:\DASD.lis* into a Working Set called *My Dasd Working Set*, and store the Working Set in directory *C:\WSets\DasdWS*, use the following command:

```
CreateRptWSet C:\DASD.lis C:\WSets\DasdWS "My Dasd Working Set"
```

## Using the CreateOvwWSet.bat procedure

The **CreateOvwWSet.bat** procedure generates a Working Set from an existing Overview Record data set on the workstation.

**Invocation:** CreateOvwWSet ovwrec dir name

where:

**ovwrec**

is the path and filename of the Overview Record file

**dir**

is the Working Set directory

**name**

is the Working Set name in double quotes.

**Example:** To convert a file with Overview Records called *C:\DASD.rec* into a Working Set called *My Dasd Working Set*, and store the Working Set in directory *C:\WSets\DasdWS*, use the following command:

```
CreateOvwWSet C:\DASD.rec C:\WSets\DasdWS "My Dasd Working Set"
```

## Using RMF spreadsheet macros

The previous sections describe the steps that you need to perform before you can feed a Working Set into a spreadsheet macro. The purpose of this section is to assist you in using spreadsheet macros to process converted Postprocessor reports and Overview Records.

You can start a spreadsheet from the Spreadsheet Reporter dialog by opening the appropriate spreadsheet macro.

## Available RMF spreadsheet macros

Read a short description of the available spreadsheet macros in the following subtopics:

- [“Macros for Report Working Sets” on page 257](#)
- [“Macros for Overview Working Sets” on page 259](#)

## Macros for Report Working Sets

[Table 46 on page 257](#) lists the available macros and specifies which RMF reports are processed by them. These reports must be contained in the Working Sets that you select as input for a macro. If you want to obtain the required reports via JCL, use the Postprocessor options listed in [Table 42 on page 252](#).

Table 46. Macros Based on Reports	
Macro	Excel
<b>Open RMF Report Spreadsheets</b> This macro displays reports from a Report Working Set.	RMFR9OPN

<i>Table 46. Macros Based on Reports (continued)</i>	
<b>Macro</b>	<b>Excel</b>
<b>Filter DASD or Cache Reports</b> This macro filters devices from large DASD Activity and Cache Activity reports. Use this macro to focus on important, frequently used DASDs or cache subsystems. You can also use this macro to reduce the amount of data if you receive a message that the data exceeds the limit that can be processed by the spreadsheet macro.	DASDCONV
<b>Summary Report</b> This macro processes a Summary report and creates analysis summaries and graphics from its data.	RMFN9SUM
<b>DASD Activity Report</b> This macro analyzes a DASD Activity report and provides summaries for the most frequently used LCUs and DASDs in your installation.	RMFR9DAS (*)
<b>Workload Activity Trend Report</b> This macro provides performance reports and analyzes your system's behavior. It also supports zAAP, zIIP and zCBP workload analysis and workload projection.	RMFR9WLM
<b>Coupling Facility Trend Report</b> This macro provides reports about activities in your coupling facilities.  The functionality of Structure Trend Report (RepTrdStr) is implicitly linked to the Interval Report: Structures (RepIntStr). RepTrdStr relies on data from the RepIntStr sheet for the chosen coupling facility.  RepTrdStr can report only coupling facility structures that are present for the interval selected in the RepIntStr sheet. If a particular structure is not on the selection menu in RepTrdStr, you can open the RepIntStr sheet and navigate to the section to select the desired coupling facility, which refers to the specific data source or system you want to analyze. After selecting the coupling facility, choose an interval corresponding to the structure you are interested in investigating. Once you have chosen RepIntStr, you can access RepTrdStr.	RMFR9CF
<b>Cache Subsystem Report</b> This macro provides reports about activities in your cache subsystems.	RMFR9CAC (*)
<b>I/O Subsystem Report</b> This macro analyzes DASD Activity reports from several systems and provides summaries for the most frequently used LCUs and DASDs in your sysplex.	RMFR9MDV
<b>LPAR Trend Report</b> This macro analyzes Partition Data reports and provides information about the active partitions in your PR/SM environment.	RMFR9LP
<b>Tape Mount Report</b> This macro displays the tape mounts and the tape activities for one or several systems.	RMFR9TAP
<b>XCF Trend Report</b> This macro processes XCF Activity reports from one or multiple systems and provides XCF performance trend reports.	RMFR9XCF

Table 46. Macros Based on Reports (continued)	
Macro	Excel
<b>Crypto Hardware Activity Trend Report</b> This macro processes Crypto Hardware Activity Reports from one or multiple systems and provides crypto card performance trend reports.	RMFR9CRY

All macros marked by (\*) offer the capability to generate control statements to create Overview Records. You can attach a file containing overview control statements to a system as described in [“How to use overview control statements”](#) on page 249.

## Macros for Overview Working Sets

Table 47. Macros Based on Overview Records	
Macro	Excel
<b>Open RMF Overview Spreadsheets</b> This macro processes any Overview Working Set. It provides interval charts, day charts and trend charts based on the data of the selected Overview Working Set.	RMFOVW
<b>LPAR Overview Report</b> This macro creates a long-term overview about CPU consumption for selected partitions. It expects Overview Records as described in <a href="#">“LPAR Overview Report”</a> on page 260.	RMFX9CPC
<b>System Overview Report</b> You can create a summary for one week, by a specified shift, for each hour and every day contained in the data. This allows you to examine data for one week at a glance. The macro expects Overview Records as described in <a href="#">“System Overview Report”</a> on page 261.	RMFY9OVW
<b>Workload Overview Report</b> This macro creates summaries and graphics for a set of selected service classes and workloads of your installation. It expects Overview Records as described in <a href="#">“Workload Overview Report”</a> on page 262. <b>Note:</b> This macro cannot process more than 27 workloads.	RMFY9WKL
<b>Device Overview Report</b> This macro creates a trend report for selected devices of your installation. It expects Overview Records as described in <a href="#">“Device Overview Report”</a> on page 263. <b>Note:</b> This macro cannot process more than 30 devices.	RMFX9DEV
<b>Cache Subsystem Overview Report</b> This macro creates a trend report for selected cache subsystems of your installation. It expects Overview Records as described in <a href="#">“Cache Subsystem Overview Report”</a> on page 264. <b>Note:</b> This macro cannot process more than 18 control units or devices.	RMFX9CAC

Table 47. Macros Based on Overview Records (continued)	
Macro	Excel
<b>Channel Overview Report</b> This macro creates a channel report for selected channels of your installation. It expects Overview Records as described in “Channel Overview Report” on page 265.	RMFX9CHN
<b>Create Overview Control Statements</b> This macro creates OVW and EXCEPT statements that can be used to generate data for the above described macros for Overview Working Sets.	RMFX9MAK

## Sets of overview control statements

For nearly all fields in Postprocessor reports you can manually define overview conditions using overview control statements. This gives you an enormous flexibility to define your own customized reports.

A second possibility to create overview control statements is to use the appropriate spreadsheet macros. For more information refer to “How to use overview control statements” on page 249.

As a third source, this section presents some examples of meaningful sets of overview control statements. You can copy and edit the sets according to your needs and use it with the related overview spreadsheet macros.

The difference between the System Overview Report and the other reports is that the first one is based on a fixed set of control statements while the other reports require customized statements containing information about your favorite service classes, DASD devices, or cache controllers, for example.

## LPAR Overview Report

The purpose of this report is to observe selected LPARs of interest in your installation. For example, you can monitor an LPAR's defined capacity limit in MSUs per hour, its actual CPU consumption, or the percentage of time when WLM capped the partition.

The template consists of a variable part which must be repeated for each LPAR included in the Overview Record and a fixed part with three statements for the LPAR \*PHYSICAL\*.

### Template:

```

----- Variable Part, replace vv with
----- the LPAR name
OVW(DEFvv(WDEFL(vv))) statements for LPAR
OVW(ACTvv(WACTL(vv)))
OVW(MINvv(WMINL(vv)))
OVW(MAXvv(WMAXL(vv)))
OVW(NLDvv(NLDEFL(vv)))
OVW(NLAvv(NLACTL(vv)))
OVW(LBUvv(LBUSYL(vv)))
OVW(PBUvv(PBUSYL(vv)))
OVW(LDMvv(LDEFMSU(vv)))
OVW(LDAvv(LACTMSU(vv)))
OVW(CAPvv(WCAPPER(vv)))
-----
OVW(NLDPHY(NLDEFL(PHYSICAL))) This part is fixed and must be added
OVW(LBUPHY(LBUSYL(PHYSICAL))) at the end of the report
OVW(PBUPHY(PBUSYL(PHYSICAL)))

```

If you want to use the template to monitor the LPARs SYSA and SYSF, you can create the following overview control statements:

### Example:

```

OVW(DEFSYSA(WDEFL(SYSA)))
OVW(ACTSYSA(WACTL(SYSA)))
OVW(MINSYSA(WMINL(SYSA)))

```

```

OVW(MAXSYSY(WMAXL(SYSA)))
OVW(NLDSYSY(NLDEFL(SYSA)))
OVW(NLASYSY(NLACTL(SYSA)))
OVW(LBUSYSY(LBUSYL(SYSA)))
OVW(PBUSYSY(PBUSYL(SYSA)))
OVW(LDMSYSY(LDEFMSU(SYSA)))
OVW(LDASYSY(LACTMSU(SYSA)))
OVW(CAPSYSY(WCAPPER(SYSA)))
OVW(DEFSYSY(WDEFL(SYSF)))
OVW(ACTSYSY(WACTL(SYSF)))
OVW(MINSYSY(WMINL(SYSF)))
OVW(MAXSYSY(WMAXL(SYSF)))
OVW(NLDSYSY(NLDEFL(SYSF)))
OVW(NLASYSY(NLACTL(SYSF)))
OVW(LBUSYSY(LBUSYL(SYSF)))
OVW(PBUSYSY(PBUSYL(SYSF)))
OVW(LDMSYSY(LDEFMSU(SYSF)))
OVW(LDASYSY(LACTMSU(SYSF)))
OVW(CAPSYSY(WCAPPER(SYSF)))
OVW(NLDPHY(NLDEFL(PHYSICAL)))
OVW(LBUPHY(LBUSYL(PHYSICAL)))
OVW(PBUPHY(PBUSYL(PHYSICAL)))

```

The LPAR Overview Report macro processes converted Overview Records which have been created based on this control set.

## System Overview Report

The report is based on data which can be used without any installation-dependent qualification. This means that you can use the described set of control statements directly without modification.

The idea of the report is to give a comprehensive overview of the system resources CPU and storage in context with the total workload activity. Therefore, the data is derived from SMF record types 70-1, 71, and 72-3. You can find most of the data in the CPU, Paging, and Workload Activity reports.

Control Statements	SMF Record	Description
OVW(CPUBUSY(CPUBSY))	70.1	CPU utilization data
OVW(MVSBUSY(MVSBYS))		
OVW(APPLPER(APPLPER(POLICY)))	72.3	V Workload utilization
OVW(NUMPROC(NUMPROC))	70.1	----
OVW(EXCP(EXCP(POLICY)))	72.3	Total EXCPs
OVW(EXCPRT(EXCPRT(POLICY)))		EXCP rate
OVW(OCPU1(OCPU1))	70.1	CPU contention
OVW(OCPU2(OCPU2))		V
OVW(OCPU3(OCPU3))		----
OVW(INREADY(AVGARDY))	70.1	SRM queues
OVW(OUTREADY(AVGORDY))		
OVW(OUTWAIT(AVGUOWT))		
OVW(LOGRDY(AVGULRDY))		
OVW(LOGWAIT(AVGULWT))		V
OVW(INUSER(AVGUIN))		----
OVW(AVGSTC(AVGSTC))		Average number of
OVW(AVGBATCH(AVGBATCH))		address spaces
OVW(AVGTSO(AVGTSO))		by class
OVW(AVGAPPC(AVGASCH))		V
OVW(AVGOMVS(AVGOMVS))		----
OVW(STOTOT(STOTOT(POLICY)))	72.3	Workload storage
OVW(STOCEN(STOCEN(POLICY)))		and paging
OVW(STOEXP(STOEXP(POLICY)))		for all
OVW(SINGLE(SINGLE(POLICY)))		system workloads
OVW(BLOCK(BLOCK(POLICY)))		
OVW(EXPSNGL(EXPSNGL(POLICY)))		V
OVW(EXPBLK(EXPBLK(POLICY)))		----
OVW(TPAGRT(TPAGRT))	71	System paging
OVW(FAULTS(PAGERT))		
OVW(DEMAND(DPAGRT))		
OVW(PGMOVERT(PGMVRT))		
OVW(TOEXPAND(PTES))		
OVW(MIGTOAUX(ESMR))		
OVW(AVGHUIC(AVGHUIC))		V
OVW(SWAPS(SWART))		----
OVW(AVGCSA(AVGCSAT))	71	Common storage utilization
OVW(AVGSQA(AVGSQA))		

You find the set of overview control statements for the report in file <resource\_root>\Text\ \$OVWGOAL.TXT.

<resource\_root> denotes the drive and folder that you specified during installation as the location where the Spreadsheet Reporter should place the Report Listings, macros and Working Sets.

The macro **System Overview Report** processes converted Overview Records which have been created based on this control set.

## Workload Overview Report

The idea for the Workload Overview report is to monitor the CPU utilization for your most important service classes.

The template for the Overview Records contains the overview control statements for workload utilization (APPLPER) and EXCP rate (EXCPRT) for one service class. You have to define these statements for each selected service class. In addition, the total workload utilization and EXCP rate, as well as the CPU utilization and the number of processors is added at the end of the template. The EXCP rate and the total numbers are used to calculate and distribute the uncaptured CPU time across the service classes.

### Template:

```
-----
OVW(CPUclass(APPLPER(S.class.p)))      This part must be repeated for each service
OVW(EXPclass(EXCPRT(S.class.p)))      class; replace class by a service class name

OVW(MPLclass(TRANSAVG(S.class.p)))    These conditions can be added optionally
OVW(TOTclass(TRANS(S.class.p)))      and are exploited only with Excel
OVW(RTMclass(RTIME(S.class.p)))
OVW(EVLclass(EXVEL(S.class.p)))
-----
OVW(NUMPROC(NUMPROC))                This part is fixed and must be added
OVW(CPUBUSY(CPUBSY))                  at the end of the report
OVW(APPLPER(APPLPER(POLICY)))
OVW(EXCPRT(EXCPRT(POLICY)))
```

**Note:** Please ensure that the OVW control-statement names (for example, CPUclass) have a maximal length of 8 characters.

The basic control set with the two conditions APPLPER and EXCPRT can be enhanced by up to four conditions for each service class. The corresponding Excel spreadsheet macros can process the Overview Records with or without the additional information. If you do not specify all information, some of the reports in the macro show that no information is available for display. Otherwise the functionality of the macros is not restricted.

In order to use the additional control statements you must adhere to the following rules:

- Whenever you add additional control statements, you must add them for **all** service classes contained in the control set.
- It is not necessary to add all four statements, you can add and combine them in the following three groups:

1. Information about transactions:

#### TRANSAVG

Average number of active transactions

#### TRANSMPL

Average number of resident transactions

2. You must always specify the following two exceptions in common:

#### TRANS

Number of ended transactions per second

#### RTIME

Transaction execution time

#### TRANSTOT

Total number of ended transactions



## RTIMETOT

Total transaction time (execution and queue time)

## 3. Execution velocity

## EXVEL

Execution Velocity

This means that you can add them **all** for all service classes, or **any combination of the three groups** for all service classes. Only keep in mind that you must always add the **same conditions** for all service classes.

- When you add the additional definitions, it is required to add them in the sequence listed above. Also make sure that the prefix of the column header is always MPL, TRX, RTM and EVL.
- You can use the macro **Create Overview Control Statements** to generate the control statements for your favorite service classes and workloads. You can also specify report classes instead of service classes.

To specify a report class TSOR, use:

```
OVW(CPUTSOA1(APPLPER(R.TSOR.1)))
```

To specify a service class TSOS, use:

```
OVW(CPUTSOA1(APPLPER(S.TSOS.1)))
```

If you want to report service class **CICS** and the first and second period of service class **TSO**, you have to define the records as follows:

### Example:

```
OVW(CPUCICS(APPLPER(S.CICS.1)))
OVW(EXPCICS(EXCPRT(S.CICS.1)))
OVW(MPLCICS(TRANSAVG(S.CICS.1)))
OVW(TOTCICS(TRANS(S.CICS.1)))
OVW(RTMCICS(RTIME(S.CICS.1)))
OVW(CPUTS01(APPLPER(S.TSO.1)))
OVW(EXPTS01(EXCPRT(S.TSO.1)))
OVW(MPLTS01(TRANSAVG(S.TSO.1)))
OVW(TOTTS01(TRANS(S.TSO.1)))
OVW(RTMTS01(RTIME(S.TSO.1)))
OVW(CPUTS02(APPLPER(S.TSO.2)))
OVW(EXPTS02(EXCPRT(S.TSO.2)))
OVW(MPLTS02(TRANSAVG(S.TSO.2)))
OVW(TOTTS02(TRANS(S.TSO.2)))
OVW(RTMTS02(RTIME(S.TSO.2)))
OVW(NUMPROC(NUMPROC))
OVW(CPUBUSY(CPUBSY))
OVW(APPLPER(APPLPER(POLICY)))
OVW(EXCPRT(EXCPRT(POLICY)))
```

The macro **Workload Overview Report** processes converted Overview Records which have been created based on this control set.

## Device Overview Report

The purpose of this report is to observe the utilization and response time for devices of interest in your installation.

The template consists of a variable part which must be repeated for each device included in the Overview Record and a fixed part with one statement reporting the processor utilization.

### Template:

```
----- Variable Part, replace vvvvvv with
----- the VolSer of the device
OVW(QTvvvvvv(DQTAVG('vvvvvv')) Average IOS Queue Time
OVW(PTvvvvvv(DPTAVG('vvvvvv')) Average Device Pending Time
OVW(DTvvvvvv(DDTAVG('vvvvvv')) Average Device Disconnect Time
OVW(CTvvvvvv(DCTAVG('vvvvvv')) Average Connect Time
```

```

OVW(ARvvvvvv(DART('vvvvvv'))))      Device Activity Rate
-----
OVW(CPUBUSY(CPUBSY))                  should be added at the end

```

You can either use the macro **Create Overview Control Statements** to generate control statements for any device in your installation, or you can use the function **Create Exceptions** which is part of the macro **DASD Activity Report**, pointing to your most important volumes.

If you want to use the template to monitor the two devices MVS215 and MVS217, you can create the following overview control statements:

#### Example:

```

OVW(QTMVS215(DQTAVG('MVS215'))))
OVW(PTMVS215(DPTAVG('MVS215'))))
OVW(DTMVS215(DDTAVG('MVS215'))))
OVW(CTMVS215(DCTAVG('MVS215'))))
OVW(ARMVS215(DART('MVS215'))))
OVW(QTMVS217(DQTAVG('MVS217'))))
OVW(PTMVS217(DPTAVG('MVS217'))))
OVW(DTMVS217(DDTAVG('MVS217'))))
OVW(CTMVS217(DCTAVG('MVS217'))))
OVW(ARMVS217(DART('MVS217'))))
OVW(CPUBUSY(CPUBSY))

```

The macro **Device Overview Report** processes converted Overview Records which have been created based on this control set.

## Cache Subsystem Overview Report

The purpose of this report is to show key characteristics (cache hit rates and cache miss rates) for the cache subsystems of interest in your installation.

The template consists of a variable part which must be repeated for each control unit included in the Overview Record, and a fixed part, which is necessary for the spreadsheet macro to determine the last control unit included in the report.

#### Template:

```

----- Variable Part, replace cu with
----- the address of the control unit
OVW(RHTcu(CASRHT(SSID(cu))))      Total Read hits rate
OVW(WHTcu(CASWHT(SSID(cu))))      Total Write hits rate
OVW(MRNCu(CASMRN(SSID(cu))))      Normal Read miss rate
OVW(MRScu(CASMRS(SSID(cu))))      Sequential Read miss rate
OVW(MRCcu(CASMRC(SSID(cu))))      CWF Read miss rate
OVW(MWNCu(CASMWN(SSID(cu))))      Normal Write miss rate
OVW(MWScu(CASMWS(SSID(cu))))      Sequential Write miss rate
OVW(MWCcu(CASMWC(SSID(cu))))      CWF Write miss rate
OVW(DFBcu(CASDFWB(SSID(cu))))      DFW operations delayed due to NVS storage constraints rate
OVW(CFBcu(CASCFWB(SSID(cu))))      Operations delayed due to cache space constraints rate
OVW(DFIcu(CASDFWI(SSID(cu))))      DFW inhibit rate
OVW(NCIcu(CASNCICL(SSID(cu))))      Non-cache I/O ICL rate
OVW(NCBcu(CASNCB(SSID(cu))))      Non-cache I/O bypass rate
OVW(ASYcu(CASASYNC(SSID(cu))))      Async rate
-----
OVW(LASTRNG(CASRHT(SSID(cu))))      should be added at the end

```

You can either use the macro **Create Overview Control Statements** to generate control statements for any cache control unit in your installation, or you can use the function **Create Exceptions** which is part of the macro **Cache Subsystem Report**, pointing to your most important control units (Excel only).

If you want to monitor two control units 0050 and 0068, you can create the following overview control statements:

#### Example:

```

OVW(RHT0050(CASRHT(SSID(0050))))
OVW(WHT0050(CASWHT(SSID(0050))))
OVW(MRN0050(CASMRN(SSID(0050))))
OVW(MRS0050(CASMRS(SSID(0050))))
OVW(MRC0050(CASMRC(SSID(0050))))

```

```

OVW(MWN0050(CASMWN(SSID(0050))))
OVW(MWS0050(CASMWS(SSID(0050))))
OVW(MWC0050(CASMWC(SSID(0050))))
OVW(DFB0050(CASDFWB(SSID(0050))))
OVW(CFB0050(CASCFWB(SSID(0050))))
OVW(DFI0050(CASDFWI(SSID(0050))))
OVW(NCI0050(CASNCICL(SSID(0050))))
OVW(NCB0050(CASNCB(SSID(0050))))
OVW(ASY0050(CASASYNC(SSID(0050))))
OVW(RHT0068(CASRHT(SSID(0068))))
OVW(WHT0068(CASWHT(SSID(0068))))
OVW(MRN0068(CASMRN(SSID(0068))))
OVW(MRS0068(CASMRS(SSID(0068))))
OVW(MRC0068(CASMRC(SSID(0068))))
OVW(MWN0068(CASMWN(SSID(0068))))
OVW(MWS0068(CASMWS(SSID(0068))))
OVW(MWC0068(CASMWC(SSID(0068))))
OVW(DFB0068(CASDFWB(SSID(0068))))
OVW(CFB0068(CASCFWB(SSID(0068))))
OVW(DFI0068(CASDFWI(SSID(0068))))
OVW(NCI0068(CASNCICL(SSID(0068))))
OVW(NCB0068(CASNCB(SSID(0068))))
OVW(ASY0068(CASASYNC(SSID(0068))))
OVW(LASTRNG(CASRHT(SSID(0068))))

```

The macro **Cache Subsystem Overview Report** processes converted Overview Records which have been created based on this control set.

## Channel Overview Report

The purpose of this report is to observe selected channels of interest in your installation. The template consists of a variable part which must be repeated for each channel included in the Overview Record and a fixed part with one statement.

### Template:

```

----- Variable Part, replace vv with
----- the Channel Path ID
OVW(TBSYvv(HTBSY(vv))) statements for channels
OVW(LBSYvv(CHLBSY(vv)))

OVW(NUMPROC(NUMPROC)) This part is fixed and must be added
OVW(CPUBUSY(CPUBSY)) at the end of the report
OVW(APPLPER(APPLPER(POLICY)))
OVW(EXCPRT(EXCPRT(POLICY)))

```

If you want to use the template to monitor the two channels 85 and 86, you can generate the following exception control statements:

### Example:

```

OVW(TBSY85(HTBSY(85)))
OVW(TBSY86(HTBSY(86)))
OVW(LBSY85(CHLBSY(85)))
OVW(LBSY86(CHLBSY(86)))
OVW(NUMPROC(NUMPROC))
OVW(CPUBUSY(CPUBSY))
OVW(APPLPER(APPLPER(POLICY)))
OVW(EXCPRT(EXCPRT(POLICY)))

```

The macro **Channel Overview Report** processes converted Overview Records which have been created based on this control set.

## Spreadsheet usage examples

To follow the instructions in this demonstration, please use the sample Report Listing *Sample.lis* which is located in subdirectory <resource\_root>\Rmflistings\Sample.lis where <resource\_root> is the location of the resources used by the Spreadsheet Reporter, that you specified during the installation process. This sample Report Listing contains one report of each of the following types:

- Cache Subsystem Activity

- Channel Path Activity
- CPU Activity
- DASD Device Activity
- I/O Queuing Activity
- Paging Activity
- Partition Data
- Summary
- Workload Activity

**Note:** This usage example guides you from the Working Set creation to the graphical presentation with a spreadsheet macro. To transfer all of the above report types contained in the sample Report Listing into the Working Set, ensure that you selected these report types on the **Reports** page in the **Options** dialog (“How to specify Postprocessor report types” on page 252).

1. Start the Spreadsheet Reporter from your desktop. If you use this program for the first time, with no system defined yet, you will receive a message asking whether to want to define a system now. For this usage example, you can answer **No**, because you want to work with an existing local report listing.
2. Open the folder with local **Report Listings**. This will display the **Sample.lis** Report Listing in the **view** pane.
3. Select the **Sample.lis** resource and apply action **Create Working Set**. This invokes the **Create Working Set** dialog where you press the **Run** button to start the generation of a Working Set. Accept the suggested name **Rpt.Sample** for the new Working Set. After successful generation, press the **OK** button. Now you can find this new Working Set in the local **Working Sets** folder.

For the following steps, we assume:

- You have installed Microsoft Excel on your workstation.
  - You have installed the RMF Spreadsheet Macros for Microsoft Excel.
4. Open the **DASD Activity Report** spreadsheet from the Spreadsheet Reporter dialog. Enable the macros for execution with the Spreadsheet Reporter as described in “Setting the security level for Excel macros” on page 269.

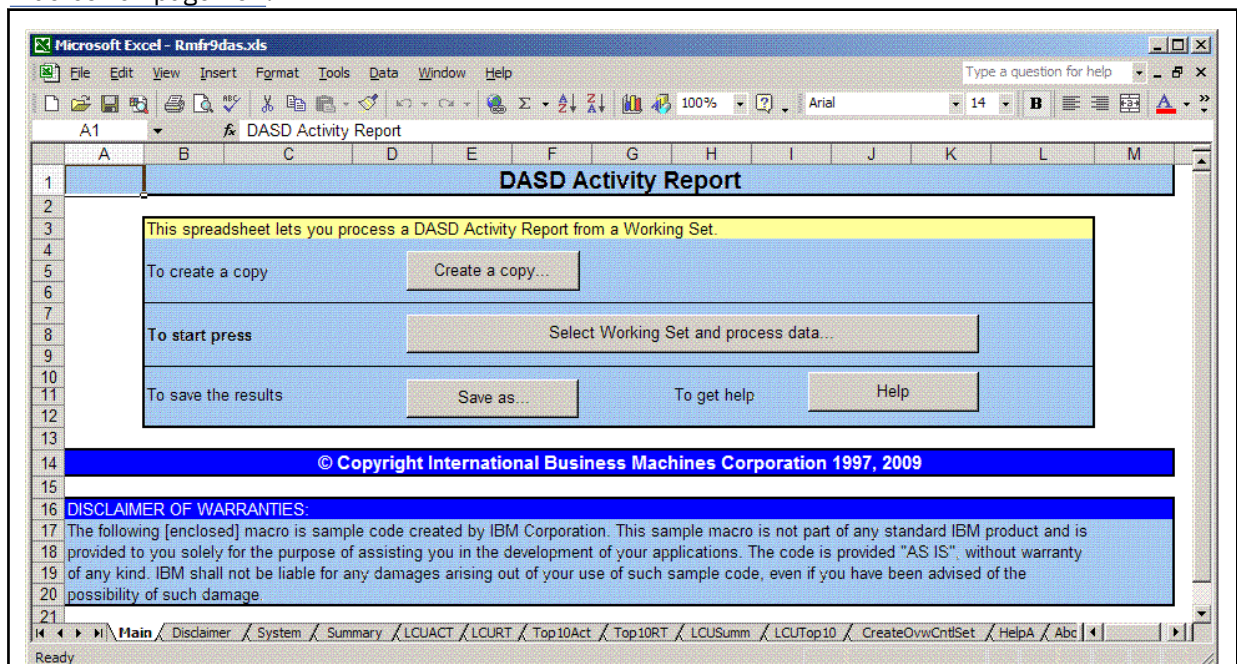


Figure 55. DASD Activity Report

5. This spreadsheet contains a button **Select Working Set** and process data. Pressing this button starts a dialog called **Select Report Working Set** which lists the available Working Sets and lets you select your *Rpt.Sample* that you created from the *Sample.lis* Report Listing.
6. Select this Working Set and press **OK**. This starts the following selection dialogs:
  - a. **Select System** which lets you select one of the systems contained in the report. In our example, select **UIG1** and press **OK**.
  - b. **Select Interval** which lets you select a reporting interval. In our example, select **UIG1-10/02/2003-09.05.11-DASD Device Activity** and press **OK**.
7. Now the **DASD Activity Report** macro processes the data from the report contained in the Working Set. On your screen, take a look at the dialog shown in Figure 55 on page 266 and wait until the **Ready** message appears in the lower left corner. Now you can scroll through the tabs shown at the bottom and view the various charts by using the arrows on the left hand side. For example, click on the **Top10Act** tab to view the chart called **Activity of Top 10 Volumes**, as shown in Figure 56 on page 267.

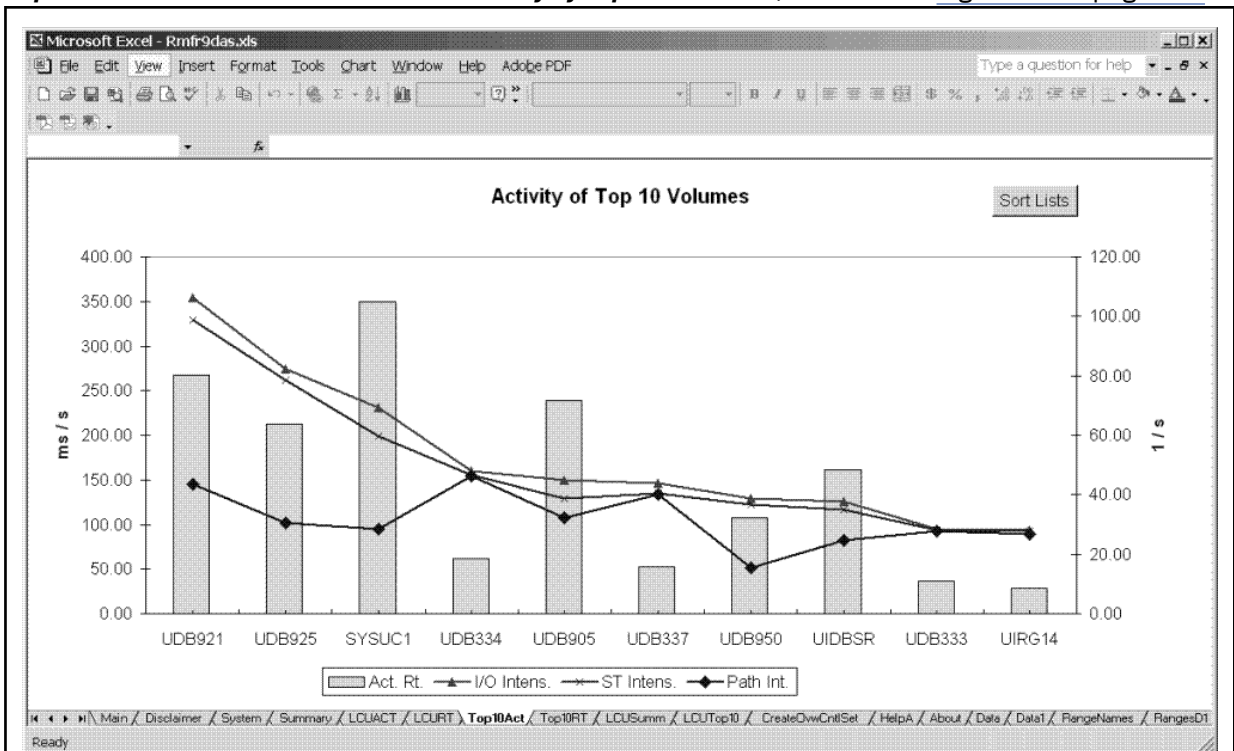


Figure 56. Activity of Top 10 Volumes

In Figure 56 on page 267, you see the 10 volumes with the highest activity. Pressing the **Sort Lists** button in the upper right corner, you can display these volumes sorted either by their **I/O intensity**, **Service time intensity** or **Path intensity**.

**Intensity** expresses the usage of a device: it is the average number of milliseconds a device was active, during one second. This metric is measured in milliseconds per second.

**I/O Intensity:** The product of activity rate and response time. The average number of milliseconds a device was busy with responding during one second.

**Service Time Intensity:** The product of activity rate and service time (that is the sum of disconnect time and connect time of a device). The average number of milliseconds a device was busy with service during one second.

**Path Intensity:** The product of activity rate and connect time of a device. The average number of milliseconds a device was connected during one second.

8. When you have finished with the first try, you can close Excel. To leave the Spreadsheet Reporter, click on **File ---> Exit** in the menu bar.

Now you are ready to process SMF data from your own installation:

1. Define a system from your environment.
2. Specify appropriate report types and reporting periods/duration intervals.
3. Create an **SMF Dump Data** resource.
4. From this resource, create a Working Set.
5. Open a spreadsheet to obtain graphical views of the SMF data contained in the Working Set.

## Open RMF Overview Spreadsheets usage example

This topic explains how to use the **Open RMF Overview Spreadsheets** macro to create customized graphical reports about certain aspects of system activity.

1. Create a file \$OVWxxxx.txt containing selected overview control statements and attach it to the system. For the example shown in [Figure 57 on page 269](#), this file would contain only one line:  
OVW(CPUBUSY(CPUBSY)).
2. Define the SMF dump data containing the data that you want to process.
3. Create an Overview Working Set from this data.
4. Open the **Open RMF Overview Spreadsheets** macro and select the Overview Working Set created in step “3” on [page 268](#).
5. Select a system or sysplex.
6. Select an interval.
7. Start processing the data.
8. Select a chart type to view the graphical presentation of your data.

[Figure 57 on page 269](#) shows the Spreadsheet Reporter output format for the overview control statement OVW(CPUBUSY(CPUBSY)).

You can apply a title of your choice to the report and label the x-/y-axis using the **Setup** tab in the spreadsheet. In the example from [Figure 57 on page 269](#), **CPU Busy** has been specified as the report title.

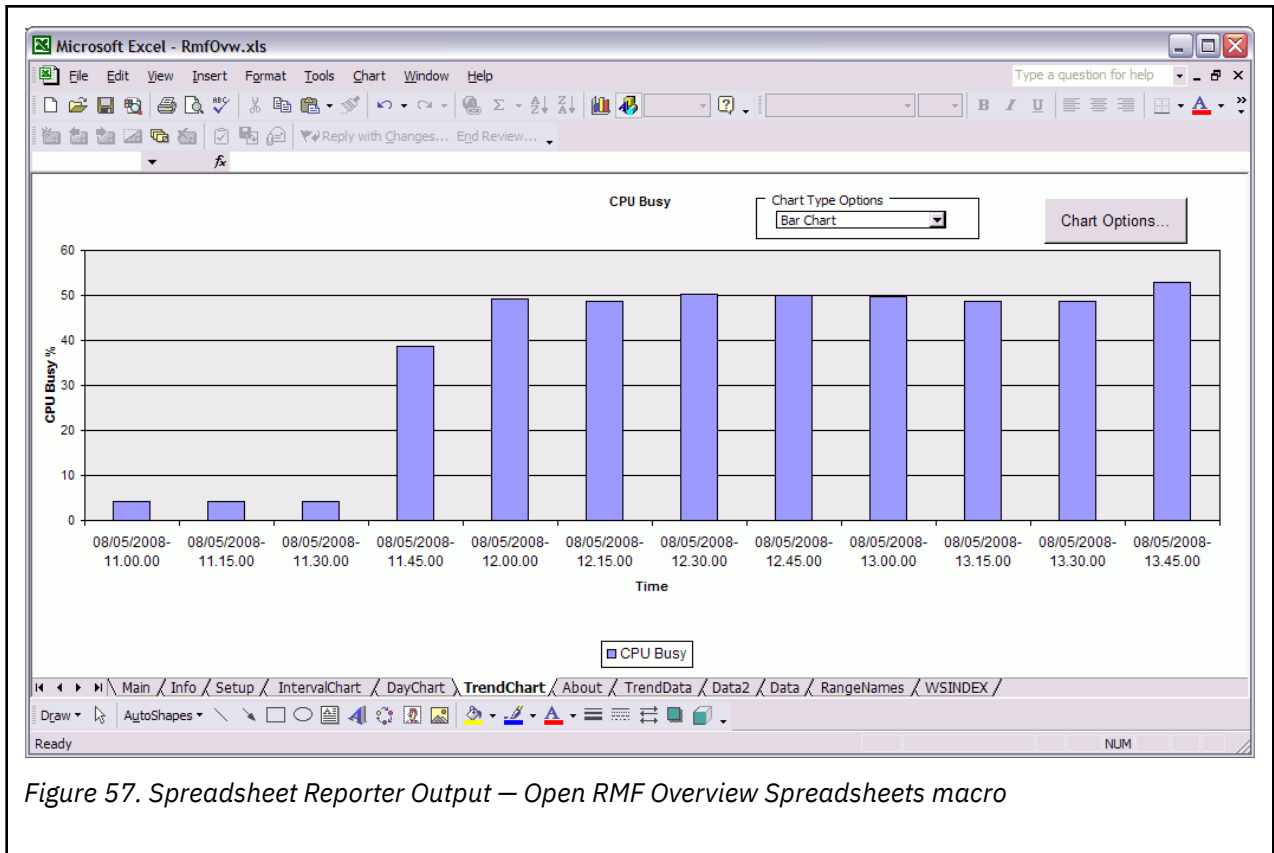


Figure 57. Spreadsheet Reporter Output — Open RMF Overview Spreadsheets macro

## Setting the security level for Excel macros

The Excel macros shipped with the Spreadsheet Reporter are signed. When you modify and save the Excel macros, the signature is discarded.

Within Excel you can specify the security level to enable or disable macro execution.

To change the security level, select **Excel Options > Trust Center > Trust Center Settings > Macro Settings**.





---

## Chapter 15. RMF Performance Monitoring

Items discussed in this information unit are:

- Performance monitoring - Overview
- Getting started - Installation and setup
- RMF PM - Let's go
- Working with sysplexes
- Working with PerfDesks and DataViews
- Working with Series
  - Series Definition Dialog
  - Plot/Save Series Dialog
  - Filter Dialog
  - Work Scope Dialog
  - Analysis Dialog
- What is monitored?
  - Sysplexes
  - Resources
  - Metrics
  - Work Scopes
- Messages

---

### Performance monitoring - Overview

**RMF Performance Monitoring (RMF PM)** allows you to monitor the performance of your z/OS host from a workstation through a TCP/IP interface to one or more z/OS sysplexes. You logon to any sysplex and you can monitor the resources in the corresponding sysplex.

RMF PM takes its input data from a single data server on one system in the sysplex, which gathers the data from the RMF Monitor III on each MVS image. Therefore, this is called the **Distributed Data Server (DDS)**. If you want to monitor several sysplexes, each one needs to have an active DDS.

RMF PM provides a selected subset of the information provided by the RMF Monitor III gatherer: general performance data, performance data for jobs, and workload-related performance data like:

- WLM workloads
- WLM service classes
- WLM service class periods
- WLM report classes

You have the flexibility to create unique scenarios that monitor the performance of your system. You can sample real-time data as bar charts, and combine data from different resources together. Once you have created these scenarios, you can save them as **PerfDesks**. With PerfDesks, you create a set of **DataViews** customized to your monitored system(s). DataViews sample performance data into one or more **Series** displayed as bar charts. You can reuse the DataViews any time. You can simply open the PerfDesk and start it whenever you want to view performance data in your monitored system again from the same angle.

**Note:** A saved PerfDesk does not contain any performance data. The PerfDesk samples new performance data each time it is opened and started. However, you can save the sampled data in spreadsheet files.

When you open RMF PM, you will find a list of **Sysplexes** in the resource view on the left side. Each sysplex comprises a hierarchy of **Resources** of your monitored system(s). Each Resource has a set of **Metrics**, which specify what is measured, for example, how the Resource is used or loaded with work.

## Getting help in RMF PM

All help information will be displayed using the default browser of your installation.

## Putting it all together

- You select Resources and Metrics, add them as Series definitions to a DataView.
- You save one or more DataViews as a PerfDesk.
- You start a DataView or PerfDesk to sample performance data on monitored system(s) and display them in the Series of DataView(s).
- You save the Series to a spreadsheet file.
- You open PerfDesks any time later to restart performance data sampling.

## Installing RMF Performance Monitoring

---

You can install the RMF Performance Monitoring (RMF PM) to monitor the performance of the z/OS host from a computer through a TCP/IP interface to one or more z/OS sysplexes.

You must complete specific tasks as indicated below:

For Client:

- A computer with Windows 10 Operating System.
- You must have an Administrator account type.

For z/OS host:

- Unix System Services must be configured in "full function mode."
- TCP/IP under Unix System Services must be configured and active.

RMF PM uses a server on the z/OS sysplex to retrieve its performance data. This server is called the **RMF Distributed Data Server**. This host component is installed automatically.

The installation utility of RMF PM is available as member GPMWINV2 of the host distribution library SERBPWSV. You can also find the latest version of RMF PM in the [GitHub](#) repository.

1. Download the GPMWINV2 member as a binary file `gpmwinv2-v.r.m.msi`. Alternatively, you can download the RMF PM from the [GitHub](#) repository.

Where *v.r.m* is the version, revision, and modification number of RMF PM.

2. Install the MSI package using the Windows Installer, either by double-clicking on the MSI package file or by running the following command:

```
msiexec /package gpmwinv2.msi
```

3. Specify the directory where to install the RMF PM.

The default location is: `C:\Program Files\RMF\RMF Performance Monitoring`

4. Follow the on-screen instructions to complete the installation.

You have installed the RMF PM.

### Related information

[“Setting up the Distributed Data Server for z/OS” on page 19](#)

Applications that want to access sysplex-wide performance data, can retrieve their input from a single data server on one system in the sysplex, which gathers the data distributed on all systems in the sysplex. Therefore, this is called the Distributed Data Server (DDS).

[“Starting the Distributed Data Server” on page 39](#)

## RMF PM - Let's go

After invoking RMF PM from the program folder **IBM RMF Performance Management - RMF Performance Monitoring**, you see the main window (Figure 58 on page 273).

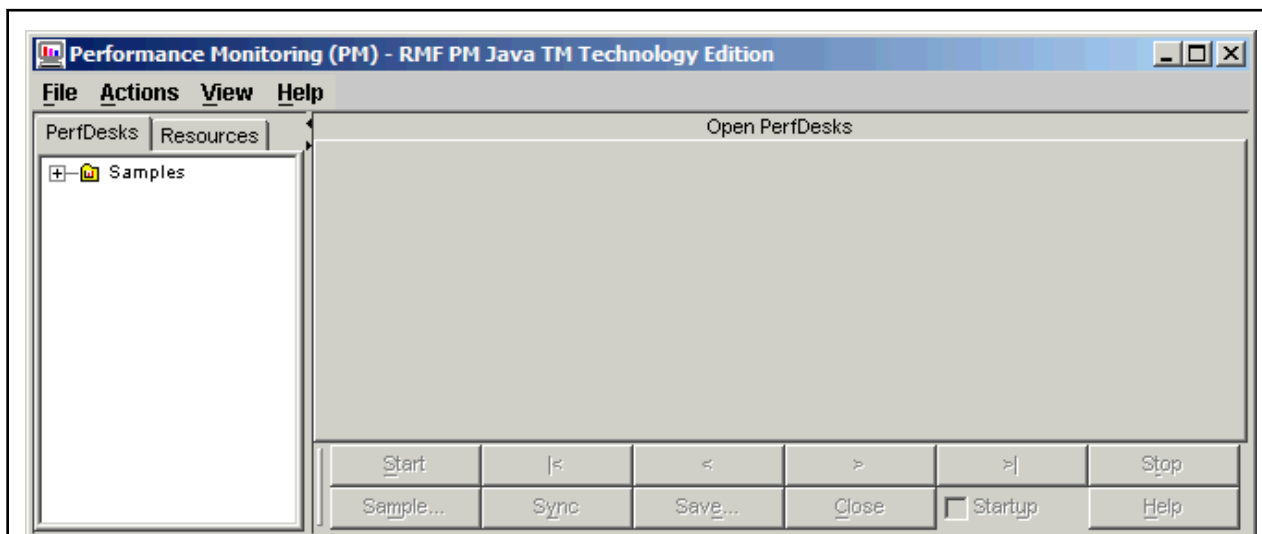


Figure 58. RMF PM — main window

There are two views:

- The view on the right is the **Opened PerfDesks** view
- The view on the left with two tabs contains the **PerfDesks** view and the **Resources** view

In the initial setup of RMF PM, the PerfDesk Folder **Samples** containing the PerfDesk **Sysplex-Overview** has been defined to be started automatically when starting RMF PM. This PerfDesk is connected to the sysplex that you have defined during installation. Therefore, the **Sysplex Logon** dialog will now be started.

### Sysplex logon dialog

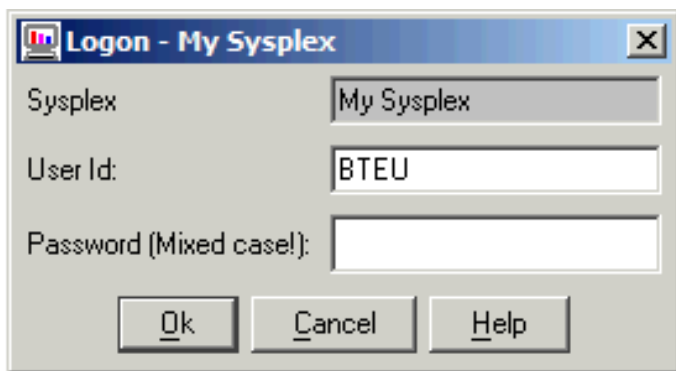


Figure 59. Sysplex logon dialog

Logon to a sysplex requires a **TSO user ID** and a **Password**.

**Note:** If you protect your Monitor III data as described in “Controlling access to RMF data for the sysplex data services” on page 18, ensure that the user ID is authorized to use the data service protected by this profile. Otherwise you will get an error message.

The Logon dialog will pop up for each sysplex that you have defined with an Automatic Startup PerfDesk Folder. Selecting **Ok** submits a logon request to the host. The request may take a considerable amount of time depending on how far away the sysplex to be monitored is, and how much it is loaded.

The user ID is **preset** in the Logon dialog but can be overwritten. You can change the **preset** user ID in the **Change Sysplex** dialog.

**Note:** If a logon fails several times, an expired password may be the reason. You should logon as TSO user to the host session, and change the password there before returning to this dialog. You **cannot** change the password from RMF PM. If a logon fails a certain amount of times, the user ID is revoked.

When the logon request has been completed successfully, the initial PerfDesk is loaded and started immediately. Unless you have changed the setup, you will see four DataViews:

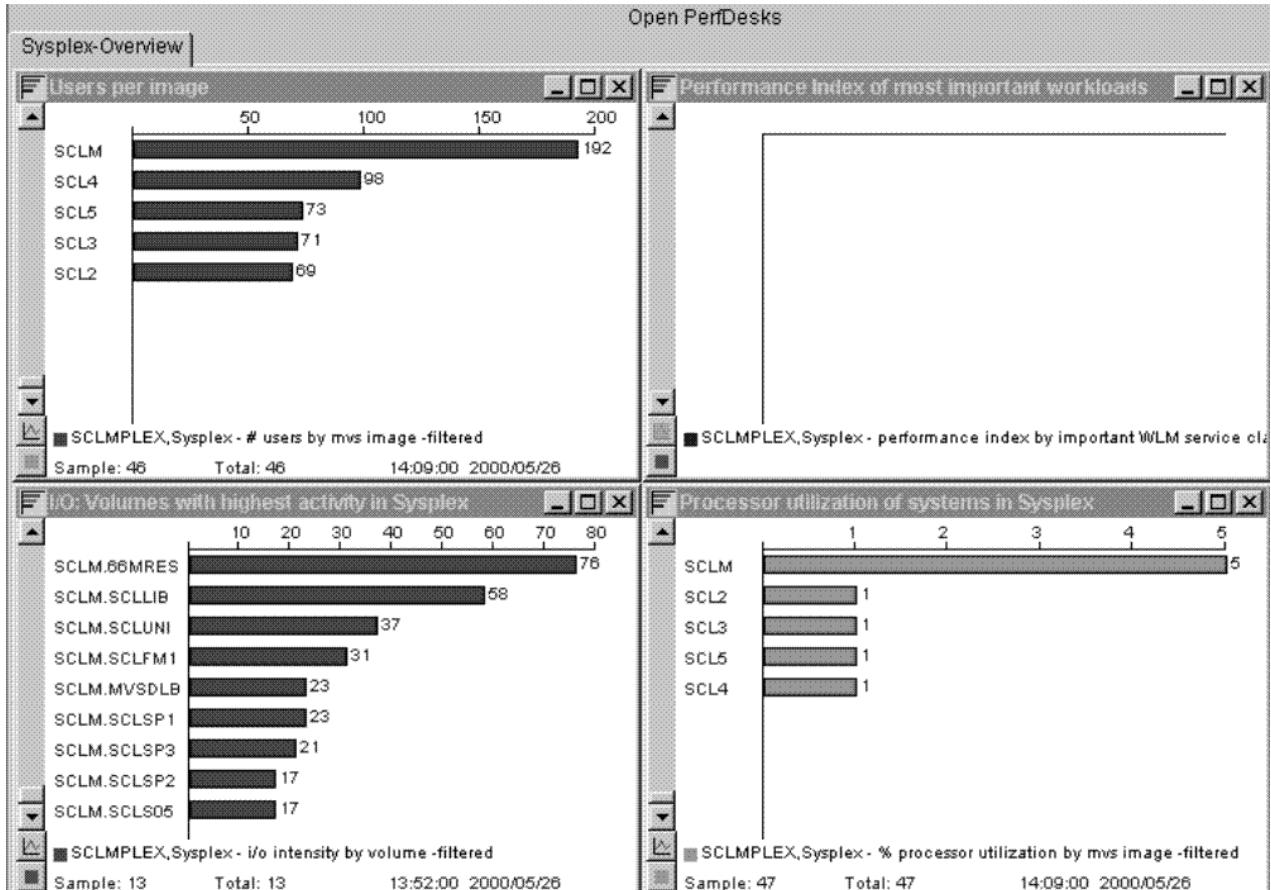


Figure 60. Initial DataViews

## Accessibility

You can access the RMF PM graphical interface using your keyboard, for example, you use Tab+F6 to toggle between the PerfDesks/Resource view and the Open PerfDesks view. Some examples of how you can access the controls in the PerfDesks using your keyboard are:

```
Alt-S: start
Alt-N: next sample
Alt-T: stop
Alt-M: Sample...
Alt-E: Save
Alt-C: Close
Alt-U: Startup check-box
```


## Working with sysplexes

With RMF PM, you can monitor the performance in one or more z/OS sysplexes. This section describes how to define a sysplex for monitoring and how to open and close a sysplex.

## Sysplex dialog

This dialog will pop up as a result of selecting **File > New > Sysplex**.

Or, if you want to change the settings of a sysplex, select **File > Change Settings > Sysplex**.

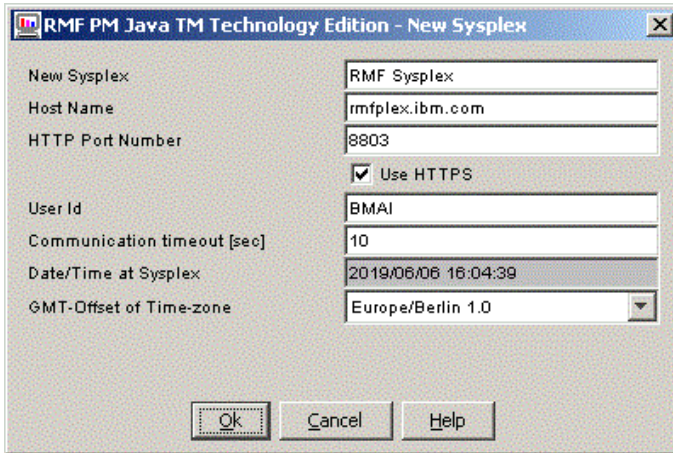

New Sysplex	RMF Sysplex
Host Name	rmfplex.ibm.com
HTTP Port Number	8803
	<input checked="" type="checkbox"/> Use HTTPS
User Id	BMAI
Communication timeout [sec]	10
Date/Time at Sysplex	2019/06/06 16:04:39
GMT-Offset of Time-zone	Europe/Berlin 1.0

Ok Cancel Help

Figure 61. Sysplex Dialog

The areas in this dialog are:

- New Sysplex
- Host Name
- HTTP Port Number
- Use HTTPS
- User Id
- Communication timeout [sec]
- Date/Time at Sysplex
- GMT-Offset of Time-zone

### New Sysplex

Here, you can enter a description of the sysplex.

### Host Name

The TCP/IP name of the host, which can be either:

- A symbolic name which can be resolved via a name server or your `/etc/hosts` file
- An IP address, such as 9.164.182.251

### HTTP Port Number

Enter the associated HTTP port number. This is normally port number 8803.

### Use HTTPS

By default, the use of HTTPS is selected. Then secure communication to the DDS will be established. See [Chapter 2, “Setting up RMF functions,” on page 13](#) for a description of how to set up secure communication for the DDS. When secure communication is to be established, RMF PM retrieves a host certificate and validates it using its local certificate key store. If the validation fails, the user is asked to accept the certificate. If the user decides to trust that certificate, it is stored in the local certificate key store and secure communication is established.

### User ID

Here, you define your TSO user ID.

### Communication timeout [sec]

You may leave the default value of 180 seconds.

### Date/Time at sysplex

This value must show the current wall clock time at the sysplex. If it is incorrect (for the remote sysplex), select a time-zone with a different GMT-Offset so that the correct **Date/Time at sysplex** value is shown.

### GMT-Offset of time-zone

This field allows you to select a GMT-Offset selecting the path **View > Options > Set Time-zone**. If you never changed the selection, the local GMT offset of your workstation should be shown selected.

Therefore, you need to change it only if the host associated with the sysplex resides in a different time zone. The **GMT-Offset** affects the time stamps in your DataViews.

## Open and close a sysplex

An open sysplex is characterized by the indicator **[+]** in front of its name. This indicator can be used to expand the sysplex.

Without this indicator, the sysplex is closed and needs to be opened to access its resources. To open a sysplex either double click on it, or select **Open** from its context menu. Then, the **Sysplex Logon** dialog will pop up.

To close a sysplex, select **Close** from its context menu. All contained resources will not be accessible until the sysplex is opened again.

You can also use the path **File - Open/Close - Sysplex...** to open or close a sysplex. This leads you to the **Sysplex Selection** dialog where you have to specify the name of the sysplex.

## Expand a sysplex

The **[+]** indicator before the sysplex means that you can expand it. Just click on the **[+]** and the resources should be listed indented below the sysplex.

```
[+]My Sysplex - PRODPLEX, Sysplex
  [+]SYS1, Image
  [+]SYS2, Image
  [+]CF1, Coupling Facility
  [+]CF2, Coupling Facility
```

The **[-]** before 'My Sysplex' means it is expanded. You can collapse it by clicking on the **[-]**.

**Note:** This will not close the sysplex, it only affects the graphical representation of the resource structures.

## Expand a Resource

The **[+]** before a Resource means that you can expand it. If you click on the **[+]**, the contained Resources should be listed indented below the expanded Resource.

```
[+]My Sysplex - PRODPLEX, Sysplex
  [-] SYS1,Image
    [+] SYS1,I/O-Subsystem
      SYS1,Processor
    [+] SYS1,Storage
      SYS1,Enqueue
      SYS1,Operator
    [+] SYS1,S/W-Subsystem
  [+] SYS2,Image
  [+] CF1,Coupling Facility
  [+] CF2,Coupling Facility
```

A Resource without a **[+]** before its name means it does not have contained Resources.

## Creating a DataView from a Resource

To create a DataView from a Resource, select **New DataView...** from its context menu. This leads you to the **Creating a DataView** dialog.

## Working with PerfDesks and DataViews

A PerfDesk is a set of DataViews that can be created, saved, opened and started altogether. A PerfDesk Folder is a container for one or more PerfDesks.

The **PerfDesks** notebook page allows you to manage your PerfDesks and DataViews from a central point:

- Creating a PerfDesk Folder
- Creating a PerfDesk
- Opening a PerfDesk
- Expanding the PerfDesk Tree into DataViews and Series
- Creating a DataView
- Exporting and importing a PerfDesk

### Creating a PerfDesk folder

Using **File - New - PerfDesk Folder...**, you can add a new PerfDesk folder.

### Creating a PerfDesk

Using **File - New - PerfDesk...**, you start the **Save PerfDesk** dialog, which displays a list of all existing PerfDesk folders. Now, you can select one of these folders as container for the new PerfDesk, or you can create a new folder. In addition, you will specify the name of the new PerfDesk by overwriting the preset name. With clicking on **Save**, you complete this process.

### Opening a PerfDesk

You can open a PerfDesk by double-clicking or through its context menu. This will add a new tab to the right part of the window, called **Open PerfDesks**, and you will see all DataViews belonging to the PerfDesk. Using **File - Open - PerfDesk...** is another way for this task.

### Expanding the tree

All containers in the **PerfDesks Overview** which are not empty, can be expanded very easily:

- PerfDesk Folder - PerfDesks
- PerfDesk - DataView
- DataView - Series

#### Example:

If a PerfDesk contains DataViews, you will see a **[+]** in front of its name:

```
[+]Sysplex-Overview
```

If you click on the **+**, the DataViews of the PerfDesk will be shown:

```
[-]Sysplex-Overview
  [+]Processor utilization of systems in Sysplex
  [+]Performance index of most important workloads
  [+]I/O: Volumes with highest activity in Sysplex
  [+]Users per image
```

In an **Open PerfDesk**:

- You have buttons:
  - Start and Stop all DataViews of the PerfDesk
  - Save a PerfDesk
  - Close a PerfDesk

- Additionally, using the context menu, you can:
  - Export a PerfDesk
  - Add a DataView to a PerfDesk
  - Change the Name of a PerfDesk
  - Paste a DataView to a PerfDesk from Clipboard

## Start and stop a PerfDesk

Clicking on **Start** will start data sampling in all DataViews belonging to the PerfDesk, this is indicated by the Run Light of all DataViews which will turn to green. Clicking on **Stop** stops data collection.

Of course, you can also start or stop each DataView individually by clicking on the appropriate Run Light.

## Save a PerfDesk

Before you save a PerfDesk, make sure the name of the PerfDesk and its DataViews reflect what is sampled in its Series. Neither PerfDesk, nor one of its DataViews should be named 'New'. Clicking on **Save...** opens the **Save PerfDesk** dialog, here you have the option to select a PerfDesk Folder, where you want to save the PerfDesk.

## Close a PerfDesk

During **Close** you will be prompted whether you want to save any changes that you have performed to the PerfDesk.

## Stepping through the history of DataViews

You can step forward and backward through the history of DataViews in a PerfDesk.

### Backward in History


Step all DataViews of this PerfDesk back one sample by pressing the < button. If the data needed is not available, the affected DataViews are stopping.

### Forward in History

Step all DataViews of this PerfDesk forward one sample by pressing the > button. If the data needed is not available, the affected DataViews are stopping.

## Sample

Open the following dialog by pressing the **Sample...** button:

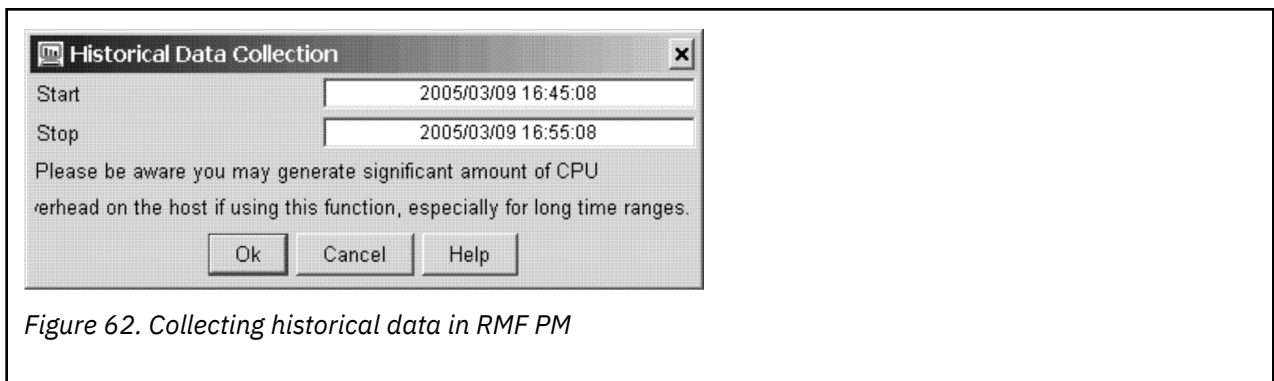

You can specify a start date/time and a stop date/time. After you've pressed the **Ok** button, all available performance samples for all DataViews of this PerfDesks for the specified time range are automatically collected.



Note that RMF PM gets its data from the z/OS host, meaning that all performance data has to be calculated by the z/OS RMF Monitor III. So if you're calculating the data for many different times, you can use some amount of CPU on the host.

## Synchronize all DataViews

All DataViews of this PerfDesk are synchronized to the time of the selected DataView.

## Startup

If this checkbox is checked, this PerfDesk is automatically started each time you are starting RMF PM. Please note that you do not need to save the PerfDesk after changing the Startup attribute of a PerfDesk; it is directly written to the disk.

## Add a DataView to a PerfDesk

Context item **New DataView...** is one way for Creating a DataView.

## Change the name of a PerfDesk

The context item **Change Description...** offers the function to change the name of the PerfDesk.

PerfDesk or DataView should be given names so that their purpose can be easily identified. PerfDesk names should sum up the purpose of its DataViews and DataView names should reflect what is sampled in their Series.

Names can contain alphanumeric characters and spaces.

You can also use the path **File - Change Settings - PerfDesk** to rename a PerfDesk.

The corresponding paths are also available for changing the name of a PerfDesk folder.

## Paste DataView to a PerfDesk

If a DataView has been previously copied, it can be pasted to the selected PerfDesk.

## Exporting and Importing a PerfDesk

If you want to transfer PerfDesks to another user or another PC, you may use the export functionality of RMF PM.

Invoke this function via **File - Export PerfDesk...** to export a **single** PerfDesk. RMF PM asks you for a file name where the exported PerfDesk description will be saved.

Alternatively you may use the **Export ... option** from the context menu of a PerfDesk which exports this current PerfDesk.

In the same way, you may import previously exported PerfDesk descriptions into a PerfDesk folder by using **File - Import PerfDesks...** which lets you select multiple files to be imported in one step. Importing PerfDesk descriptions from explicitly selected files into a PerfDesk folder can also be done via the **Import ... option** from the context menu of a **PerfDesk folder**.

To export **all** PerfDesks from an existing PerfDesk folder at once, use the **Export Folder ...** option from the PerfDesk folder context menu. This function exports all PerfDesks from this folder into files in a target directory. The file names are derived from the PerfDesk names.

If you use the **Import Folder ...** option from the PerfDesk folder context menu, you must select a directory containing PerfDesk descriptions, all of which are then imported into the PerfDesk folder.

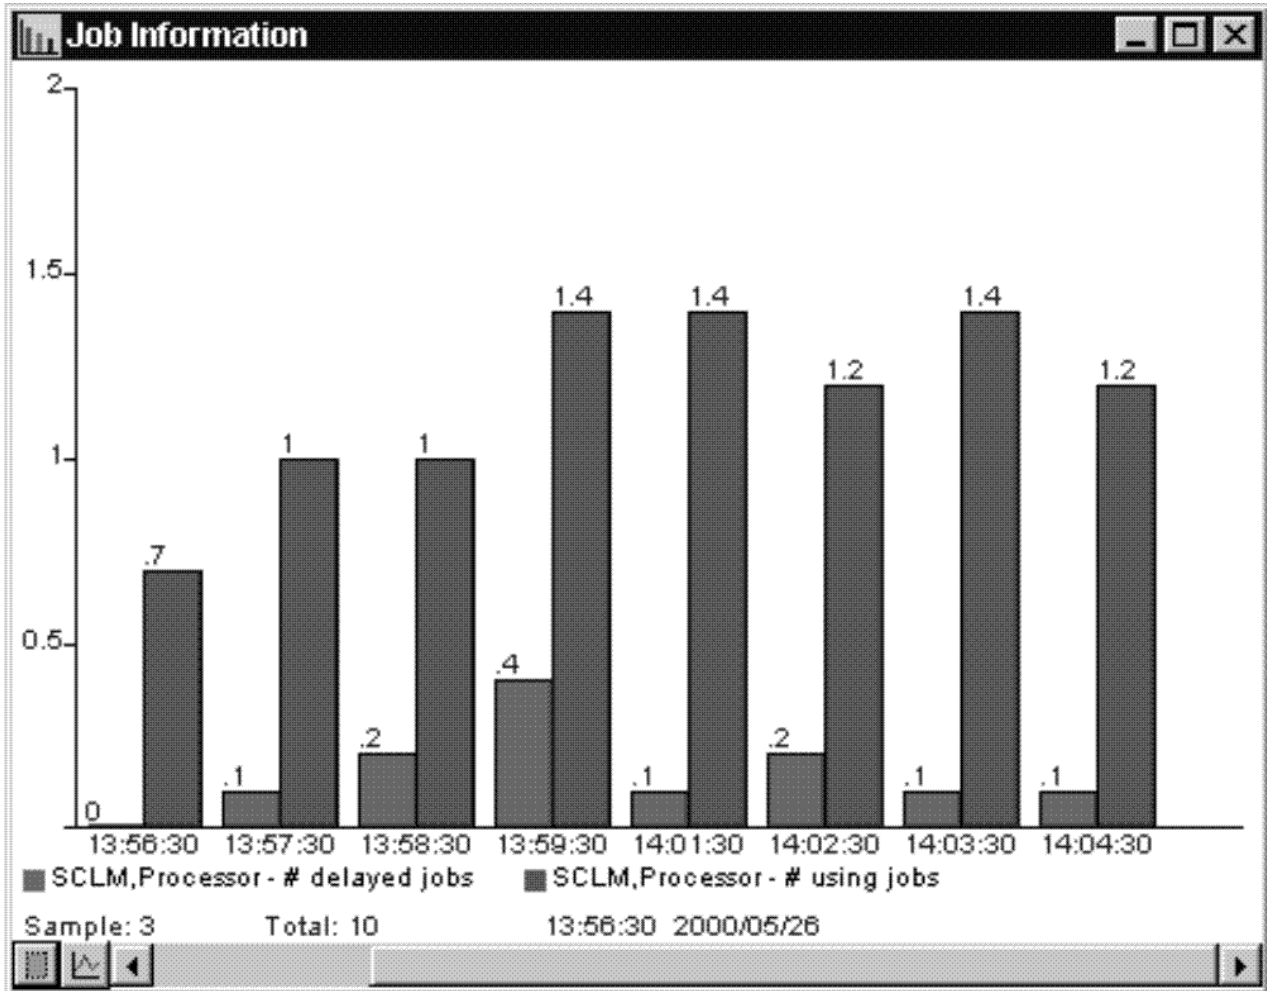


Figure 63. Sample DataView

A DataView displays the performance data currently sampled as so called Series.

## Creating a DataView

For adding a DataView to a PerfDesk, you select **New DataView...** from the context menu either of an open PerfDesk in the **PerfDesks** notebook page or of a PerfDesk in the **Open PerfDesks** window. This will start the **New DataView - Properties** dialog, which offers you an input field to specify the **Title** of the DataView. Furthermore:

- You can select whether you want to have a fixed scale in the DataView, or whether you prefer rescaling of the DataView depending on the values of the measurement data (check **Rescale automatically**).
- You can specify whether you want the Series to be displayed as vertical or horizontal bars.

Clicking **Ok** leads you to the **Series Definition** dialog where you can define the metrics of the Series that you want to add to the DataView.

Using **File - New - DataView...** will also lead you to this process.

**Note:** For defining a Series, it is necessary that you have selected a resource in the **Resources** notebook page. If this is not the case, you will get the message **Select a Resource of the correct type**. Now, you have to **Close** the dialog and to select the resource of your interest in the **Resources** notebook page.

Having in mind the above note, you also can use a resource as starting point of the above described process:

- You select a resource in the **Resources** notebook page and get the context menu for defining a DataView.
- If the resource of your interest is currently not displayed, you can use the path **Actions - Find I/O Resource...** which leads you to the **Find I/O Resource** dialog where you can specify the resource. This might be of special interest if you are looking for a specific volume which normally is not displayed in the **Resources** notebook page due to the large number of volumes in a sysplex. Therefore, this alternate path could be the faster way to find a volume for creating a new DataView with performance data for this specific volume.

Another function of this dialog is to display the properties of a specific resource.

Both ways will lead you to the **New DataView - Properties** dialog.

## Working with DataViews

A DataView contains three areas:

- Bar Chart
- Legend
- Control Panel

The DataView has a context menu for actions applicable to the entire DataView as opposed to a single Series. This menu will pop up, if the right mouse button is selected in the background of the bar chart.

- Properties
- Add Series
- Plot/Save Series
- Remove Values
- Copy
- Print

### DataView bar chart

When creating a DataView, you specify whether you want to create a DataView with horizontal or vertical bars. All following descriptions refer to vertical bar charts.

The bars represent the values measured, they are colored so they can be identified in the legends. There are two types of a bar chart:

- Single-Value Chart
- Value-List Chart

**Note:** It is **not** possible to display a Single-Value and Value-list chart in the **same** DataView.

#### *Single-Value chart*

A single-value chart displays Series with **one value per time-stamp**, for example, **% delay** or **# active users**.

#### *Value-list chart*

A value-list chart displays Series having for one metric (for example **# active users**) a list of values reported per time-stamp: **# active users by MVS image**.

#### *Bar chart context menu*

Several actions can be applied to a bar in the chart:

- Analysis
- Find highest

- Find lowest
- Series Settings
- Remove Series
- Color Chooser

## ***Analysis***

If you see a value that could be an indicator for a performance problem, analysis might be useful. Selecting **Analysis** leads to the Analysis dialog which offers you other DataViews with Series related to the value which you want to analyze.

## ***Find highest***

Selecting **Find highest** will search for the highest value in the Series and will display it.

## ***Find lowest***

Selecting **Find lowest** will search for the lowest value in the Series and will display it.

## ***Series settings***

Selecting **Series Settings** leads to the **Change Series** dialog. Depending on the type of the Series, it will have up to three pages:

- **Display** - displays the Resource and the Metrics of the Series.
- **Work Scope** - is the Work Scope dialog to specify reporting characteristics for jobs running in a goal mode environment.
- **Filter** - is the Filter dialog to define specific filter criteria for selecting Resources to be shown in the reports.

Clicking the Color Chooser button provides the capability for changing the color of the bar.

## ***Remove Series***

Will remove the Series from the DataView. Unless the PerfDesk is saved after the removal, the Series will be present the next time the PerfDesk is loaded.

## ***Color chooser***

Here, you can select the color for the Series that you would like to have.

## **DataView legend**

A **Legend** is a description of the Series. It consists of four elements:

- The little color square in front, to identify the bar associated with it
- The Resource for which the Series is sampled
- The Metric for which the Series is sampled
- An extension like filter or workscope

## ***Legend context-menu***

Except for 'Analysis', the same actions as in the Bar Chart Context Menu can be applied.

## **DataView control panel**

The control panel of a DataView allows you to control the sampling and display of the Series:

- Control Series Position
- Start/Stop

- Plot/Save Button

### ***Control Series Position***

At the bottom of the DataView, you find a **Position Indicator** and a **Time-Slider**.

The position indicator shows two values:

#### **Sample**

The position of the first value displayed.

#### **Total**

Total number of values sampled so far.

**Example:** Sample: 34 Total: 105

The position of the first value in the DataView is 34 out of 105 values.

By moving the time-slider to the left or to the right, you will change the time frame for which the series will be displayed.

### ***Start/Stop - Run Light***

In the left lower corner of the panel, you see the **Run Light** which is also the **Start/Stop Button**. It indicates if the DataView is sampling:

#### **Green**

The DataView is sampling

#### **Red**

The DataView does not sample

By clicking on this button, you can start or stop data sampling.

### ***Plot/Save Button***

Between the Start/Stop button and the time-slider you see the **Plot/Save Button** which leads you to the Plot/Save Series dialog with the capability to plot a Series or part of it, and to save the data to a .WK1 spreadsheet file.

## **DataView context-menu**

### ***Properties of the DataView***

You know the first page from this dialog, when you have specified the values while creating a new DataView. Now, the dialog has a second page Sampling. You see all details about the sampling for the series in this DataView, and you can change these settings, for example, the reporting interval.

### ***Add Series to a DataView***

Each Series is associated with a Series definition. Therefore, a Series Definition dialog will pop up to specify the Resource, Metric and other details.

### ***Plot/Save Series***

This context item shows another way to the Plot/Save Series dialog.

### ***Remove Values***

Here, you can remove all values that have been gathered for the series belonging to the DataView.

### ***Copy the DataView***

Use this function to copy a DataView into another PerfDesk. In the target PerfDesk, just call **Paste** to complete the task.

### ***Print the DataView***

Here, you can print the selected DataView with the printer of your choice.

## **Sampling dialog**

---

This dialog will pop up as a result of selecting **Properties** in the DataView's context menu. It allows you to modify sampling of the Series in several ways:

- Have a common sample interval, which is a multiple of the least common sample interval of all Series in the DataView.
- Sample any time in the past or future.

The areas in the dialog from top to bottom are:

- Sample Intervals
- Use Common Interval
- Sample From
- Sample To
- Wrap-Around Buffer Size

### **Sample intervals**

Lists the Series legend and the individual sample interval. If the interval is **\*\*:\*\*:\***, the interval could not be obtained.

### **Use Common Interval**

If the checkbox is selected, the Common Interval is used. Initially, the spinbutton shows the least Common Interval of all Series, or what was previously adjusted. It allows you to adjust it to multiple of this least interval.

### **Sample From**

Selecting the checkbox, you can adjust to any time in the past or future, when sampling should be **started**. If the **Sample To** checkbox is not selected, it means "continue to sample until manually stopped".

Initially, the spinbutton shows the current time minus one hour, or what was set previously.

### **Sample To**

Selecting the checkbox, you can adjust to any time in the past or future, when sampling should be **stopped**. If the **Sample From** checkbox is not selected, it means "start sampling now" and stop when the Sample-To time is reached.

Initially, the spinbutton shows the current time, or what was set previously.

**Note:** The time-stamp is affected by the setting of the Time-zone. So, make sure the time-zone is set correctly.

## Wrap-around buffer size

This field shows the size of the wrap-around buffer, this is the maximal number of samples that can be available to be displayed.

## Set Time-zone

Using the path **View - Options - Set Time-zone...**, you get a panel where you can specify the GMT-Offset and Time-zone.

## Series

---

A Series comprises:

- The definition of what Metric is sampled on a Resource
- The Series of time-stamps with their values or list of name-value pairs.

## Series time-stamps

The time-stamps are in the form HH:MM:SS, with **HH** in the 24-hour format. The date in MM/DD format is shown separately in front of the scale below the x-axis in the DataView.

**Note:** The time-stamp is affected by the setting of the Time-zone. So, make sure the time-zone is set correctly.

## Series definition dialog

This dialog will pop up when you:

- Create a DataView...
- Add a Series to a DataView...
- Use the path **File - New - Series...**

It basically allows you to add Series to a DataView. Here you specify all details which are required to sample data on the monitored system like the Sysplex, the Resource, or the Metric, to form a Series definition.

If you have selected a Resource in the **Resources** notebook page, all you need to select is a Metric, because the Resource is preselected. Otherwise, you will be prompted to select a Resource.

The areas in the dialog from top to bottom are:

- Sysplex and Resource: You cannot change directly these fields by overtyping them. If you need another selection, you can specify this in the **Resources** notebook page.
- Metric Types radio buttons
- Metrics list
- Buttons: Add - Done - Metric Help - Help

## Metric types

Selection affects the type of Metrics shown in the Metrics list.

- **All** - Shows Single-Value and Value-List Metrics
- **Single** - Shows Single-Value Metrics
- **List** - Shows Value-List Metrics

See also Single-Value Chart and Value-List Chart.

## Metrics list

Contains the types of Metrics available for the Resource. Context item **Description** on a selected Metric or button **Metric Help** will pop up a description.

### Push Buttons: Add - Close - Metric Help - Help

If a Metric is selected, clicking on **Add** causes the resulting Series to be added to the DataView. The dialog is not ended, thus allowing further selections.

The **Close** button ends the dialog.

Clicking on **Metric help** leads to an explanation of the selected Metric.

Clicking on **Help** displays general information about this dialog.

## Plot/Save Series dialog

This dialog will pop up as a result of selecting Plot/Save Series... in the DataView's context menu, or by clicking the Plot/Save button. It allows you to view Series plots and save Series of a DataView into a CSV file.

You can select:

- One Series from a list of Series
- Multiple Series if the Series contain Single-Values
- A range to be zoomed (from one time-stamp to another time-stamp)
- Series for one or more value names (on Value-Lists only) selectable from two Value Name lists , sorted by highest maximum values and by highest average value in descending order.

The areas in the dialog from top to bottom are:

- Series Plot Area
- Control Panel
- Dialog Button Area

### Series plot area

In this area, the values of Series are plotted over time. The parts in this area from top to bottom are:

- Line plots of one or more values plotted over time. Triangles pointing upwards indicate maximum values, and those pointing downwards indicate minimum values. The plotted values belong to one or more Series, described by legends below the x-axis.
- A horizontal **Range-Bar** below the x-axis indicates which range of values can be saved or zoomed.

By changing the time-stamps in the **From** and **To** spinbuttons of the Control Panel, the range can be limited. Therefore, only the values lining up above the remaining dark-gray area will be saved or zoomed.

- Below the Range-Bar, two time-stamps are shown. **If not zoomed**, these are the time-stamps of
  - the first sample taken
  - the current last sample taken.

**If zoomed**, these are the time-stamps of:

- the first sample to be saved
  - the last sample to be saved.
- Below the time-stamps, the Series legends are shown.
  - For Series containing Value-lists only one common legend is shown, because only one Series can be selected for one or more value names. The Series for each value name is represented by a different color.



When the dialog pops up, the first Series is shown, but any other Series can be selected in the Series listbox of Control Panel.

- For Series containing single values, more than one Series can be selected.

When the dialog pops up, all Series are shown, but any of them can be eliminated from the plot by deselecting the legend in the Series listbox of Control Panel.

## Control Panel

The Control Panel allows you to:

- Select the range of the Series to be saved or zoomed
- Select one or more (if single values) Series to be plotted.
- Select (for value-lists) the value name for which the Series should be plotted.

The areas from top to bottom are:

- The range selection, composed of:
  - The **From** spinbutton, which allows to adjust to the time-stamp of the first sample in the Series be saved or zoomed. Changing the time-stamp will change the start point in the Range-Bar and the number of samples.
  - The **# Samples** in the selected range.
  - The **To** spinbutton, which allows to adjust to the time-stamp of the last sample of the Series to be saved or zoomed. Changing the time-stamp will change the ending point in the Range-Bar and the number of samples.
- The **Zoom** button (if there are at least 11 values in the range), used to expand the dark part of the Range-Bar into the entire plot area. Note, that when pressed, its label changes to **Total** to indicate that by pressing the button again, the total Series can be shown.
- The Series listbox. Note, that this listbox will appear only if the DataView has more than one Series.

The effect of selecting a Series is that it is shown in the Plot Area.

If the Series are Value-lists, then initially the first Series is selected. Selecting another Value-list Series causes the value name with the highest maximum value to be shown. See Value Name lists below for how to select other value names.

If the Series has Single-Values (not Value-lists) then all Series are selected initially. Deselect Series you do **not** wish to see in the plot.

- The **Value Name** lists. Note, that these list boxes will only appear if the DataView contains Series with Value-lists.

Both lists contain **value names**. For example, if the selected Series legend is **% delay by job**, then the names in the list boxes are **job names**.

The first list box contains value names sorted by **maximum values** in descending order. For example, list item **BWSC(30)** means that the maximum delay detected for job BWSC was 30%.

The second list box contains value names sorted by **average values** in descending order. For example, list item **BWSC(2.5)** means that job BWSC experienced a delay of 2.5% on average.

If you select a name from either list, the values for that name are plotted over time. Deselecting withdraws the plot for the name. For example, selecting BWSC will show the **% delay for job BWSC** over the entire time range. The maximum (30%) will be marked by a triangle pointing upwards.

## Dialog button area

Besides the usual Cancel and Help buttons, there are the buttons **Save...** and **Print....**

Clicking on **Save...** leads to a **Save Series** dialog. A file dialog will pop up to specify a file which is stored in .CSV format. RMF PM uses the following CSV format: The semicolon (“;”) is used as list separator. You can specify the decimal separator using **View ---> Options ---> Set Decimal Separator...** from the menu.

Clicking on **Print...** lets you print the plot on the printer of your choice.

## Filter dialog

The screenshot shows the 'Change Series' dialog box with the 'Filter' tab selected. The 'Resource' field contains 'SCLM,Image' and the 'Metric' field contains '% using by job'. Below these fields is a text input area labeled 'Specify names or name-pattern'. A list of resources is displayed on the left, including \*MASTER\*, ALLOCAS, AMAD, AME, ANTAS000, ANTMMAIN, APPC, ASCH, ASCHINT, BALU, BANK, BARB, BASC, BDOW, BDOWI, BENK, and BGBOOLD. To the right of the list is a 'Refresh' button and a 'Sort order' section with four radio buttons: 'Value ascending', 'Value descending' (selected), 'Name ascending', and 'Name descending'. Below the sort order is an 'Include values' section with 'From value' and 'To value' input fields. At the bottom left is a 'Max. number of list elements' section with a text input field containing '5' and two radio buttons: 'Lowest values' and 'Highest values' (selected). At the bottom right are four buttons: 'Done', 'Color Chooser', 'Cancel', and 'Help'.

**Change Series**

Resource and Metric | Work scope | **Filter**

Resource: SCLM,Image  
Metric: % using by job

Specify names or name-pattern

\*MASTER\*  
ALLOCAS  
AMAD  
AME  
ANTAS000  
ANTMAIN  
APPC  
ASCH  
ASCHINT  
BALU  
BANK  
BARB  
BASC  
BDOW  
BDOWI  
BENK  
BGBOOLD

Refresh

Sort order

☐ Value ascending  
☒ Value descending  
☐ Name ascending  
☐ Name descending

Include values

From value  
To value

Max. number of list elements

5

☐ Lowest values ☒ Highest values

Done Color Chooser Cancel Help

Figure 64. Filter Dialog

## Resource and Metric information

This area on the top of the dialog informs you about the Resource and the Metric for which a filter can be specified in this panel.

A multi-valued metric consists of a list of name-value pairs, for example, "Response Time by Volume". A filter is provided to reduce the number of name-value pairs of a multi-valued metric, and to sort them by name or value.

Filtering is performed stepwise in the following sequence:

1. Name-pattern Matching
2. Value-bound Comparison
3. Ordering
4. List-length Reduction

## Name pattern

Optionally, one or more name patterns in the form of a simple expression to be matched against the names in the list of name-value pairs of the multi-valued metric can be entered in this field.

The following rules apply to this definition:

- ? - one character
- \* - zero, one, or several characters
- If the name contains an '\*' (for example, \*MASTER\*), each \* must be preceded by a back slash

**Example:** You want to define a filter that will accept the following job names:

- XJSMITH1
- \*MASTER\*
- All BAXx, where xx is any two characters
- All starting with CIC
- All with HOT somewhere in the name

You have to specify in the entry field:

```
XJSMITH1|\*MASTER\*|BA??|CIC*|*HOT*
```

**Note:** The '\ ' in '\\*' means: take \* as a character, and not as a character string of any length (wildcard).

A list of valid names to be used as patterns is provided. It may take some time for the program to bring up a long list of these names for the first time. When the selection list is available, the entry field can be filled in by selecting items from the list. Selected items are concatenated with | in the entry field. The entry field can be edited.

Clicking **Refresh** will receive a refreshed selection list from the host.

## Value bounds

Optionally, an upper bound and a lower bound to be compared against the values in the list of name-value pairs of the multi-valued Metric can be entered. If both upper and lower bounds are specified, the upper bound must be greater than or equal to the lower bound.

All list elements with values higher than the specified upper bound, and all list elements with values lower than the specified lower bound, are discarded.

## Sort order

For ordering the values in the list of name-value pairs of the multi-valued metric, you must select one of the choices:

- Value ascending
- Value descending
- Name ascending

- Name descending

## List length

For restricting the length of the list of name-value pairs of the multi-valued metric, you must select one of the choices:

- Highest values
- Lowest values

Additionally, the maximum number of list elements must be specified.

## Work Scope dialog

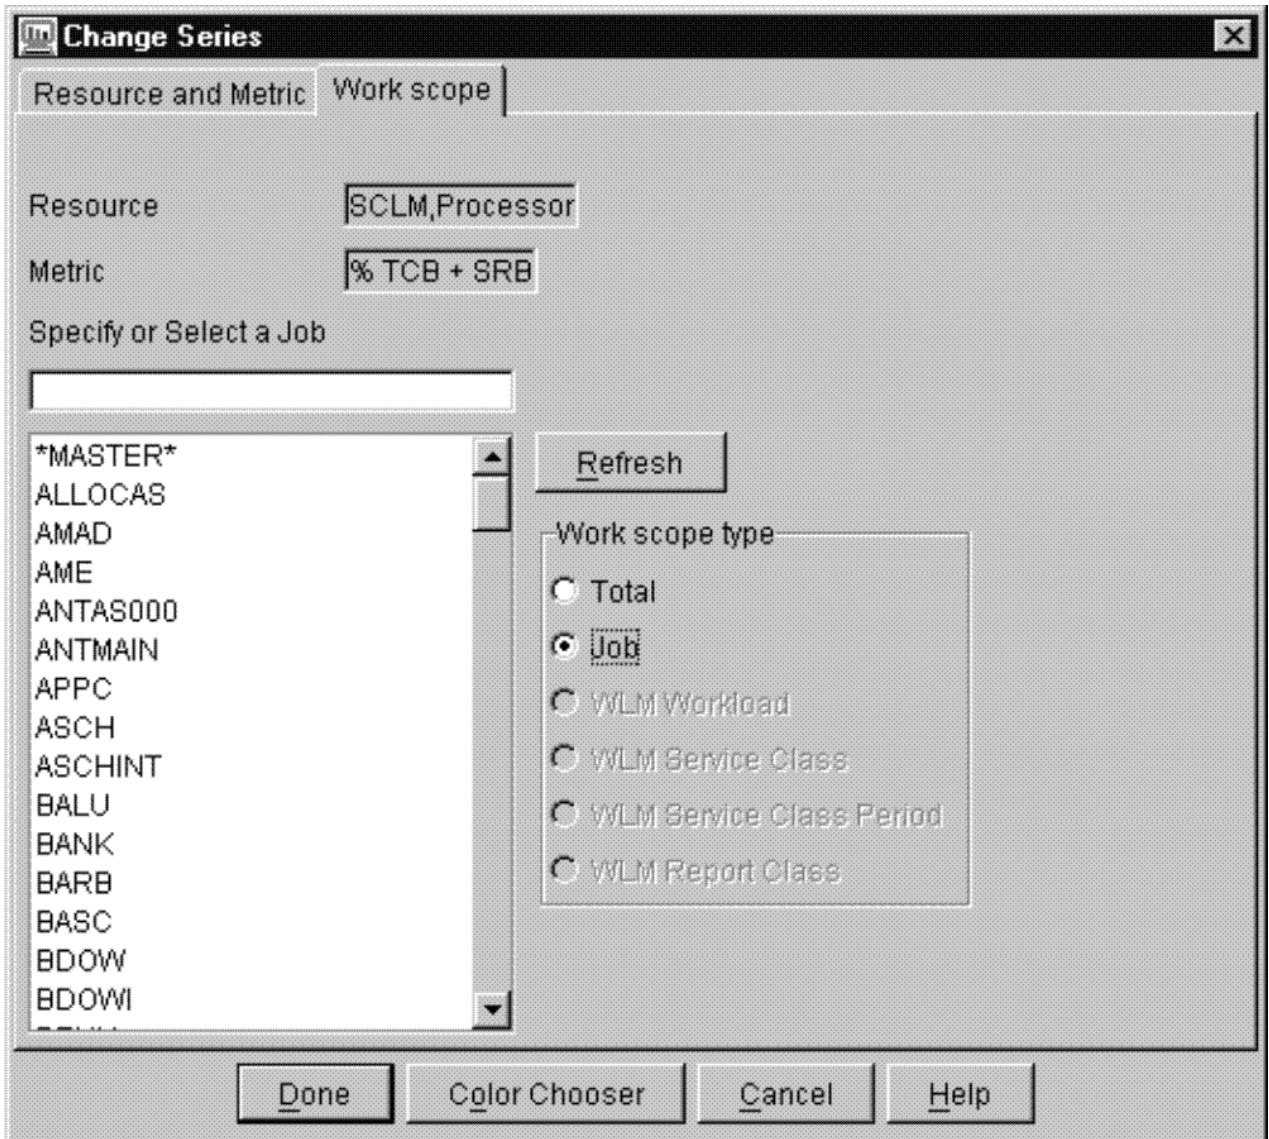


Figure 65. Work Scope Dialog

## Resource and Metric information

This area informs you about the Resource and the Metric, for which a Work Scope name can be specified in this panel.

## Work Scope type

You have to select a work scope type:

- Total
- Job
- WLM Workload
- WLM Service Class
- WLM Service Class Period
- WLM Report Class

Only those radio buttons are enabled that are available for the selected combination of resource and metric.

## Work Scope name

For **Work Scope Type = Total** nothing has to be entered here.

For other work scope types, a list of valid names is provided. It may take some time to create a long list of these names for the first time. When the selection list has been filled, the entry field may be filled in by selecting an item from the list.

**RMF PM** will remember the selection list and will display it again the next time. **Refresh** can be used to get a refreshed selection list.

## Analysis dialog

The **Title** shows the sysplex for which analysis is intended.

### Resource, Work Scope, Metric, Value, Name, and Sample Time

These fields inform you about the source of the analysis which is the context of the data point in the DataView that you clicked on. You can either have analysis based on

- the time when data was collected, or
- **current** data, which analyzes the next Metric sample.

If the work scope field is empty, then the Metric is not for a specific work scope rather than global.

### Analysis Type

This listbox allows you to select another PerfDesk as the next step of the analysis. Each alternative is shown with the resource and its work scope (if required) as the target for the analysis.

### Close Previous PerfDesk(s)

The PerfDesks that were previously shown during the analysis process can be closed to avoid an overloaded screen with too many DataViews. The selected PerfDesks will be closed if the checkbox is selected.

## What is monitored?

---

The following sections describe the objects involved in monitoring with RMF PM.

## Sysplexes

In general, RMF PM can monitor one or more sysplexes, where each sysplex provides access to system management information for a certain set of resources.

## Resources

- Sysplex

- MVS Image
- I/O-Subsystem
  - Storage Subsystem (SSID)
  - Logical Control Unit (LCU)
  - Channel
  - Volume
  - zFS Aggregate
    - zFS File System
- Processor
- Memory (Processor Storage)
  - Central Storage
    - CSA
    - ECSA
    - SQA
    - ESQA
  - Auxiliary Storage
- Enqueue
- Operator
- SW-Subsystem
  - JES
  - HSM
  - XCF
- CPC
  - LPAR
- Coupling Facility
  - Coupling Facility Structure

A resource is any facility of a computing system or an operating system required by a job or task. This includes storage, processor, channels, volumes, or software subsystems. Resources are named according to the following naming conventions:

- A resource is unique in the sysplex

SYS1,Image

CF1A,Coupling Facility

- A resource has several instances in the sysplex

SYS1,0020,Storage Subsystem

SYS1,0030,Storage Subsystem

SYS1,TSO001,Volume

SYS1,TSO002,Volume

## **Sysplex**

A sysplex consists of MVS images and coupling facilities.

You can either expand the sysplex to these images, or you can select a new DataView. The available data is either

- total data for the sysplex or

- workload-related information provided for
  - WLM Report Classes
  - WLM Service Classes
  - WLM Service Class Periods
  - WLM Workloads

In addition, details for the sysplex (policy definition) are available.

### **MVS Image**

An MVS image consists of several resources to which it can be expanded:

- I/O Subsystem
- Processor
- Storage
- Enqueue
- Operator
- SW Subsystem

Some of these resources can be expanded, or you can select a new DataView. The available data is either total data or data with job-related information.

### **I/O-Subsystem**

You can either expand this resource to see the details of the I/O configuration, or you can select a new DataView with information belonging to the I/O subsystem.

- Storage Subsystem (SSID)
- Logical Control Units (LCU)
- Channels
- Volumes

### **Storage Subsystem (SSID)**

You can either expand this resource to see SSIDs, or you can select a new DataView with information about cache hits and misses by SSID.

In addition, details for an SSID (type, model, storage size, NVS) are available.

### **Logical Control Unit**

You can either expand this resource to see all LCUs, or you can select a new DataView with information belonging to LCUs.

### **Channel**

You can either expand this resource to see all channels, or you can select a new DataView with information about the utilization of channel paths in the system.

In addition, details for the channel (channel type) are available.

### **Volume**

Due to the fact that typically the number of volumes in an installation is very high, not all volumes will be shown when expanding this resource level, but ranges of volumes, which can be expanded to single volumes with a second step.

You can select a new DataView with information belonging to specific volumes.

In addition, details for the volume (device type, device address, CU type) are available.

### **zFS Aggregate**

You can select a new DataView with information about zFS activity related to specific zFS aggregates or related to one or more file systems contained in an aggregate.

### **Processor**

You can select a new DataView with information about the usage of the processor and about delays for jobs waiting for the processor.

In addition, details for the processor (model and version) are available.

Memory (Processor Storage)

You can select a new DataView with information about the usage of storage and about delays for jobs waiting for storage. The information is available in some more detail for the different types of storage:

- Central Storage
- Auxiliary Storage

### **Central Storage**

You can select a new DataView with information about the usage of central storage and about delays for jobs waiting for storage. The information is available in some more detail for the different areas of central storage:

- CSA - Common System Area
- ECSA - Extended Common System Area
- SQA - System Queue Area
- ESQA - Extended System Queue Area

### **Auxiliary Storage**

You can select a new DataView with information about the usage of auxiliary storage slots.

### **Enqueue**

You can select a new DataView with information about delays in the system caused by usage of serially reusable resources.

### **Operator**

You can select a new DataView with information about delays in the system caused by jobs waiting for the operator to reply to a message or mount a tape, or by address spaces that are quiesced by the operator.

### **SW-Subsystem**

You can select a new DataView with information about delays in the system caused by jobs waiting for service from

- JES - Job Entry Subsystem
- HSM - Hierarchical Storage Manager
- XCF - Cross-System Coupling Facility

### **CPC**

You can select a new DataView to monitor values that are relevant for software pricing. You can also get information about partition related processor activities.

### **Coupling Facility**

You can select a new DataView with information about performance and usage of Coupling Facilities installed in your Parallel Sysplex®.

### **Coupling Facility Structure**

You can select a new DataView with information and usage of the Coupling Facility Structures on your Coupling Facility.



## Metrics

RMF PM has two formats for presenting performance data:

- **Single-Value Metrics**, for example
  - **% utilization** (of a processor, of a channel, ...)
  - **i/o activity rate** (of a logical control unit, ...)
- **Value-List Metrics**, for example
  - **% utilization by job**
  - **# delayed jobs for i/o by mvs image**

The unique indicator in the name of a Value-List Metric is the keyword **by**.

## Work Scopes

A work scope is the specification of an entity of work. RMF PM supports the following work scopes:

- Job (representing the work performed in an address space)
- WLM workload
- WLM service class
- WLM service class period
- WLM report class

Metrics with values for work scope instances are available in two ways:

- As a single-valued Metric, where the corresponding work scope name has been specified
- As a multi-valued Metrics (ordered lists), where each list element belongs to one instance of a work scope

Work scopes are not modeled as resources showing up in a PM configuration view, because frequently changing instances of jobs would flood the system with configuration updates.

## Message Browser

Whenever an important message has to be brought to the user's attention, the Message Browser will pop up (if not opened yet), and a message will be displayed emphasized by a short beep.

Each message has the following format:

```
YYYY/MM/DD HH:MM:SS  
GPMxxxxI Message.....  
.....
```

The following actions are possible on the Message Browser:

- Save Messages to a File
- Delete Messages
- Query Help for a Message
- Close the Message Browser

## Save messages to a file

Using the path **File - Save Messages ...**, you can save the messages to a file. By convention all message files have a file extension of **.msg**.

## Delete messages

To delete messages, simply select the part you would like to remove, and press the **Delete** key.

## Query help for a message

To query help for a messages, select it (at least the message-identifier) and press F1. You can also use the path **Help - Message Help** after having selected the message.

## Close the Message Browser

Use the File menu or double click on the Message Browser icon to close it. All messages will be lost. If a new message needs to be displayed, the Message Browser will pop up again.

# Chapter 16. z/OS Management Facility - Resource Monitoring

IBM z/OS Management Facility (z/OSMF) provides a framework for managing various aspects of a z/OS system through a Web browser interface. By streamlining some traditional tasks and automating others, z/OSMF can help to simplify some areas of system management and reduce the level of expertise needed for managing a system.

Most functions of the z/OSMF area are provided through plug-ins, which you can enable when configuring the product. Choosing the **Resource Monitoring** plug-in adds the Resource Monitoring and the System Status tasks to the **Home** page of z/OSMF.

The **Resource Monitoring** task allows you to monitor the performance of the z/OS sysplexes, AIX system complexes (System p) or Linux system complexes (IBM Z and System x) in your environment. You can monitor the supported metrics, create and save custom metrics views, and display real-time data as bar charts.

For z/OS sysplexes, the **Resource Monitoring** task takes its input from the RMF Distributed Data Server (GPMSSERVE). To monitor several sysplexes, ensure that each sysplex has an active Distributed Data Server.

Similarly for AIX or Linux system complexes, the **Resource Monitoring** task takes its input from the RMF XP GPM4CIM started task, which is a cross platform Distributed Data Server on a z/OS system that gathers data via connected CIM servers from the systems to be monitored.

Before you can use the **Resource Monitoring** task, you must define the sysplexes, system complexes, or images that you want to monitor. For this purpose, you use the **System Status task**. This task provides a comfortable way to assess the health status of all systems in your installation at a glance. [Figure 66 on page 297](#) presents a sample list of z/OS sysplexes. You can add all target sysplexes, system complexes, or images you want to monitor to this list.

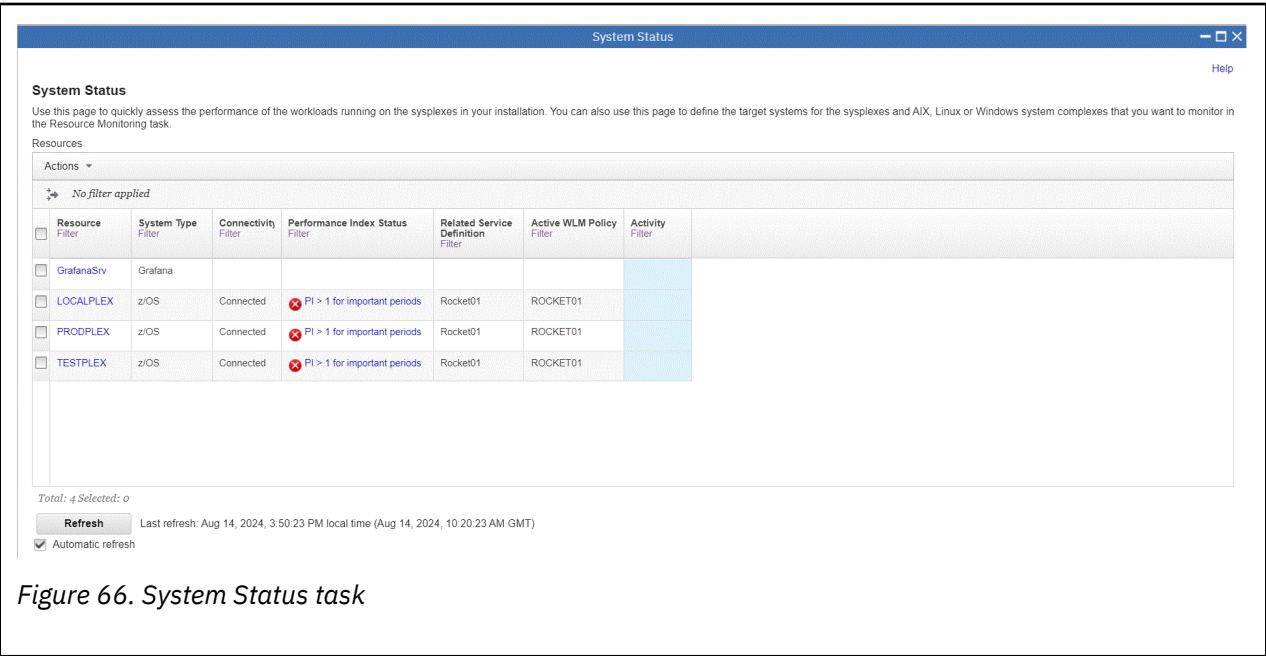


Figure 66. System Status task

The **Performance Index Status** column provides a red, yellow, or green indicator for the health of the sysplexes, system complexes, or images. If all service class periods on the systems are meeting their goals (that is, they have a performance index of less than or equal 1), the status is green. If at least one service class with importance 1 or 2 misses the WLM goal, the status indication is red. In this case, you

can figure out the reasons by looking at the details on the respective sysplex, system complex, or image, using the **Resource Monitoring task**.

A **Monitoring Dashboard** is a customizable view containing a set of performance metrics. You can create and save your own dashboards or open and modify the predefined dashboards shipped with the **z/OSMF Resource Monitoring** plug-in.

Figure 67 on page 298 shows how you can use the **Resource Monitoring task** of **z/OSMF** to monitor the common storage activity of a sysplex, system complex, or image.

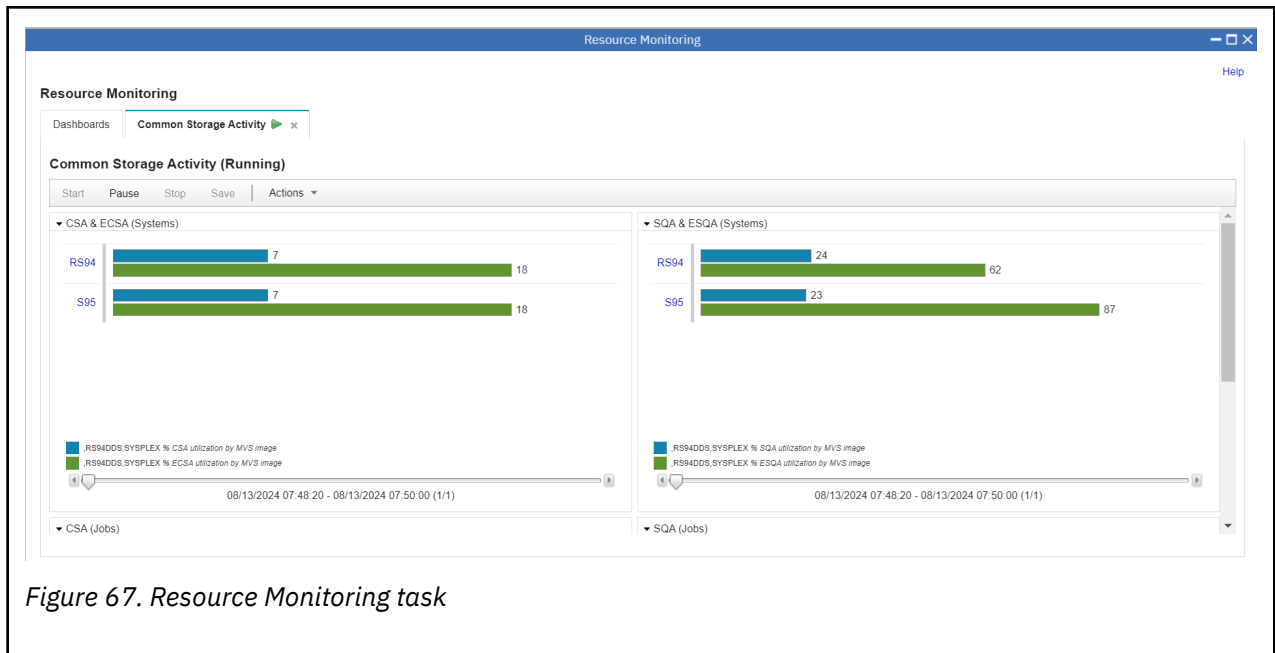


Figure 67. Resource Monitoring task

A comprehensive online help is provided for each panel. Tooltips, descriptive texts as well as error, warning, and information indications will guide you through the panels and ensure an intuitive user experience. For more information about **z/OSMF**, visit the **z/OS Management Facility** home page ([www.ibm.com/products/zos/management-facility](http://www.ibm.com/products/zos/management-facility)) or refer to the **IBM z/OS Management Facility Configuration Guide**.

---

## Part 7. Using OpenMetrics

Monitor III metrics can be exposed to third-party tools by using the OpenMetrics exposition format.

Some examples of the tools are:

- [Prometheus](#)
- [VictoriaMetrics](#)
- [Telegraf](#)
- [Grafana](#) (on top of any data source solutions such as Prometheus, VictoriaMetrics, InfluxDB and others.)



---

## Chapter 17. OpenMetrics Configuration

Each Monitor III metric offers flexible configuration options. You can choose to skip a metric, expose it with its default name, or give a custom name. For more information see, [OpenMetrics Endpoint](#) topic.

For a complete list of exposable metrics, refer to the SERBPWSV(GPMOMC) that is shipped with SYS1.SERBPWSV(GPMOMC).





---

## Chapter 18. Monitor III metrics in Grafana

[Grafana](#) provides a built-in support for major metric storage solutions.

RMF provides a set of Grafana sample dashboards that can be used for visualisation of Monitor III data exported to third-party tools such as Prometheus and VictoriaMetrics. These samples can be used for building customized Grafana dashboards as well.

For more information, see [Grafana Sample Dashboards](#).



---

## Appendix A. Accessibility

Accessible publications for this product are offered through [IBM Documentation \(www.ibm.com/docs/en/zos\)](http://www.ibm.com/docs/en/zos).

If you experience difficulty with the accessibility of any z/OS documentation see [How to Send Feedback to IBM](#) to leave documentation feedback.



## Notices

---

This information was developed for products and services that are offered in the USA or elsewhere.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing  
IBM Corporation  
North Castle Drive, MD-NC119  
Armonk, NY 10504-1785  
United States of America*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing  
Legal and Intellectual Property Law  
IBM Japan Ltd.  
19-21, Nihonbashi-Hakozakicho, Chuo-ku  
Tokyo 103-8510, Japan*

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:** INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

This information could include missing, incorrect, or broken hyperlinks. Hyperlinks are maintained in only the HTML plug-in output for IBM Documentation. Use of hyperlinks in other output formats of this information is at your own risk.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

*IBM Corporation  
Site Counsel  
2455 South Road*

Poughkeepsie, NY 12601-5400  
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

## Terms and conditions for product documentation

---

Permissions for the use of these publications are granted subject to the following terms and conditions.

### **Applicability**

These terms and conditions are in addition to any terms of use for the IBM website.

### **Personal use**

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

### **Commercial use**

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or

reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

## Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

## IBM Online Privacy Statement

---

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering's use of cookies is set forth below.

Depending upon the configurations deployed, this Software Offering may use session cookies that collect each user's name, email address, phone number, or other personally identifiable information for purposes of enhanced user usability and single sign-on configuration. These cookies can be disabled, but disabling them will also eliminate the functionality they enable.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at [ibm.com/privacy](http://ibm.com/privacy) and IBM's Online Privacy Statement at [ibm.com/privacy/details](http://ibm.com/privacy/details) in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at [ibm.com/software/info/product-privacy](http://ibm.com/software/info/product-privacy).

## Policy for unsupported hardware

---

Various z/OS elements, such as DFSMSdfp, JES2, JES3, and MVS, contain code that supports specific hardware servers or devices. In some cases, this device-related element support remains in the product even after the hardware devices pass their announced End of Service date. z/OS may continue to service element code; however, it will not provide service related to unsupported hardware devices. Software problems related to these devices will not be accepted for service, and current service activity will cease if a problem is determined to be associated with out-of-support devices. In such cases, fixes will not be issued.

## Minimum supported hardware

---

The minimum supported hardware for z/OS releases identified in z/OS announcements can subsequently change when service for particular servers or devices is withdrawn. Likewise, the levels of other software products supported on a particular release of z/OS are subject to the service support lifecycle of those

products. Therefore, z/OS and its product publications (for example, panels, samples, messages, and product documentation) can include references to hardware and software that is no longer supported.

- For information about software support lifecycle, see: [IBM Lifecycle Support for z/OS \(www.ibm.com/software/support/systemsz/lifecycle\)](http://www.ibm.com/software/support/systemsz/lifecycle)
- For information about currently-supported IBM hardware, contact your IBM representative.

## Programming Interface Information

---

This book is intended to help the customer to use RMF sessions. It contains a description of what RMF is, what it can do, and how to use the different sessions.

The book also documents intended Programming Interfaces that allow the customer to write programs to obtain the services of RMF.

## Trademarks

---

IBM, the IBM logo, and [ibm.com](http://ibm.com) are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at [Copyright and Trademark information \(www.ibm.com/legal/copytrade.shtml\)](http://www.ibm.com/legal/copytrade.shtml).

Java is a trademark of Sun Microsystems, Inc. in the United States, other countries, or both.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States and/or other countries.

Other company, product, and service names may be trademarks or service marks of others.



# Glossary

---

This glossary contains chiefly definitions of terms used in this book, but some more general RMF and MVS terms are also defined.

Words that are set in *italics* in the definitions are terms that are themselves defined in the glossary.

## **APPC/MVS**

Advanced program-to-program communication

## **ASCH address space**

APPC transaction scheduler address space

## **AS**

*Address space*

## **address space**

That part of MVS main storage that is allocated to a job.

## **auxiliary storage (AUX)**

All addressable storage, other than main storage, that can be accessed by means of an I/O channel; for example storage on direct access devices.

## **background session**

In RMF, a monitor session that is started and controlled from the operator console. Contrast with *interactive session*

## **balanced systems**

To avoid bottlenecks, the system resources (CP, I/O, storage) need to be balanced.

## **basic mode**

A central processor mode that does not use logical partitioning. Contrast with *logically partitioned (LPAR) mode*.

## **bottleneck**

A system resource that is unable to process work at the rate it comes in, thus creating a queue.

## **callable services**

Parts of a program product that have a published external interface and can be used by application programs to interact with the product.

## **captured storage**

See shared page group.

## **capture ratio**

The ratio of reported CPU time to total used CPU time.

## **central processor (CP)**

The part of the computer that contains the sequencing and processing facilities for instruction execution, initial program load, and other machine operations.

## **central processor complex (CPC)**

A physical collection of hardware that consists of central storage, one or more central processors, timers, and channels.

## **channel path**

The channel path is the physical interface that connects control units and devices to the CPU.

## **CICS**

Customer Information Control System

## **CIM provider**

A CIM provider is the link between the CIM server and the system interfaces. It allows the CIM server to access and manage the resources. Each CIM provider exposes the resources it represents in a standard way, using a small number of classes from the CIM schema or derived from the CIM schema. RMF monitoring providers are CIM providers implemented by RMF.

**contention**

Two or more incompatible requests for the same resource. For example, contention occurs if a user requests a resource and specifies exclusive use, and another user requests the same resource, but specifies shared use.

**coupling facility**

See *Cross-system Extended Services/Coupling Facility*.

**CP**

*Central processor*

**criteria**

Performance criteria set in the WFEX report options. You can set criteria for all report classes (PROC, SYSTEM, TSO, and so on).

**CPU speed**

Measurement of how much work your CPU can do in a certain amount of time.

**cross-system coupling facility (XCF)**

A component of MVS that provides functions to support cooperation between authorized programs running within a *sysplex*.

**Cross-system Extended Services/Coupling Facility (XES/CF)**

Provides services for MVS systems in a *sysplex* to share data on a coupling facility (CF).

**CS**

*Central storage*

**Customer Information Control System (CICS)**

An IBM licensed program that enables transactions entered at remote terminals to be processed concurrently by user-written application programs. It includes facilities for building, using, and maintaining data bases.

**cycle**

In RMF, the time at the end of which one sample is taken. Varies between 50 ms and 9999 ms. See also *sample*.

**data sample**

See *sample*

**DCM**

See *Dynamic Channel Path Management*

**delay**

The delay of an address space represents a job that needs one or more resources but that must wait because it is contending for the resource(s) with other users in the system.

**direct access storage device (DASD)**

A device in which the access time is effectively independent of the location of the data. Usually: a magnetic disk device.

**DLY**

*Delay*

**DP**

*Dispatching priority*

**dynamic channel path management**

Dynamic channel path management provides the capability to dynamically assign channels to control units in order to respond to peaks in demand for I/O channel bandwidth. This is possible by allowing you to define pools of so-called floating channels that are not related to a specific control unit. With the help of the Workload Manager, channels can float between control units to best service the work according to their goals and their importance.

**EMIF**

*ESCON multiple image facility*

**enclave**

An enclave is a group of associated dispatchable units. More specifically, an enclave is a group of SRB routines that are to be managed and reported on as an entity.

**EPDM**

Enterprise Performance Data Manager/MVS

**execution velocity**

A measure of how fast work should run when ready, without being delayed for processor or storage access.

**exception reporting**

In RMF, the reporting of performance measurements that do not meet user-defined criteria. Shows potential performance problems explicitly, thus avoiding the need for constant monitoring.

**generalized trace facility (GTF)**

A service program that records significant system events, such as supervisor calls and start I/O operations, for the purpose of problem determination.

**GO mode**

In RMF, the Monitor III mode in which the screen is updated with the interval you specified in your session options. The terminal cannot be used for anything else when it is in GO mode. See also *mode*.

**graphic mode**

In RMF Monitor III, the mode which presents the performance data from the system in graphic format using the GDDM product. Contrast with *tabular mode*.

**GTF**

generalized trace facility

**high-speed buffer (HSB)**

A cache or a set of logically partitioned blocks that provides significantly faster access to instructions and data than provided by central storage.

**HS**

hiperspace

**HSB**

High-speed buffer

**HSM**

Hierarchical Storage Manager

**IBM Z Application Assist Processor (zAAP)**

A special purpose processor configured for running Java programming on selected zSeries machines.

**IBM Z Integrated Information Processor (zIIP)**

A special purpose processor designed to help free-up general computing capacity and lower overall total cost of computing for selected data and transaction processing workloads for business intelligence (BI), ERP and CRM, and selected network encryption workloads on the mainframe.

**IMS**

Information Management System

**Information Management System (IMS)**

A database/data communication (DB/DC) system that can manage complex databases and networks. Synonymous with IMS/VS.

**interactive session**

In RMF, a monitor display-session that is controlled from the display terminal. Contrast with *background session*.

**JES**

Job Entry Subsystem

**LCU**

Logical control unit. Logical control units are also called 'Control Unit Headers' (CUH). For details about LCU/CUH please refer to the applicable *IBM Z Input/Output Configuration Program User's Guide for ICP IOCP* (SB10-7037).

**logically partitioned (LPAR) mode**

A central processor mode that is available on the Configuration frame when using the PR/SM feature. It allows an operator to allocate processor unit hardware resources among logical partitions. Contrast with *basic mode*.

**logical partition (LP)**

A subset of the processor hardware that is defined to support an operating system. See also *logically partitioned (LPAR) mode*.

**LP**

Logical partition

**LPAR**

Logically partitioned (mode)

**LPAR cluster**

An LPAR cluster is the subset of the systems that are running as LPARs on the same CEC. Based on business goals, WLM can direct PR/SM to enable or disable CP capacity for an LPAR, without human intervention.

**migration rate**

The rate (pages/second) of pages being moved from expanded storage through central storage to auxiliary storage.

**mintime**

The smallest unit of sampling in Monitor III. Specifies a time interval during which the system is sampled. The data gatherer combines all samples gathered into a set of samples. The set of samples can be summarized and reported by the reporter.

**mode**

Monitor III can run in various modes: GO mode (see *GO mode*) and STOP mode, which is the default mode. See also *graphic mode* and *tabular mode*.

**MPL**

Multiprogramming level

**OMVS**

Reference to z/OS UNIX System Services

**partitioned data set (PDS)**

A data set in direct access storage that is divided into partitions, called members, each of which can contain a program, part of a program, or data.

**PDS**

partitioned data set

**performance management**

The activity which monitors and allocates data processing resources to applications according to goals defined in a service level agreement or other objectives.

The discipline that encompasses collection of performance data and tuning of resources.

**PR/SM**

Processor Resource/Systems Manager

**Processor Resource/Systems Manager (PR/SM)**

The feature that allows the processor to run several operating systems environments simultaneously and provides logical partitioning capability. See also *LPAR*.

**range**

The time interval you choose for your report.

**Resident time**

The time the address space was swapped in, in units of seconds.

**RMF monitoring provider**

see CIM provider

**sample**

Once in every cycle, the number of jobs waiting for a resource, and what job is using the resource at that moment, are gathered for all resources of a system by Monitor III. These numbers constitute one sample.

**SCP**

System control program

**seek**

The DASD arm movement to a cylinder. A seek can range from the minimum to the maximum seek time of a device. In addition, some I/O operations involve multiple imbedded seeks where the total seek time can be more than the maximum device seek time.

**service class**

In Workload Manager, a subdivision of a *workload*. Performance goals and capacity boundaries are assigned to service classes.

**service level agreement (SLA)**

A written agreement of the information systems (I/S) service to be provided to the users of a computing installation.

**Service Level Reporter (SLR)**

An IBM licensed program that provides the user with a coordinated set of tools and techniques and consistent information to help manage the data processing installation. For example, SLR extracts information from SMF, IMS, and CICS logs, formats selected information into tabular or graphic reports, and gives assistance in maintaining database tables.

**service rate**

In the system resources manager, a measure of the rate at which system resources (services) are provided to individual jobs. It is used by the installation to specify performance objectives, and used by the workload manager to track the progress of individual jobs. Service is a linear combination of processing unit, I/O, and main storage measures that can be adjusted by the installation.

**shared page groups**

An address space can decide to share its storage with other address spaces using a function of RSM. As soon as other address spaces use these storage areas, they can no longer be tied to only one address space. These storage areas then reside as *shared page groups* in the system. The pages of shared page groups can reside in central, expanded, or auxiliary storage.

**SLA**

service level agreement

**SLIP**

serviceability level indication processing

**SLR**

Service Level Reporter

**SMF**

System management facility

**SMF buffer**

A wrap-around buffer area in storage, to which the z/OS Data Gatherer writes performance data, and from which the Postprocessor extracts data for reports.

**speed**

See *workflow*

**SRB**

Service request block

**SRM**

System resource manager

**SSCH**

Start subchannel

**system control program (SCP)**

Programming that is fundamental to the operation of the system. SCPs include MVS, VM, and VSE operating systems and any other programming that is used to operate and maintain the system. Synonymous with *operating system*.

**sysplex**

A complex consisting of a number of coupled MVS systems.

**tabular mode**

In RMF, the mode in which Monitor III displays performance data in the form of lists. Contrast with *graphic mode*.

**TCB**

Task control block

**threshold**

The exception criteria defined on the report options screen.

**throughput**

A measure of the amount of work performed by a computer system over a period of time, for example, number of jobs per day.

**TPNS**

Teleprocessing network simulator

**TSO**

Time Sharing Option, see *Time Sharing Option/Extensions*

**Time Sharing Option Extensions (TSO/E)**

In MVS, a time-sharing system accessed from a terminal that allows user access to MVS system services and interactive facilities.

**UIC**

Unreferenced interval count

**uncaptured time**

CPU time not allocated to a specific address space.

**using**

Jobs getting service from hardware resources (PROC or DEV) are *using* these resources.

**velocity**

A measure of how fast work should run when ready, without being delayed for processor or storage access. See also *execution velocity*.

**VTOC**

Volume table of contents

**workflow**

The workflow of an address space represents how a job uses system resources and the speed at which the job moves through the system in relation to the maximum average speed at which the job could move through the system.

The workflow of resources indicates how efficiently users are being served.

**workload**

A logical group of work to be tracked, managed, and reported as a unit. Also, a logical group of service classes.

**WLM**

Workload Manager

**XCF**

Cross-system coupling facility

**XES/CF**

See *Cross-system Extended Services/Coupling Facility*.

**zAAP**

see IBM Z Application Assist Processor.

**zIIP**

see IBM Z Integrated Information Processor.

---

# Index

## Special Characters

.lis [244](#)  
.xml [244](#), [245](#)

## A

accessibility  
    contact IBM [305](#)  
address space activity  
    selection conditions [149](#)  
address space resource data  
    ARD/NOARD [115](#)  
    Monitor II background session (ARD/NOARD) [117](#)  
    Monitor II display session (ARD) [117](#)  
    Postprocessor  
        report generation [149](#)  
address space resource data by jobname  
    Monitor II background session (ARDJ/NOARDJ)  
        syntax summary [115](#)  
    Monitor II display session (ARDJ)  
        syntax summary [115](#)  
    Postprocessor  
        report generation [149](#)  
address space SRM data  
    Monitor II background session (ASRM/NOASRM)  
        syntax summary [115](#)  
    Monitor II display session (ASRM)  
        syntax summary [115](#)  
    Postprocessor  
        report generation [149](#)  
address space SRM data by jobname  
    Monitor II background session (ASRMJ/NOASRMJ)  
        syntax summary [115](#)  
    Monitor II display session (ASRM)  
        syntax summary [115](#)  
    Monitor II display session (ASRMJ) [118](#)  
    Postprocessor  
        report generation [149](#)  
address space state data  
    Monitor II background session (ASD/NOASD)  
        syntax summary [115](#)  
    Monitor II display session (ASD)  
        syntax summary [115](#)  
    Postprocessor  
        report generation [149](#)  
address space state data by jobname  
    Monitor II background session (ASDJ/NOASDJ)  
        syntax summary [115](#)  
    Monitor II display session (ASDJ)  
        syntax summary [115](#)  
    Postprocessor  
        report generation [149](#)  
administration of RMF [11](#)  
AIX systems  
    monitoring with RMF XP [7](#)  
ALL

ALL (*continued*)  
    Postprocessor  
        report generation [148](#)  
Analysis  
    on DataView bar chart [282](#)  
analysis dialog [291](#)  
APF authorization [14](#)  
Application Transparent Transport Layer Security [215](#)  
applications  
    providing data for [6](#)  
ARD (address space resource data)  
    Monitor II display session [117](#)  
ARD/NOARD (address space resource data)  
    Monitor II background session [117](#)  
ARD|NOARD (address space resource data)  
    Postprocessor  
        report generation [149](#)  
ARDJ (address space resource data by jobname)  
    Monitor II display session  
        syntax summary [115](#)  
ARDJ/NOARDJ (address space resource data by jobname)  
    Monitor II background session  
        syntax summary [115](#)  
ARDJ|NOARDJ (address space resource data by jobname)  
    Postprocessor  
        report generation [149](#)  
ASCH address spaces [130](#)  
ASD (address space state data)  
    Monitor II display session  
        syntax summary [115](#)  
ASD/NOASD (address space state data)  
    Monitor II background session  
        syntax summary [115](#)  
ASD|NOASD (address space state data)  
    Postprocessor  
        report generation [149](#)  
ASDJ (address space state data by jobname)  
    Monitor II display session  
        syntax summary [115](#)  
ASDJ/NOASDJ (address space state data by jobname)  
    Monitor II background session  
        syntax summary [115](#)  
ASDJ|NOASDJ (address space state data by jobname)  
    Postprocessor  
        report generation [149](#)  
ASRM (address space SRM data)  
    Monitor II display session  
        syntax summary [115](#)  
ASRM/NOASRM (address space SRM data)  
    Monitor II background session  
        syntax summary [115](#)  
ASRM|NOASRM (address space SRM data)  
    Postprocessor  
        report generation [149](#)  
ASRMJ (address space SRM data by jobname)  
    Monitor II display session  
        syntax summary [115](#)

- ASRMJ/NOASRMJ (address space SRM data by jobname)
  - Monitor II background session
    - syntax summary [115](#)
- ASRMJ/NOASRMJ (address space SRM data by jobname)
  - Postprocessor
    - report generation [149](#)
- assistive technologies [305](#)
- AT-TLS [215](#)
- attention (PA1) key
  - Monitor III reporter session
    - STOP mode [80](#)
- automatic customization
  - Monitor III reporter session
    - description [88](#)
    - option set/system ID relation [88](#)
- automatic update [111](#)

## B

- background session [99](#)
- bar chart
  - DataView [281](#)
- bar chart context menu [281](#)
- batch mode [254](#)
- batch reporter [221](#)
- bottlenecks and exceptions
  - observing [49](#)
- BPX.DAEMON FACILITY resource [16](#)
- BPX.SMF
  - READ access for GPM4CIM [219](#)
- BPX.WLMSEVER [15](#)
- BREF (backward reference) command
  - Monitor III reporter session
    - description [76](#)
    - parameter exceptions [78](#)
    - RANGE value [78](#)
    - syntax [77](#)
    - without parameters [79](#)

## C

- CACHDET (Cache Detail)
  - Monitor III report
    - command abbreviation [91](#)
- cache activity
  - Postprocessor
    - report generation [149](#)
  - SMF record type 74-5
    - overview/exception control statements [193–199](#)
- cache activity details
  - Monitor III report (CACHDET) [91](#)
- cache activity summary
  - Monitor III report (CACHSUM) [91](#)
- Cache Detail
  - Monitor III report
    - command abbreviation [91](#)
- Cache Subsystem Overview Report [264](#)
- Cache Summary (CACHSUM)
  - Monitor III report
    - command abbreviation [91](#)
- CACHE|NOCACHE (cache activity)
  - Postprocessor

- CACHE|NOCACHE (cache activity) (*continued*)
  - Postprocessor (*continued*)
    - report generation [149](#)
- CACHSUM (Cache Summary)
  - Monitor III report
    - command abbreviation [91](#)
- CANCEL command
  - Monitor II ISPF session [107](#)
  - Monitor III reporter session
    - description [79](#)
    - resetting entries [83](#)
- cataloged procedure
  - Postprocessor [130](#)
- central processor unit (CPU) activity
  - Postprocessor
    - overview/exception control statements [161](#)
    - report generation [150](#)
    - SMF record type 70–1 [161](#)
- central storage/processor/SRM activity
  - Monitor II background session (SRCS/NOSRCS)
    - syntax summary [116](#)
  - Monitor II display session (SRCS)
    - syntax summary [116](#)
  - Postprocessor
    - report generation [152](#)
- CF Systems report (Monitor III CFSYS report) [91](#)
- CF|NOCF (coupling facility activity)
  - Postprocessor
    - report generation [156](#)
- CFACT (Coupling Facility Activity)
  - Monitor III report
    - command abbreviation [91](#)
- CFOVER (Coupling Facility Overview)
  - Monitor III report
    - command abbreviation [91](#)
- CFSYS (Coupling Facility Systems)
  - Monitor III report
    - command abbreviation [91](#)
- CHAN|NOCHAN (channel path activity)
  - Postprocessor
    - report generation [149](#)
- CHANNEL (channel path activity)
  - Monitor II display session [119](#)
- CHANNEL (Channel Path Activity)
  - Monitor III report
    - command abbreviation [91](#)
- Channel Overview Report [265](#)
- channel path activity
  - Monitor II background session (CHANNEL/NOCHANNEL)
    - syntax summary [115](#)
  - Monitor II display session (CHANNEL)
    - syntax summary [115](#)
  - Postprocessor
    - report generation [149](#)
  - SMF record
    - overview/exception control statements [188](#)
- Channel Path Activity (CHANNEL)
  - Monitor III report
    - command abbreviation [91](#)
- CHANNEL/NOCHANNEL (channel path activity)
  - Monitor II background session



- CHANNEL/NOCHANNEL (channel path activity) (*continued*)
  - Monitor II background session (*continued*)
    - syntax summary [115](#)
- CHANNEL|NOCHANNEL (channel path activity)
  - Postprocessor
    - report generation [149](#)
- CLISTs
  - setting up [33](#)
- Collect.bat [255](#)
- COLOR (color graphic option panel) command
  - Monitor III reporter session
    - panel display [85](#)
- command
  - OVERVIEW [68](#)
  - RESOURCE [69](#)
  - syntax diagrams [xvii](#)
- commands
  - Monitor II session
    - report commands [115](#), [116](#)
    - session commands [102](#)
  - Monitor III reporter session
    - session commands [75](#)
- COMMANDS command
  - Monitor II ISPF session [107](#)
- configuration file
  - gpm4cim [213](#)
- contact
  - z/OS [305](#)
- control panel [287](#)
- control statement
  - Postprocessor
    - examples [157](#)
- control statements
  - Postprocessor [138](#)
- coupling facility activity
  - Postprocessor
    - report generation [156](#)
    - SMF record type 74-4
      - overview control statements [191](#)
- Coupling Facility Activity (CFACT)
  - Monitor III report
    - command abbreviation [91](#)
- coupling facility hardware data [130](#)
- Coupling Facility Overview (CFOVER)
  - Monitor III report
    - command abbreviation [91](#)
- Coupling Facility Systems report
  - CFSYS report (Monitor III)
    - command abbreviation [91](#)
- CPC Capacity report (Monitor III report) [91](#)
- CPU|NOCPU (central processor unit activity)
  - Postprocessor
    - report generation [150](#)
- Create Overview Record [245](#)
- create report from current session [110](#)
- Create Report Listing [244](#)
- Create Working Set [246](#)
- CreateOvwWSet.bat [257](#)
- CreateRptWSet.bat [256](#)
- cross platform monitoring
  - RMF XP [211](#)
- cross-system coupling facility (XCF)
  - Postprocessor
    - EXRPTS control statement [153](#)

- Cross-System Coupling Facility Delays (XCF)
  - Monitor III report
    - command abbreviations [92](#)
- CRYPTO|NOCRYPTO (cryptographic hardware activity)
  - Postprocessor
    - report generation [150](#)
- cryptographic hardware activity
  - Postprocessor
    - overview/exception control statements [169](#)
    - report generation [150](#)
    - SMF record type 70–2 [169](#)
- CURRENT (current range data) command
  - Monitor III reporter session
    - description [79](#)
- current session
  - create report from [110](#)
- cursor-sensitive control
  - Monitor III reporter session
    - description [89](#)
- customizing
  - system environment [14](#)

## D

- D (delta mode) command
  - Monitor II display session [109](#)
- data collection
  - Monitor II background session
    - DELTA/NODELTA option [104](#), [110](#)
  - Monitor II display session
    - DELTA option [110](#)
- Data Index (DI)
  - Monitor III report
    - command abbreviations [91](#)
- data index (DI) screen
  - field descriptions [72](#)
  - report limitations [72](#)
  - screen display
    - with preallocated data sets [71](#)
    - without preallocated data sets [71](#)
- Data Set Delays (DSND)
  - Monitor III report
    - command abbreviations [91](#)
- data sets
  - Postprocessor output [134](#)
- DataView
  - bar chart [281](#)
  - creating [280](#)
  - creating from a Resource [276](#)
  - metrics list [286](#)
  - paste to a PerfDesk [279](#)
  - remove Series from [282](#)
  - working with [277](#)
- DataView context-menu [283](#)
- DATE [254](#)
- DATE (report period) control statement
  - Postprocessor [139](#)
- ddname (data definition name)
  - Postprocessor [136](#)
- ddnames
  - XML output [137](#)
- DDS

- DDS (*continued*)
  - HTTP API to retrieve Postprocessor data [18](#)
  - Postprocessor API [18](#)
  - selective deactivation of Monitor III reports [29](#)
- DDS (Distributed Data Server)
  - customization [28](#)
  - START command [39](#)
- deactivation of Monitor III reports [29](#)
- Define new System [248](#), [249](#)
- defining SMF synchronization [32](#)
- DELAY
  - Monitor III report
    - command abbreviation [91](#)
- delay monitoring [9](#)
- DELAYJ (Job Delay)
  - Monitor III report
    - command abbreviations [91](#)
- DELTA
  - Monitor II display session [110](#)
- delta mode [109](#)
- delta mode (D command)
  - Monitor II display session [109](#)
- delta report mode [102](#)
- DELTA/NODELTA
  - Monitor II background session
    - syntax summary [104](#)
- DELTA|NODELTA
  - Postprocessor [140](#)
- DEV (device activity table report)
  - Monitor II display session
    - syntax summary [115](#)
- DEV (Device Delays)
  - Monitor III report
    - command abbreviations [91](#)
- DEV/NODEV (device activity table report)
  - Monitor II background session
    - syntax summary [115](#)
- DEV|NODEV (device activity table report)
  - Postprocessor
    - report generation [150](#)
- device activity
  - Monitor II background session row report (DEVV/NODEVV)
    - syntax summary [115](#)
  - Monitor II background session table report (DEV/NODEV)
    - syntax summary [115](#)
  - Monitor II display session row report (DEVV)
    - syntax summary [115](#)
  - Monitor II display session table report (DEV)
    - syntax summary [115](#)
  - SMF record type 74-1
    - overview/exception control statements [190](#)
- Device Delays - Job (DEVJ)
  - Monitor III report
    - command abbreviations [91](#)
    - variation of JOB report [91](#)
- Device Delays (DEV)
  - Monitor III report
    - command abbreviations [91](#)
- Device Overview Report [263](#)
- Device Resource Delays (DEVVR)
  - Monitor III report

- Device Resource Delays (DEVVR) (*continued*)
  - Monitor III report (*continued*)
    - command abbreviations [91](#)
- DEVICE|NODEVICE (I/O device activity)
  - Postprocessor
    - report generation [150](#)
- DEVJ (Device Delays - Job)
  - Monitor III report
    - command abbreviations [91](#)
    - variation of JOB report [91](#)
- DEVJ (device delays job) [91](#)
- DEVVR (Device Resource Delays)
  - Monitor III report
    - command abbreviations [91](#)
- DEVV (device activity row report)
  - Monitor II display session
    - syntax summary [115](#)
- DEVV|NODEVV (device activity row report)
  - Monitor II background session
    - syntax summary [115](#)
- DEVV|NODEVV (device activity row report)
  - Postprocessor
    - report generation [151](#)
- DI (Data Index)
  - Monitor III report
    - command abbreviations [91](#)
- DI (data index) command
  - Monitor III reporter session
    - report limitations [72](#)
    - screen display [71](#), [72](#)
- dialog
  - filter [288](#)
- dialog button area [287](#)
- DINTV [254](#)
- DINTV (duration interval) control statement
  - Postprocessor [139](#)
- display session [95](#), [117](#)
- display session commands [102](#)
- Distributed Data Server
  - customization [28](#)
  - PassTicket support [17](#)
  - RACF access [16](#)
  - selective deactivation of Monitor III reports [29](#)
  - START command [39](#)
- Distributed Data Server (DDS)
  - setting up for z/OS [19](#)
- Distributed Data Server options [28](#)
- Domino server activity
  - report generation [151](#)
  - SMF records [128](#)
- DOMINO/NODOMINO (Domino server activity)
  - report generation [151](#)
- DSINDEX
  - Monitor III report
    - command abbreviations [91](#)
- DSND (Data Set Delays)
  - Monitor III report
    - command abbreviations [91](#)
- DSNJ (data set delays - Job report) [91](#)
- DSNV (data set delays - Volume report) [91](#)
- duration interval
  - DINTV control statement [139](#)
  - Postprocessor

- duration interval (*continued*)
  - Postprocessor (*continued*)
    - maximum length [142](#)
    - relation to report interval [141](#)
- duration report
  - Postprocessor
    - reporting period specification [153](#)
- duration reports [127](#), [140](#)

## E

- EADM (EADM activity) [91](#)
- EADM Activity
  - OVW (overview condition) control statement [205](#)
- EADM|NOEADM (extended asynchronous data mover)
  - Postprocessor [151](#)
- ENCLAVE (enclave activity) [91](#)
- ENQ (enqueue delays) [91](#)
- ENQ|NOENQ (enqueue activity)
  - Postprocessor
    - report generation [151](#)
- ENQJ (enqueue delays job) [91](#)
- ENQR (resource-oriented enqueue delays) [91](#)
- enqueue activity
  - Monitor II background session (SENQ|NOSENQ)
    - syntax summary [116](#)
  - Monitor II display session (SENQ)
    - syntax summary [116](#)
  - Postprocessor
    - report generation [151](#)
  - SMF record type 77
    - overview/exception control statements [206](#)
- enqueue contention
  - Monitor II background session (SENQ|NOSENQ)
    - Postprocessor report generation [152](#)
- Enqueue, storage, and SRM reports [97](#)
- Enterprise Disk Systems report
  - report generation [151](#)
- environment file
  - gpm4cim.env [213](#)
- ERBRMF01 (Parmlib member)
  - Monitor II background session
    - contents [108](#)
    - use [117](#)
- ERBS2V [65](#)
- ERBS2V CLIST [65](#)
- ERBV2S CLIST [64](#)
- ESS statistics
  - OVW (overview condition) control statement [200](#)
  - report generation [151](#)
- ESS|NOESS (ESS statistics)
  - report generation [151](#)
- ETOD (exception time of day) control statement
  - Postprocessor [139](#), [143](#)
- Excel macros [269](#)
- EXCEPT (exceptional value) control statement
  - Postprocessor
    - cache activity (type 74-5 SMF record) [193](#)–[199](#)
    - channel path activity (type 73 SMF record) [188](#)
    - CPU activity (type 70–1 SMF record) [161](#)
    - cryptographic hardware activity (type 70–2 SMF record) [169](#)
    - device activity (type 74-1 SMF record) [190](#)

- EXCEPT (exceptional value) control statement (*continued*)
  - Postprocessor (*continued*)
    - enqueue activity (type 77 SMF record) [206](#)
    - examples [145](#)
    - ficon director activity (type 74-7 SMF record) [200](#)
    - I/O queuing activity (type 78-3 SMF record) [207](#)
    - page data set activity (type 75 SMF record) [206](#)
    - paging activity (type 71 SMF record) [175](#)
    - virtual storage activity (type 78-2 SMF record) [207](#)
- EXCEPT control statement
  - syntax [144](#)
- exception report
  - Postprocessor
    - EXCEPT control statement [143](#)
    - exceptions list [161](#), [169](#)
    - report period [143](#)
    - specification [144](#), [145](#)
- EXITS|NOEXITS (user exit)
  - Postprocessor [139](#), [145](#)
- EXRPTS (exception report) control statement
  - Postprocessor [139](#), [145](#)
- extended asynchronous data mover reporting (EADM|NOEADM)
  - Postprocessor [151](#)

## F

- F (frame display command) [108](#)
- F (frame) command
  - Monitor II display session [108](#)
- FACILITY class
  - RACF resource profiles [18](#)
- FCD|NOFCD (FICON Director Activity)
  - report generation [151](#)
- ficon director activity
  - SMF record type 74-7
    - overview/exception control statements [200](#)
- FICON Director Activity
  - report generation [151](#)
- filter dialog [288](#)
- FIND command
  - Monitor II ISPF session [109](#)
- FIND/RFIND (find) command
  - Monitor III reporter session
    - description [79](#)
- frame display command (F) [108](#)
- FREF (forward reference) command
  - Monitor III reporter session
    - description [76](#)
    - parameter exceptions [78](#)
    - RANGE value [78](#)
    - syntax [77](#)
    - without parameters [79](#)

## G

- GDDM (Graphical Data Display Manager)
  - Monitor III reporter session
    - graphic mode [80](#)
- GDG [240](#)
- generation data groups (GDGs) [240](#)
- glossary [311](#)

- GO command
  - Monitor II ISPF session [111](#)
- GO mode
  - introduction [70](#)
  - Monitor III reporter session
    - command description [80](#)
- GPM4CIM
  - configuration file [213](#)
  - diagnostic aids [219](#)
  - how to start [216](#)
  - post-installation steps [215](#)
  - READ access to BPX.SMF [219](#)
  - RMF XP started task [211](#)
  - security setup [215](#)
  - setup after SMP/E [215](#)
- gpm4cim configuration file [213](#)
- GPM4CIM options [28](#)
- GPM4CIM server [211](#)
- GPM4CIM started task [211](#)
- gpm4cim.env
  - environment file [213](#)
- GPMSERVE (Distributed Data Server) [39](#)
- GPMSERVE options [28](#)
- GPMSRV00 (parmlib member) [28](#)
- GRAPHIC (graphic mode) command
  - Monitor III reporter session
    - description [80](#)
- graphic report
  - Monitor III reporter session
    - activating [80](#)
    - printing [81](#)
    - switching to table report [84](#)
- GROUP (group response time) [91](#)
- grouping Monitor II and Monitor III users [35](#)

## H

- H (hardcopy mode) command
  - Monitor II display session [110](#)
- HARDCOPY (print screen/report) command
  - Monitor III reporter session
    - description [81](#)
- hardcopy mode
  - for ISPF and TSO/E sessions [110](#)
- HFS (UNIX file system statistics)
  - Monitor II display session
    - syntax summary [115](#)
  - Postprocessor report generation [151](#)
- HFS|NOHFS (HFS statistics)
  - Postprocessor
    - report generation [151](#)
- hierarchical file system statistics [97](#)
- High Performance FICON for IBM Z [189](#)
- hometest [248](#)
- HSM (hierarchical storage manager delays) [91](#)
- HSMJ (hierarchical storage manager delays job) [91](#)
- HTTP server activity
  - HTTP/ NOHTTP report option [151](#)
  - SMF records [128](#)

## I

- I/O device activity

- I/O device activity (*continued*)
  - Monitor I session (DEVICE|NODEVICE)
    - Postprocessor report generation [150](#)
  - Monitor II background session row report (DEVV|NODEVV) [120](#)
  - Monitor II background session row report (DEVV|NODEVV)
    - Postprocessor report generation [151](#)
  - Monitor II background session table report (DEV|NODEV) [119](#)
  - Monitor II background session table report (DEV|NODEV)
    - Postprocessor report generation [150](#)
  - Monitor II display session row report (DEVV) [120](#)
  - Monitor II display session table report (DEV) [119](#)
  - SMF record type 74-1
    - overview/exception control statements [190](#)
- I/O queuing activity
  - IOQ|NOIOQ
    - Postprocessor report generation [151](#)
  - Monitor II background session (IOQUEUE|NOIOQUEUE)
    - Postprocessor report generation [151](#)
  - Monitor II session (IOQUEUE|NOIOQUEUE) [116](#), [121](#)
  - SMF record type 78-3
    - overview/exception control statements [207](#)
- IBM Z Application Assist Processor (zAAP)
  - definition [313](#)
- IBM Z Integrated Information Processor (zIIP)
  - definition [313](#)
- IBM z/OS Management
  - Facility
    - overview [297](#)
- ICU (Interactive Chart Utility)
  - Monitor III reporter session
    - directory panel [81](#)
    - ICU command description [81](#)
    - printing graphic reports [81](#)
- IFASMFDP program
  - creation of non-VSAM data set [128](#)
- IFASMFDP program
  - Postprocessor
    - creation of non-VSAM data set [128](#)
- ILOCK (IRLM long lock detection)
  - Monitor II display session [121](#)
- in reporting hierarchy [46](#)
- INITIAL (option set default values) options
  - Monitor III reporter session [88](#)
- installation directory
  - default [254](#)
- intermediate resources [241](#)
- interval measurement
  - SINTV (interval length)
    - Monitor II background session [104](#), [112](#)
- interval report
  - Monitor II background session (REPORT|NOREPORT)
    - syntax summary [104](#)
  - Postprocessor
    - EXRPTS control statement [145](#)
    - reporting period specification [153](#)

- interval report (*continued*)
  - REPORT/NOREPORT option
  - Monitor II background session [126](#)
- interval reports [127](#)
- intervals [254](#)
- IOQ|NOIOQ (I/O queuing activity) [151](#)
- IOQUEUE (I/O queuing activity) [91](#)
- IOQUEUE/NOIOQUEUE (I/O queuing activity)
  - Monitor II session [116](#), [121](#)
- IOQUEUE|NOIOQUEUE (I/O queuing activity)
  - Postprocessor report generation [151](#)
- IRLM long lock detection
  - Monitor II display session (ILOCK)
    - syntax summary [116](#)
- ISPF (Interactive System Product Facility)
  - Monitor II display session [95](#)
  - Monitor III reporter session [63](#)
- ISPF session
  - hardcopy mode [110](#)
- ISPF session panels
  - scrolling through [108](#)

## J

- JCL
  - starting Postprocessor with [131](#)
- Jclgen.bat [254](#)
- JES delays
  - Monitor III reporter session command [91](#)
- JESJ (JES delays for specified job) [91](#)
- JOB (Job Delay)
  - Monitor III report
    - command abbreviations [91](#)
- Job Delay (JOB)
  - Monitor III report
    - command abbreviations [91](#)
- job or resource view in resource hierarchy [46](#)

## K

- keyboard
  - navigation [305](#)
  - PF keys [305](#)
  - shortcut keys [305](#)

## L

- language
  - Monitor III reporter session (LO option) [75](#)
- LANGUAGE (language option panel) command
  - Monitor III reporter session
    - description [86](#)
- Language Environment applications
  - under Program Control [16](#)
- library list
  - Monitor II (LLI)
    - description [122](#)
- Library List and OPT Settings Selection Menu [97](#)
- link list [14](#)
- Linux systems
  - monitoring with RMF XP [7](#)

- LLI (library list)
  - Monitor II display session [122](#)
- LLI (program library list)
  - Monitor II display session
    - syntax summary [116](#)
- LOCKSP (Spin locks) [91](#)
- LOCKSU (Suspend locks) [92](#)
- long-term data gathering
  - with Monitor I [4](#)
  - with Monitor III [4](#)
- long-term overview reporting [5](#)
- long-term performance analysis
  - RMF XP
    - long-term performance analysis [7](#)
    - with RMF XP [7](#)
- long-term reporting with the Postprocessor [127](#)
- Lotus Domino server activity
  - SMF records [128](#)
- Lotus Domino Server report [151](#)
- LPAR Overview Report [260](#)

## M

- M (menu) command
  - Monitor II display session [104](#)
- macros
  - Overview Working Set [259](#)
  - Report Working Set [257](#)
- MEMBER (Parmlib member)
  - Monitor II background session
    - syntax summary [104](#)
- menu
  - Resource Report Selection [69](#)
- menu display (M) command for Monitor II sessions [104](#)
- menu items
  - Monitor II display session [105](#)
- menus
  - Monitor III Primary Menu [66](#)
- Message Browser [295](#)
- messages
  - Monitor III start [65](#)
- metric types [285](#)
- metrics list
  - for DataView [286](#)
- MFEEnnnnn ddname
  - Postprocessor [136](#)
- MFPINPUT data set
  - Postprocessor
    - DD statement [130](#)
- MFPMSGDS (message output) ddname
  - Postprocessor [136](#)
- MFRnnnnnn ddname
  - Postprocessor [136](#)
- MFxnnnnn (exception interval report data) ddname
  - Postprocessor [136](#)
- migrating from previous releases [13](#)
- migration
  - Working Set [254](#)
- MM (menu default options) command
  - Monitor II display session [105](#)
- MNTJ (operator mount job delays) [92](#)
- mode
  - Monitor III reporter session
    - default [80](#)

- mode (*continued*)
  - Monitor III reporter session (*continued*)
    - GO display command [80](#)
    - GRAPHIC command [80](#)
    - STOP mode [80](#)
- Monitor I
  - long-term data gathering with [4](#)
- Monitor I session
  - interval report [139](#)
  - session option
    - SYNC/NOSYNC (interval synchronization) [32](#)
  - SMF record
    - synchronization with Monitor III [32](#)
  - system activity measured [8](#)
- Monitor II
  - displaying available commands [107](#)
  - finding character string in report, [109](#)
  - ISPF interface to [57](#)
  - leaving options unchanged [107](#)
  - Library List and OPT Settings Selection Menu [97](#)
  - OPT information [97](#)
  - recalling previously displayed data [108](#)
  - repeat FIND command [109](#)
  - report commands [116](#)
  - report modes [102](#)
  - reports
    - structure of [99](#)
  - resetting default options [107](#)
  - snapshot monitoring with [4](#)
  - snapshot reporting with [5](#)
  - sorting reports [109](#)
- Monitor II and Monitor III users
  - grouping [35](#)
- Monitor II background session
  - controlling [117](#)
  - interval report [139](#)
  - options
    - conflicting [126](#)
    - specifying [117](#)
  - Parmlib member
    - ERBRMF01 [117](#)
    - member name generating [108](#)
  - Postprocessor
    - SESSION control statement [154](#)
    - user reports [153](#)
  - starting [117](#)
  - system activity measured [8](#)
  - user reports [115](#), [116](#)
- Monitor II background session options [115](#), [116](#)
- Monitor II display session
  - commands
    - delta mode (D) [109](#)
    - frame (F) [108](#)
    - hardcopy mode (H) [110](#)
    - menu default options (MM) [105](#)
    - menu of available reports (M) [104](#)
    - print (P) [113](#)
    - program function (PF) key assignment [112](#)
    - recall previous report (R) [108](#)
    - stop (Z) [114](#)
    - timed update (T) [111](#)
  - display menu [99](#)
  - ending [114](#)
  - ISPF session commands
- Monitor II display session (*continued*)
  - ISPF session commands (*continued*)
    - automatic report refresh (GO) [111](#)
    - cancel options (CANCEL) [107](#)
    - display commands (COMMANDS) [107](#)
    - find string (FIND) [109](#)
    - print report page (PRINT) [113](#)
    - repeat find (RFIND) [109](#)
    - reset options (RESET) [107](#)
    - set report options (RO) [105](#)
    - sort report (SORT) [109](#)
    - specify system (SYSTEM) [114](#)
    - stop (RETURN) [104](#)
  - program function (PF) key
    - override assigned keys [112](#)
  - system activity measured [8](#)
  - TSO/E session
    - controlling [114](#)
- Monitor II display session options [115](#), [116](#)
- Monitor II snapshot reporting [95](#)
- Monitor II User Reports panel [98](#)
- Monitor III
  - before starting [63](#)
  - enabling RMF [63](#)
  - help facility [90](#)
  - ISPF interface to [57](#)
  - long-term data gathering with [4](#)
  - messages during start [65](#)
  - Primary Menu [66](#)
  - Reporter session
    - data set allocation [63](#)
  - short-term data collection with [3](#)
  - short-term interactive performance analysis with [5](#)
  - STOP mode [70](#)
  - sysplex considerations [66](#)
- Monitor III batch reporter [221](#)
- Monitor III data gatherer session
  - delay information [9](#)
  - system activity measured [8](#)
- Monitor III report data
  - exception handling for [229](#)
- Monitor III reporter session
  - BREF (backward reference) command
    - description [76](#)
    - parameter exceptions [78](#)
    - RANGE value [78](#)
    - summary [75](#)
    - syntax [77](#)
    - without parameters [79](#)
  - CANCEL (cancel options) command
    - description [79](#)
    - resetting entries [83](#)
    - summary [75](#)
  - changing options [75](#)
  - COLOR (color graphics panel) command [85](#)
  - color graphic options
    - description [75](#)
    - field description [86](#)
    - selection panels [85](#), [86](#)
  - commands
    - session commands [75](#)
  - COMMANDS (help menu for commands) command
    - description [79](#)
    - summary [75](#)



## Monitor III reporter session (*continued*)

- controlling [63](#)
- CURRENT (current range data) command
  - description [79](#)
  - summary [75](#)
- cursor-sensitive control
  - description [89](#)
- data set support
  - alternate system support [64](#)
  - data set preallocation [64](#)
  - DI screen [71](#), [72](#)
- delay information [9](#)
- DI screen [71](#), [72](#)
- FIND/RFIND (find) command
  - description [79](#)
  - summary [75](#)
- FREF (forward reference) command
  - description [76](#)
  - parameter exceptions [78](#)
  - RANGE value [78](#)
  - summary [75](#)
  - syntax [77](#)
  - without parameters [79](#)
- GO (GO mode) command
  - command summary [75](#)
  - description [80](#)
- GRAPHIC (graphic mode) command
  - description [80](#)
  - summary [75](#)
- graphic report
  - switching to table report [84](#)
- HARDCOPY (print screen/report) command
  - description [81](#)
  - summary [75](#)
- ICU (Interactive Chart Utility) command
  - description [81](#)
  - summary [75](#)
- LANGUAGE (language option panel) command [86](#)
- language (LO) option
  - description [86](#)
- option set selection menu
  - default values (INITIAL) [88](#)
  - description [88](#)
- OPTSET (option set)
  - command [88](#)
  - option [75](#)
- primary menu [63](#)
- program function (PF) key
  - building commands [83](#)
  - changing settings [83](#)
  - PFK command summary [75](#)
- report options
  - description [87](#)
  - RO command [75](#)
- RESET (reset options) command
  - description [83](#)
  - summary [75](#)
- RETRIEVE (display last command) command
  - description [83](#)
  - summary [75](#)
- ROPTIONS (report options panel) command [87](#)
- session commands [75](#)
- session options
  - automatic customization [88](#), [89](#)

## Monitor III reporter session (*continued*)

- session options (*continued*)
    - creating a new option set [89](#)
    - deleting an option set [89](#)
    - making an option set current [89](#)
    - selecting an option set [89](#)
  - SESSION (session options panel) command [84](#)
  - SO command [75](#)
  - specification [84](#)
  - summary [84](#)
  - STOP mode
    - description [80](#)
  - system activity measured [8](#)
  - tabular report
    - cursor-sensitive control [89](#)
    - displaying [83](#)
    - switching to graphic report [84](#)
    - TABULAR command description [83](#)
    - TABULAR command summary [75](#)
  - TOGGLE (toggle reports) command
    - description [84](#)
    - summary [75](#)
  - user written report [84](#)
- ## Monitor III reports
- selective deactivation from DDS [29](#)
- ## MSGJ (operator message job delays) [92](#)

## N

- name [291](#)
- navigating from the Primary Menu [66](#)
- navigation
  - keyboard [305](#)

## O

- observing bottlenecks and exceptions [49](#)
- observing response times [47](#)
- OMVS kernel activity
  - Postprocessor OMVS|NOOMVS report option [151](#)
- online reporting environment [57](#)
- OPD (OMVS process data) [92](#)
- Open RMF Overview Spreadsheets
  - usage examples [268](#)
- OPT Settings report
  - OPT parameter settings [123](#)
- optimized coupling facility hardware data [130](#)
- option list
  - Monitor II background session
    - syntax summary [104](#)
  - Postprocessor [138](#)
- options
  - Monitor II background session [105](#), [115](#)
  - Monitor II display session [105](#)
- OPTIONS (option selection menu) command
  - Monitor III reporter session
    - description [75](#)
- OPTIONS/NOOPTIONS (option list)
  - Monitor II background session
    - syntax summary [104](#)
- OPTSET (option set)
  - Monitor III reporter session command [88](#)
  - Monitor III reporter session option [75](#)

- output data sets
  - Postprocessor [134](#)
- overview and exception conditions [161](#)
- OVERVIEW command [68](#)
- OVERVIEW control statement
  - Postprocessor [139](#), [146](#)
- overview control statements
  - OVW file [249](#), [251](#)
- Overview Records [235–237](#), [239](#), [240](#), [245](#), [257](#)
- overview report
  - Postprocessor
    - conditions list [161](#), [169](#)
    - report generation [146](#)
  - type selection
    - specifying (OVERVIEW control statement) [146](#)
    - specifying (OVW control statement) [147](#)
- Overview Reports [235](#), [236](#)
- Overview Working Set
  - macros [259](#)
- OVERVIEW(RECORD) [236](#)
- OVERVIEW(REPORT) [236](#)
- OVW [248](#), [249](#)
- OVW (overview condition) control statement
  - Postprocessor
    - cache activity (type 74-5 SMF record) [193–199](#)
    - channel path activity (type 73 SMF record) [188](#)
    - coupling facility activity (type 74-4 SMF record) [191](#)
    - CPU activity (type 70–1 SMF record) [161](#)
    - cryptographic hardware activity (type 70–2 SMF record) [169](#)
    - device activity (type 74-1 SMF record) [190](#)
    - EADM Activity (type 74-10 SMF record) [205](#)
    - enqueue activity (type 77 SMF record) [206](#)
    - ESS statistics (type 74-8 SMF record) [200](#)
    - ficon director activity (type 74-7 SMF record) [200](#)
    - I/O queuing activity (type 78-3 SMF record) [207](#)
    - page data set activity (type 75 SMF record) [206](#)
    - paging activity (type 71 SMF record) [175](#)
    - PCIE Function statistics (type 74-9 SMF record) [204](#)
    - virtual storage activity (type 78-2 SMF record) [207](#)
    - workload activity (type 72-3 SMF record) [178](#)
- OVW control statement
  - Postprocessor [139](#)

## P

- P (print) command
  - Monitor II display session [113](#)
- PA1 (attention) key
  - Monitor III reporter session
    - STOP mode [80](#)
- page data set activity
  - Monitor I session (PAGE SP|NO PAGE SP)
    - Postprocessor report generation [151](#)
  - Monitor II background session (PG SP|NO PG SP) [123](#)
  - Monitor II background session (PG SP|NO PG SP) [152](#)
  - Monitor II display session (PG SP) [123](#)
  - Monitor II session (PG SP|NO PG SP) [116](#)
  - SMF record type 75
    - overview/exception control statements [206](#)
- PAGE SP|NO PAGE SP (page data set activity)
  - Postprocessor
    - report generation [151](#)
- paging activity
  - Monitor II background session (SPAG|NO SPAG)
    - syntax summary [116](#)
  - Monitor II display session (SPAG)
    - syntax summary [116](#)
- PAGING|NO PAGING (system paging activity)
  - Postprocessor
    - report generation [151](#)
- panel
  - Monitor II User Reports [98](#)
- Parmlib member
  - member name generating
    - Monitor II background session [108](#)
    - Monitor II background session (MEMBER)
      - syntax summary [104](#)
- PassTicket support [17](#)
- paste DataView to a PerfDesk [279](#)
- PCIE (PCI Express-based functions) [92](#)
- PCIE Activity Report
  - (PCIE|NO PCIE) [152](#)
- PCIE Function statistics
  - OVW (overview condition) control statement [204](#)
- PCIE|NO PCIE (PCIE Activity Report)
  - Postprocessor [152](#)
- PerfDesk
  - change name of [279](#)
  - closing [278](#)
  - creating [277](#)
  - paste DataView to [279](#)
  - working with [277](#)
- PerfDesk folder
  - creating [277](#)
- performance goals
  - watching [47](#)
- performance management [41](#)
- Performance Monitoring
  - metrics list [286](#)
- performance problem
  - definition of [51](#)
- persistence capability
  - for Linux and AIX performance monitoring [212](#)
- PFK (program function key)
  - Monitor III reporter session [82](#)
- PG SP (page data set activity)
  - Monitor II display session [123](#)
- PG SP|NO PG SP (page data set activity)
  - Monitor II background session [123](#)
  - Monitor II session [116](#)
- PG SP|NO PG SP (page data set activity) [152](#)
- plot area, Series [286](#)
- Plot/Save Series dialog [286](#)
- Postprocessor
  - cache activity (type 74-5 SMF record) [193–199](#)
  - cataloged procedure [130](#)
  - channel path activity (type 73 SMF record) [188](#)
  - control statements
    - examples [157](#)
  - coupling facility activity (type 74-4 SMF record) [191](#)
  - CPU activity (type 70–1 SMF record) [161](#)
  - cryptographic hardware activity (type 70–2 SMF record) [169](#)
  - data set
    - preallocation [135](#)
  - description [130](#)



- Postprocessor (*continued*)
  - device activity (type 74-1 SMF record) [190](#)
  - duration interval [140](#)
  - duration report [158](#)
  - duration reports [140](#)
  - enqueue activity (type 77 SMF record) [206](#)
  - error conditions [138](#)
  - exception report [143](#)
  - ficon director activity (type 74-7 SMF record) [200](#)
  - I/O queuing activity (type 78-3 SMF record) [207](#)
  - IFASMFDP program
    - creation of non-VSAM data set [128](#)
  - IFASMFDP program
    - creation of non-VSAM data set [128](#)
  - input
    - log streams [133](#)
    - SMF data sets [133](#)
  - ISPF interface to [57](#)
  - JCL
    - ddname summary [136](#)
  - long-term overview reporting [5](#)
  - long-term reporting with [127](#)
  - options list [138](#)
  - Options panel [135](#)
  - output data sets [134](#)
  - Overview Records [240](#)
  - page data set activity (type 75 SMF record) [206](#)
  - paging activity (type 71 SMF record) [175](#)
  - report generation [147](#)
  - reporting period
    - specification [153](#)
  - return codes [138](#)
  - setup panel [132](#)
  - SMF record
    - DD statement for spanned records [130](#)
    - multiple data sets [128](#)
    - multiple systems [128](#)
    - non-VSAM data set [128](#)
  - starting
    - data set preallocation [135](#)
    - sample JCL [130](#)
  - starting from ISPF [132](#)
  - starting with JCL [131](#)
  - sysplex considerations [129](#)
  - virtual storage activity (type 78-2 SMF record) [207](#)
  - workload activity (type 72-3 SMF record) [178](#)
- Postprocessor control statements [138](#)
- Postprocessor data
  - graphical presentation [235](#)
  - performance analysis [235](#)
  - Spreadsheet Reporter [235](#)
- Postprocessor HTTP API of the DDS [18](#)
- Postprocessor Input pane [133](#)
- Postprocessor reporting [127](#)
- Postprocessor reports
  - XML output viewing [233](#)
- Postprocessor XML reports
  - sorting [233](#)
- PPEXTnnn (exception report) ddname
  - Postprocessor [136](#)
- PPORPnnn (overview report) ddname
  - Postprocessor [136](#)

- PPOVWREC (overview records) ddname
  - Postprocessor [137](#)
- PPRPTS (combined interval report) ddname
  - Postprocessor [136](#)
- PPSUMnnn (summary report) ddname
  - Postprocessor [136](#)
- PPXRPTS (combined exception report) ddname
  - Postprocessor [136](#)
- PPXSRPTS (sysplex reports) ddname
  - Postprocessor [136](#)
- Primary Menu
  - navigating from [66](#)
- PRINT command
  - Monitor II ISPF session [113](#)
- printed report
  - Monitor II background session
    - SYSOUT (sysout class) option [104](#), [111](#)
    - SYSTEM (system ID) option [114](#)
  - Monitor II display session
    - P (print) command [113](#)
  - Monitor III reporter session
    - graphic reports [81](#)
    - screens and tabular reports [81](#)
- PROC (processor delays) [92](#)
- procedure
  - RMF procedure [39](#)
- PROCL (processor job delays) [92](#)
- PROCU (processor usage) [92](#)
- program function (PF) key
  - Monitor II display session
    - override assigned keys [112](#)
  - Monitor III reporter session
    - building commands [83](#)
    - changing settings [83](#)
- program library lists
  - Monitor II display session (LLI)
    - syntax summary [116](#)
- Programming Interface Information [310](#)

## Q

- QSCJ (quiescent jobs) [92](#)
- quick start [61](#)

## R

- R (recall) command
  - Monitor II display session [108](#)
- RACF access to the Distributed Data Server [16](#)
- RACF FACILITY
  - BPX.WLMSEVER [15](#)
- RACF resource profiles [18](#)
- READ access for RMF Language Environment applications [16](#)
- recall display command [108](#)
- RECORD/NORECORD (record to SMF data set)
  - Monitor II background session
    - conflicting options [126](#)
    - syntax summary [104](#)
- registry [241](#)
- remote resources
  - how to add [248](#)
- report (RO) option
  - Monitor III reporter session [75](#)

- report commands
  - Monitor II [116](#)
- report from the current session
  - creating [110](#)
- report interval
  - Monitor I session
    - synchronization [32](#)
  - Postprocessor
    - relation to duration interval [141](#)
- Report Listings
  - .lis [245](#)
  - .xml [245](#)
  - local [245](#)
  - viewing [245](#)
- report mode
  - delta [99](#), [102](#)
  - total [99](#), [102](#)
- report types [243](#)
- Report Working Set
  - macros [257](#)
- REPORT/NOREPORT (interval report)
  - Monitor II background session
    - conflicting options [126](#)
    - syntax summary [104](#)
- reporters
  - starting [57](#)
- reporting
  - Postprocessor [127](#)
- reporting across time zones, Sysplex [129](#)
- reporting capabilities [55](#)
- reporting hierarchy [46](#)
- reporting period [254](#)
- REPORTS control statement
  - Postprocessor [139](#)
- reports that provide data for analysis [51](#)
- reserve activity
  - Monitor II background session (SENQR/NOSENQR)
    - syntax summary [116](#)
  - Monitor II display session (SENQR)
    - syntax summary [116](#)
- RESET (reset options) command
  - Monitor III reporter session
    - description [83](#)
- RESET command
  - Monitor II ISPF session [107](#)
- Resource
  - creating a DataView from [276](#)
  - expanding [276](#)
- Resource and Metric information [288](#)
- RESOURCE command [69](#)
- resource directory [239](#)
- Resource Report Selection Menu [69](#)
- resources
  - how to work with [243](#)
  - local [242](#)
  - remote [242](#), [248](#)
- response times
  - observing [47](#)
- RETRIEVE (display last command) command
  - Monitor III reporter session
    - description [83](#)
- return code
  - Postprocessor [138](#)
- RETURN command
  - RETURN command (*continued*)
    - Monitor II ISPF session [104](#)
- RFIND command
  - Monitor II ISPF session [109](#)
- RLSDS (VSAM RLS activity by data set) [92](#)
- RLSLRU (VSAM RLS activity LRU statistics) [92](#)
- RLSSC (VSAM RLS activity by storage class) [92](#)
- RMF
  - overview of capabilities [1](#)
  - what you can gather [7](#)
  - what you can report [7](#)
- RMF (Resource Measurement Facility)
  - CLISTs [33](#)
  - gathers data using three monitors [3](#)
  - message help [61](#)
  - online help [61](#)
  - setting up [13](#)
  - tutorial [61](#)
- RMF administration [11](#)
- RMF batch reporter [221](#)
- RMF Monitor III batch reporter
  - automated approach [230](#)
  - components [221](#)
  - custom report exits [229](#)
  - customize exceptions [226](#)
  - exception handling for all Monitor III report data [229](#)
  - how to use [224](#)
  - modify sample report exits [228](#)
  - processing workflow [223](#)
  - usage considerations [229](#)
  - user-defined exception-initiated monitoring [230](#)
- RMF Performance Monitoring
  - introduction [271](#)
  - overview [271](#)
  - what is monitored [291](#)
- RMF Performance Monitoring (RMF PM) [58](#)
- RMF PM (RMF Performance Monitoring) [58](#)
- RMF Postprocessor Data Sets [246](#)
- RMF procedure [39](#)
- RMF Sysplex Data Server
  - overview [5](#)
- RMF Sysplex Data Server's SMF buffer [18](#), [240](#), [244](#), [245](#)
- RMF XP
  - cross platform monitoring [211](#)
  - GPM4CIM started task [211](#)
  - monitoring AIX, Linux, or Windows systems [7](#)
  - persistence capability [212](#)
  - SMF record type 104 [212](#)
- RMF XP options [28](#)
- RMFPnnnn (Monitor II interval report) ddname
  - Postprocessor [136](#)
- rmfpp1.jcl [244](#)
- RMFSTART CLIST [33](#)
- RO command
  - Monitor II ISPF session [105](#)
- ROPTIONS (report options panel) command
  - Monitor III reporter session [87](#)
- RTOD [254](#)
- RTOD (report time of day) control statement
  - Postprocessor [139](#), [153](#)

**S**

- sample interval [284](#)

- Sample.lis [265](#)
- scroll forward [108](#)
- scrolling through ISPF session panels [108](#)
- SDELAY|NOSDELAY (serialization delay)
  - Postprocessor [152](#)
- SDEVICE|NOSDEVICE (shared device activity)
  - Postprocessor
    - report generation [156](#)
- SDS (sysplex data server activity)
  - Monitor II display session
    - syntax summary [116](#)
- SDS (Sysplex Data Server activity)
  - Monitor II display session [123](#)
- security
  - Excel macros [269](#)
  - for z/OS UNIX [16](#)
- SENQ (enqueue activity)
  - Monitor II display session
    - syntax summary [116](#)
- SENQ/NOSENQ (enqueue activity)
  - Monitor II background session
    - syntax summary [116](#)
- SENQ|NOSENQ (system enqueue activity)
  - Monitor II background session
    - Postprocessor report generation [152](#)
- SENQR (reserve activity)
  - Monitor II display session
    - syntax summary [116](#)
- SENQR/NOSENQR (reserve activity)
  - Monitor II background session
    - syntax summary [116](#)
- SENQR|NOSENQR (system enqueue reserve activity)
  - Postprocessor report generation [152](#)
- SERBLNKE [14](#)
- serialization delay reporting
  - (SDELAY|NOSDELAY) [152](#)
- Series
  - add to a DataView [285](#)
  - definition dialog [285](#)
  - plot area [286](#)
  - remove from DataView [282](#)
  - settings for [282](#)
  - time-stamps [285](#)
  - value-list chart [281](#)
- Seriesfind lowest value in
  - Series [282](#)
- service level agreement [43](#)
- session
  - create report from [110](#)
- SESSION (Monitor II background session) control
  - statement
    - Postprocessor [139](#), [154](#)
- SESSION (session options panel) command
  - Monitor III reporter session [84](#)
- session (SO) option
  - Monitor III reporter session [75](#)
- session command
  - STOP command
    - Monitor II background session [115](#)
- session control
  - Monitor II background session [117](#)
- session duration
  - Monitor II background session (STOP/NOSTOP)
    - conflicting options [126](#)
- session duration (*continued*)
  - Monitor II background session (STOP/NOSTOP) (*continued*)
    - syntax summary [104](#)
- session mode [109](#)
- sets, Postprocessor output data [134](#)
- setting up RMF [13](#)
- setting up RMF CLISTs [33](#)
- setup panel
  - Postprocessor [132](#)
- SFCB [211](#)
- shared device activity
  - Postprocessor
    - report generation [156](#)
- short-term data collection with Monitor III [3](#)
- short-term interactive performance analysis with Monitor III
  - [5](#)
- shortcut keys [305](#)
- single-value chart [281](#)
- SINTV (interval length)
  - Monitor II background session
    - conflicting options [126](#)
    - syntax summary [104](#)
- SLA [43](#)
- Small Footprint CIM Broker (SFCB) [211](#)
- SMF buffer [18](#)
- SMF data [240](#)
- SMF dump data [237](#), [240](#), [243–245](#)
- SMF Dump Input Data [246](#)
- SMF record
  - Monitor I and Monitor III synchronization [32](#)
  - Monitor II background session
    - syntax summary [104](#)
  - Postprocessor [128](#)
  - spanned records [130](#)
  - type 70–1 (CPU activity)
    - overview/exception control statements [161](#)
  - type 70–2 (Crypto Hardware activity)
    - overview/exception control statements [169](#)
  - type 71 (paging activity)
    - overview/exception control statements [175](#)
  - type 72-3 (workload activity)
    - overview control statements [178](#)
  - type 73 (channel path activity)
    - overview/exception control statements [188](#)
  - type 74-1 (device activity)
    - overview/exception control statements [190](#)
  - type 74-10 (EADM Activity) [205](#)
  - type 74-4 (Coupling Facility activity)
    - overview control statements [191](#)
  - type 74-5 (cache activity)
    - overview/exception control statements [193–199](#)
  - type 74-7 (ficon director activity)
    - overview/exception control statements [200](#)
  - type 74-8 (Ess statistics) [200](#)
  - type 74-9 (PCIE Function statistics) [204](#)
  - type 75 (page data set activity)

- SMF record (*continued*)
  - type 75 (page data set activity) (*continued*)
    - overview/exception control statements [206](#)
  - type 77 (enqueue activity)
    - overview/exception control statements [206](#)
  - type 78-2 (virtual storage activity)
    - overview/exception control statements [207](#)
  - type 78-3 (I/O queuing activity)
    - overview/exception control statements [207](#)
- SMF record type [104](#)
  - authorize GPM4CIM [219](#)
- SMF record type 104 collection
  - how to request [218](#)
- SMF record writing
  - activating [32](#)
  - suppressing [32](#)
- SMF records [235](#)
- SMF synchronization
  - defining [32](#)
- Snapshot monitoring with Monitor II [4](#)
- snapshot reporting
  - with Monitor II [5](#)
- SORT command
  - Monitor II ISPF session [109](#)
- sorting XML reports [233](#)
- SPACED (disk space) [92](#)
- SPACEG (storage group space) [92](#)
- SPAG (system paging activity)
  - Monitor II display session
    - syntax summary [116](#)
- SPAG/NOSPAG (system paging activity)
  - Monitor II background session
    - syntax summary [116](#)
- SPAG|NOSPAG (system paging activity)
  - Monitor II background session
    - Postprocessor report generation [152](#)
- spreadsheet
  - usage examples [265](#)
- spreadsheet macros [235](#), [241](#), [247](#), [257](#)
- Spreadsheet Reporter
  - .lis [244](#), [245](#)
  - .xml [244](#), [245](#)
  - batch mode [254](#)
  - Cache Subsystem Overview Report [264](#)
  - Channel Overview Report [265](#)
  - Collect.bat [255](#)
  - concepts [235](#)
  - Create
    - menu bar choice [243](#)
  - Create Overview Record [245](#)
  - Create Report Listings [244](#)
  - Create Working Set [246](#)
  - CreateOvwWSet.bat [257](#)
  - CreateRptWSet.bat [256](#)
  - DATE [254](#)
  - Define
    - menu bar choice [243](#)
  - Define new System [248](#), [249](#)
  - Device Overview Report [263](#)
  - DINTV [254](#)

- Spreadsheet Reporter (*continued*)
  - duration interval [251](#), [254](#)
  - Excel macros [269](#)
  - File
    - menu bar choice [243](#)
  - file transfer [243](#)
  - GDG [240](#)
  - generation data group (GDG) [240](#)
  - hometest [248](#)
  - how to use [239](#)
  - installation directory
    - default [254](#)
  - intermediate resources [241](#)
  - intervals [254](#)
  - introduction [6](#)
  - Jclgen.bat [254](#)
  - LPAR Overview Report [260](#)
  - macros
    - Overview Working Set [259](#)
    - Report Working Set [257](#)
  - main dialog [242](#)
  - menu bar [243](#)
  - Messages
    - menu bar choice [243](#)
  - migration [254](#), [255](#)
  - Open RMF Overview Spreadsheets [268](#)
  - Options [251](#), [252](#)
  - overview [235](#), [237](#)
  - overview control statements
    - OVW file [251](#)
  - Overview Records [235–237](#), [239](#), [240](#), [245](#), [257](#)
  - Overview Reports [235](#), [236](#)
  - Overview Working Set
    - macros [259](#)
  - OVERVIEW(RECORD) [236](#)
  - OVERVIEW(REPORT) [236](#)
  - OVW [248](#), [249](#)
  - performance analysis [235](#)
  - Postprocessor reports [235](#), [252](#)
  - processing options [251](#)
  - registry [241](#)
  - remote resources
    - how to add [248](#)
  - Report Listings
    - local [245](#)
    - viewing [245](#)
  - report types [251](#), [252](#)
  - Report Working Set
    - macros [257](#)
  - reporting period [251](#), [254](#)
  - resource directory [239](#)
  - resource-oriented concept [237](#)
  - resources
    - how to work with [243](#)
    - local [237](#), [242](#)
    - remote [237](#), [242](#), [248](#)
  - RMF Postprocessor Data Sets [246](#)
  - RMF Sysplex Data Server's SMF buffer [240](#), [244](#), [245](#)
  - rmfpp1.jcl [244](#)
  - RTOD [254](#)
  - Sample.lis [265](#)
  - security
    - Excel macros [269](#)
  - settings

- Spreadsheet Reporter (*continued*)
  - settings (*continued*)
    - how to specify [251](#)
  - Settings
    - menu bar choice [243](#)
  - SMF data [240](#)
  - SMF dump data [237](#), [240](#), [243–245](#)
  - SMF Dump Input Data [246](#)
  - SMF records [235](#)
  - spreadsheet macros
    - support [235](#)
  - spreadsheets [237](#), [241](#), [247](#)
  - Summary report [236](#)
  - System Overview Report [261](#)
  - System Properties [249](#)
  - systems [239](#), [242](#), [248](#), [249](#)
  - transfer a file [243](#)
  - usage examples [265](#), [268](#)
  - View
    - menu bar choice [243](#)
  - Working Set
    - migration [254](#)
    - Overview Working Set [246](#)
    - Report Working Set [246](#)
  - Working Sets [237](#)
  - Workload Overview Report [262](#)
  - XML reports [237](#), [245](#)
- spreadsheets
  - creating [247](#)
  - Spreadsheet Reporter [235](#)
- SRCS (central storage/processor/SRM)
  - activity
    - Monitor II display session
      - syntax summary [116](#)
- SRCS/NOSRCS (central storage/processor/SRM)
  - activity
    - Monitor II background session
      - syntax summary [116](#)
- SRCS|NOSRCS (central storage/processor/SRM)
  - activity
    - Postprocessor
      - report generation [152](#)
- START command
  - session command [117](#)
- STOD (summary report time of day) control statement
  - Postprocessor [139](#), [154](#)
- STOP mode
  - Monitor III [70](#)
- STOP/NOSTOP (session duration)
  - Monitor II background session
    - conflicting options [126](#)
    - syntax summary [104](#)
- STOR (storage delays) [92](#)
- STORC (common storage) [92](#)
- STORCR (common storage remaining) [92](#)
- STORF (storage frames) [92](#)
- storing data [4](#)
- STORJ (storage job delays) [92](#)
- STORM (storage usage by memory objects) [92](#)
- STORR (resource-oriented storage delays) [92](#)
- STORS (storage delays summary) [92](#)
- SUMMARY (summary report) control statement
  - Postprocessor [139](#), [155](#)
- summary of changes [xxiii](#)
- summary report
  - Postprocessor
    - report generation [155](#)
    - reporting period specification [154](#)
- Summary report [236](#)
- SYNC/NOSYNC (interval synchronization)
  - Monitor I session
    - synchronizing with Monitor III [32](#)
- syntax diagrams
  - how to read [xvii](#)
- SYSENG (sysplex enqueue delays) [92](#)
- SYSID (system identifier) control statement
  - Postprocessor [139](#), [155](#)
- SYSINFO (system information) [92](#)
- SYSOUT (sysout class)
  - Monitor II background session option
    - syntax summary [104](#)
- SYSOUT (sysout class) control statement
  - Postprocessor [139](#), [155](#)
- sysplex
  - coupling facility hardware data [130](#)
  - expanding [276](#)
  - open and close [276](#)
  - reporting across time zones [129](#)
- SYSPLEX command [67](#)
- Sysplex Data Server
  - SMF buffer [18](#)
- sysplex data server activity
  - Monitor II display session (SDS)
    - syntax summary [116](#)
- Sysplex Data Server activity
  - Monitor II display session (SDS) [123](#)
- sysplex view [46](#)
- SYSRG (Resource Group Activity report) [92](#)
- SYSRPTS (sysplex reports) control statement
  - Postprocessor [139](#), [156](#)
- SYSRTD (response time distribution) [92](#)
- SYSSUM (sysplex summary) [92](#)
- SYSTEM (system ID)
  - Monitor II background session option [114](#)
  - Monitor II display session command [114](#)
- system activities measured
  - Monitor I session [8](#)
  - Monitor II session [8](#)
  - Monitor III session [8](#)
  - Postprocessor [8](#)
- system enqueue contention [152](#)
- system enqueue reserve activity
  - Postprocessor report generation [152](#)
- system environment
  - customizing [14](#)
- system identifier
  - Postprocessor
    - SYSID control statement [155](#)
- System Overview Report [261](#)
- system paging activity
  - Monitor I session (PAGING|NOPAGING)
    - Postprocessor report generation [151](#)
  - Monitor II background session (SPAG|NOSPAG) [125](#)
  - Monitor II background session (SPAG|NOSPAG)
    - Postprocessor report generation [152](#)
  - Monitor II display session (SPAG) [125](#)
- SMF record type [71](#)

- system paging activity (*continued*)
  - SMF record type 71 (*continued*)
    - overview/exception control statements [175](#)
- System Properties [249](#)
- system view [46](#)
- systems
  - how to maintain [249](#)
- SYSWKM (work manager delays) [92](#)

## T

- T (timed update) command
  - Monitor II display session [111](#)
- T (tutorial) command
  - RMF interactive reporting
    - description [61](#)
- TABULAR (tabular report) command
  - Monitor III reporter session
    - description [83](#)
- tabular report
  - Monitor III reporter session
    - cursor-sensitive control [89](#)
    - displaying [83](#)
    - switching to graphic report [84](#)
- this document
  - who should use xvii
- throughput definition [48](#)
- time zones
  - sysplex reporting across [129](#)
- time-stamps
  - Series [285](#)
- timed update (T command)
  - Monitor II display session [111](#)
- TOGGLE (toggle reports) command
  - Monitor III reporter session
    - description [84](#)
- total report mode [102](#)
- TRACE|NOTRACE (trace activity)
  - Postprocessor
    - report generation [152](#)
- trademarks [310](#)
- transaction rate [48](#)
- TSO/E session
  - ending [114](#)
  - hardcopy mode [110](#)
- tutorial
  - RMF interactive reporting
    - description [61](#)

## U

- UNIX System Services
  - access to UNIX System Services [15](#)
  - OMVS kernel activity [151](#)
  - UNIX file system statistics [121](#)
- USER (user exit) option
  - Monitor II display session
    - syntax summary [116](#)
- USER command [70](#)
- user exit routine
  - Monitor II background session (USER/NOUSER)
    - syntax summary [116](#)

- user exit routine (*continued*)
  - Monitor II display session (USER)
    - syntax summary [116](#)
  - Postprocessor
    - EXITs control statement [145](#)
- user interface
  - ISPF [305](#)
  - TSO/E [305](#)
- user reports
  - Monitor II session
    - specifying for Postprocessor [153](#)
- user-written reports
  - Monitor III reporter session
    - displaying [84](#)
- USER/NOUSER (user exit)
  - Monitor II background session
    - syntax summary [116](#)

## V

- value-list chart [281](#)
- virtual storage activity
  - Postprocessor report generation [153](#)
  - SMF record type 78-2
    - overview/exception control statements [207](#)
- VSAM (Virtual Storage Access Method) data set
  - Monitor III reporter session
    - alternate system support [64](#)
    - data set preallocation [64](#)
    - DI screen [71](#), [72](#)
- VSTOR|NOVSTOR (virtual storage activity)
  - Postprocessor report generation [153](#)

## W

- WFEX (workflow/exceptions) [92](#)
- what's new [58](#)
- who should use this document xvii
- Windows systems
  - monitoring with RMF XP [7](#)
- WLM OPT parameters [123](#)
- WLMGL (workload activity)
  - Postprocessor
    - SMF record type 72-3 [178](#)
- WLMGL|NOWLMGL (sysplex workload activity)
  - Postprocessor
    - report generation [157](#)
- work scope [291](#)
- work scope type [291](#)
- Working Set
  - batch mode [254](#)
  - migration [254](#)
  - Overview Working Set [241](#), [246](#)
  - Report Working Set [241](#), [246](#)
- workload activity
  - Postprocessor
    - SMF record type 72-3 [178](#)
    - SYSRPTS control statement [157](#)
    - SMF record type 72-3
      - overview control statements [178](#)
- Workload Overview Report [262](#)
- workstation

workstation (*continued*)  
reporting capabilities on [231](#)

## X

XCF (Cross-System Coupling Facility  
Delays)  
Monitor III report  
command abbreviations [92](#)  
XCF|NOXCF (cross-system coupling facility)  
Postprocessor  
EXRPTS control statement [153](#)  
XCFJ (cross system coupling facility job delays) [93](#)  
XML output  
ddnames [137](#)  
XML Postprocessor reports  
viewing in a browser [233](#)  
viewing with the HTTP API of the DDS [233](#)  
viewing with the Spreadsheet Reporter [233](#)  
XML reports  
how to create [245](#)  
sorting [233](#)  
XPOVWRPT ddname [137](#)  
XPRPTS ddname [137](#)  
XPXSRPTS ddname [137](#)

## Z

Z (stop) command  
Monitor II display session [114](#)  
z/OS Management Facility  
overview [297](#)  
z/OSMF  
overview [297](#)  
Resource Monitoring plug-in [297](#)  
zHPF [189](#)









Product Number: 5655-ZOS

SC27-4936-70

