

z/OS
3.2

*IBM Tivoli Directory Server
Administration and Use for z/OS*



Note

Before using this information and the product it supports, read the information in [“Notices” on page 729](#).

This edition applies to IBM® z/OS® 3.2 (5655-ZOS) and to all subsequent releases and modifications until otherwise indicated in new editions.

Last updated: 2025-09-30

© **Copyright International Business Machines Corporation 1998, 2025.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures.....	xv
Tables.....	xix
About this document.....	xxv
Intended audience.....	xxv
Typographic conventions.....	xxv
z/OS information.....	xxv
How to provide feedback to IBM.....	xxvii
Summary of changes.....	xxix
Summary of changes for z/OS 3.2.....	xxix
Summary of changes for z/OS 3.1.....	xxix
Part 1. Administration.....	1
Chapter 1. Introducing the LDAP server.....	3
What is a directory service?.....	3
What is LDAP?.....	4
How is information stored in the directory?	4
How is the information arranged?.....	4
How is the information referenced?.....	5
How is the information accessed?.....	6
How is the information protected from unauthorized access?.....	6
How does LDAP work?.....	6
What about X.500?.....	6
What are the capabilities of the z/OS LDAP server?	6
Participation in multilevel security.....	12
RFCs supported by z/OS LDAP.....	12
Draft RFCs.....	13
Superseded RFCs.....	13
Chapter 2. Planning and roadmap.....	15
Planning directory content.....	15
LDAP server roadmap.....	15
Chapter 3. Installing and setting up related products.....	17
Required products.....	17
Installing and setting up WLM (Workload Management).....	17
Installing a z/OS UNIX System Services file system for the schema backend.....	18
Optional products.....	18
Installing and setting up Db2 for TDBM and GDBM (Db2-based).....	19
Getting Db2 installed and set up for CLI and ODBC	19
Installing RACF for SDBM and native authentication.....	21
Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends.....	21
Installing System SSL.....	21
Installing ICSF for encryption, hashing, or SSL/TLS.....	21

Installing Kerberos.....	22
Chapter 4. Configuring an LDAP server using the dsconfig utility.....	25
Overview of the LDAP configuration utility.....	25
Capabilities.....	26
Restrictions.....	27
Running the dsconfig utility.....	27
dsconfig utility.....	27
Purpose.....	27
Format.....	28
Parameters.....	28
Examples.....	28
Input file description.....	28
Usage notes.....	29
Configuration roles and responsibilities.....	31
Steps for configuring an LDAP server.....	33
Configuration confirmation.....	36
Specifying advanced configuration options with the dsconfig utility	36
Setting the time zone.....	38
Chapter 5. Configuring an LDAP server without the dsconfig utility.....	39
Roadmap for configuring the LDAP server.....	39
Preparing for configuration variable interactions.....	42
Setting the time zone.....	43
Chapter 6. Setting up the user ID and security for the LDAP server.....	45
Setting up a user ID for your LDAP server.....	45
Requirements for a user ID that runs the LDAP server.....	46
Additional setup for user ID that runs the LDAP server.....	47
Additional setup for LDAP console commands.....	48
Additional setup when using SDBM.....	48
Additional setup for RACF PROXY segment and SDBM.....	49
Additional setup for sysplex.....	49
Defining the Kerberos identity.....	49
Additional setup for generating audit records.....	50
Additional setup for using the securityLabel option.....	50
Additional setup when defining administrative roles in RACF.....	50
Additional setup for using SHA-2 or Salted SHA-2 hashing.....	50
Protecting the environment for the LDAP server.....	51
Chapter 7. Preparing WLM, backends, sysplex, SSL/TLS, and encryption or hashing.....	53
Setting up for WLM (workload management).....	53
Copying the configuration files.....	54
Creating a sample server with an LDBM backend.....	54
Creating the Db2 database and table spaces for TDBM or GDBM.....	55
After applying Db2 ODBC maintenance	58
Partitioning Db2 table spaces.....	58
Partition-by-range Db2 table spaces for TDBM.....	59
Partition-by-growth Db2 table spaces for TDBM or GDBM.....	60
Setting up for TDBM.....	61
Copying a TDBM database.....	61
Setting up for SDBM.....	62
Setting up for LDBM.....	62
Copying an LDBM backend.....	63
Setting up for CDBM.....	64
Setting up for GDBM.....	65
Configuring file-based GDBM.....	65
Configuring Db2-based GDBM.....	66

Setting up for Policy Director extended operations.....	66
Setting up for sysplex.....	66
Setting up for SSL/TLS.....	68
Using SSL/TLS protected communications.....	68
Creating and using key databases, key rings, or PKCS #11 tokens.....	69
Obtaining a certificate.....	70
Enabling SSL/TLS support.....	70
Setting up the security options for the LDAP server.....	70
Setting up an LDAP client.....	75
Using LDAP client APIs to access LDAP using SSL/TLS.....	76
Support of certificate bind.....	76
Configuring for encryption or hashing.....	76
One-way hashing formats.....	77
Two-way encryption formats	78
Symmetric encryption keys.....	78
Configuring for user and administrator password encryption or hashing.....	78
Configuring for secret encryption.....	80
Configuring for securityLabel option.....	81
 Chapter 8. Customizing the LDAP server configuration.....	 83
Creating the ds.conf file.....	83
Locating ds.conf.....	83
Configuration file format.....	83
Specifying a value for filename.....	85
Specifying a value for a distinguished name.....	85
Configuration file checklist	86
Configuration file options.....	90
Deprecated options.....	137
CDBM backend configuration and policy entries.....	137
cn=configuration.....	138
cn=Replication,cn=configuration.....	140
cn=Log Management,cn=Configuration.....	142
cn=Replication,cn=Log Management,cn=Configuration.....	142
cn=admingroup,cn=configuration.....	142
cn=safadmingroup,cn=configuration.....	143
cn=ibmpolicies.....	143
cn=pwdpolicy,cn=ibmpolicies.....	143
Configuration considerations	143
Configuring the operational mode	145
Single-server mode.....	147
Multiple single-server mode.....	147
Multi-server mode.....	147
PC callable support mode.....	149
Establishing the root administrator DN and basic replication replica server DN and passwords...	150
Example configuration scenarios.....	152
Configuring a TDBM backend with SSL/TLS and password encryption or hashing.....	152
Configuring SDBM and GDBM (Db2-based) backends.....	153
Configuring SDBM and TDBM backends.....	153
Configuring LDBM with native authentication and GDBM (file-based) backends.....	153
Configuring LDBM and CDBM backends with advanced replication and password policy.....	154
Configuring an EXOP backend.....	154
 Chapter 9. Administrative group and roles.....	 155
Administrative roles.....	155
Enabling the administrative group and roles.....	159
Defining administrative group and roles.....	160
Administrative roles defined in LDAP.....	160
Administrative roles defined in RACF.....	161

Administrative group member examples.....	162
Administrative roles and extended operations.....	163
Administrative group and roles-related extended operation.....	164
User type extended operation examples.....	164
Chapter 10. Running the LDAP server.....	167
Setting up the PDSE for the LDAP server DLLs	167
Setting up and running the LDAP server.....	167
Defining the started task for the LDAP server	167
Running the LDAP server using the sample JCL	167
LDAP server messages and debug output	171
Running the LDAP server using data sets.....	171
Verifying the LDAP server.....	172
Finalizing setup of LDAP backends.....	173
Environment variables used by the LDAP server.....	174
Dynamic debugging.....	177
CTRACE in-memory trace records.....	177
Viewing LDAP server CTRACE output.....	178
Displaying performance information and server settings.....	179
Size limitations.....	188
Activity logging.....	188
Configuring the activity log support.....	190
LDAP SMF auditing.....	195
Auditing events.....	195
Working with audit records.....	196
Monitoring LDAP server resources.....	196
Server backends and plug-ins during startup.....	196
Db2.....	197
Network communications.....	197
Client connections.....	197
File system.....	198
LDAP server abnormal termination.....	198
Health checks supported by the LDAP server.....	198
TDS-Db2 Health Check.....	198
TDS-CONFIG health check.....	199
LDAP server operator commands.....	200
Chapter 11. Migrating to z/OS.....	203
Actions required for migrations from previous releases of z/OS.....	203
Fallback from a TDBM or Db2-based GDBM backend in z/OS IBM Tivoli Directory Server to an earlier z/OS IBM Tivoli Directory Server version.....	204
LDAP_COMPAT_FLAGS environment variable.....	204
Updating LDAP configurations settings in a sysplex without server outage.....	205
Checking file ownership for the LDAP server.....	207
Migration roadmap.....	208
z/OS Version 2 Release 3 update summary.....	208
z/OS Version 2 Release 2 update summary.....	213
Chapter 12. Running and using the LDAP server utilities.....	217
Running the LDAP server utilities in the z/OS shell.....	217
Running the LDAP server utilities from JCL.....	218
Running the LDAP server utilities in TSO.....	218
SSL/TLS information for LDAP utilities.....	219
Using RACF key rings.....	220
Using PKCS #11 tokens.....	220
Using a Java keystore or RACF key ring for ldapdiff.....	221
Server utilities.....	221
The db2pwwden utility.....	221

The ds2ldif utility.....	225
The ldif2ds utility.....	235
The ldapdiff utility.....	245
The ldapexop utility.....	253
Chapter 13. Globalization support.....	263
Translated messages.....	263
UTF-8 support.....	263
Part 2. Use.....	265
Chapter 14. Data model	267
Relative distinguished names	267
Distinguished name syntax.....	268
Domain component naming.....	268
RACF-style distinguished names.....	268
Chapter 15. LDAP directory schema.....	271
Setting up the schema for LDBM, TDBM, and CDBM.....	271
Schema introduction.....	272
Schema attribute syntax.....	280
LDAP schema attributes.....	282
Defining new schema elements.....	291
Updating the schema.....	291
Changing the initial schema.....	293
Replacing individual schema values.....	293
Updating a numeric object identifier (NOID).....	294
Analyzing schema errors.....	295
Retrieving the schema	295
Displaying the schema entry.....	295
Finding the subschemaSubentry DN.....	296
Chapter 16. Modify DN operations.....	297
Modify DN operation syntax.....	297
Considerations in the use of Modify DN operations.....	301
Eligibility of entries for rename.....	302
Concurrency considerations between Modify DN operations and other LDAP operations.....	303
Access control and ownership.....	303
Relocating an entry.....	304
Relocating an entry with DN realignment requested.....	305
Access control changes.....	305
Ownership changes.....	307
Modify DN operations related to suffix DNs.....	307
Scenario constraints.....	308
Example scenarios.....	308
Modify DN operations and replication.....	314
Initial validation of compatible server versions in consumer and replica servers.....	315
Periodic validation of compatible server versions in basic replication replicas.....	315
Loss of basic replication synchronization because of incompatible replica server versions.....	316
Loss of basic replication synchronization because of incompatible replica server versions - recovery.....	316
Chapter 17. Accessing RACF information.....	317
SDBM authorization	317
RACF authorization	318
Binding using a RACF user ID and password or password phrase.....	318
Binding with SDBM using password policy.....	319

SDBM group gathering	319
Associating LDAP attributes to RACF fields.....	319
Associating LDAP attributes to RACF fixed fields.....	320
Associating LDAP attributes to RACF custom fields.....	330
Special usage of racfAttributes, racfConnectAttributes, racfResourceAttributes, and racfSetroptsAttributes	331
RACF namespace entries.....	331
SDBM schema information.....	332
SDBM support for special characters.....	332
Control of access to RACF data.....	333
SDBM operational behavior.....	333
SDBM search capabilities.....	343
Retrieving RACF user password and password phrase envelopes.....	355
Changing a user password or password phrase in RACF using SDBM.....	356
Using LDAP client utilities with SDBM.....	357
Deleting attributes.....	360
 Chapter 18. Password policy.....	363
Password policy entries.....	363
Activating password policy.....	364
Password policy attributes.....	364
Password policy evaluation.....	372
Evaluation of a user's individual and composite group password policy.....	373
Effective password policy examples.....	375
Password policy operational attributes.....	376
PasswordPolicy control.....	378
Replicating password policy operational attributes.....	380
Password policy related extended operations.....	381
Overriding password policy and unlocking accounts.....	381
Unlocking or unexpiring the account of the LDAP root administrator (adminDN).....	383
Password policy examples.....	383
Global password policy example.....	383
Group password policy example.....	384
Individual password policy example.....	385
Effective password policy extended operation example.....	385
Account status extended operation example.....	386
Changing password values when pwdsafemodify is set to true.....	386
 Chapter 19. Kerberos authentication.....	389
Setting up for Kerberos.....	389
Schema for Kerberos.....	390
Identity mapping.....	391
Default mapping.....	391
SDBM mapping.....	392
Configuring access control.....	392
Example of setting up a Kerberos directory.....	394
Kerberos operating environments.....	396
 Chapter 20. Native authentication.....	397
Initializing native authentication.....	397
Schema for native authentication.....	397
Defining participation in native authentication.....	398
Binding with native authentication.....	398
Updating native passwords and password phrases.....	400
Updating native passwords or password phrases during bind.....	400
Password policy with native authentication.....	401
Example of setting up native authentication.....	401
Using native authentication with web servers.....	405

Chapter 21. CRAM-MD5 and DIGEST-MD5 authentication.....	407
Considerations for setting up a TDBM, LDBM, or CDBM backend for CRAM-MD5 and DIGEST-MD5 authentication.....	407
CRAM-MD5 and DIGEST-MD5 configuration option.....	408
Example of setting up for CRAM-MD5 and DIGEST-MD5.....	408
Chapter 22. Using extended operations to access Policy Director data.....	411
GetDnForUserId extended operation.....	411
GetPrivileges extended operation.....	411
Chapter 23. Static, dynamic, and nested groups.....	413
Static groups.....	413
Dynamic groups.....	413
Dynamic group search filter examples.....	414
Nested groups.....	415
Determining group membership.....	415
Displaying group membership.....	415
ACL restrictions on displaying group membership.....	416
ACL restrictions on group gathering.....	416
Managing group search limits.....	416
Creating group search limits.....	417
Enabling group search limit processing.....	417
Using the limits from search limit groups.....	417
Group examples.....	417
Examples of adding, modifying, and deleting group entries.....	417
Examples of querying group membership.....	420
Chapter 24. Using access control.....	425
Access control attributes.....	425
aclEntry attribute.....	426
aclPropagate attribute.....	430
aclSource attribute.....	430
entryOwner attribute.....	430
ownerPropagate attribute.....	431
ownerSource attribute.....	431
ACL filters.....	432
Initializing ACLs with TDBM or LDBM.....	433
Default ACLs with LDBM or TDBM.....	434
Initializing ACLs with GDBM.....	434
Initializing ACLs with CDBM.....	434
Initializing ACLs with schema entry.....	435
Access determination.....	435
Access determination examples.....	438
Search.....	441
Filter.....	441
Compare.....	441
Requested attributes	441
Querying effective permissions.....	441
Propagating ACLs.....	444
Example of propagation.....	444
Examples of overrides.....	445
Other examples.....	445
Access control groups.....	446
Associating DNs, access groups, and additional bind and directory entry access information with a bound user	446
Deleting a user or a group.....	447
Retrieving ACL information from the server.....	447

Creating and managing access controls.....	448
Creating an ACL.....	448
Modifying an ACL.....	450
Deleting an ACL.....	451
Creating an owner for an entry.....	452
Modifying an owner for an entry.....	453
Deleting an owner for an entry.....	454
Creating a group for use in ACLs and entry owner settings.....	455
Chapter 25. Basic replication.....	457
Basic replication in a sysplex.....	457
ibm-entryuuid replication.....	458
Complex modify DN replication.....	458
Basic replication and ldif2ds.....	458
Data encryption or hashing and basic replication.....	458
Replicating server.....	459
Replica entries.....	459
Adding replica entries in TDBM or LDBM.....	462
Searching a replica entry.....	462
Displaying basic replication status.....	463
Basic replication maintenance mode.....	463
Replica server.....	463
Populating a replica.....	464
Configuring the replica.....	464
LDAP update operations on read-only replicas.....	465
Changing a read-only replica to a master.....	465
Basic peer to peer replication	466
Server configuration.....	466
Basic replication conflict resolution.....	467
Adding a peer replica to an existing server.....	467
Upgrading a read-only replica to be a peer replica of the master server.....	467
Downgrading a peer server to read-only replica.....	468
SSL/TLS and basic replication.....	468
Replica server with SSL/TLS enablement (basic).....	468
Replicating the server with SSL/TLS enablement (basic).....	468
Basic replication error log.....	469
Troubleshooting basic replication.....	470
Recovering from basic replication out-of-sync conditions	471
Chapter 26. Advanced replication.....	473
Advanced replication terminology.....	473
Replication topology.....	475
Advanced replication overview.....	476
Master-replica replication.....	476
Forwarding (cascading) replication	477
Peer-to-peer replication.....	477
Gateway replication.....	477
Advanced replication features.....	478
Partial replication.....	478
Replication scheduling.....	479
Replication conflict resolution.....	479
Enabling advanced replication.....	479
Supplier server entries.....	480
Replication contexts.....	481
Replica groups.....	481
Replica subentries.....	482
Replication agreements.....	483
Credentials entries.....	486

Schedule entries.....	488
Consumer server entries.....	491
Things to consider before configuring advanced replication.....	495
Advanced replication configuration examples.....	496
Suppliers and consumers.....	496
Server ID.....	497
Advanced replication related entries summary.....	497
Creating a master-replica topology.....	499
Creating a peer-to-peer replication topology.....	502
Creating a master-forwarder-replica (cascading) topology.....	506
Creating a gateway topology.....	511
Replication topology hints and tips.....	516
Replication of schema and password policy updates.....	517
Protecting replication topology entries.....	517
Unconfiguring advanced replication.....	517
Advanced replication maintenance mode.....	518
Partial replication.....	519
Replication filter examples.....	520
SSL/TLS and advanced replication.....	521
Replica server with SSL/TLS enablement (advanced).....	521
Replicating server with SSL/TLS enablement (advanced).....	522
Displaying advanced replication configuration.....	523
Command line tasks for managing replication.....	523
Advanced replication related extended operations.....	523
Viewing replication configuration information.....	525
Monitoring and diagnosing advanced replication problems.....	525
Recovering from advanced replication errors.....	529
Advanced replication error recovery example.....	531
Chapter 27. Alias.....	537
Impact of aliasing on search performance.....	537
Alias entry	537
Alias entry rules.....	538
Dereferencing an alias.....	538
Dereferencing during search.....	539
Alias examples.....	540
Chapter 28. Change logging.....	545
Configuring the GDBM backend.....	545
Configuring a Db2-based GDBM backend.....	546
Configuring a file-based GDBM backend.....	546
Additional required configuration.....	546
When changes are logged.....	547
RACF changes.....	547
TDBM, LDBM, CDBM, and schema changes.....	547
Change log schema.....	547
Change log entries.....	548
Searching the change log.....	549
Passwords in change log entries.....	550
Unloading and loading the change log.....	550
Trimming the change log.....	550
Change log information in the root DSE entry.....	550
Multi-server considerations.....	550
How to set up and use the LDAP server for logging changes.....	551
Chapter 29. Referrals.....	555
Using the referral object class and the ref attribute.....	555
Creating referral entries.....	555

Associating servers with referrals	556
Pointing to other servers.....	556
Defining the default referral.....	557
Processing referrals.....	557
Using LDAP Version 2 referrals.....	558
Using LDAP Version 3 referrals.....	558
Bind considerations for referrals.....	559
Example: Associating servers through referrals and basic replication.....	559
Chapter 30. Client considerations.....	565
Root DSE.....	565
Root DSE search with base scope.....	565
Root DSE search with subtree scope (Null-based subtree search).....	570
Monitor support.....	571
UTF-8 data over the LDAP Version 2 protocol.....	571
Attribute types stored and returned in lowercase.....	571
Abandon behavior.....	571
Chapter 31. Performance tuning.....	573
Overview.....	573
General LDAP server performance considerations.....	573
Threads.....	573
Debug settings.....	573
Storage in the LDAP address space.....	573
LDAP server cache tuning.....	573
Operations monitor.....	575
Workload Management (WLM).....	575
Password policy considerations.....	578
LDBM performance considerations.....	578
Storage in the LDAP address space for LDBM data.....	579
LDAP server initialization time with LDBM.....	579
Database commit processing.....	579
DASD space for LDBM data.....	580
Sample LDBM benchmark data.....	580
CDBM performance considerations.....	581
TDBM performance considerations.....	581
Db2 tuning.....	581
TDBM database tuning.....	584
Monitoring performance with cn=monitor.....	585
Monitor search examples.....	591
User groups considerations in large directories.....	594
Large static groups considerations.....	595
Dynamic groups memberURL filter indexing considerations.....	596
Warning regarding Db2 logging of large static group updates.....	597
Language Environment heap pools considerations.....	598
Tuning Language Environment heap and heap pools.....	598
General usage considerations.....	599
Paged search considerations.....	599
Sorted search considerations.....	600
GDBM (Changelog) performance considerations.....	601
SDBM performance considerations.....	601
Appendix A. Initial LDAP server schema.....	603
Appendix B. SPUFI files.....	631
The DSTDBMDB SPUFI file.....	631
The TDBMMGRT SPUFI file	643

Appendix C. Supported server controls.....	653
authenticateOnly.....	653
Do Not Replicate.....	653
IBMLdapProxyControl.....	653
IBMModifyDNRealignDNAttributesControl.....	655
IBMModifyDNTimelimitControl.....	655
IBMSchemaReplaceByValueControl.....	656
IBMSdbmExtendedSearchControl.....	656
manageDsaIT.....	657
No Replication Conflict Resolution.....	657
pagedresults.....	658
PasswordPolicy.....	659
PersistentSearch.....	660
Refresh Entry.....	663
replicateOperationalAttributes.....	663
Replication bind failure time stamp control.....	665
Replication Supplier ID Bind.....	665
Server Administration.....	666
SortKeyRequest.....	667
SortKeyResponse.....	667
Appendix D. Supported extended operations.....	669
Account status.....	669
Cascading control replication.....	670
changeLogAddEntry.....	672
Control replication.....	674
Control replication error log.....	675
Control replication queue.....	677
Effective password policy.....	678
GetDnForUserid.....	679
GetEffectiveACL.....	680
GetPrivileges.....	683
Quiesce or unquiesce context.....	684
Remote auditing.....	685
Remote authorization.....	685
RemoteCryptoCCA.....	686
RemoteCryptoPKCS#11.....	686
Replication topology.....	686
Start TLS.....	688
unloadRequest.....	689
User type.....	691
Appendix E. SMF records.....	693
SMF Record Type 83, subtype 3 records.....	693
RACF SMF unload utility output.....	697
Appendix F. Activity log records.....	707
Activity log start and end field descriptions.....	707
Activity log mergedRecord field descriptions.....	710
Appendix G. Guidelines for interoperability between non-z/OS TDS and z/OS	
TDS.....	715
Schema considerations.....	715
Import or export of directory entries.....	717
Functional considerations.....	717

Administrative group and roles considerations.....	718
Appendix H. Searching operational attributes.....	719
Appendix I. Accessibility.....	727
Notices.....	729
Terms and conditions for product documentation.....	730
IBM Online Privacy Statement.....	731
Policy for unsupported hardware.....	731
Minimum supported hardware.....	731
Trademarks.....	732
.....	733
Index.....	741

Figures

1. Directory hierarchy example.....	5
2. Sample DSNAOINI file	21
3. Overview of the LDAP configuration utility	26
4. Sample portion of ds.profile.....	29
5. LDAP configuration utility roles and responsibilities	33
6. General format of ds.conf.....	84
7. GDG JCL example.....	191
8. Sample schema entry.....	272
9. Before Modify DN operation.....	298
10. After Modify DN operation.....	299
11. Before Modify DN operation.....	299
12. After Modify DN operation.....	300
13. Before Modify DN operation.....	300
14. After Modify DN operation.....	301
15. Before Modify DN operation.....	306
16. After Modify DN operation.....	306
17. Suffix rename with no new superior.....	309
18. Suffix rename with new superior.....	310
19. Overlapping suffix rename A.....	311
20. Overlapping suffix rename B.....	312
21. Suffix rename to non-suffix entry.....	313
22. Rename non-suffix entry to suffix entry.....	314
23. RACF namespace hierarchy (Part 1 of 2).....	332

24. RACF namespace hierarchy (Part 2 of 2).....	332
25. Kerberos directory example.....	395
26. Native authentication example.....	402
27. CRAM-MD5 and DIGEST-MD5 authentication example.....	409
28. Group hierarchy and membership for the examples.....	420
29. Example of adding propagating ACL to existing entry in directory.....	449
30. Example of adding propagating ACL to existing entry in the directory.....	449
31. Example of setting up a non-propagating ACL	450
32. Example of adding an aclEntry attribute value.....	450
33. Example of modifying aclPropagate attribute.....	451
34. Example of removing a single aclEntry attribute value.....	451
35. Example of deleting an ACL from an entry.....	451
36. Example of adding a propagating set of entry owners to existing entry in the directory.....	452
37. Example of setting up a non-propagating entry owner.....	453
38. Example of adding an entryOwner attribute value.....	453
39. Example of modifying the ownerPropagate attribute.....	454
40. Example of removing a single entryOwner Attribute value.....	454
41. Example of deleting an entry owner set from an entry.....	454
42. Example of adding a group to access control information.....	455
43. Example of adding a group to entry owner information.....	455
44. Master-replica replication	476
45. Cascading replication	477
46. Peer-to-peer replication	477
47. Gateway replication.....	478
48. Master-replica topology.....	499

49. Peer-to-peer topology.....	502
50. Master-forwarder-replica topology.....	506
51. Gateway topology.....	511
52. Alias example.....	540
53. Example using the ref attribute.....	556
54. Setting up the servers.....	560
55. Server A database (LDIF input)	560
56. Server D configuration file.....	561
57. Referral example summary (servers A and E)	562
58. Referral example summary (server B1)	563
59. Referral example summary (server B2)	564
60. WLM ISPF rules classification panel	576
61. SDSF enclave display example.....	578

Tables

1. LDAP configuration utility roles and responsibilities.....	32
2. Configuration variable interactions.....	43
3. TDBM value definitions for DSTDBMDB.....	55
4. TDBM table space partitioning indexes and values	59
5. TDBM table space partitioning using EID range	59
6. SSL ciphers supported by the sslCipherSpecs configuration option	74
7. Checklist for the configuration file options	87
8. Options for db2CheckHealth.....	97
9. cn=configuration entry attribute descriptions.....	138
10. cn=replication,cn=configuration entry attribute descriptions.....	140
11. cn=Replication,cn=Log Management,cn=Configuration entry attribute descriptions.....	142
12. cn=safadmingroup,cn=configuration entry attribute descriptions.....	143
13. Configuration considerations	143
14. ibm-slapdAdminGroupMember objectclass schema definition (optional and required attributes)....	160
15. Administrative roles authorized to issue various extended operations and controls.....	163
16. Administrative group and roles extended operation	164
17. LDAP debug levels.....	169
18. Service levels for the associated z/OS release.....	180
19. LDAP_COMPAT_FLAGS levels and support.....	204
20. Summary of IBM TDS updates for z/OS Version 2 Release 3.....	208
21. Summary of IBM TDS updates for z/OS Version 2 Release 2.....	213
22. Sample script file.....	217
23. Names for running LDAP server utilities from TSO.....	219

24. Options for the db2pwwden utility.....	222
25. Considerations for using ldif2ds or ldapadd.....	240
26. General options for the ldapdiff utility.....	246
27. Server options for the ldapdiff supplier	247
28. Options for the ldapdiff consumer server	248
29. ldapexop general options.....	254
30. Mapping between Unicode and UTF-8.....	263
31. Syntax and default EQUALITY, ORDERING, and SUBSTR matching rules.....	273
32. Syntax and acceptable matching rules (EQUALITY, ORDERING, and SUBSTR).....	275
33. Character representations.....	281
34. Supported LDAP syntaxes - general use.....	282
35. Supported LDAP syntaxes - server use.....	284
36. Supported matching rules.....	285
37. LDAP return and reason codes returned to the client when binding to SDBM.....	319
38. Mapping of LDAP attribute names to RACF fixed fields (user).....	320
39. Mapping of LDAP attribute names to RACF fixed fields (group).....	324
40. Mapping of LDAP attribute names to RACF fixed fields (connection).....	325
41. Mapping of LDAP attribute names to RACF fixed fields (resource)	325
42. Mapping of LDAP attribute names to RACF fixed fields (setropts)	329
43. RACF backend behavior.....	334
44. SDBM search behaviors with different extended search settings.....	343
45. SDBM search filters that are processed by RACF.....	344
46. Password policy attributes and default values.....	365
47. Composite group password policy examples	374
48. Effective password policy examples.....	375

49. Password policy operational attributes in user entries.....	376
50. PasswordPolicy response control warnings.....	379
51. PasswordPolicy response control errors.....	379
52. Password policy extended operations.....	381
53. Kerberos attributes and object classes.....	390
54. Operating modes for native authentication binding.....	399
55. LDAP return and reason codes returned to the client when binding with native authentication.....	399
56. LDAP return and reason codes returned to the client when updating the password or password phrase.....	400
57. Behavior of native authentication in example 1.....	402
58. Behavior of native authentication in example 2.....	403
59. Behavior of CRAM-MD5 and DIGEST-MD5 authentication in example.....	409
60. ACL and entry owner attributesACL attributesentry owner attributes.....	425
61. Permissions that apply to an entire entry.....	429
62. Permissions that apply to attribute access classes.....	429
63. ibm-filterIP expansion examples.....	432
64. Replica entry schema definition (mandatory attributes)	459
65. Replica entry schema definition (optional attributes)	460
66. Additional optional replication attributes.....	461
67. Server roles.....	475
68. ibm-replicationContext objectclass schema definition (optional attribute).....	481
69. ibm-replicaGroup objectclass schema definition (optional and required attributes).....	481
70. ibm-replicaSubentry objectclass schema definition (optional and required attributes).....	482
71. ibm-replicationAgreement objectclass schema definition (required attributes).....	483
72. ibm-replicationAgreement objectclass schema definition (optional attributes)	484
73. ibm-replicationCredentialsSimple objectclass schema definition (required attributes).....	486

74. ibm-replicationCredentialsExternal objectclass schema definition (optional attributes)	487
75. ibm-replicationWeeklySchedule objectclass schema definition (optional attributes).....	488
76. ibm-replicationDailySchedule objectclass schema definition (optional attributes).....	490
77. ibm-slapedReplication objectclass schema definition (required and optional attributes).....	492
78. ibm-slapedSupplier objectclass schema definition (required and optional attributes).....	494
79. Topology setup.....	496
80. ibm-replicationFilter objectclass schema definition (required attributes).....	519
81. Description of advanced replication extended operations on the ldapexop utility.....	524
82. ibm-replicationContext operational attributes.....	526
83. ibm-replicationAgreement operational attributes.....	526
84. Object Identifiers (OIDs) for supported and enabled capabilities.....	567
85. LDBM benchmark data.....	580
86. Server statistics.....	586
87. Server and backend-specific statistics.....	587
88. Backend-specific statistics.....	588
89. Operations monitor statistics.....	589
90. LDAP event codes.....	693
91. LDAP extended relocates.....	693
92. Event type strings.....	697
93. Event qualifiers.....	697
94. Event specific fields for LDAP add event (Event code 1).....	697
95. Event specific fields for LDAP bind event (Event code 2).....	699
96. Event specific fields for LDAP compare event (Event code 3).....	700
97. Event specific fields for LDAP connect, delete, disconnect, and unbind events (Event code 4, 5, 6, 11).....	701
98. Event specific fields for LDAP extended operations event (Event code 7).....	701

99. Event specific fields for LDAP modify event (Event code 8).....	702
100. Event specific fields for LDAP modify DN event (Event code 9).....	704
101. Event specific fields for LDAP search event (Event code 10).....	705
102. Start or end activity log fields.....	707
103. mergedRecord activity log fields.....	711
104. Search operational attributes.....	719

About this document

This document supports z/OS (5650-ZOS) and explains the LDAP server. The LDAP server supports Lightweight Directory Access Protocol (LDAP) and runs as a stand-alone daemon. It is based on a client/server model that provides client access to an LDAP server. The LDAP server provides an easy way to maintain directory information in a central location for storage, updating, retrieval, and exchange.

Intended audience

This document is intended to assist LDAP administrators. LDAP administrators should be experienced and have previous knowledge of directory services. It is also intended for anyone that will be implementing the directory service.

Typographic conventions

Bold

Bold words or characters represent system elements that you must enter into the system literally, such as commands. They are shown in bold monospace.

options

The options element describes an option that can be used to modify a command. They are shown in monospace.

Italic

Italic words or characters represent values for variables that you must supply.

Example Font

Examples and information displayed by the system appear in constant width type style.

[]

Brackets enclose optional items in format and syntax descriptions.

{ }

Braces enclose a list from which you must choose an item in format and syntax descriptions.

|

A vertical bar separates items in a list of choices.

< >

Angle brackets enclose the name of a key on the keyboard.

...

Horizontal ellipsis points indicate that you may repeat the preceding item one or more times.

\

A backslash is used as a continuation character when you enter commands from the shell that exceed one line (255 characters). If the command exceeds one line, use the backslash character \ as the last nonblank character on the line to be continued, and continue the command on the next line.

z/OS information

This information explains how z/OS references information in other documents and on the web.

When possible, this information uses cross-document links that go directly to the topic in reference using shortened versions of the document title. For complete titles and order numbers of the documents for all products that are part of z/OS, see *z/OS Information Roadmap*.

How to provide feedback to IBM

We welcome any feedback that you have, including comments on the clarity, accuracy, or completeness of the information. For more information, see [How to send feedback to IBM](#).

Summary of changes

This information includes terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations for the current edition are indicated by a vertical line to the left of the change.

Note: IBM z/OS policy for the integration of service information into the z/OS product documentation library is documented on the z/OS Internet Library under [IBM z/OS Product Documentation Update Policy](http://www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy) (www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy).

Summary of changes for z/OS 3.2

The following content is new, changed, or no longer included in z/OS 3.2.

New

The following content is new.

September 2025 release

- The `radminAuthCheck` configuration option is added. These sections are updated:
 - [“Additional setup when using SDBM”](#) on page 48
 - [“Configuration file options”](#) on page 90 (`radminAuthCheck`)
 - [“RACF authorization ”](#) on page 318

Changed

The following content is changed.

September 2025 release

- None.

Deleted

The following content is deleted.

September 2025 release

- None.

Summary of changes for z/OS 3.1

The following content is new, changed, or no longer included in z/OS 3.1.

New

The following content is new.

April 2024 refresh

- Information is added about RACF class search restrictions. See [“Searching resource profiles”](#) on page 354.

September 2023 release

- The **ldapdiff** utility requires IBM Semeru Runtime Certified Edition for z/OS, Version 11 or later, to be installed on the system. For more information, see the following sections.
 - [“Using a Java keystore or RACF key ring for ldapdiff”](#) on page 221

- [“The ldapdiff utility” on page 245](#)

Changed

The following content is changed.

February 2025 refresh

- A reference is updated in [“Relative distinguished names ” on page 267.](#)

September 2024 refresh

- A restriction is added in [“Running the LDAP server using the sample JCL ” on page 167.](#) If the PC callable service is configured with the z/OS LDAP server, you cannot use the REUSASID parameter when restarting the server.

April 2024 refresh

- Information is added about service levels for z/OS releases. See [“Displaying performance information and server settings” on page 179.](#)
- Additional information is added to [“TDBM performance considerations” on page 581.](#)

February 2024 refresh

- Clarification is added to [“Setting up an LDAP client” on page 75.](#)

January 2024 refresh

- Additions are made to the usage notes for the **ldif2ds** utility. See [“Usage notes for the ldif2ds utility” on page 244.](#)
- [“SDBM search capabilities” on page 343](#) is updated with a clarification.

September 2023 release

- None.

Deleted

The following content was deleted.

September 2023 release

- None.

Part 1. Administration

Chapter 1. Introducing the LDAP server

The z/OS Lightweight Directory Access Protocol (LDAP) server, part of IBM Tivoli® Directory Server for z/OS (LDAP), is based on a client/server model that provides client access to an LDAP server. An LDAP directory provides an easy way to maintain directory information in a central location for storage, update, retrieval, and exchange.

The LDAP server provides the following functions:

- Interoperability with any Version 2 or Version 3 LDAP directory client
- Access controls on directory information, using static, dynamic, and nested groups
- Secure Sockets Layer (SSL) communication (SSL V3 and TLS V1)
- Start TLS (Transport Layer Security) activation of secure communication
- Client and server authentication using SSL/TLS
- Password encryption or hashing
- Password policy
- Basic replication
- Advanced replication
- Referrals
- Aliases
- Change logging
- LDAP Version 2 and Version 3 protocol support
- Schema publication and update
- Kerberos authentication
- Native authentication
- CRAM-MD5 (Challenge-Response Authentication Method) and DIGEST-MD5 authentication
- Root DSE information
- LDAP access to information stored in RACF®
- Support for sharing directory data in a sysplex
- Plug-in support to extend the LDAP server

This information describes how to install, configure, and run the stand-alone LDAP server and other LDAP programs. It is intended for newcomers and experienced administrators alike. This section provides a basic introduction to directory services, and the directory service that is provided by the LDAP server in particular.

z/OS IBM Tivoli Directory Server Client Programming for z/OS describes the LDAP client application programming interfaces (APIs) you can use to develop LDAP applications.

z/OS IBM Tivoli Directory Server Messages and Codes for z/OS describes the messages and reason codes that are issued by the LDAP server.

z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS describes the LDAP server application programming interfaces (APIs) you can use to develop a plug-in for the LDAP server and the ICTX and remote crypto plug-ins provided by the z/OS LDAP server.

What is a directory service?

A directory is like a database, but tends to contain more descriptive, attribute-based information. The information in a directory is generally read much more often than it is written. As a consequence, directories do not typically implement the complicated transaction or rollback schemes that relational

databases use for doing high-volume complex updates. Directory updates are typically simple all-or-nothing changes, if they are allowed at all. Directories are tuned to give quick-response to high-volume lookup or search operations. They might be able to replicate information widely in order to increase availability and reliability, while reducing response time. When directory information is replicated, temporary inconsistencies between the replicas are considered acceptable, if they get in sync eventually.

There are many different ways to provide a directory service. Different methods allow different kinds of information to be stored in the directory, place different requirements on how that information can be referenced, queried, and updated, how it is protected from unauthorized access, and so on. Some directory services are local, providing service to a restricted context (for example, the finger service on a single machine). Other services are global, providing service to a much broader context (for example, the entire Internet). Global services are typically distributed, meaning that the data they contain is spread across many machines, all which cooperate to provide the directory service. Typically a global service defines a uniform namespace which gives the same view of the data no matter where you are in relation to the data itself.

What is LDAP?

The LDAP server's model for the directory service is based on a global directory model called LDAP, which stands for the Lightweight Directory Access Protocol. LDAP Version 2 (V2) and LDAP Version 3 (V3), both supported in z/OS, are directory service protocols that run over TCP/IP. The details of LDAP V2 are defined in RFC 1777 (tools.ietf.org/html/rfc1777) and the details of LDAP V3 are defined in the set of IETF RFCs 2251 - 2256. "[RFCs supported by z/OS LDAP](#)" on page 12 shows the entire list of supported RFCs.

This section gives an overview of LDAP from a user's perspective.


How is information stored in the directory?

The LDAP directory service model is based on *entries*. An entry is a collection of attributes that has a name, called a *distinguished name* (DN). The DN is used to refer to the entry unambiguously. Each of the entry's attributes has a type and one or more values. The types are typically mnemonic strings, like `cn` for common name, or `mail` for email address. The values depend on what type of attribute it is. For example, a `mail` attribute might contain an email address with an attribute value of `thj@vnet.ibm.com`. A `jpegPhoto` attribute would contain a photograph in binary JPEG format.

How is the information arranged?

In LDAP, directory entries are arranged in a hierarchical tree-like structure that sometimes reflects political, geographic, or organizational boundaries. Entries representing countries appear at the top of the tree. Below them are entries representing states or national organizations. Under them might be entries representing people, organizational units, printers, documents, or just about anything else you can think of. [Figure 1 on page 5](#) shows an example LDAP directory tree, which should help make things clear.

LDAP Directory Content

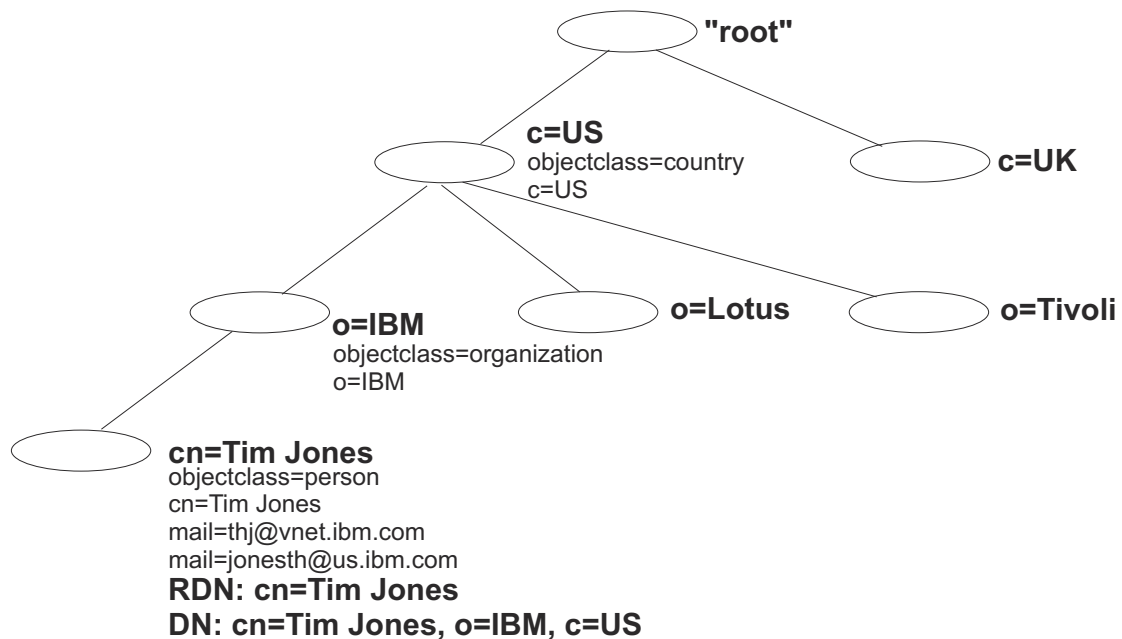

- All entries have attributes (and values)
- objectclass is an attribute in all entries
- Attributes grouped into required and allowed

Figure 1. Directory hierarchy example

In addition, LDAP allows you to control which attributes are required and allowed in an entry through the use of a special attribute called *object class*. The values of the `objectClass` attribute determine the attributes that can be specified in the entry.

How is the information referenced?

An entry is referenced by its distinguished name, which is constructed by taking the name of the entry itself (called the *relative distinguished name*, or RDN) and concatenating the names of its ancestor entries. For example, the entry for Tim Jones in the example in the previous section has an RDN of `cn=Tim Jones` and a DN of `cn=Tim Jones, o=IBM, c=US`. The full DN format is described in [RFC 2253](https://tools.ietf.org/html/rfc2253) (tools.ietf.org/html/rfc2253).

The z/OS LDAP server supports different naming formats. While naming based on country, organization, and organizational unit is one method, another method is to name entries based on an organization's registered DNS domain name. Names of this form look like: `cn=Tim Smith, dc=vnet, dc=ibm, dc=com`. These naming formats can also be mixed, for example: `cn=Tim Brown, ou=Sales, dc=ibm, dc=com`.

How is the information accessed?

LDAP defines operations for interrogating and updating the directory. Operations are provided for adding/deleting an entry to/from the directory, changing an existing entry, and changing the name of an entry. Most of the time, though, LDAP is used to search for information in the directory. The LDAP search operation allows some portion of the directory to be searched for entries that match some criteria specified by a search filter. Information can be requested from each entry that matches the criteria. The LDAP compare operation allows a value to be tested in an entry without returning that value to the client.

An example of search is, you might want to search the entire directory subtree below IBM for people with the name Tim Jones, retrieving the email address of each entry found. LDAP lets you do this easily. Or you might want to search the entries directly below the c=US entry for organizations with the string Acme in their name, and that have a FAX number. LDAP lets you do this too. The section [“How does LDAP work?”](#) on page 6 describes in more detail what you can do with LDAP and how it might be useful to you.

How is the information protected from unauthorized access?

LDAP client requests can be performed using an anonymous identity or the LDAP bind operation can be used to supply an authentication identity. The LDAP server can use the identity to perform authorization checking when accessing entries in the directory. An Access Control List (ACL) provides a means to protect information stored in an LDAP directory. An ACL is used to restrict access to different portions of the directory, to specific directory entries, or to information within an entry. Access control can be specified for individual users or for groups. This authentication process can be used by distributed applications which must implement some form of authentication.

How does LDAP work?

LDAP directory service is based on a client/server model. One or more LDAP servers contain the data making up the LDAP directory tree. An LDAP client application connects to an LDAP server using LDAP APIs and asks it a question. The server responds with the answer, or with a pointer to where the application can get more information (typically, another LDAP server). With a properly constructed namespace, no matter which LDAP server an application connects to, it sees the same view of the directory; a name presented to one LDAP server references the same entry it would at another LDAP server. This is an important feature of a global directory service, which LDAP servers can provide.

What about X.500?

LDAP was originally developed as a front end to X.500, the OSI directory service. X.500 defines the Directory Access Protocol (DAP) for clients to use when contacting directory servers. DAP has been characterized as a heavyweight protocol that runs over a full OSI stack and requires a significant amount of computing resources to run. LDAP runs directly over TCP and provides most of the functionality of DAP at a much lower cost.

An LDAP server is meant to remove much of the burden from the server side just as LDAP itself removed much of the burden from clients. If you are already running an X.500 service and you want to continue to do so, you can probably stop reading this guide, which is all about running LDAP through an LDAP server without running X.500. If you are not running X.500, want to stop running X.500, or have no immediate plans to run X.500, read on.

What are the capabilities of the z/OS LDAP server?

You can use the z/OS LDAP server to provide a directory service of your own. Your directory can contain just about anything you want to put in it. Some of the z/OS features of the LDAP servers include:

Multiple concurrent database instances

These are referred to as *backends*. The LDAP server can be configured to serve multiple databases at the same time. A single z/OS LDAP server can respond to requests for many logically different portions of the LDAP tree. A z/OS LDAP server can be configured to provide access to RACF and store application-specific information.

Robust general-purpose databases

The LDAP server comes with TDBM and LDBM backends. There are no restrictions on the types of information that these backends can contain. The TDBM backend is based on Db2® and is a highly scalable database implementation. The LDBM backend keeps its entries in memory for quick access and requires a minimum amount of setup. When the LDAP server is not running, LDBM stores its directory information in z/OS UNIX System Services files.

Note: Db2 is required to use TDBM, but is not required for LDBM.

Access to RACF data

The LDAP server can be configured to provide read/write access to RACF user, group, connection, and general resource profiles by using the LDAP protocol. The LDAP server can also be used to manage RACF options that affect classes. (RACF is a component of the Security Server for z/OS.) If the RACF data is shared across the sysplex, then users, groups, connections, and resource profiles in the sysplex can be managed by using LDAP. The LDAP server's access to RACF is managed by an additional configurable backend called SDBM. See [Chapter 17, “Accessing RACF information,” on page 317](#) for more information.

Note: To use SDBM just for authentication (LDAP bind processing), any security manager implementing the SAF service that is required by the RACROUTE REQUEST=VERIFY,ENVIR=CREATE macro can be used. A password or a password phrase can be used for authentication. To use SDBM for accessing and updating user, group, connection, and resource profile information, and to set class options, RACF is required.

Configuration backend

The LDAP server can be configured with a CDBM backend. The CDBM backend is used to store configuration information. See [“Setting up for CDBM” on page 64](#) for more information.

Access control

The LDAP server provides a rich and powerful access control facility, allowing you to control access to the information in your database or databases. You can control access to entries based on LDAP authentication information, including users and groups. Group membership can be either static, dynamic, or nested. Access control is configurable down to individual attributes within entries. Also, access controls can be set up to explicitly deny access to information. See [Chapter 24, “Using access control,” on page 425](#) about access control and [Chapter 23, “Static, dynamic, and nested groups,” on page 413](#) for more information about groups.

Threads

The LDAP server is threaded for optimal performance. A single multi-threaded z/OS LDAP server process handles all incoming requests, reducing the amount of system overhead required.

Multiple concurrent servers

The LDAP server can be configured to permit multiple LDAP servers to serve the TDBM, LDBM, CDBM, or GDBM directory at the same time. The multiple servers might run on the same z/OS image, and they might run on multiple z/OS images in a Parallel Sysplex. This improves availability and might offer improved performance in certain configurations. See [“Configuring the operational mode ” on page 145](#) for more information.

Basic replication

The LDAP server can be configured to maintain replica copies of its database. Master/consumer replication is vital in high-volume environments where a single LDAP server just does not provide the necessary availability or reliability. Peer to peer replication is also supported. See [Chapter 25, “Basic replication,” on page 457](#) for more information. This feature is contrasted with multiple concurrent servers.

Advanced replication

The LDAP server can be configured to act as a supplier, consumer, cascading, or gateway server in an advanced replication environment. An advanced replication environment allows for only certain subtrees or entries in a TDBM, LDBM, or CDBM backend to be replicated to other servers. See [Chapter 26, “Advanced replication,” on page 473](#) for more information.

Referrals

The LDAP server is able to refer clients to additional directory servers. Using referrals you can distribute processing overhead, distribute administration of data along organizational boundaries,

and provide potential for widespread interconnection beyond an organization's own boundaries. See [Chapter 29, “Referrals,” on page 555](#) for more information.

Aliases

An alias entry can be created in the directory to point to another entry in the directory. During search operations, an alias entry can provide a convenient public name for an entry or subtree, hiding the more complex actual name of the entry or subtree. It can also avoid the need to duplicate an entry in multiple subtrees. See [Chapter 27, “Alias,” on page 537](#) for more information.

Change Logging

The LDAP server can be configured to create change log entries in the GDBM backend. Each change log entry contains information about a change to an entry in a TDBM, CDBM, or LDBM backend, to the LDAP server schema, or to a RACF user, group, connection, or resource profile. The GDBM backend can be configured to store its entries in Db2 (similar to TDBM) or in z/OS UNIX System Services files (similar to LDBM). See [Chapter 28, “Change logging,” on page 545](#) for more information.

Configuration

The LDAP server configuration process can be simplified by using the **dsconfig** configuration utility. This utility requires minimal user interaction and allows novice LDAP users to quickly configure an LDAP server. See [Chapter 4, “Configuring an LDAP server using the dsconfig utility,” on page 25](#) for more information.

If you do not use the **dsconfig** utility, the LDAP server is highly configurable through a single configuration file that allows you to change just about everything you would ever want to change. Configuration options have reasonable defaults, making your job much easier. See [“Creating the ds.conf file” on page 83](#) for more information.

Secure communications

The LDAP server can be configured to encrypt data to and from LDAP clients using the z/OS Cryptographic Services System SSL. The LDAP server supports the Start TLS extended operation to switch a non-secure connection to a secure connection. It has various ciphers for encryption to choose from, all that provide server and optionally client authentication by using X.509 certificates. See [“Setting up for SSL/TLS” on page 68](#) for more information.

Dynamic workload management

The LDAP server can be configured to participate in dynamic workload management in a Parallel Sysplex by using TCP/IP connection optimization. With multiple concurrent server instances configured in this way, availability is improved, including resource usage. In addition, performance improvements might be experienced as sysplex resource usage is more evenly balanced across z/OS systems in the sysplex. See [“Configuring the operational mode” on page 145](#) for more information.

Retrieve Policy Director data

This capability is deprecated. The z/OS LDAP server, when using the EXOP backend, supports two LDAP extended operations, `GetDnForUserid` and `GetPrivileges`, that retrieve Policy Director data from any LDAP server. See [Chapter 22, “Using extended operations to access Policy Director data,” on page 411](#) for more information.

Native authentication

The z/OS LDAP server allows clients to bind to entries in a TDBM, LDBM, or CDBM backend by using the system for verifying the authentication attempt. The client can perform a simple bind supplying an LDAP DN of an entry in a TDBM, LDBM, or CDBM backend along with a security manager-maintained password or password phrase. Password or password phrase authentication is then performed by the security manager. See [Chapter 20, “Native authentication,” on page 397](#) for more information.

Note: To use native authentication, any security manager implementing the SAF service required by the `RACROUTE REQUEST=VERIFY,ENVIR=CREATE` macro function call can be used.

LDAP Version 3 protocol support

The LDAP server provides support for Version 3 of the LDAP protocol in addition to the LDAP Version 2 protocol. Version 3 includes:

- All protocol operations
- Implicit bind

- Certificate (or Simple Authentication and Security Layer) bind
- Version 3 referrals
- Aliases
- Controls
- Root DSE support
- Globalization (UTF-8) support
- Modify name supported for all entries including subtree move
- Schema publication
- Additional syntax support
- Online schema update capability

Dynamic schema

The LDAP server allows the schema to be changed dynamically through the LDAP protocol. See [Chapter 15, “LDAP directory schema,”](#) on page 271 for more information.

Globalization (UTF-8) support

The LDAP server allows storage, update, and retrieval, through LDAP operations, of national language data using LDAP Version 3 protocol. See [“UTF-8 support”](#) on page 263 for more information.

SASL external bind and client and server authentication

The LDAP server allows client applications to use a certificate when communicating with the server using SSL/TLS communications. To use a certificate on bind, the server must be configured to perform both client and server authentication. This requirement ensures that both entities are who they claim to be. See [“Setting up for SSL/TLS”](#) on page 68 for more information.

SASL GSS API Kerberos bind with mutual authentication

The LDAP server allows clients to bind to the server using Kerberos credentials. Mutual authentication is used to verify both the client and server identities. See [Chapter 19, “Kerberos authentication,”](#) on page 389 for more information.

SASL CRAM-MD5 and DIGEST-MD5 authentication

The LDAP server allows clients to bind to the server using DIGEST-MD5 ([RFC 2831 \(tools.ietf.org/html/rfc2831\)](http://tools.ietf.org/html/rfc2831)) and CRAM-MD5 ([RFC 2195 \(tools.ietf.org/html/rfc2195\)](http://tools.ietf.org/html/rfc2195)) authentication bind methods. See [Chapter 21, “CRAM-MD5 and DIGEST-MD5 authentication,”](#) on page 407 for more information.

Support for root DSE

The LDAP server supports search operations, including subtree search, against the root of the directory tree as described in [RFC 2251 \(tools.ietf.org/html/rfc2251\)](http://tools.ietf.org/html/rfc2251). The so-called Root DSE can be accessed using LDAP V3 search operations. See [“Root DSE”](#) on page 565 for more information.

Extended group membership searching

The LDAP server supports extended group membership searching which allows the LDAP server to find a DN that might be a member of static and nested groups in a backend (TDBM, LDBM, or CDBM) where the DN does not reside. The LDAP server can find the group memberships for the DNs in the other backends that are configured. See the `extendedGroupSearching` configuration file option, [“Configuration file options”](#) on page 90 for more information.

Supported server controls

The LDAP server supports the following server controls.

```
authenticateOnly
Do Not Replicate
IBMLdapProxyControl
IBMModifyDNRealignDNAttributesControl
IBMModifyDNTimeLimitControl
IBMSchemaReplaceByValueControl
manageDsaIT
No Replication Conflict Resolution
```


- pagedresults
- PasswordPolicy
- PersistentSearch
- Refresh Entry
- replicateOperationalAttributes
- Replication Supplier ID Bind
- Server Administration
- SortKeyRequest

See [Appendix C, “Supported server controls,” on page 653](#) for more information.

Supported extended operations

The LDAP server supports the following attributes:

- Account status
- Cascading control replication
- changeLogAddEntry
- Control replication
- Control replication error log
- Control replication queue
- Effective password policy
- GetDnForUserid
- GetEffectiveACL
- GetPrivileges
- Quiesce or unquiesce context
- Remote auditing
- Remote authorization
- RemoteCryptoPKCS#11
- RemoteCryptoCCA
- Replication topology
- Start TLS
- unloadRequest
- User type

See [Appendix D, “Supported extended operations,” on page 669](#) for more information.

Attribute encryption or hashing

The LDAP server supports encryption or hashing of the values of several critical attributes to prevent unauthorized access to these attribute values in TDBM, LDBM, and CDBM backends. The attributes that can be encrypted or hashed are as follows:

- ibm-replicaKeyPwd
- ibm-slapdAdminPw
- ibm-slapdMasterPw
- replicaCredentials
- secretKey
- userPassword

See [“Configuring for encryption or hashing” on page 76](#) for more information.

Multiple socket ports

The LDAP server can be configured to listen for secure and nonsecure connections from clients on one or more IPv4 or IPv6 interfaces on a system. With the `listen` configuration option on the LDAP server, the hostname, a specific IPv4 or IPv6 address, or all active and available IPv4 and IPv6 addresses available on the system, along with the port number, can target one or multiple IPv4 or IPv6 interfaces on a system. See the `listen` configuration option, [“listen ldap_URL” on page 106](#), for more information.

Persistent search

The LDAP server provides an event notification mechanism for applications, directories, and meta directories that must maintain a cache of directory information or to synchronize directories when changes are made to an LDAP directory. Persistent search allows these applications to be notified when a change has occurred. See [Appendix C, “Supported server controls,” on page 653](#) for more information.

ibm-entryuuid attribute

The LDAP server generates a unique identifier for any entry that is created or modified and does not already have a unique identifier assigned. The unique identifier is stored in the `ibm-entryuuid` attribute. The `ibm-entryuuid` attribute is replicated to servers that support the `ibm-entryuuid` attribute. See [“Configuration file options” on page 90](#) to configure the `serverEtherAddr` option in the LDAP server configuration file.

ibm-entryChecksum and ibm-entryChecksumOp attributes

The LDAP server supports the querying of a checksum of all non-operational attributes with the `ibm-entryChecksum` operational attribute.

The LDAP server also supports the `ibm-entryChecksumOp` operational attribute, which is a checksum of the following operational attributes: `aclEntry`, `aclPropagate`, `entryOwner`, `ownerPropagate`, `creatorsName`, `modifiersName`, `createTimestamp`, `modifyTimestamp`, `ibm-entryuuid`, `ibm-pwdIndividualPolicyDN`, and `ibm-pwdGroupPolicyDN`. The `ibm-entryChecksum` and `ibm-entryChecksumOp` operational attributes are used by the **ldapdiff** utility to simplify comparisons of entries between two different servers. See [“The ldapdiff utility” on page 245](#) for more information.

ibm-allMembers and ibm-allGroups attributes

The LDAP server supports the querying of the members of static, dynamic, and nested groups in a TDBM, LDBM, or CDBM backend by using the `ibm-allMembers` operational attribute. The LDAP server also supports the querying of the static, dynamic, and nested groups that a user belongs to with the `ibm-allGroups` operational attribute.

Plug-in support

The LDAP server can be configured to provide access to extensions to the LDAP server. The extensions are supplied by other products or created by you. Plug-in extensions are invoked before, during, or after the LDAP server processes a client request. The z/OS LDAP server provides two client operation plug-in extensions of its own: `remote crypt`, and `ICTX`. See the `plugin` configuration option in [Chapter 8, “Customizing the LDAP server configuration,” on page 83](#) for more information about configuring a plug-in extension. For more information about creating a plug-in extension and the `remote crypt` and `ICTX` plug-in extensions, see [Plug-ins for IBM TDS for z/OS in z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS](#).

Workload Management

The LDAP server can be configured to use transaction names configured in Workload Management (WLM) to use different performance goals for LDAP operations based on the client's IP address or the bound user's distinguished name (DN). See [“Workload Management \(WLM\)” on page 575](#) for more information about using WLM with the LDAP server.

Comparing directories

The **ldapdiff** utility is provided to compare the directory contents of two different LDAP servers. This utility is useful in determining and optionally synchronizing data between a master and replica server before configuring basic or advanced replication. For more information, see [“The ldapdiff utility” on page 245](#).

Extended operations utility

The **ldapexop** utility provides a command line interface for the following extended operations: `Account status`, `Cascading control replication`, `Control replication`, `Control replication error log`, `Control replication queue`, `Effective password policy`, `GetEffectiveACL`, `User type`, `Quiesce or unquiesce context`, and `Replication topology`. See [“The ldapexop utility” on page 253](#) for more information.

Password policy

The LDAP server supports password policy, which is a set of rules that control how passwords are defined, used, and administered. See [Chapter 18, “Password policy,” on page 363](#) for more information.

Group search limits

Groups can be used to set specific size and time limits for searches requested by members of the group. This ability provides greater control over usage of LDAP server resources during search operations. See [“Managing group search limits” on page 416](#) for more information.

Paged and sorted search results

The LDAP server supports paged and sorted search results. Paged search results provide paging capabilities for LDAP client applications that want to receive just a subset of search results at a time. Sorted search results enable LDAP client applications to receive sorted search results based on a list of criterion, where each criteria represents a sort key. See [“pagedresults” on page 658](#) and [“SortKeyRequest” on page 667](#) for more information.

Administrative group and roles

The LDAP root administrator can delegate administrative authority to different users by placing them in the administrative group and assigning one or more administrative roles. The roles are assigned in the LDAP administrative group member entry or alternately the roles are assigned in RACF. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information.

Participation in multilevel security

Multilevel security is an enhanced security environment that can be configured on a z/OS system from the SECLABEL class and various SECLABEL-related options. In this environment, the security server and trusted resource managers enforce mandatory access control policies in addition to the typical discretionary access control policies. Resource managers that do not support mandatory access control processing can participate in a multilevel secure system, if they are physically managed, to guarantee that all information made available by that resource manager has the same single security label and all users of the resource manager are permitted to that security label. These servers are referred to as single-level security. Each LDAP server can participate in a multilevel security environment by being configured as a single-level server. For more information about configuring a z/OS system for multilevel security and how to configure an LDAP server in that environment, see [z/OS Planning for Multilevel Security and the Common Criteria](#).

RFCs supported by z/OS LDAP

The z/OS LDAP server supports all or parts of the following Internet Engineering Task Force (IETF) request for comments:

- [RFC 1738 \(tools.ietf.org/html/rfc1738\)](https://tools.ietf.org/html/rfc1738)
- [RFC 1823 \(tools.ietf.org/html/rfc1823\)](https://tools.ietf.org/html/rfc1823)
- [RFC 2052 \(tools.ietf.org/html/rfc2052\)](https://tools.ietf.org/html/rfc2052)
- [RFC 2104 \(tools.ietf.org/html/rfc2104\)](https://tools.ietf.org/html/rfc2104)
- [RFC 2195 \(tools.ietf.org/html/rfc2195\)](https://tools.ietf.org/html/rfc2195)
- [RFC 2222 \(tools.ietf.org/html/rfc2222\)](https://tools.ietf.org/html/rfc2222)
- [RFC 2247 \(tools.ietf.org/html/rfc2247\)](https://tools.ietf.org/html/rfc2247)
- [RFC 2251 \(tools.ietf.org/html/rfc2251\)](https://tools.ietf.org/html/rfc2251)
- [RFC 2252 \(tools.ietf.org/html/rfc2252\)](https://tools.ietf.org/html/rfc2252)
- [RFC 2253 \(tools.ietf.org/html/rfc2253\)](https://tools.ietf.org/html/rfc2253)
- [RFC 2254 \(tools.ietf.org/html/rfc2254\)](https://tools.ietf.org/html/rfc2254)
- [RFC 2255 \(tools.ietf.org/html/rfc2255\)](https://tools.ietf.org/html/rfc2255)
- [RFC 2256 \(tools.ietf.org/html/rfc2256\)](https://tools.ietf.org/html/rfc2256)
- [RFC 2279 \(tools.ietf.org/html/rfc2279\)](https://tools.ietf.org/html/rfc2279)

- [RFC 2373 \(tools.ietf.org/html/rfc2373\)](https://tools.ietf.org/html/rfc2373)
- [RFC 2696 \(tools.ietf.org/html/rfc2696\)](https://tools.ietf.org/html/rfc2696)
- [RFC 2713 \(tools.ietf.org/html/rfc2713\)](https://tools.ietf.org/html/rfc2713)
- [RFC 2714 \(tools.ietf.org/html/rfc2714\)](https://tools.ietf.org/html/rfc2714)
- [RFC 2732 \(tools.ietf.org/html/rfc2732\)](https://tools.ietf.org/html/rfc2732)
- [RFC 2743 \(tools.ietf.org/html/rfc2743\)](https://tools.ietf.org/html/rfc2743)
- [RFC 2744 \(tools.ietf.org/html/rfc2744\)](https://tools.ietf.org/html/rfc2744)
- [RFC 2820 \(tools.ietf.org/html/rfc2820\)](https://tools.ietf.org/html/rfc2820)
- [RFC 2829 \(tools.ietf.org/html/rfc2829\)](https://tools.ietf.org/html/rfc2829)
- [RFC 2830 \(tools.ietf.org/html/rfc2830\)](https://tools.ietf.org/html/rfc2830)
- [RFC 2831 \(tools.ietf.org/html/rfc2831\)](https://tools.ietf.org/html/rfc2831)
- [RFC 2849 \(tools.ietf.org/html/rfc2849\)](https://tools.ietf.org/html/rfc2849)
- [RFC 2891 \(tools.ietf.org/html/rfc2891\)](https://tools.ietf.org/html/rfc2891)
- [RFC 3377 \(tools.ietf.org/html/rfc3377\)](https://tools.ietf.org/html/rfc3377)
- [RFC 4517 \(tools.ietf.org/html/rfc4517\)](https://tools.ietf.org/html/rfc4517)
- [RFC 4523 \(tools.ietf.org/html/rfc4523\)](https://tools.ietf.org/html/rfc4523)

Although the LDAP V3 protocol RFCs are listed as supported, the specific function that z/OS LDAP supports is listed in the "LDAP Version 3 protocol support" section. See [“What are the capabilities of the z/OS LDAP server?”](#) on page 6 for more information.

Note:

1. RFC 2251 is listed as supported, however, the z/OS LDAP server does not support the documented binary option.
2. RFCs 2251 and 2254 are listed as supported, however, the z/OS LDAP server does not support extensible search filters. Approximate search filters are treated as equality search filters in the z/OS LDAP server.
3. RFC 2252 is listed as supported, however, the z/OS LDAP server does not support all documented schema syntaxes. See Chapter 15, “LDAP directory schema,” on page 271 for more information about the schema syntaxes supported by the z/OS LDAP server.

LDAP RFCs rely on the International Telecommunication Union (ITU-T) standards to define many of the basic constructs:

X.500 The Directory: Overview of Concepts, Models and Services
X.501 The Directory: Models
X.520 The Directory: Selected Attribute Types
X.690 Abstract Syntax Notation One (ASN.1)

Draft RFCs

The z/OS LDAP server supports all or parts of the following request for comment (RFC) draft:

Password Policy for LDAP directories

Superseded RFCs

The following obsolete RFCs were implemented by the z/OS LDAP client and server but have been superseded by current RFCs:

[RFC 1777 \(tools.ietf.org/html/rfc1777\)](https://tools.ietf.org/html/rfc1777)
[RFC 1778 \(tools.ietf.org/html/rfc1778\)](https://tools.ietf.org/html/rfc1778)
[RFC 1779 \(tools.ietf.org/html/rfc1779\)](https://tools.ietf.org/html/rfc1779)
[RFC 1959 \(tools.ietf.org/html/rfc1959\)](https://tools.ietf.org/html/rfc1959)

[RFC 1960 \(tools.ietf.org/html/rfc1960\)](http://tools.ietf.org/html/rfc1960)

Chapter 2. Planning and roadmap

This topic:

- Shows you where to find information that helps you plan your directory content.
- Contains a roadmap that points you to information that might be helpful in preparing for your LDAP server configuration.

Planning directory content

Before configuring and populating your database, determine:

- What type of data you are going to store in the directory.

You should decide on what sort of schema you need to support the type of data you want to keep in your directory. The directory server is shipped with a standard set of attribute type and object class definitions.

Before you begin adding entries to the directory, you might need to add new attribute type and object class definitions that are customized to your data.

Schema definition styles are specific to the backend or data store being configured. Once you have determined which backends to configure, see [Chapter 15, “LDAP directory schema,” on page 271](#) or [“Setting up for SDBM” on page 62](#) for more information.

- How you want to structure your directory data.

See [Chapter 14, “Data model,” on page 267](#) for more information.

- A set of policies for access permissions.

See [Chapter 24, “Using access control,” on page 425](#) for more information.

LDAP server roadmap

[“Steps for installing and running LDAP” on page 15](#) is a roadmap that points you to information that may be helpful in preparing for your LDAP server configuration.

See [Chapter 11, “Migrating to z/OS,” on page 203](#) if you have a previous release of the LDAP server that is installed on your system.

For complete instructions for installing the LDAP server product, see *z/OS Program Directory* in the z/OS Internet library (www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary), which comes with the LDAP server tape or cartridge. Be sure to read the license agreement in [z/OS Licensed Program Specifications](#), which is also included in the box.

Important: Before you proceed, review the *Memo to Users*, which describes any late changes to the procedures in this information. A printed copy is included with the LDAP server tape or cartridge.

Steps for installing and running LDAP

1. If you are configuring your LDAP server for WebSphere® Application Server for z/OS, you must review the WebSphere documentation for details about the LDAP server requirements.
2. If you are configuring your LDAP server for z/OS Enterprise Identity Mapping (EIM), you must review the z/OS EIM documentation for details on LDAP server requirements.
3. If you want to see how a working LDAP server looks, you must review the `/usr/lpp/ldap/examples/sample_server` directory, which contains everything necessary to set up a sample LDAP server. See the `ds.README` file in this directory for complete instructions.

4. If you are migrating from a previous release of the LDAP server, you must review [Chapter 11, “Migrating to z/OS,”](#) on page 203.
5. If this is the first time you are installing the z/OS LDAP server, you must read the following documents that are included in the box with the z/OS LDAP server tape or cartridge:
 - *z/OS Program Directory* in the z/OS Internet library (www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary) for the complete installation instructions.
 - *z/OS Licensed Program Specifications*, which contains the license agreement.
 - *Memo to Users*, which describes any late changes to the procedures in this information.
6. Choose a configuration method from the following options:
 - The **dsconfig** configuration utility uses a profile file as input to generate jobs to set up the system environment and configuration. Check [“Restrictions”](#) on page 27 to decide whether this method will work for your installation. For more information, see [Chapter 4, “Configuring an LDAP server using the dsconfig utility,”](#) on page 25.
 - If you do not use the **dsconfig** utility, use the instructions for customizing your configuration. For more information, see [Chapter 5, “Configuring an LDAP server without the dsconfig utility,”](#) on page 39.

Chapter 3. Installing and setting up related products

This topic contains information about required and optional products that are necessary to install or set up before configuring the z/OS LDAP server product.

Required products

This section describes the products that must either be installed or configured for the LDAP server to work properly.

To run the LDAP server:	You must:	See:
Workload Management (WLM)	Install and configure Workload Management (WLM).	“Installing and setting up WLM (Workload Management)” on page 17
Schema backend (based on z/OS UNIX System Services file system).	Ensure that a z/OS UNIX System Services file system exists and has enough space to store the schema backend and that it can be written to by the LDAP server.	“Installing a z/OS UNIX System Services file system for the schema backend” on page 18

Installing and setting up WLM (Workload Management)

The z/OS LDAP server supports Workload Management (WLM) to allow an installation to set performance goals for work within the LDAP server when compared against other work that is running on the system. The LDAP subsystem type is reserved in WLM to allow the system administrator to set performance goals for z/OS LDAP server operations. The performance goals can be set based on the IP address of the client, distinguished name (DN) of the bound user, both the IP address and DN associated with the request, or a request that matches a search pattern in the operations monitor.

The z/OS LDAP WLM support is always active and cannot be deactivated. A default service class must be configured in the WLM ISPF panels for the LDAP subsystem type before running the z/OS LDAP server. If a default service class is not configured in WLM, all LDAP server operations run under the discretionary or SYSOTHER profile and receive a low priority, which impacts LDAP server performance and response times. See [“Verifying the service class for the LDAP server” on page 577](#) for information about determining the service class for the LDAP servers that are running on your system.

The following WLM classification parameters are accepted on the LDAP subsystem type:

Sysplex Name (PX)

Identifies the sysplex name where the LDAP server resides. This allows an installation to establish the same performance goals for all LDAP servers running within the same sysplex.

Subsystem Instance (SI)

Identifies the started task name of the LDAP server. This allows an installation to establish performance goals for an individual LDAP server that is running within the sysplex.

Transaction Name (TN)

Identifies a WLM transaction name that has been configured in WLM. These transaction names can be used within any subsystem type in WLM. For the LDAP server, the default transaction name is GENERAL.

See [“Setting up for WLM \(workload management\)” on page 53](#) for more information about setting up additional transaction names.

Installing a z/OS UNIX System Services file system for the schema backend

The LDAP server must have write access to a z/OS UNIX System Services file system to store the schema backend. The schema backend is required to run the LDAP server.

The amount of space required to store the schema backend in a z/OS UNIX System Services file system is approximately three times the size of the expected schema input LDIF files. Initially, approximately 300 kilobytes are required for storing the initial or minimum schema when the server is first started. Generally, the space required to hold the schema data is one and a half times the size of the expected input LDIF data. However, when the schema is modified a copy of the original schema file is copied, therefore, resulting in occasionally needing twice the amount of file system space.

See the following documentation for more information about how to install zFS:

- *z/OS Program Directory* in the *z/OS Internet library* (www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary)
- *z/OS File System Administration*

Optional products

This section describes the products that might need to be installed and configured depending on how you want to set up your LDAP server.

If you plan to use:	You must:	See:
TDBM or GDBM backend (based on Db2)	Install the Db2 product and set up CLI and ODBC. Note that if your LDAP server is used only for accessing RACF information, it is not necessary to install Db2 or set up a Db2 database. See “Setting up for SDBM” on page 62 for information about configuring the LDAP Server for accessing RACF information.	“Installing and setting up Db2 for TDBM and GDBM (Db2-based)” on page 19
SDBM backend (based on RACF)	Install RACF.	“Installing RACF for SDBM and native authentication” on page 21
LDBM, CDBM, or GDBM backend (based on z/OS UNIX System Services file system)	Ensure that a z/OS UNIX System Services file system exists and has enough space to store the LDBM, CDBM, or GDBM (file based) backend and that it can be written to by the LDAP server.	“Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends” on page 21
Protect access to your LDAP server with Secure Sockets Layer (SSL) security or Transport Layer Security (TLS)	Install z/OS Cryptographic Services System SSL.	“Installing System SSL” on page 21
Encryption setup	Install ICSF (optional).	“Installing ICSF for encryption, hashing, or SSL/TLS” on page 21
Kerberos authentication	Install Kerberos.	“Installing Kerberos” on page 22

If you plan to use:	You must:	See:
Native authentication	Install a security server.	“Installing RACF for SDBM and native authentication” on page 21
Remote crypto plug-in	Install ICSF.	Remote crypto plug-in
ICTX plug-in	Install RACF.	ICTX plug-in

Installing and setting up Db2 for TDBM and GDBM (Db2-based)

This section describes how to get Db2, version 9 or later, running and how to run the LDAP server using the TDBM and GDBM (Db2-based) backend. If TDBM or GDBM (Db2-based) backends are run in 64-bit mode, then Db2 version 9 with PTF UK50918 or Db2 version 10 or later is required. For more information about Db2, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](#).

Getting Db2 installed and set up for CLI and ODBC

Following are the steps to get Db2 installed:

1. Have your database system administrator install Db2, version 9 or later. If running your LDAP server in multi-server mode on multiple images in a parallel sysplex, your administrator must configure a Db2 data sharing group with members on each z/OS images on which an LDAP server instance runs. (See [“Configuring the operational mode” on page 145](#) for a description of the various operating modes in which the LDAP server may run.)

Make sure that the SMP/E jobs are a part of the Db2 installation. See the information about installing Db2 CLI in [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](#). Also, specify the user ID (for example, **su xxxx**) that should be granted database system administrator authority. This should be the ID you log on with to run the SPUFI jobs to create the Db2 tables for the LDAP server. Obtain following information from your database administrator:

- Db2 subsystem name. For example, DSN9.
- Db2 server location (or data source). For example, LOC1.

In order to use a local or remote Db2 database, you must include a DDF record in your Bootstrap Data Set (BSDS). That DDF record must include a LOCATION keyword and an LUNAME keyword. If you are using a Db2 database that is on the local system, (including a database that is set up for Db2 data sharing) the DDF component does not need to be started. If you are using a Db2 database that is on a remote system, the DDF component of Db2 must be configured and started on systems using the Db2 Call Level Interface (CLI). CLI is used by the LDAP server for requesting services from Db2. (The Db2 Call Level Interface is IBM's callable SQL interface used by the Db2 family of products, based on the ISO Call Level Interface Draft International Standard specification and the Microsoft Open Database Connectivity specification.)

It might be necessary to have your Db2 administrator set up buffer pools, TEMP space, and TEMP data sets for additional buffer pool sizes. By default, the LDAP server Db2-based backends use buffer pool BP0. The buffer pool choice and size (4 K, 32 K, or other sizes) should be examined by your database system administrator to ensure that they are large enough to meet the additional needs of the LDAP server, once you have loaded data into its database. Use the Db2 RUNSTATS utility after the data is loaded so that Db2 queries are optimized. See [Chapter 31, “Performance tuning,” on page 573](#) for detailed information about running the Db2 RUNSTATS utility.

It may also be necessary to have your Db2 administrator increase the configured Db2 limits for MAX USERS and MAX BATCH CONNECT settings to accommodate the resources required by the LDAP server. These settings are controlled by the Db2 subsystem parameters CTHREAD and IDBACK, respectively, by way of installation panel DNSTIPE. For more information about these parameters, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](#). The LDAP server requires the following connections to Db2:

- Two connections for miscellaneous functions
- One connection for each communication thread, as defined by the **commThreads** option in the LDAP server configuration file
- One connection for each program call thread, as defined by the **pcThreads** option in the LDAP server configuration file
- One connection for each defined replica object, when basic replication is being used.
- If advanced replication is being used:
 - One connection for each defined replication agreement.
 - One connection for each advanced replication plug-in utility operation.
 - Five connections for system communication for each configured TDBM backend that is used with sysplex data sharing (sysplex threads for TDBM function shifting).

2. Enter:

```
-dsn start db2
```

from the image console and wait for Db2 to finish the Db2 initialization. The *dsn* is the Db2 subsystem name.

You can stop Db2 by entering:

```
-dsn stop db2
```

from the console.

Note: This may already be done when the system is re-IPled.

3. Edit and Submit *DSNHLQ.SDSNSAMP(DSNTIJCL)* where *DSNHLQ* is the high-level qualifier used during Db2 installation. See the information about setting up the Db2 CLI runtime environment in [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](http://www.ibm.com/docs/en/db2-for-zos). You must run this from the user ID that has been granted the appropriate database authorities. This step establishes the environment that is needed for the LDAP server to use the CLI. It is often referred to as "binding the CLI plan". When binding the CLI plan, it must be bound using the bind option RELEASE(COMMIT), either by default (when no RELEASE option is specified on the bind statement) or by explicitly specifying the option on the bind statement for information about bind options and syntax). Note the plan name used when editing this job, for example, DSNACLI.
4. Create (Allocate) the Db2 CLI initialization file. A sample of the CLI initialization file can be found at *DSNHLQ.SDSNSAMP(DSNAOINI)*. Create your own CLI initialization file and copy *DSNHLQ.SDSNSAMP(DSNAOINI)* into it. If a data set is used for the CLI initialization file, it must not contain sequence numbers. For more information about the contents of this file, see the information about the Db2 CLI initialization file in [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](http://www.ibm.com/docs/en/db2-for-zos). Figure 2 on page 21 shows a sample file. The example in Figure 2 on page 21 shows a DSNAOINI file with values based on the examples that are used in this section. Items in the file that may need to be customized to your Db2 installation are in **bold** type. See your Db2 administrator for the values of these items for your installation.

```
;This is a comment line...
; Example COMMON stanza
[COMMON]
MVSDEFAULTSSID=DSN9

; Example SUBSYSTEM stanza for your DB2 subsystem name
[DSN9]
;MVSATTACHTYPE=CAF
MVSATTACHTYPE=RRSAF
PLANNAME=DSNACLI

; Example DATA SOURCE stanza for your data source
[LOC1]
AUTOCOMMIT=0
CURSORHOLD=0
CONNECTTYPE=1
```

Figure 2. Sample DSNAOINI file

Choosing the MVSATTACHTYPE

The LDAP server can be set up to use either the Call Attachment Facility (CAF) or the Resource Recovery Services attachment facility (RRSAF) to access Db2. For more information about these choices, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](http://www.ibm.com/docs/en/db2-for-zos).

Setting AUTOCOMMIT

To prevent data corruption, the LDAP server always uses a value of 0 for AUTOCOMMIT, regardless of the value specified in the DSNAOINI file.

Installing RACF for SDBM and native authentication

In order for your LDAP server to have access to RACF data, you must have RACF installed on your system and have a license for the z/OS Security Server. RACF is part of the z/OS Security Server. See the following documentation for information about installing and configuring RACF:

- [z/OS Program Directory in z/OS Internet library \(www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary\)](http://www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary)
- [Activating LDAP change notification in z/OS Security Server RACF Security Administrator's Guide](#)
- [z/OS Upgrade Workflow](#)

The RACF Subsystem function of RACF must be defined and activated to allow the LDAP server to communicate with RACF through the SDBM backend. For more information, see [The RACF subsystem in z/OS Security Server RACF System Programmer's Guide](#).

Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends

The LDAP server must have write access to a z/OS UNIX System Services file system to store each LDBM, GDBM (file-based), and CDBM backend that is configured.

See [“Setting up for LDBM” on page 62](#), [“Setting up for GDBM” on page 65](#), and [“Setting up for CDBM” on page 64](#) for the amount of space that is needed to store the backend.

See the following documentation for more information about installing zFS:

- [z/OS Program Directory in z/OS Internet library \(www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary\)](http://www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary)
- [zFS installation and configuration steps in z/OS File System Administration](#)

Installing System SSL

In order for your LDAP server to provide SSL/TLS support, you must install z/OS Cryptographic Services System SSL and use STEPLIB, LPALIB, or LNKST to make their libraries available. For more information about SSL/TLS, see [System SSL and FIPS 140-2 in z/OS Cryptographic Services System SSL Programming](#). Also, see [“Setting up for SSL/TLS” on page 68](#) for details on configuring and using SSL/TLS with your LDAP server.

Installing ICSF for encryption, hashing, or SSL/TLS

The z/OS LDAP server supports AES, crypt, DES, MD5, SHA, Salted SHA (SSHA), SHA-2, and Salted SHA-2 algorithms for encryption or hashing of the userPassword and ibm-slapdAdminPw attribute values in the TDBM, LDBM, and CDBM backends. The secretKey, replicaCredentials, ibm-replicaKeyPwd,

and `ibm-slapdMasterPw` attribute values in the TDBM, LDBM, and CDBM backends can be encrypted in either AES or DES.

The SHA-2 and Salted SHA-2 hashing algorithms consists of the following methods: SHA224, SSHA224 (Salted SHA224), SHA256, SSHA256 (Salted SHA256), SHA384, SSHA384 (Salted SHA384), SHA512, and SSHA512 (Salted SHA512).

If the LDAP server is configured to use any SHA-2 or Salted SHA-2 hashing method, ICSF must be installed because the LDAP server uses the ICSF PKCS #11 omnipresent token to perform the SHA-2 and Salted SHA-2 hashing. The user ID that runs the LDAP server must have READ access to the CSFPOWH profile in the CSFSERV class to perform the SHA-2 or Salted SHA-2 hashing. See [“Additional setup for using SHA-2 or Salted SHA-2 hashing”](#) on page 50 for more information.

AES or DES keys can be stored in either an LDAPKEYS data set or in ICSF. If ICSF is not used by the z/OS LDAP server, the encryption is done either by software or hardware assists (if it is available) depending on the encryption method selected. For more information about the LDAPKEYS data set and the other encryption or hashing methods in the z/OS LDAP server, see [“Configuring for encryption or hashing”](#) on page 76.

If ICSF is used to perform AES or DES encryption, the processor must have hardware cryptographic support. All new processors have hardware cryptographic support, while some older processors optionally provide this support. Other services of ICSF needed for AES or DES encryption in the z/OS LDAP server are the Key Generator Utility Program (KGUP) and the Cryptographic Key Data Set (CKDS). They are needed to generate and store the key and key label that is needed for AES or DES encryption of `userPassword`, `secretKey`, `replicaCredentials`, `ibm-replicaKeyPw`, `ibm-slapdAdminPW`, and `ibm-slapdMasterPW` attribute values. The AES and DES keys that are supported by the LDAP server depend on the underlying hardware and ICSF support.

- For AES encryption, a 128-bit, 192-bit, or 256-bit data-encrypting key can be stored in the CKDS. AES and DES keys can be stored in the clear or encrypted in the CKDS.
- For DES encryption, a single-length, double-length, or triple-length data-encrypting key (also referred to as a data key) can be stored in the CKDS.

See *z/OS Cryptographic Services ICSF Overview* for more information about the AES and DES keys that are supported for your hardware and ICSF level. For instructions about generating and storing into CKDS a data-encrypting key for AES or DES encryption and setting up the necessary security authorizations when using RACF to protect use of the key, see [Managing Cryptographic Keys Using the Key Generator Utility](#) in *z/OS Cryptographic Services ICSF Administrator's Guide*. Refresh both CKDS and RACF after you make the changes. ICSF must be configured so that the user ID under which the LDAP server runs can use ICSF services. Other portions of the ICSF manuals may be useful for general background information about ICSF and cryptographic keys.

Note: ICSF is not required to be installed when using crypt, MD5, SHA, or SSHA.

ICSF is also used by z/OS System SSL for some of its cryptographic processing. Many of the cryptographic algorithms are available through software processing that is performed by System SSL, but some are only available by using ICSF. If you are using SSL/TLS for secure communications with your LDAP server, depending on the configuration settings and cipher suites that are used, you might need ICSF also. Some of the ICSF callable services that are used by these algorithms might be protected in the CSFSERV class within RACF. You might need to permit the LDAP server user ID access to these, depending on which algorithms are selected. Any z/OS LDAP client or z/OS LDAP client application user IDs might also need similar permission. For more information, see [RACF CSFSERV resource requirements](#) in *z/OS Cryptographic Services System SSL Programming*.

Installing Kerberos

In order for your LDAP server to provide Kerberos support, you must install the Security Server Network Authentication and Privacy Service for z/OS which is the IBM implementation of Kerberos Version 5. See [z/OS Integrated Security Services Network Authentication Service Administration](#) for more information regarding Kerberos.

A sample Kerberos configuration file is provided in `/etc/skrb`. See [*z/OS Integrated Security Services Network Authentication Service Administration*](#) for details about setting up this file.

Chapter 4. Configuring an LDAP server using the dsconfig utility


The LDAP configuration utility, **dsconfig**, simplifies and automates the LDAP server configuration process for GDBM (Db2-based or file-based), TDBM, LDBM, EXOP, CDBM, and SDBM backends. The **dsconfig** utility also configures the remote crypto and ICTX plug-ins. The following table shows where to find specific information about the LDAP configuration utility within this topic.

Description	Topic
Overview of how the LDAP configuration utility works and information for determining if the utility is appropriate for your LDAP server configuration	“Overview of the LDAP configuration utility” on page 25
Details describing how to use the dsconfig utility	“dsconfig utility” on page 27
Step-by-step instructions describing how to configure an LDAP server	“Steps for configuring an LDAP server” on page 33
Configuration confirmation	“Configuration confirmation” on page 36
Advanced configuration options	“Specifying advanced configuration options with the dsconfig utility ” on page 36
How to set the time zone	“Setting the time zone” on page 38

Overview of the LDAP configuration utility

The LDAP configuration utility helps you configure new LDAP server instances with minimal user interaction.

The LDAP configuration utility takes a profile file as input and generates a set of output members in a data set to facilitate an LDAP server configuration. The profile file is targeted for the system administrator (or system programmer) and the LDAP administrator and it contains statements that must be updated with appropriate values. The LDAP configuration utility generates a series of JCL members, configuration files, and a procedure to start the LDAP server. The JCL jobs are grouped, based on typical administrative roles in a z/OS installation and contain the required commands to configure the z/OS components used by the LDAP server. Each administrator is responsible for reviewing and submitting their JCL job. After all JCL jobs are submitted, each administrator is responsible for reviewing the output of their job and addressing any errors that might have occurred. When all JCL jobs have completed successfully, the LDAP server can be started.

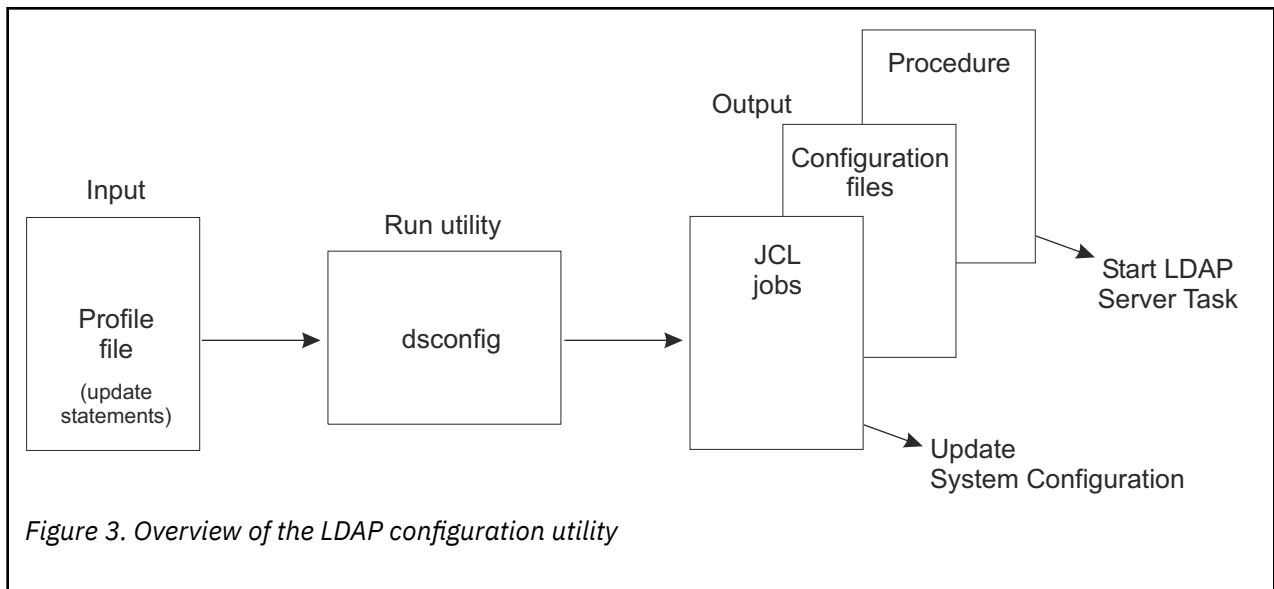

The minimal user interaction with the utility and the jobs that it produces to update the required z/OS components results in a simplified approach to LDAP configuration. This approach allows novice LDAP users and administrators and even novice z/OS users to quickly deploy an LDAP server. In addition, the utility does not restrict the configuration of advanced LDAP features, such as referrals, replication, password encryption or hashing, and sysplex setup. See [“Specifying advanced configuration options with the dsconfig utility”](#) on page 36 for more information.

Capabilities

- Allows the following backends to be configured:
 - CDBM - file-based for configuration
 - EXOP - for extended operations (deprecated)
 - GDBM - Db2-based for change log
 - GDBM - file-based for change log
 - LDBM - file-based
 - SDBM - RACF-based for security
 - TDBM - Db2-based
- Allows the following plug-in extensions to be configured:
 - Remote crypto - Perform PKCS #11 or CCA services functions with ICSF
 - ICTX - Perform remote auditing and authorization checking
- Generates JCL jobs to accomplish the updates of all the z/OS components required for an LDAP server.
- Can configure advanced LDAP server features, including:
 - Administrative group and roles
 - Advanced replication
 - Basic replication
 - Change logging
 - Encryption or hashing (**dsconfig** does not generate encryption key labels or data)
 - Extended operations (EXOP) backend (used for accessing Policy Directory information). This feature is deprecated.
 - Kerberos authentication
 - Native authentication

- Password policy
- Plug-in extensions to the server
- Referrals
- Secure Sockets Layer (SSL) or Transport Layer Security (TLS) (**dsconfig** does not generate certificates or passwords)

Restrictions

- Assumes that RACF is the security server in use. However, if RACF is not the security server in use, **dsconfig** could still be used. The resulting RACF JCL job must be converted to properly update the security server in use.
- Does not allow configuring multiple backends of the same database type.
- All values in the input files must be less than 66 bytes in length and must contain only printable characters in the IBM-1047 code page.
- Cannot extend or enhance an existing LDAP server configuration.
- Any manual updates to the output that the utility produces is lost if you run the utility again with the same output data set.
- The **database name** value can be manually updated. Edit and update the value in the LDAP server configuration file that is generated by **dsconfig**.

If you cannot use the **dsconfig** utility because of one or more of these restrictions, see Chapter 5, “Configuring an LDAP server without the dsconfig utility,” on page 39 for information about alternate methods you can use to configure your LDAP server.

Running the dsconfig utility

In order to run the **dsconfig** utility in the shell, some environment variables must be set properly, as follows:

STEPLIB

If SYS1.SIEALNKE is not in LNKLIST, a STEPLIB is required before running the **dsconfig** utility. Issue:

```
export STEPLIB=SYS1.SIEALNKE:$STEPLIB
```

PATH

Ensure that /usr/lpp/ldap/sbin is added to the PATH environment variable. Issue:

```
export PATH=/usr/lpp/ldap/sbin:$PATH
```

NLSPATH

Ensure that /usr/lpp/ldap/lib/nls/msg/%L/%N is added to the NLSPATH environment variable. Issue:

```
export NLSPATH=/usr/lpp/ldap/lib/nls/msg/%L/%N:$NLSPATH
```

LANG

Ensure that the LANG environment variable is set properly. Issue:

```
export LANG=En_US.IBM-1047
```

dsconfig utility

Purpose

dsconfig takes as input a profile containing a set of options that, when updated, are used to create a set of JCL members, configuration files, and the LDAP server start-up procedure. This output set configures

an LDAP server and sets up the z/OS system to run the server. When the JCL jobs are submitted and are successful, the LDAP server can be started.

Format

```
dsconfig -i profile_file [-s ds_file] [-a yes|no] [-d debug_level] [-?]
```

Parameters

-?	Specifies the usage.
-a yes no	Specifies a preemptive answer for the dsconfig prompted question to overwrite an existing output data set, from a previous execution of dsconfig .
-d <i>debug_level</i>	Specifies the debug level of tracing for dsconfig . The debug level is specified in the same fashion as the debug level for the LDAP server, as described in Table 17 on page 169 . The default is no debug messages.
-i <i>profile_file</i>	Specifies the path and file name of the input profile file. This file contains the base set of configuration options for the LDAP server and options necessary for the JCL output members.
-s <i>ds_file</i>	Specifies the path and file name of the output server configuration file. The LDAP configuration file that is generated with this option can be used with the method referred to at Chapter 5, "Configuring an LDAP server without the dsconfig utility," on page 39 . When this option is specified, no output data set members are generated.

Examples

To execute **dsconfig** in its most typical usage, where `ds.profile` is the input profile file and in the current directory, enter:

```
dsconfig -i ds.profile
```

This example looks for the profile file in the `/home/u` directory and only generates a configuration file in the `/home/u` directory.

```
dsconfig -i /home/u/ds.profile -s /home/u/ds.conf
```

To enable error and trace debugging and preemptively skip the "overwrite data set" question, enter:

```
dsconfig -i ds.profile -d error+trace -a yes
```

Input file description

The input file, `ds.profile`, must be modified before executing the LDAP configuration utility, **dsconfig**. Make a copy of the `ds.profile` file from `/usr/lpp/ldap/etc` to a directory where the modifications can be made.

Statements in this file contain a keyword and value that must have the appropriate value for the target system being configured. There is a brief description for each keyword and value in the file. [Figure 4 on page 29](#) shows a sample portion of the `ds.profile` file:

```
# LDAPUSRID <user_id>
#
# Description:
#   User ID for the LDAP server to run under.
#
# -----
LDAPUSRID = GLDSRV
```

Figure 4. Sample portion of *ds.profile*

The LDAPUSRID statement has a preassigned value of GLDSRV. Preceding that statement is commentary that describes the statement and its usage.

Most of the statements in the *ds.profile* are required and those that are not required are labeled as optional. Some statements in the *ds.profile* have preassigned values; however, they might not be valid on the target system being configured. Values must be provided for all required statements in the *ds.profile* file.

These keywords are intentionally left blank in *ds.profile* and their values must be provided:

- ADMINDN - the distinguished name (DN) of the root administrator defined in the configuration file for this LDAP server
- PROG_SUFFIX - specifies a two character suffix for the 'PROG' output member. This member contains the APF authorizations that are required for the LDAP server.
- The following four JCL job card options must be provided:
 - APF_JOBCARD_1
 - PRGCTRL_JOBCARD_1
 - DB2_JOBCARD_1
 - RACF_JOBCARD_1

Examples and descriptions are included in the file. Change the value for OUTPUT_DATASET, the name of the data set where all configuration utility output is placed.

The *ds.profile* file embeds three other advanced input files. Information about these files can be found in [“Specifying advanced configuration options with the dsconfig utility”](#) on page 36. A common mistake, when specifying advanced configurations, is to copy and modify the advanced profiles but forget to modify the embedded path and name references for the modified advanced profiles in *ds.profile*.

Usage notes

1. The **dsconfig** utility automatically configures a CDBM backend in the following instances:
 - When the CDBM_USEADVANCEDREPLICATION statement is set to on or off, and the SERVERCOMPATLEVEL statement is set or defaults to 5 or greater, or
 - when the USEPASSWORDPOLICY statement is set to on and the SERVERCOMPATLEVEL statement is set or defaults to 6 or greater, or
 - when the USEADMINROLES statement is set to on and the SERVERCOMPATLEVEL statement is set or defaults to 7 or greater.
2. The output from **dsconfig** is written to a partitioned data set that you specify in *ds.profile*. If the data set does not exist, the utility allocates the output data set for you.

The **dsconfig** utility prompts to confirm overwriting an existing output data set. When you specify -a yes on the **dsconfig** command line, the prompt is skipped when the output data set exists. When -a no is specified, the existing data set is not overwritten and **dsconfig** ends.

When the -s parameter is used, the value that is specified for the parameter is the path and file name of the LDAP server configuration file that is created. The -a parameter can also be used to avoid the prompt that confirms overwriting an existing file.

For advanced LDAP configuration as described in [“Specifying advanced configuration options with the dsconfig utility”](#) on page 36, the `ds.profile` contains pointers to the advanced configuration profile files. **dsconfig** expects to find the default pointers in the `ds.profile`.

3. The utility allows the configuration of an LDAP server, which uses SSL/TLS. (See [“Setting up for SSL/TLS”](#) on page 68 for details.) It does not, however, automate the process of generating SSL/TLS certificates.
4. The utility allows the configuration of an LDAP server, which uses encryption. It does not, however, automate the process of generating encryption keys. (See [“Configuring for encryption or hashing”](#) on page 76 for more information.)
5. Verify that the SYS1.SIEALNKE data set containing the LDAP code is in the LNKLIST. If it is not in LNKLIST, then STEPLIB must be used to locate this data set.

The **dsconfig** utility does not provide an interface for adding STEPLIB statements to the started task procedure that it generates. Therefore, if an administrator wants to add STEPLIB statements to the started task procedure, the started task procedure must be manually updated and the following must occur:

- The data sets specified in the new STEPLIB statements must be APF authorized.
 - When submitting the PRGMCTRL JCL job, the data sets specified in the new STEPLIB statements must be in the program control data set list.
 - The user ID specified on the LDAPUSRID statement in the `ds.profile` file must have read access to the data sets specified in the new STEPLIB statements.
6. The APF JCL job does not work on a system using JES3. JES3 users must manually enter the following operator command in place of submitting the APF JCL job:

- In SDSF, enter:

```
/SET PROG=PROGsuffix
```

- From the operator’s console, enter:

```
SET PROG=PROGsuffix
```

The *suffix* is specified on the PROG_SUFFIX statement in the `ds.profile` file.

7. The PRGMCTRL and RACF jobs that **dsconfig** generates require that the definitions listed exist in RACF before submission. If the definitions do not exist, the jobs contain RACF errors in their output.
 - a. To ensure that all required data sets are program controlled, the PRGMCTRL job requires that the PROGRAM. ** definition exist in RACF.
 - b. To ensure that the user ID that appears on the LDAPUSRID statement in the `ds.profile` file has read permission on all required data sets, the RACF job requires that data set definitions exist for the following data sets in RACF.
 - CEEHLQ.** (where CEEHLQ appears on the CEEHLQ statement in the `ds.profile` file)
 - GLDHLQ.** (where GLDHLQ appears on the GLDHLQ statement in the `ds.profile` file)
 - GSKHLQ.** (where GSKHLQ appears on the GSKHLQ statement in the `ds.profile` file)
 - DSNHLQ.** (where DSNHLQ appears on the DSNHLQ statement in the `ds.profile` file)
 - CBCHLQ.** (where CBCHLQ appears on the CBCHLQ statement in the `ds.profile` file)
 - OUTPUT_DATASET_HLQ (where OUTPUT_DATASET_HLQ is the first qualifier of the data set name that appears on the OUTPUT_DATASET statement in the `ds.profile` file)

Note: The server operates properly even if the definitions required by the RACF JCL job do not exist, given that the user ID that appears on the LDAPUSRID statement in the `ds.profile` file has read permission on all required data sets.

8. Administrators with the appropriate authorizations must submit the JCL jobs generated by **dsconfig** on the target system.

9. You might receive an error when running **dsconfig** from a **rlogin** session. This error return code of 12 can be ignored when running under the **rlogin** environment. The error is caused when both **dsconfig** and the **rlogin** environment free the OUTPUT_DATASET. No data is lost.
10. If an error occurs when submitting and running a **dsconfig** output JCL job or, if before submission, an administrator considers a value within the JCL job unsatisfactory, the administrator does not modify the JCL job directly. Instead, the administrator updates the appropriate profile files and perform all the steps that are outlined in [“Steps for configuring an LDAP server”](#) on page 33 again.

To help determine the statements within a profile file that the administrator might have to update, at the top of every file that is generated by **dsconfig** there is a listing of statements that **dsconfig** used to create the output file. The administrator can use this listing to determine the exact statement within a profile file that is updated. When resubmitting all the JCL jobs, **dsconfig** creates, many times JCL jobs for other components might have errors because of the duplication of a previous update. These messages can be ignored.
11. If the value of a statement requires a length greater than 65 within the generated DSCONFIG member, the LDAP Administrator can move the DSCONFIG member out of the output data set into a data set where the record length is greater than 80 bytes and update the member in the new data set. Then, the system administrator must update the CONFIG DD card in the generated procedure to point to the new data set.
12. The profile files do not replace the LDAP server configuration file; they are used to create an LDAP server configuration file to run the LDAP server.
13. Make all updates through the input files, running the utility again to re-create the jobs. Otherwise, if the generated JCL jobs are manually updated, those updates are lost if the utility is run again using the same output data set.
14. Be sure to use a different output data set than is currently being used by other LDAP servers.
15. The DBCLI, DSNAOINI and TDBSPUFI output members are created when the Db2-based TDBM backend is being configured.
16. The DBCLI, DSNAOINI and GDBSPUFI output members are created when the Db2-based GDBM backend is being configured.
17. The output set of JCL jobs, configuration files, and LDAP server start procedure are rewritten whenever **dsconfig** is rerun. This only happens if the OUTPUT_DATASET option in the *profile_file* is not changed. A common mistake is made when an LDAP administrator makes changes to the output of **dsconfig**, particularly the configuration files, and then at some point later, reruns **dsconfig** and writes over those administrative changes.

Configuration roles and responsibilities


The output from the LDAP configuration utility consists of jobs and configuration files that finalize the LDAP server configuration. These jobs group Db2 updates based on typical administrative roles, allowing each administrator to control their component's updates. The typical administrative roles that are assumed to exist to configure an LDAP server are:

- System Administrator (or System Programmer)
- Database Administrator
- LDAP Administrator
- Security Administrator

Each administrator is responsible for updating input files in addition to reviewing and submitting jobs in the output members that the LDAP configuration utility produces for their component, as shown in [Table 1](#) on page 32.

Table 1. LDAP configuration utility roles and responsibilities			
Role	Responsibility	Input file name/type	Output members
System Administrator (or System Programmer)	APF authorization	ds.profile (main)	<ul style="list-style-type: none"> • APF • PROGsuffix (suffix is specified on the PROG_SUFFIX statement in ds.profile)
Database Administrator	Db2, CLI	ds.db2.profile (advanced)	<ul style="list-style-type: none"> • TDBSPUFI • GDBSPUFI • DBCLI • DSNAOINI
LDAP Administrator	LDAP server, Kerberos authentication, native authentication	ds.slapped.profile (advanced)	<ul style="list-style-type: none"> • user_id procedure (user ID is specified on the LDAPUSRID statement in ds.profile) • DSENVVAR • DSCONFIG
Security Administrator	RACF, SSL/TLS, password encryption or hashing	ds.racf.profile ds.slapped.profile (both files are advanced)	<ul style="list-style-type: none"> • RACF • PRGMCTRL

Figure 5 on page 33 is a graphical representation showing the administrative roles, input files, and output members for **dsconfig**.

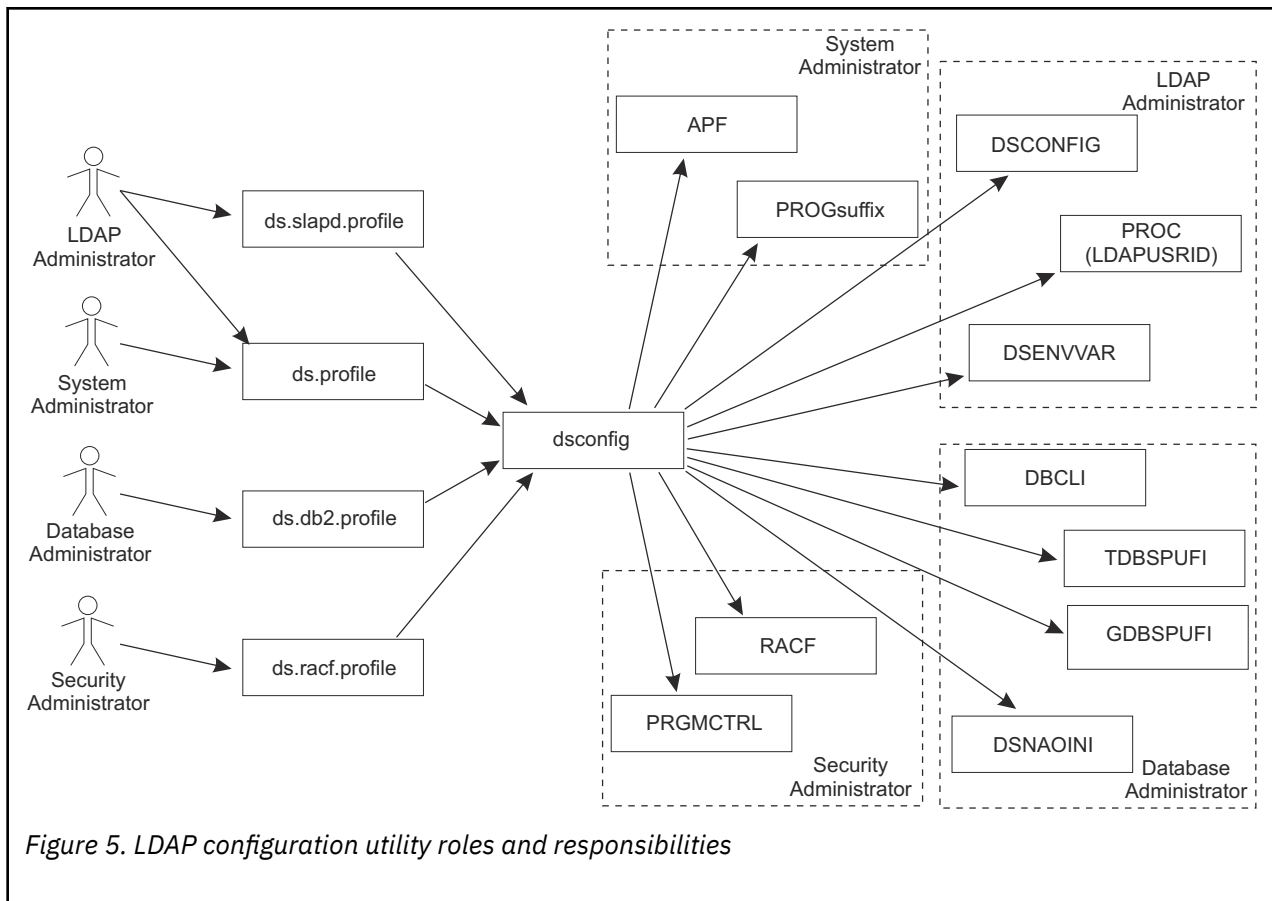

Steps for configuring an LDAP server

To configure with the configuration utility:

1. Copy the **ds.profile** file, found in `/usr/lpp/ldap/etc`, to a local directory and update it according to the commentary found in the file. (If you must update the advanced configuration files that are mentioned in [Table 1 on page 32](#), you must copy those files also. See [“Specifying advanced configuration options with the dsconfig utility” on page 36](#) for more details on these files.)

Some statements in **ds.profile** do not have any preassigned values but are required for successful configuration. These are noted in the file. Assign values to all these required statements, referring to information in the file above each statement for assistance. The intended audience of the **ds.profile** file is the system administrator (or system programmer) and the LDAP Administrator. The file contains information required from both administrators.

These **ds.profile** statements must be assigned values:

- **ADMINDN**
- **PROG_SUFFIX**
- **APF_JOB CARD_1**
- **PRGCTRL_JOB CARD_1**
- **DB2_JOB CARD_1**
- **RACF_JOB CARD_1**

The JOB CARD statements must be assigned regardless of their need. They are the job cards for the JCL output that is generated by **dsconfig**. The **dsconfig** utility determines what backends are configured at the same time it processes the JOB CARD statements. Note the **dsconfig** utility uses only the appropriate job cards.

See the `ds.profile` for all statement descriptions and examples.

Note: Some statement values are case-sensitive and are denoted accordingly. Be sure to set up the editor to allow both upper and lowercase letters to be specified.

Specify a distinguished name for `ADMINDN` that does not contain any of the suffixes that you are defining in the configuration. Also, specify a value for `ADMINPW`. This enables the root administrator defined in the configuration file to bind to the LDAP server and do the final setup of the LDAP server described in step “6” on page 35. As part of that final setup, the `adminDN` option is changed and the `adminPW` option removed from the configuration file.

2. Run the **dsconfig** utility. The utility generates a set of members in a partitioned data set, as specified on the `OUTPUT_DATASET` statement in the `ds.profile` file.

The **dsconfig** utility generates:

- **APF member:** A JCL job which sets APF authorizations on libraries used by the LDAP server product.
- **DBCLI member:** A JCL job which binds the CLI packages to Db2 and the DSNACLI plan.
- **DSCONFIG member:** The LDAP server configuration file.
- **DSENVVAR member:** The LDAP server environment variables file.
- **DSNAOINI member:** The Db2 DSNAOINI initialization file.
- **GDBSPUFI member:** A set of Db2 SQL statements to be executed using the SPUFI tool that defines database tables for the GDBM Db2-based backend.
- **PRGMCTRL member:** A JCL job which sets Program Control on libraries used by the LDAP server product.
- **PROGsuffix member:** A member needed for APF authorization.
- **RACF member:** A JCL job which updates RACF to allow the LDAP server to run as a started task.
- **TDBSPUFI member:** A set of Db2 SQL statements to be executed using the SPUFI tool that defines database tables for the TDBM backend.
- A procedure member needed to start the LDAP server as a started task.

Note: `DBCLI`, `DSNAOINI`, `TDBSPUFI` and `GDBSPUFI` are conditionally generated when either of the Db2-based backends are configured.

3. Copy members and submit jobs.
 - a. Copy the LDAP server started task procedure from the output data set to the target system's procedure library. The name of the LDAP server started task procedure is the name of the LDAP user ID specified on the `LDAPUSRID` statement in the `ds.profile` file. The preassigned name of the LDAP user ID is `GLDSRV`.
 - b. Copy the generated `PROGsuffix` member (where *suffix* is specified on the `PROG_SUFFIX` statement in the `ds.profile` file) from the output data set to the target system's `PARMLIB`.
 - c. Submit the following generated JCL jobs that can be found in the output data set in the following order:
 - i) `RACF` member
 - ii) `APF` member
 - iii) `DBCLI` member, if `TDBM` or `Db2-based GDBM` is being configured
 - iv) `PRGMCTRL` member

Note: Be sure Db2 is started before submitting this job.

The `PRGMCTRL` member is only required if an `SDBM` backend is being configured and Program Control is active.

4. Through the Db2 SPUFI interactive tool, submit the `TDBSPUFI` member, if a `TDBM` backend is being configured, and the `GDBSPUFI` member, if the `Db2-based GDBM` backend is being configured.

Note: Update the table spaces in the `GDBM` database to set up for row level locking. See step “3” on page 57 in “Steps for configuring an LDAP server” on page 33 for more information.

5. Start the LDAP server. The LDAP server can be started from SDSF or from the operator's console.

Note: The name of the LDAP server procedure is the same as the user ID specified on the LDAPUSRID statement. The preassigned value is GLDSRV.

To start the LDAP server in SDSF, enter:

```
/s user_id
```

To start the LDAP server from the operator's console, enter:

```
s user_id
```

6. Finalize setup of the LDAP server.
 - a. If TDBM, LDBM, or CDBM is configured, modify the LDAP server schema entry to contain the schema needed for your usage of these backends. The **schema.user.ldif** and **schema.IBM.ldif** files found in the `/usr/lpp/ldap/etc` directory might contain the schema you need. **schema.IBM.ldif** requires that you first load **schema.user.ldif**.

Note: The distinguished name (DN) of the LDAP server schema is `cn=schema`. If the `ldif` file containing your schema has a DN of `cn=schema, suffix`, then update the file to change the DN to `cn=schema`.

Use the `ldapmodify` utility to modify the schema entry.

```
ldapmodify -h ldaphost -p ldapport -D binddn -w passwd -f file
```

where:

ldaphost

Is the hostname of the system where the LDAP server is running.

ldapport

Is the TCP/IP port on which the LDAP server is running. The port is specified in an advanced profile file, `ds.slapd.profile`, on the `LISTEN` statement. The preassigned value is 389.

binddn

Is the root administrator DN of the LDAP server. The root administrator DN is specified in the `ds.profile` file on the `ADMINDN` statement. This value is required and not preassigned.

passwd

Is the root administrator password of the LDAP server. The root administrator password is specified in the `ds.profile` file on the `ADMINPW` statement. The example value is "secret".

file

Is a file containing modifications to the schema entry in LDIF format. More information about the schema can be found in [Chapter 15, "LDAP directory schema," on page 271](#).

Following is an example of using `ldapmodify` to modify the schema entry:

```
ldapmodify -h myhost -p 389 -D "cn=Admin" -w secret -f /usr/lpp/ldap/etc/schema.user.ldif
```

More information about `ldapmodify` can be found in [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

Multiple schemas might need to be loaded before applications that use the directory works. For example, in addition to the `schema.user.ldif` schema file, it is common for directory applications to require the elements defined in the `schema.IBM.ldif` schema file.

- b. Load the suffix entries for each configured TDBM and LDBM backend. Suffix entries are specified in the `ds.profile` file on the `TDBM_SUFFIX` and `LDBM_SUFFIX` statements.

Note: If you intend to load large amounts of data in LDIF format into a TDBM backend, see ["The ldif2ds utility" on page 235](#) for instructions on using the `ldif2ds` utility. In this case, do not load the suffix entry separately. Include the suffix instead with the rest of the entries to be loaded by **ldif2ds**.

Use the `ldapadd` utility to load the suffix entry.

```
ldapadd -h ldaphost -p ldapport -D binddn -w passwd -f file
```

See descriptions of *ldaphost*, *ldapport*, *binddn*, and *passwd*. *file* is a file containing the entries to be loaded in LDIF format.

For example, if `suffix.ldif` contains the following suffix entry:

```
dn: o=Your Company
objectclass: organization
o: Your Company
```

then the suffix entry can be added by **ldapadd** as follows:

```
ldapadd -h myhost -p 389 -D "cn=Admin" -w secret -f suffix.ldif
```

More information about `ldapadd` can be found in [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

- c. Set an appropriate ACL for controlling access to change log entries for the GDBM backend, if configured. See [Chapter 28, “Change logging,”](#) on page 545 for more information.
- d. Remove the **adminPW** option from the LDAP server configuration file, after initial setup of the LDAP server, See [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 for more information.

To confirm the LDAP server is configured and ready for client requests, see [“Configuration confirmation”](#) on page 36.

To load the data in LDIF format into a TDBM backend, you can use **ldif2ds** or **ldapadd**. However, if you intend to load more than 100,000 directory entries, use **ldif2ds**.

Configuration confirmation

Following is an optional Installation Verification Procedure (IVP) to confirm that the LDAP server configuration is successful.

Run the `ldapsearch` utility to verify the configuration.

```
ldapsearch -h ldaphost -p ldapport -D binddn -w passwd -s base -b "" "objectclass=*"
```

See descriptions of *ldaphost*, *binddn*, *passwd*, and *ldapport*.

The `-s base` specifies the base scope for the search and the `-b ""` specifies the root DSE as the base.

The result of this search contains a list of all naming contexts supported by the LDAP server. For example, if both TDBM and SDBM are configured, the result of the search contains both naming contexts (suffixes) listed.

Following is an example using `ldapsearch` to verify a configuration:

```
ldapsearch -h myhost -p 389 -D cn=admin -w secret -s base -b "" "objectclass=*"
```

If the naming context is not returned, an error message is returned indicating a problem.

More information about `ldapsearch` can be found in [z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

Specifying advanced configuration options with the dsconfig utility

There are advanced configuration options specified in the following input files:

- `ds.db2.profile` (Db2 input file)
- `ds.racf.profile` (RACF input file)

- `ds.slapd.profile` (SLAPD input file)

These advanced profile files are in the `/usr/lpp/ldap/etc` directory and are all included by the `ds.profile` file. Every statement contains a preassigned value in the advanced profile files.

To modify these optional statements:

1. Copy the files you want to a local directory and update them. Each input file is modified by the appropriate administrator (see [Table 1 on page 32](#) for LDAP configuration utility roles and responsibilities).
2. Update the `ds.profile` to correctly include those modifications. Near the end of `ds.profile`, there are three statements:

```
SLAPD_PROFILE = /usr/lpp/ldap/etc/ds.slapd.profile
DB2_PROFILE = /usr/lpp/ldap/etc/ds.db2.profile
RACF_PROFILE = /usr/lpp/ldap/etc/ds.racf.profile
```

Update these statements to show the new paths of the files you modified. Here is an example where the modified versions of `ds.db2.profile` and `ds.slapd.profile` are in a different directory (`/home/u`), and `ds.racf.profile` is not changed:

```
SLAPD_PROFILE = /home/u/ds.slapd.profile
DB2_PROFILE = /home/u/ds.slapd.profile
RACF_PROFILE = /usr/lpp/ldap/etc/ds.racf.profile
```

Advanced configuration options might require more instructions that are not covered by the LDAP configuration utility. The following table provides references for those instructions.

Configuration option	More information
Administrative group and roles	Chapter 9, “Administrative group and roles,” on page 155
Referrals	Chapter 29, “Referrals,” on page 555
Basic replication	Chapter 25, “Basic replication,” on page 457
Advanced replication	Chapter 26, “Advanced replication,” on page 473
Password encryption or hashing	“Configuring for encryption or hashing” on page 76
Multi-server	“Configuring the operational mode ” on page 145
Kerberos authentication	Chapter 19, “Kerberos authentication,” on page 389
Native authentication	Chapter 20, “Native authentication,” on page 397
CRAM-MD5 and DIGEST-MD5 authentication	Chapter 21, “CRAM-MD5 and DIGEST-MD5 authentication,” on page 407
Extended operations to access Policy Director data (deprecated)	“Setting up for Policy Director extended operations” on page 66
Entry UUID support	serverEtherAddress option at “serverEtherAddr mac_address” on page 126
Change logging	Chapter 28, “Change logging,” on page 545
Plug-in extensions to the server	<i>z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</i>
Password policy	Chapter 18, “Password policy,” on page 363
Other LDAP server options	Chapter 8, “Customizing the LDAP server configuration,” on page 83

Notes:

1. If the UID that is specified on the LDAPUID statement in the `ds.racf.profile` file is greater than 0 and the port that is specified with the LISTEN statement in the `ds.slapd.profile` file is less than 1024, the LISTEN statements that are generated in the DSCONFIG member commentary must be added to the PROFILE.TCPIP data set on the target system. These LISTEN statements are in the commentary directly above the `listen` option in the generated DSCONFIG member. For more information about the PROFILE.TCPIP data set, see *z/OS Communications Server: IP Configuration Guide*.
2. When using **dsconfig** to configure an LDAP server with Kerberos enabled, the user ID that the server runs under is created with a temporary password. This temporary password is then immediately removed. This is required to complete the configuration of an LDAP server with Kerberos enabled. See Chapter 19, “Kerberos authentication,” on page 389 for more details.

Setting the time zone

The LDAP server uses time values returned by the operating system when it records server activity or when it generates LDAP trace records. The LDAP server assumes that time values are in Universal Time Coordinated (UTC) format. The UTC time value is mapped to a (local) time zone value as specified by the TZ environment variable. By default, TZ is set to GMT0.

To change the time zone value, you must edit the `ds.slapd.profile` file. See [“Specifying advanced configuration options with the dsconfig utility”](#) on page 36 for more information about updating `ds.slapd.profile`. In `ds.slapd.profile`, uncomment the TIMEZONE variable and set the value you want. For more information about time zones, see [Customizing a time zone](#) in *z/OS XL C®/C++ Programming Guide*.

Chapter 5. Configuring an LDAP server without the dsconfig utility

This topic lists the necessary steps involved in configuring your LDAP server if you do not use the **dsconfig** utility. It may be necessary for you to use this method instead of the **dsconfig** utility, as some LDAP configuration scenarios cannot be set up with the **dsconfig** utility. More information about the **dsconfig** utility is in [Chapter 4, “Configuring an LDAP server using the dsconfig utility,” on page 25](#).

This topic contains:

- A roadmap that provides LDAP server configuration steps based on which backends and options you choose to configure, such as:
 - SDBM backend (RACF-based)
 - TDBM backends (general purpose directory, Db2-based)
 - LDBM backends (general purpose directory, file-based)
 - CDBM backend (configuration directory, file-based)
 - GDBM backend (change log directory, Db2-based and file-based)
 - EXOP backend for accessing Policy Director data (deprecated)
 - Plug-in extensions to the server
 - Secure Sockets Layer (SSL) or Transport Layer Security (TLS)
 - Password encryption or hashing
 - Kerberos authentication
 - Native authentication
- A list of configuration variables and their interactions
- Setting the time zone

Roadmap for configuring the LDAP server

The setup and configuration tasks you must complete depend on which backends and options your LDAP server needs.

If you are configuring an SDBM (RACF-based) backend, you must do these tasks.

Task	Topic
Install RACF.	“Installing RACF for SDBM and native authentication” on page 21
Set up the user ID and security for the LDAP server.	“Setting up a user ID for your LDAP server” on page 45
Set up the LDAP server for SDBM.	“Setting up for SDBM” on page 62.
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server and finalize setup.	Chapter 10, “Running the LDAP server,” on page 167
See other SDBM-specific information.	Chapter 17, “Accessing RACF information,” on page 317

If you are configuring a TDBM (Db2-based) backend, you must do these tasks.

Task	Topic
Install and set up Db2	“Installing and setting up Db2 for TDBM and GDBM (Db2-based)” on page 19
Set up the user ID and security for the LDAP server.	“Setting up a user ID for your LDAP server” on page 45
Create the Db2 database and table spaces for TDBM.	“Creating the Db2 database and table spaces for TDBM or GDBM” on page 55 .
Set up the LDAP server for TDBM.	“Setting up for TDBM” on page 61
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server and finalize setup (including adding schema and loading data).	Chapter 10, “Running the LDAP server,” on page 167

If you are configuring an LDBM backend, you must do these tasks.

Task	Topic
Install a z/OS UNIX System Services file system.	“Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends” on page 21
Set up the user ID and security for the LDAP server.	“Setting up a user ID for your LDAP server” on page 45
Set up the LDAP server for LDBM.	“Setting up for LDBM” on page 62
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server and finalize setup (including adding schema and loading data).	Chapter 10, “Running the LDAP server,” on page 167

If you are configuring a CDBM backend, you must do these tasks.

Task	Topic
Install a z/OS UNIX System Services file system.	“Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends” on page 21
Set up the user ID and security for the LDAP server.	“Setting up a user ID for your LDAP server” on page 45
Set up the LDAP server for CDBM.	“Setting up for CDBM” on page 64
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server and finalize setup (including adding schema and loading data).	Chapter 10, “Running the LDAP server,” on page 167

If you are configuring a GDBM (Db2-based) backend, you must do these tasks.

Task	Topic
Install and set up Db2	“Installing and setting up Db2 for TDBM and GDBM (Db2-based)” on page 19

Task	Topic
Set up the user ID and security for the LDAP server.	“Setting up a user ID for your LDAP server” on page 45
Create the Db2 database and table spaces for TDBM.	“Creating the Db2 database and table spaces for TDBM or GDBM” on page 55 .
Set up the LDAP server for GDBM.	“Configuring file-based GDBM” on page 65
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server and finalize setup (including adding schema and loading data).	Chapter 10, “Running the LDAP server,” on page 167

If you are configuring a GDBM (file-based) backend, you must do the tasks in the following table:

Task	Topic
Install a z/OS UNIX System Services file system.	“Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends” on page 21
Set up the user ID and security for the LDAP server.	“Setting up a user ID for your LDAP server” on page 45
Set up the LDAP server for GDBM.	“Configuring file-based GDBM” on page 65
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server and finalize setup (including setting access control).	Chapter 10, “Running the LDAP server,” on page 167
Set up the user ID and security for the LDAP server	“Setting up a user ID for your LDAP server” on page 45
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server.	Chapter 10, “Running the LDAP server,” on page 167

If you are configuring a plug-in extension to the LDAP server, you must do the tasks in the following table.

Task	Topic
Create the extension.	<i>z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</i>
Set up the extension.	<i>z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</i>
Configure the LDAP server.	<i>z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</i> and Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server.	Chapter 10, “Running the LDAP server,” on page 167

If your LDAP server is going to support Secure Sockets Layer (SSL) or Transport Layer Security (TLS), you must do the tasks in the following table:

Task	Topic
Install and set up System SSL.	“Installing System SSL” on page 21
Set up the LDAP server for SSL/TLS.	“Setting up for SSL/TLS” on page 68

Task	Topic
Configure the LDAP server.	z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS and Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server.	Chapter 10, “Running the LDAP server,” on page 167

If your LDAP server is going to use encryption or hashing of attribute values, you must do the tasks in the following table:

Task	Topic
Install ICSF if using ICSF to store DES or AES keys.	“Installing ICSF for encryption, hashing, or SSL/TLS” on page 21
Set up the LDAP server for encryption or hashing.	“Configuring for encryption or hashing” on page 76
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server.	Chapter 10, “Running the LDAP server,” on page 167

If your LDAP server is going to support Kerberos Authentication, you must do the tasks in the following table.

Task	Topic
Install and configure Kerberos.	“Installing Kerberos” on page 22
Start the KDC.	“Setting up for Kerberos” on page 389
Update the Kerberos segment of the LDAP server's user ID	“Setting up for Kerberos” on page 389
Generate the LDAP server's key table file (optional)	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server.	Chapter 10, “Running the LDAP server,” on page 167

If your LDAP server is going to support native authentication, you must do the tasks in the following table.

Task	Topic
Install RACF or other security server.	“Installing RACF for SDBM and native authentication” on page 21
Configure the LDAP server.	Chapter 8, “Customizing the LDAP server configuration,” on page 83
Run the LDAP server.	Chapter 10, “Running the LDAP server,” on page 167

Preparing for configuration variable interactions

Some of the variables involved in configuring the LDAP server and its related products are used in more than one file or configuration step. The same value must be used each time the variable is referenced. The following table lists the interactions of each such variable, for each backend.

Table 2. Configuration variable interactions	
Variable	Used in:
TDBM or GDBM (Db2-based) Backend	
Db2 subsystem ID	<ul style="list-style-type: none"> • SYSTEM(DSN) value in CLI bind JCL, DSNTIJCL (see Step 3) • MVSDEFAULTSSID and SUBSYSTEM values in CLI initialization file, DSNAOINI (see Step 4)
Plan name	<ul style="list-style-type: none"> • PLAN value in CLI bind JCL, DSNTIJCL (see Step 3) • PLANNAME value in CLI initialization file, DSNAOINI (see Step 4) • The zzz value in SQL commands to grant permissions to LDAP user (see Step 2)
Database name	<ul style="list-style-type: none"> • -DB_NAME- value in SPUFI script to create database, GLDHLQ.SGLDSAMP(DSTDBMDB) (see Step 2) • The yyy value in SQL commands to grant permissions to LDAP user (see Step 5)
Database owner	<ul style="list-style-type: none"> • -DB_USERID- value in SPUFI script to create database, GLDHLQ.SGLDSAMP(DSTDBMDB) (see Step 2) • The dbuserid value in LDAP server configuration file, ds.conf) •
CLI initialization file name	<ul style="list-style-type: none"> • The dsnaoini value in LDAP server configuration file, ds.conf) • DSNAOINI DD value in JCL for LDAP server and utilities
User ID running LDAP server, ds2ldif and ldif2ds utilities	<ul style="list-style-type: none"> • LDAPSRV value in RACF commands to create user ID (see “Requirements for a user ID that runs the LDAP server” on page 46) • The xxx value in SQL commands to grant permissions to LDAP user (see Step 5) • LDAPSRV value in RACF commands to create SSL/TLS key ring (see “Creating and using key databases, key rings, or PKCS #11 tokens” on page 69) • LDAPSRV value in RACF commands to create started task (see “Defining the started task for the LDAP server ” on page 167)
Server name	<ul style="list-style-type: none"> • DATA SOURCE value in CLI initialization file, DSNAOINI (see Step 4) • The servername value in LDAP server configuration file, ds.conf)
SDBM Backend	
User ID running LDAP server or utilities	<ul style="list-style-type: none"> • LDAPSRV value in RACF commands to create user ID (see “Requirements for a user ID that runs the LDAP server” on page 46) • LDAPSRV value in RACF commands to create SSL/TLS key ring (see “Creating and using key databases, key rings, or PKCS #11 tokens” on page 69) • LDAPSRV value in RACF commands to create started task (see “Defining the started task for the LDAP server ” on page 167)

Setting the time zone

The LDAP server uses time values that are returned by the operating system when it records server activity or when it generates LDAP trace records. The LDAP server assumes that time values are in Universal Time Coordinated (UTC) format. The UTC time value is mapped to a (local) time zone value as specified by the TZ environment variable. By default, TZ is set to GMT0.

If you have not already done this, copy `/usr/lpp/ldap/etc/ds.envvars` to the `/etc/ldap` directory. Edit `/etc/ldap/ds.envvars`, uncomment the TZ environment variable and set the value you want. For more information about time zones, see [*z/OS XL C/C++ Programming Guide*](#).

When started, the LDAP server reads an environment variable file. The default file is `/etc/ldap/ds.envvars`. This default can be changed by setting the environment variable `LDAP_DS_ENVVARS_FILE` to the full path name of the environment variable file you want. LDAP server time stamps are then generated by using a UTC value and the time zone value.

Chapter 6. Setting up the user ID and security for the LDAP server

This topic contains information about how to configure and set up the products that are needed by your LDAP server.

Some of the examples and descriptions reflect assumptions that might not apply to your environment. Following are descriptions of these assumptions, with guidance on how to use this information if they do not apply to your environment:

- Some examples use Resource Access Control Facility (RACF). You can use any z/OS external security manager that has equivalent support. You must substitute the appropriate procedures for any examples that use RACF.
- The default name `/usr/lpp/ldap` is used for the directory in which you installed the LDAP server product. If you used a different name, substitute that name in the examples and descriptions where applicable.
- The language setting `En_US.IBM-1047` is used for the locale in which you are running the LDAP server. This setting is used in the names of several directories that are referred to in this information. If you are using a different language setting, substitute that setting in the examples and descriptions where applicable. You must also specify this setting as the value of the `LANG` parameter in the environment variables file as described in Chapter 13, “Globalization support,” on page 263. The default environment variables file already sets `LANG` to `En_US.IBM-1047`.
- The name `LDAPSRV` is used for the user ID that runs the LDAP server. If you use a different name, substitute that name in the examples and descriptions where applicable.
- The name of the production directory is `/etc/ldap`. If you use a different name, you must symbolic link the names of the appropriate files in your directory to the `/etc/ldap` directory.

Setting up a user ID for your LDAP server

A separate user ID should be created to run the LDAP server. The user ID that runs the LDAP server must have the following attributes:

- The user ID must have read access to the `BPX.WLMSEVER` profile in the `FACILITY` class.
- If the `BPX.SERVER` profile in the `FACILITY` class is defined, the user ID must have update access to the profile. If the administrative group and roles are defined in RACF, the `BPX.SERVER` profile is required.
- The user ID must have read access to the data sets or files that are defined in the started task procedure. This includes the following files:
 - LDAP server configuration file
 - LDAP server environment variables file
 - Db2 `DSNAOINI` file
- The user ID must have read access to the English or Japanese message catalog files that are stored in the `/usr/lib/nls/msg` directory.
- If the administrative group and roles are defined in RACF, the LDAP class must be activated.
- The user ID must belong to a group that is the owning `GID` or it must be the same `UID` as the owning `UID` for all z/OS UNIX System Services file-based backend data stores (`CDBM`, `LDBM`, file-based `GDBM`, and schema). A z/OS UNIX System Services file-based backend data store consists of a z/OS UNIX System Services directory and the files that are created by the LDAP server in the directory.

The user ID running the z/OS LDAP server requires access to specific locations in the z/OS UNIX System Services file systems because data might be accessed or created in these directory locations.

Note: If the UID of the user ID is zero or is granted control access to the SUPERUSER.FILESYS profile in the UNIXPRIV class, the user ID already has access to all files and directories in the z/OS UNIX System Services.

- If the LDAP server configuration file (`ds.conf`) or environment variables (`ds.envvars`) file are copied to the `/etc/ldap` directory, the user ID must have read access to the `/etc/ldap` directory.
- If an LDBM, GDBM (file-based), or CDBM backend and the **databaseDirectory** configuration option is specified in the LDAP server configuration file, the user ID must be able to create the specified directory if it does not exist. If the directory exists, then the user ID must have read and write access to it.
- If the **schemaPath** configuration option is specified in the LDAP server configuration file, the user ID must be able to create the specified directory if it does not exist. If the directory exists, then the user ID must have read and write access to it.
- If the **schemaPath** configuration option is not specified or there is an LDBM, GDBM (file-based), or CDBM backend that is configured and the **databaseDirectory** configuration option is not specified, then the user ID must be able to create directories under `/var` or the `/var/ldap` directory must exist. If the `/var/ldap` directory exists, then the user ID must have read and write access to the directory.
- If the **logfile** configuration option is specified in the LDAP server configuration file and it specifies a file in the z/OS UNIX System Services file system, the directory must exist and the user ID must have read and write access to the directory.
- If the **logfileRolloverDirectory** configuration option is specified in the LDAP server configuration file and it specifies a file in the z/OS UNIX System Services file system, the directory must exist and the user ID must have read and write access to the directory.
- If the **krbKeytab** configuration option is specified in the LDAP server configuration file and it specifies a file in the z/OS UNIX System Services file system, the user ID must have read access to the file.

Note:

1. Ownership and permissions to directories and files in the z/OS UNIX System Services file system can be granted to users or groups. The LDAP server user ID can be granted permissions to files and directories based on group membership.
2. If the UID of the user ID is nonzero and is not granted control access to the SUPERUSER.FILESYS profile in the UNIXPRIV class, **chmod**, **chown**, or **setfacl** commands might have to be performed to grant the necessary authorization to the appropriate directories in the z/OS UNIX System Services file systems.
3. The RACF job that is generated by the **dsconfig** utility grants control access to the SUPERUSER.FILESYS profile in the UNIXPRIV class. This authorization to the profile grants the LDAP server's user ID access to all files and directories in z/OS UNIX System Services. If you do not want this access, issue the appropriate **chmod**, **chown**, or **setfacl** commands so that the LDAP server's user ID has access to the aforementioned directories and files mentioned.
4. For information about the **chmod**, **chown**, or **setfacl** commands, see *z/OS UNIX System Services Command Reference*.
5. For information about setting file and directory permissions or ACLs and the SUPERUSER.FILESYS profile, see *z/OS UNIX System Services Planning*.

Requirements for a user ID that runs the LDAP server

Any user ID can be used to run the LDAP server. The examples in this topic use a user ID of LDAPSRV in the commands provided.

Note if the UID of the user ID running the LDAP server is not zero, all console messages that are produced by the LDAP server are accompanied by a BPXM023I message identifying the user writing to the console.

The user ID performing the RACF commands in the following examples requires RACF SPECIAL authority.

You can use the RACF commands in the following example to define the user ID that runs the LDAP server (substitute appropriate values for UID and GID).

```
ADDGROUP LDAPGRP SUPGROUP(SYS1) OMVS(GID(2))
ADDUSER LDAPSRV DFLTGRP(LDAPGRP) OMVS(UID(1) PROGRAM('/bin/sh'))
```

The following RACF commands give the LDAP server access to Workload Management (WLM). This is required when starting the LDAP server even if WLM is not being used to classify or prioritize work within the LDAP server.

```
RDEFINE FACILITY BPX.WLMSEVER UACC(NONE)
PERMIT BPX.WLMSEVER CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETOPTS RACLIST(FACILITY) REFRESH
```

The following RACF commands are entered if the BPX.SERVER profile is defined.

```
PERMIT BPX.SERVER CLASS(FACILITY) ID(LDAPSRV) ACCESS(UPDATE)
SETOPTS RACLIST(FACILITY) REFRESH
```

When file-based backend (LDBM, GDBM (file-based), CDBM) commits are done or the schema is modified, the LDAP server creates a new version of necessary files, and updates the permissions and ownership of the files to maintain the original permissions and ownership. If the LDAP server user ID has a nonzero UID value, more permissions might be needed to allow access to files it uses and for it to perform **chmod** and **chown** commands on the schema or backend files and directories. The following examples can be used, but should be evaluated and tailored to comply with your own security policies:

- Grant control access to the SUPERUSER.FILESYS profile in the UNIXPRIV class. You might not want control access to the SUPERUSER.FILESYS profile because it grants the LDAP server user ID access to all files and directories in z/OS UNIX System Services. Issue these RACF commands to grant control access to SUPERUSER.FILESYS:

```
RDEFINE UNIXPRIV SUPERUSER.FILESYS UACC(NONE)
PERMIT SUPERUSER.FILESYS CLASS(UNIXPRIV) ID(LDAPSRV) ACCESS(CONTROL)
SETOPTS CLASSACT(UNIXPRIV)
SETOPTS RACLIST(UNIXPRIV) REFRESH
```

- Grant read access to the SUPERUSER.FILESYS.CHOWN and SUPERUSER.FILESYS.CHANGEPERMS profiles in the UNIXPRIV class by issuing these RACF commands:

```
RDEFINE UNIXPRIV SUPERUSER.FILESYS.CHOWN UACC(NONE)
PERMIT SUPERUSER.FILESYS.CHOWN CLASS(UNIXPRIV) ID(LDAPSRV) ACCESS(READ)
RDEFINE UNIXPRIV SUPERUSER.FILESYS.CHANGEPERMS UACC(NONE)
PERMIT SUPERUSER.FILESYS.CHANGEPERMS CLASS(UNIXPRIV) ID(LDAPSRV) ACCESS(READ)
SETOPTS CLASSACT(UNIXPRIV)
SETOPTS RACLIST(UNIXPRIV) REFRESH
```

If you are going to set up more than one LDAP server on the same system, a separate user ID is used for each one.

Additional setup for user ID that runs the LDAP server

The user ID that runs the LDAP server must be in the group that owns the backend directory and files, or it must own the backend directory and files. If not, message GLD1342E is issued and

Indicates the UID and GIDs for the LDAP server user ID.

Indicates which file or directory it does not own.

Indicates the UID and GID of the file or directory.

For example:

```
GLD1342E Unwilling to open file or directory '/var/ldap/schema':
File or directory UID 8, UID of program 0, GID of file or
directory 8, GIDs of program (10, 0, 1, 110011).
```

In the message text:

- The file or directory is "/var/ldap/schema". An "ls -n" of this path shows that it is a directory.
- The owning UID of the directory is 8.
- The owning GID of the directory is 8.
- The UID of the program is 0. Therefore, it does not own the directory.
- The GIDs of the program are 10, 0, 1 and 110011. Therefore, it is not in a group that owns the directory.

If the server has other file-based backends such as CDBM, LDBM, or file-based GDBM, then an "ls -n" of the backend directory (as specified in the databaseDirectory option in the LDAP server configuration file) shows the UID and GID of the files and directories. All of the backend files and directories must be owned by the user ID that runs the LDAP server, or be owned by one of the user ID's groups (see "Requirements for a user ID that runs the LDAP server" on page 46 for the example with the group "LDAPGRP").

The z/OS UNIX System Services chown command can be used to change the owner of the file or directory. The z/OS UNIX System Services chgrp command can be used to change the owning group of the file or directory.

Note: When the LDAP server creates the files, the owning group is inherited from the parent directory.

These requirements also apply to the **ds2ldif** and **ldif2ds** utilities. The **ds2ldif** utility accesses the schema directory and file, and the directory and files for the backend that is being unloaded. The **ldif2ds** utility accesses the schema directory and file, and the CDBM backend directory and files. Therefore, the user ID that runs either utility must be in the group that owns these directories and the files within these directories.

Additional setup for LDAP console commands

The LDAP server contains trace points that might dump data contents of directory entries or LDAP protocol messages. At times, this data can include values for attributes such as **userPassword** that are highly sensitive. By default, these trace points are disabled. If these trace records are needed, the following operator console command can be used to enable the trace output:

```
MODIFY DSSRV,DEBUGSECRET ON
```

To issue the command successfully, the operator ID must have READ permission to the profile Domain_Name.MODIFY.DEBUGSECRET in the RACF supplied LDAP general resource class. Domain_Name is the value specified in the **ibm-slapsAFSecurityDomain** attribute in the cn=configuration entry. The default value for Domain_Name is GLDSEC. See Chapter 8, "Customizing the LDAP server configuration," on page 83 for more information.

The following RACF commands can be used to grant operator ID *pAdmin* permission to issue this command when the default GLDSEC is being used.

```
SETOPTS GENERIC(LDAP)
RDEFINE LDAP GLDSEC.MODIFY.DEBUGSECRET UACC(NONE)
SETOPTS CLASSACT(LDAP)
PERMIT GLDSEC.MODIFY.DEBUGSECRET CLASS(LDAP) ID(pADMIN) ACCESS(READ)
```

Additional setup when using SDBM

If you plan to use an SDBM backend, the following RACF commands must be entered to set up the user ID that runs the LDAP server:

```
RDEFINE FACILITY IRR.RUSERMAP UACC(NONE)
PERMIT IRR.RUSERMAP CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETOPTS RACLIST(FACILITY) REFRESH
```

The SDBM backend also supports the RACF functions that search for users and groups with a given UID or GID value, control sharing user UID and group GID values, and retrieve a user password or password phrase envelope. Using these functions requires additional RACF configuration and profiles, as described in the RACF documentation.

If additional RACF FACILITY class authorization check is requested by using the `radminAuthCheck` LDAP server configuration option, refer to “SDBM authorization ” on page 317 to grant RACF users bound to the SDBM backend with proper access.

Additional setup for RACF PROXY segment and SDBM

The SDBM backend supports the PROXY segment within the RACF user profile. If you intend to use SDBM to set the BINDPW value in the PROXY segment, RACF requires that you create KEYSMSTR class profile LDAP.BINDPW.KEY with the SSIGNON segment.

- To create the LDAP.BINDPW.KEY profile in the KEYSMSTR class, use the KEYMASKED sub-operand if no cryptographic product is installed on your system:

```
RDEFINE KEYSMSTR LDAP.BINDPW.KEY SSIGNON(KEYMASKED(key-value))
```

Or, use the KEYENCRYPTED suboperand if a cryptographic product is installed:

```
RDEFINE KEYSMSTR LDAP.BINDPW.KEY SSIGNON(KEYENCRYPTED(key-value))
```

key-value is a Secured Sign-on Application key and must be specified as a string of 16 hexadecimal characters.

- Then, activate the KEYSMSTR class:

```
SETROPTS CLASSACT(KEYSMSTR)
```

For information about these RACF commands, see *z/OS Security Server RACF Command Language Reference*.

For information about creating and using profiles, see *z/OS Security Server RACF Security Administrator's Guide*.

Additional setup for sysplex

If you plan to run the LDAP server in a sysplex group, the user ID that runs the LDAP server must have READ access to the GLD.XCF.GROUP.*group_name* resource in the FACILITY class, where *group_name* is the value of the `serverSysplexGroup` option in the LDAP server configuration file. For example, if the `serverSysplexGroup` value is LDAP, then issue the following RACF commands:

```
RDEFINE FACILITY GLD.XCF.GROUP.LDAP UACC(NONE)
PERMIT GLD.XCF.GROUP.LDAP CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

Defining the Kerberos identity

To enable Kerberos support, you must associate a Kerberos identity with the server's user ID and generate a Kerberos key. The following RACF command must be entered:

```
ALTUSER LDAPSRV PASSWORD(password) NOEXPIRED KERB(KERBNAME(ldap_prefix/hostname))
ALTUSER LDAPSRV NOPASSWORD
```

ldap_prefix must be either `ldap` or `LDAP`. Use `ldap` unless compatibility with earlier z/OS LDAP clients is needed. Also, the *hostname* must be the primary hostname for the system in DNS.

If the LDAP server is on the same machine as the Key Distribution Center (KDC), a key table is not necessary to start the LDAP server. The user ID that starts the server must have at least read access to IRR.RUSERMAP in the FACILITY class when the `KRB5_SERVER_KEYTAB` environment variable in the security server configuration file (`krb5.conf`) is set to 1. This can be done by issuing the following RACF commands:

```
RDEFINE FACILITY IRR.RUSERMAP UACC(NONE)
PERMIT IRR.RUSERMAP CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

If the LDAP server is not running on the same machine as the Kerberos KDC server, then a key table is required. The **kadmin** command can be used to create or update the key table in a directory that can be accessed by the LDAP server. The **kadmin** command must be used to get the KDC to generate the key table when the KDC does not reside on z/OS. However, the **keytab** command can be used to add the principal to the key table if the principal's password is known. The name of the key table is then specified in the `krbKeytab` option in the LDAP server configuration file.

For more information about configuring the KDC, see [Overview](#) in *z/OS Integrated Security Services Network Authentication Service Administration*.

Additional setup for generating audit records

If you plan to generate LDAP SMF 83 audit records, the following RACF commands must be entered to set up the user ID that runs the LDAP server:

```
RDEFINE FACILITY IRR.RAUDITX UACC(NONE)
PERMIT IRR.RAUDITX CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

Additional setup for using the `securityLabel` option

If you plan on specifying **`securityLabel on`** in the global section of the LDAP server configuration file, the following RACF commands must be entered to set up the user ID that runs the LDAP server:

```
RDEFINE FACILITY BPX.POE UACC(NONE)
PERMIT BPX.POE CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

For more information about BPX.POE, see *z/OS UNIX System Services Planning*. For other LDAP server considerations in a multilevel security environment, see [Assigning security labels to data sets in z/OS Planning for Multilevel Security and the Common Criteria](#).

Additional setup when defining administrative roles in RACF

If the administrative group and roles are to be defined in RACF, the BPX.SERVER profile in the FACILITY class is required and the user ID for the LDAP server must have update access to that profile. The following RACF commands must be entered to set up the user ID that runs the LDAP server.

```
RDEFINE FACILITY BPX.SERVER UACC(NONE)
PERMIT BPX.SERVER CLASS(FACILITY) ID(LDAPSRV) ACCESS(UPDATE)
SETROPTS RACLIST(FACILITY) REFRESH
```

The LDAP class must also be activated to define administrative roles in RACF. The following RACF command activates this class:

```
SETROPTS CLASSACT(LDAP)
```

Additional setup for using SHA-2 or Salted SHA-2 hashing

The SHA-2 and Salted SHA-2 hashing algorithms consists of the following methods: SHA224, SSHA224 (Salted SHA224), SHA256, SSHA256 (Salted SHA256), SHA384, SSHA384 (Salted SHA384), SHA512, and SSHA512 (Salted SHA512).

If you plan on using any SHA-2 or Salted SHA-2 hashing algorithms for the `userPassword` and `ibm-slapdAdminPw` attribute values, ensure that the LDAP server is permitted to use the ICSF CSFPOWH and CSFPOWH6 callable service. You need to define a discrete profile to grant the LDAP server READ access if there is a generic CSFSERV class profile with a UACC(NONE) defined in RACF.

If the profile prefixing is enabled for CSFSERV class profiles, and the system name is set to SYS1, then the following RACF commands must be entered to set up the user ID that runs the LDAP server:


```
RDEFINE CSFSERV SYS1.CSFOWH UACC(NONE)
PERMIT SYS1.CSFOWH CLASS(CSFSERV) ID(LDAPSRV) ACCESS(READ)
SETROPTS CLASSACT(CSFSERV) RACLIST(CSFSERV)
SETROPTS RACLIST(CSFSERV) REFRESH
```

Else, use the following RACF commands to grant the user ID that runs the LDAP server READ access to the CSFOWH profile:

```
RDEFINE CSFSERV CSFOWH UACC(NONE)
PERMIT CSFOWH CLASS(CSFSERV) ID(LDAPSRV) ACCESS(READ)
SETROPTS CLASSACT(CSFSERV)
SETROPTS RACLIST(CSFSERV) REFRESH
```

Protecting the environment for the LDAP server

The data set containing the LDAP server and the data sets containing any DLLs loaded by the LDAP server must be APF-authorized. Additionally, if program control is active on your system, these same data sets must be program controlled. This includes the following data sets (substitute the appropriate high-level data set name qualifier for DB2HLQ):

- SYS1.SIEALNKE
- SYS1.LINKLIB
- CEE.SCEERUN
- CEE.SCEERUN2
- DB2HLQ.SDSNLOAD
- DB2HLQ.SDSNLOAD2 (if running the LDAP server in 64-bit)
- SYS1.CSSLIB

The data sets can be APF-authorized by placing them in a PROGnn member in the system parameter library, or by using the SETPROG operator command. For example:

```
SETPROG APF,ADD,DSN=SYS1.SIEALNKE,VOL=valid
```

To determine if program control is active on your system, you can use the RACF command SETROPTS LIST and examine the ATTRIBUTES output. If NOWHEN(PROGRAM) is shown, program control is not active on your system. If WHEN(PROGRAM) is shown, program control is active on your system, and the data sets above must be program controlled. For more information about using program control, see [Protecting programs](#) in *z/OS Security Server RACF Security Administrator's Guide*.

In addition, data sets used by plug-in extensions to the LDAP server must be similarly protected. For more information, see *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS*.

Chapter 7. Preparing WLM, backends, sysplex, SSL/TLS, and encryption or hashing

This topic contains information about what you must do to prepare WLM, backends, sysplex, SSL/TLS, and encryption or hashing.

To run the LDAP server optimally:	See:
Configure WLM (Workload Management)	“Setting up for WLM (workload management)” on page 53

If you plan to use:	You must:	See:
A backend, such as LDBM, TDBM, CDBM, GDBM, SDBM, or EXOP	Copy the configuration file.	“Copying the configuration files” on page 54
The sample server to set up an LDBM backend	Use the set of example files shipped with the code.	“Creating a sample server with an LDBM backend” on page 54
TDBM or GDBM (Db2-based) backend	Create the Db2 database and table spaces by using SPUFI.	“Creating the Db2 database and table spaces for TDBM or GDBM” on page 55
TDBM backend	Set up your configuration file.	“Setting up for TDBM” on page 61
SDBM backend	Set up your configuration file.	“Setting up for SDBM” on page 62
LDBM backend	Set up your configuration file.	“Setting up for LDBM” on page 62
CDBM backend	Set up your configuration file.	“Setting up for CDBM” on page 64
GDBM backend	Set up your configuration file.	“Setting up for GDBM” on page 65
EXOP backend (deprecated)	Set up your configuration file.	“Setting up for Policy Director extended operations” on page 66
Sysplex	Enable sysplex support.	“Setting up for sysplex” on page 66
SSL/TLS	Enable SSL/TLS support.	“Setting up for SSL/TLS” on page 68
Encryption or hashing	Configure encryption or hashing.	“Configuring for encryption or hashing” on page 76

Setting up for WLM (workload management)

The z/OS LDAP server supports Workload Management (WLM). With WLM, installations can set performance goals for work within the LDAP server when compared against other work that is running

on the system. The LDAP subsystem type is reserved in WLM to allow the system administrator to set performance goals for z/OS LDAP server operations. The performance goals can be set based on the IP address of the client, distinguished name (DN) of the bound user, both the IP address and DN associated with the request, or a request matching a search pattern in the operations monitor.

The WLM support for z/OS LDAP is always active and cannot be deactivated. A default service class must be configured in the WLM ISPF panels for the LDAP subsystem type before running the z/OS LDAP server. If a default service class is not configured in WLM, all LDAP server operations that are run under the discretionary or SYSOTHER profile. They also receive a low priority, which affects LDAP server performance and response times. See [“Verifying the service class for the LDAP server”](#) on page 577 for information about determining the service class for the LDAP servers that are running on your system.

The `wlmExcept` configuration option can be used to specify the IP address of the client, distinguished name (DN) of bound user, or both to route those requests to any configured WLM transaction name (TN). The `wlmExcept` configuration option can be specified multiple times within the LDAP server configuration file to allow multiple client IP addresses or DNs of bound users to be associated with the same or different WLM transaction name. The order of the `wlmExcept` configuration options in the LDAP server configuration file determines the order the LDAP server uses to match incoming client requests and route them to the WLM transaction name. See the `wlmExcept` configuration option for more information.

The `WLMEXCEPT` operator modify command can be used to change the routing of incoming client requests to new or different WLM transaction names while the server is running. The `WLMEXCEPT` operator modify command can be used to associate a search pattern in the `cn=operations, cn=monitor` entry to a WLM transaction name. See [“Workload Management \(WLM\)”](#) on page 575 for information about associating search patterns in the operations monitor entry to a WLM transaction name. Each time the `WLMEXCEPT` operator modify command is issued, the new mappings are added before any of the configured `wlmExcept` configuration options or previously issued `WLMEXCEPT` operator modify commands. See [“LDAP server operator commands”](#) on page 200 for more information about the `WLMEXCEPT` operator modify command.

During LDAP server initialization, a WLM enclave with a `GENERAL` transaction name is automatically created. WLM enclaves are created by the LDAP server for each configured `wlmExcept` configuration option. Based on how the WLM enclaves are configured, the LDAP server runs under the highest priority enclave in WLM.

Any WLM transaction names that are specified on `wlmExcept` configuration options or on the `WLMEXCEPT` modify operator commands must be mapped to a WLM service class. If a WLM transaction name is not mapped to a service class, those LDAP server operations are run under a discretionary or `SYSOTHER` profile. They also receive a low priority, which affects LDAP server performance and response times.

See [“Workload Management \(WLM\)”](#) on page 575 for more information about using LDAP with WLM.

Copying the configuration files

The configuration files must be copied from the directory in which they are installed, `/usr/lpp/ldap/etc`, to the directory where they are used, `/etc/ldap`. Do not modify these files in the installation directory because any service to the files overwrites the modifications. Instead, modify them in `/etc/ldap`. The following commands copy the configuration files:

```
cp /usr/lpp/ldap/etc/ds.conf /etc/ldap/.
cp /usr/lpp/ldap/etc/ds.envvars /etc/ldap/.
```

Creating a sample server with an LDBM backend

There is a set of example files shipped in `/usr/lpp/ldap/examples/sample_server` that can be used to understand how to configure and run the LDAP server using an LDBM backend. The `ds.README` provides step-by-step instructions for getting an LDAP server configured and started quickly. The following list shows the files shipped in that directory.

- `ds.README` (Installation information for sample server)

- sample.ldif (Sample directory entries for sample server)

Creating the Db2 database and table spaces for TDBM or GDBM

When using TDBM or Db2-based GDBM, the LDAP server Db2 database must be created by running a SPUFI (SQL Processor Using File Input) script from Db2 Interactive (Db2I). Db2I is a Db2 facility that provides for the running of SQL statements, Db2 (operator) commands, and utility invocation. For more information about how to use Db2I and SPUFI, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](http://www.ibm.com/docs/en/db2-for-zos). A sample Db2 SPUFI script to create the LDAP server Db2 database is provided. The same script is used for both TDBM and GDBM. To use it, follow these steps:

1. Copy the SPUFI script over to your SPUFI input data set.

The SPUFI script for creating the database, table spaces, tables, and indexes can be found in GLDHLQ.SGLDSAMP(DSTDBMDB). (GLDHLQ refers to the high-level qualifier that was used to install the LDAP server data sets.)

2. Determine values for SPUFI script.

In order to create the Db2 database and table spaces for TDBM or GDBM, you must first decide on certain values within the SPUFI file, as shown in [Table 3 on page 55](#). ([Table 2 on page 43](#) lists variables that are used in more than one file or configuration step. Be sure to specify the same values where necessary.) The SPUFI script provides specific instructions and information to help you determine the values to use in the table. “[The DSTDBMDB SPUFI file](#)” on [page 631](#) shows an example of the file to edit and run in the SPUFI facility.

<i>Table 3. TDBM value definitions for DSTDBMDB</i>		
Attribute script	Suggested value	Variable name in SPUFI script
Database name	GLDDB*	-DB_NAME-
Database owner	GLDSRV*	-DB_USERID-
User ID running the LDAP server	GLDSRV	-LDAP_USERID-
CLI plan name	DSNACLI	-DB_PLAN-
Entry table space name	ENTRYTS	-ENTRYTS-
Buffer pool name for the LDAP entry table space	BP0	-ENTRYTS_BP0-
Long entry table space name	LENTRYTS	-LENTRYTS-
Buffer pool name for the LDAP long entry	BP0	-LENTRYTS_BP0-
Long attribute table space name	LATTRTS	-LATTRTS-
Buffer pool name for the LDAP long attribute	BP0	-LATTRTS_BP0-
Miscellaneous-0 table space name	MISC0TS	-MISC0TS-
Buffer pool name for the LDAP miscellaneous-0 attribute	BP0	-MISC0TS_BP0-
Miscellaneous-1 table space name	MISC1TS	-MISC1TS-
Buffer pool name for the LDAP miscellaneous-1 attribute	BP0	-MISC1TS_BP0-
Miscellaneous-2 table space name	MISC2TS	-MISC2TS
Buffer pool name for the LDAP miscellaneous-2 attribute	BP0	-MISC2TS_BP0-

<i>Table 3. TDBM value definitions for DSTDBMDB (continued)</i>		
Attribute script	Suggested value	Variable name in SPUFI script
Miscellaneous-3 table space name	MISC3TS	-MISC3TS-
Buffer pool name for the LDAP miscellaneous-3 attribute	BP0	-MISC3TS_BP0-
Miscellaneous-4 table space name	MISC4TS	-MISC4TS-
Buffer pool name for the LDAP miscellaneous-4 attribute	BP0	-MISC4TS_BP0-
Miscellaneous-5 table space name	MISC5TS	-MISC5TS-
Buffer pool name for the LDAP miscellaneous-5 attribute	BP0	-MISC5TS_BP0-
Search table space name	SEARCHTS	-SEARCHTS-
Buffer pool name for the LDAP search table	BP0	-SEARCHTS_BP0-
Replica-0 table space name	REP0TS	-REP0TS-
Buffer pool name for the LDAP replica-0 attribute	BP0	-REP0TS_BP0-
Replica-1 table space name	REP1TS	-REP1TS-
Buffer pool name for the LDAP replica-1 attribute	BP0	-REP1TS_BP0-
Replica-2 table space name	REP2TS	-REP2TS-
Buffer pool name for the LDAP replica-2 attribute	BP0	-REP2TS_BP0-
Replica-3 table space name	REP3TS	-REP3TS-
Buffer pool name for the LDAP replica-3 attribute	BP0	-REP3TS_BP0-
Replica-4 table space name	REP4TS	-REP4TS-
Buffer pool name for the LDAP replica-4 attribute	BP0	-REP4TS_BP0-
Replica-5 table space name	REP5TS	-REP5TS-
Buffer pool name for the LDAP replica-5 attribute	BP0	-REP5TS_BP0-
Descendants table space name	DESCTS	-DESCTS-
Buffer pool name for the LDAP descendants attribute	BP0	-DESCTS_BP0-
Storage group	SYSDEFLT	-SYSDEFLT-
Search column truncation size (VALUE in DIR_SEARCH)	32	-SEARCH_TRUNC_SIZE-
DN truncation size (DN_TRUNC in DIR_ENTRY)	32 for GDBM 64 for TDBM	-ENTRY_DN_TRUNC_SIZE-

Table 3. TDBM value definitions for DSTDBMDB (continued)		
Attribute script	Suggested value	Variable name in SPUFI script
Maximum size of a DN (DN in DIR_ENTRY)	512	-ENTRY_DN_SIZE-

Important: * This value must be unique for each database you are creating.

3. Modify the script. Use the values from [Table 3 on page 55](#) to modify the script. You must have a unique database name and owner for each database you are creating.

You should define GDBM backend table spaces to Db2 with row-level locking, but this action is not required. Define the backend by adding LOCKSIZE ROW to each CREATE TABLESPACE statement in the SPUFI script to create a GDBM database.

```
CREATE TABLESPACE ttt IN yyy
USING STOGROUP SYSDEFLT
PRIQTY 14400
SECQTY 7200
LOCKSIZE ROW
BUFFERPOOL BP0;
```

ttt is a table space name that is used in the GDBM SPUFI script and *yyy* is the database name that is used in the script.

An existing GDBM database can be updated for row-level locking by running the following statements. Use SPUFI (Db2 Interactive) for that task. Change the tables space names if you used different names when you created the database.

```
ALTER TABLESPACE yyy.ENTRYTS LOCKSIZE ROW;
ALTER TABLESPACE yyy.LENTRYTS LOCKSIZE ROW;
ALTER TABLESPACE yyy.LATTRTS LOCKSIZE ROW;
ALTER TABLESPACE yyy.SEARCHTS LOCKSIZE ROW;
ALTER TABLESPACE yyy.DESCTS LOCKSIZE ROW;
ALTER TABLESPACE yyy.MISC0TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.REP0TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.MISC1TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.REP1TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.MISC2TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.REP2TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.MISC3TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.REP3TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.MISC4TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.REP4TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.MISC5TS LOCKSIZE ROW;
ALTER TABLESPACE yyy.REP5TS LOCKSIZE ROW;
```

where *yyy* is the database name that is used in the GDBM SPUFI script.

4. Run the script from Db2I SPUFI.

Use the Db2 SPUFI (SQL Processor Using File Input) facility to create the database and table spaces.

Be sure to run the script that was copied and modified in the previous steps under a user ID with Db2 SYSADM authority. When the script completes running, scan the output data set to ensure that it ran successfully.

5. Grant appropriate Db2 resource authorizations.

In order to run the LDAP server, **ds2ldif**, and **ldif2ds**, certain minimum Db2 resource authorizations must be granted to the user ID or user IDs that are running these programs. Following are the suggested minimums for those user IDs, where *xxx* is the user ID running the LDAP server, **ds2ldif**, or **ldif2ds**, *yyy* is the database name that is identified in the SPUFI file, and *zzz* is the CLI plan name as specified in your Db2 CLI initialization file. The grant for execute is only performed once, for the LDAP server. The grant for database administration authority (DBADM) must be done for each TDBM or GDBM backend. Use SPUFI (Db2 Interactive) to run the following statements:

```
grant execute on plan zzz to xxx;
grant dbadm on database yyy to xxx;
```

These privileges might be granted by any user ID with SYSADM authority.

The LDAP server, **ds2ldif**, and **ldif2ds** require SELECT access to SYSIBM tables in Db2. If SELECT access to these tables is tightly controlled in your Db2 installation, you might have to grant this access to the user ID under which the LDAP server, **ds2ldif**, or **ldif2ds** runs. Grant the action by performing the following operations (either by using SPUFI or another means of issuing SQL commands). These grants are only done once, for the LDAP server.

```
grant select on sysibm.syscolumns to xxx;  
grant select on sysibm.syscoldist to xxx;  
grant select on sysibm.systables to xxx;  
grant select on sysibm.systablepart to xxx;  
grant select on sysibm.syskeys to xxx;
```

where xxx is the user ID under which the LDAP server runs. If this authority is not granted to the user ID under which the LDAP server runs, the LDAP server fails during start with an SQL -551 return code.

After applying Db2 ODBC maintenance

Whenever Db2 Open Database Connectivity (ODBC) maintenance is applied on the system, to avoid server inconsistencies, issue the DSN subcommand REBIND PACKAGE through Db2. Due to how LDAP holds the ODBC package, the safest way to rebind the package is to shut down the LDAP server first. Then, issue REBIND PACKAGE and bring the LDAP server back up. If your system has APAR PH12186 installed you can rebind the package without taking down the server by utilizing the Rebind Phase-In functionality that Db2 offers. For more information about the functionality, see [Rebind phase-in for packages that are being used for execution \(www.ibm.com/docs/en/db2-for-zos/12?topic=d1fl-function-level-505-activation-enabled-by-apar-ph09191-june-2019#db2z_fl_v12r1m505__82144\)](http://www.ibm.com/docs/en/db2-for-zos/12?topic=d1fl-function-level-505-activation-enabled-by-apar-ph09191-june-2019#db2z_fl_v12r1m505__82144).

If the LDAP server does not receive activity within a certain time (60 minutes by default), the cached ODBC connection is closed. After the connection is closed, the REBIND can be issued without bringing down the server. If maintenance is applied and the package is not rebound, the server might issue an SQL -805 error when Db2 is started. To resolve the error, the DSNTIJCL job will need to be run as mentioned in step 3 of “Getting Db2 installed and set up for CLI and ODBC ” on page 19.

For more information about REBIND PACKAGE, see [REBIND PACKAGE \(DSN\) \(www.ibm.com/docs/en/db2-for-zos/12?topic=commands-rebind-package-dsn\)](http://www.ibm.com/docs/en/db2-for-zos/12?topic=commands-rebind-package-dsn).

Partitioning Db2 table spaces

If you have a large amount of data in the TDBM or Db2-based GDBM backends, use partitioning to improve performance and ease maintainability.

Range-partitioned table space and partition-by-growth table space are types of universal table spaces. Universal table spaces can combine the benefits of segmented space management with partitioned table space organization. A universal table space has better space management and improved mass delete performance.

The table space type can be changed as follows:

- To convert a simple or segmented table space to a partition-by-growth table space:
Use ALTER TABLESPACE with MAXPARTITIONS clause to alter the table space,
Use REORG to make the pending change take effect. (The change to the value of MAXPARTITIONS is a pending change to the definition of the table space, if the data sets of the table space are already created.)
- For any other table space changes:
Unload the data from the backends,
Delete and re-create the table spaces with the type you want,
Reload the data to the backends.

Partition-by-range Db2 table spaces for TDBM

Note: Range-partitioning is considered only for a TDBM database. Do not partition a GDBM database by range.

If you are creating a large TDBM directory, partition the "entry table space" and "search table space" to improve performance and ease maintainability of the database. The following information identifies the partitioning indexes and values to use when partitioning these table spaces by using range-partitioning.

Table 4. TDBM table space partitioning indexes and values				
Table space	Table name	Partitioning index	Partitioning column	Value range of column
Search table space	DIR_SEARCH	DIR_SEARCHX2	EID	0-999999999999999
Entry table space	DIR_ENTRY	DIR_ENTRYX0	EID	0-999999999999999

The EID value that is generated by the TDBM backend is a 15-digit decimal number between 1 and 999999999999999. To determine the maximum value to assign to each partition, calculate the maximum value's first 4 digits and concatenate it with eleven 9s (9999999999999). The formula for calculating the first 4 digits is:

```
first 4 digits of partition_max_value = (10000/number of partitions) *  
partition_number - 1 where partition_number starts with 1
```

You can also partition the following additional table spaces in TDBM by using the EID range as the partitioning value.

Table 5. TDBM table space partitioning using EID range				
Table space	Table name	Partitioning index	Partitioning column	Value range of column
Descendants table space	DIR_DESC	DIR_DESCX1	DEID	0-9999999999999999
Long attribute table space	DIR_LONGATTR	DIR_LONGATTRX1	EID	0-9999999999999999
Long entry table space	DIR_LONGENTRY	DIR_LONGENTRYX1	EID	0-9999999999999999

Range-partitioned example

If you want to partition your directory into 10 partitions, the maximum value for each partition is:

Partition number	Partition maximum value
1	099999999999999
2	199999999999999
3	299999999999999
4	399999999999999
5	499999999999999
6	599999999999999
7	699999999999999
8	799999999999999
9	899999999999999

Partition number	Partition maximum value
10	9999999999999999

If you want to partition your directory into four partitions, the maximum value for each partition is:

Partition number	Partition maximum value
1	2499999999999999
2	4999999999999999
3	7499999999999999
4	9999999999999999

You can use range-partitioned universal table spaces by specifying the Numparts keyword, or both keywords Segsize and Numparts on a CREATE TABLESPACE statement. Some examples to create a range-partitioned table space are:

```
CREATE TABLESPACE SEARCHTS IN GLDDB
  USING STOGROUP SYSDEFLT
  PRIQTY 14400
  SECQTY 7200
  Numparts 4 Segsize 4
  BUFFERPOOL BP0;
```

```
CREATE TABLE GLDSRV.DIR_SEARCH(
  EID          DECIMAL(15 , 0)      NOT NULL,
  ATTR_ID      INTEGER              NOT NULL,
  VALUE        CHAR(32)             FOR BIT DATA,
  LVALUE       LONG VAR             CHAR FOR BIT
DATA )
```

In this example, the search table is partitioned in to four partitions:

```
PARTITION BY (EID ASC)
(PARTITION 1 ENDING AT (2499999999999999),
 PARTITION 2 ENDING AT (4999999999999999),
 PARTITION 3 ENDING AT (7499999999999999),
 PARTITION 4 ENDING AT (9999999999999999))
IN GLDDB.SEARCHTS;
```

Partition-by-growth Db2 table spaces for TDBM or GDBM

You might want to configure partition-by-growth table spaces for TDBM or GDBM backends because this type of table space can grow to accommodate increased data. Db2 for z/OS manages partition-by-growth table spaces automatically by adding new data sets (new partitions) when the database needs more space to satisfy an insert operation.

The table space begins as a single-partition table space and automatically increases as needed, and more partitions are added to accommodate increased data. Partition-by-growth table spaces can grow to 128 TB. The maximum size is determined by the MAXPARTITIONS and DSSIZE values that you specified and the page size.

An example of how to create partition-by-growth table space is:

```
CREATE TABLESPACE SEARCHTS IN GLDDB
  USING STOGROUP SYSDEFLT
  DSSIZE 1G MAXPARTITIONS 4
  BUFFERPOOL BP0;
```

DSSIZE specifies the maximum size for each partition. MAXPARTITIONS specifies that the table space is a partition-by-growth table space, and the value specifies the maximum number of partitions that the table space can grow. The example shows the partition-by-growth universal table space has a maximum size of 1 GB for each partition, with a maximum of 4 partitions.

Setting up for TDBM

The LDAP server provides a backend to store directory information in a Db2 database. TDBM is a general-purpose backend that can store any type of directory information.

In order to configure your LDAP server to run with the TDBM backend of the LDAP server:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files”](#) on page 54).
- You must use the following lines in your `ds.conf` file:

```
database tdbm GLDBTD31/GLDBTD64
dbuserid userid
suffix "your_suffix"
```

where *userid* is the TDBM database owner and *your_suffix* is any valid DN (distinguished name). Be sure to provide a meaningful value for the suffix.

Note:

1. Multiple TDBM backends can be configured in any given LDAP server, but, they must each use a different Db2 database. The **dbuserid** value must be different than the ones used by any other TDBM backends or Db2-based GDBM backend. Similarly, the database name used when creating the Db2 tables for the TDBM backend must be unique.
2. The attributes and object classes used by TDBM depend on your usage of TDBM. It is possible that you must add schema to the LDAP server schema. See [“Setting up the schema for LDBM, TDBM, and CDBM”](#) on page 271 for more information about adding schema to the LDAP server.
3. If the TDBM backend is run in 64-bit mode, then Db2 version 9 with PTF UK50918 or Db2 version 10 or higher is required.
4. If you specify the **dsnaoini** or **serverName** configuration option for TDBM, then you must also specify the option for each TDBM backend and Db2-based GDBM backend and the value must be the same.

Copying a TDBM database

If you want to copy an existing TDBM database to a new one, use the **ds2ldif** to unload the existing TDBM database and **ldif2ds** to load the results into the new TDBM database.

If the new TDBM database is not on the same LDAP server as the existing one, the LDAP server schema for the target LDAP server must contain all the attributes and object classes that are used by the TDBM entries before they can be loaded into the new TDBM database. You can use **ds2ldif** or **ldapsearch** to unload the LDAP server schema from the source LDAP server and then load the schema LDIF file into the target LDAP server by using **ldapmodify**.

For more information about **ds2ldif** and **ldif2ds**, see [Chapter 12, “Running and using the LDAP server utilities,”](#) on page 217.

You can also use the Db2 copy utility to copy the existing database to a new database. The DDL specifications that are defined for the existing database must be used. Otherwise, the Db2 copy utility produces unreliable results.

Follow these steps to create the new Db2 database:

1. Create the database by using the DDL specifications defined for the existing database that you are copying or backing up.
2. Use the Db2 copy utility to copy the existing database into the new database.

If the new database is to be used by a new or different z/OS LDAP server, the server schema might require updates for the entries that are being ported. Follow these steps for migrating the schema to the new z/OS LDAP server configuration:

1. Unload the schema from the original z/OS LDAP server by using the **ds2ldif** or **ldapsearch** utility.

2. Start the new z/OS LDAP server without the new TDBM backend specified in the server configuration file.
3. Update the schema on the new z/OS LDAP server to match the schema on the old z/OS LDAP server. Do that task by using the **ldapmodify** utility and specifying the LDIF file that was unloaded in step “1” on page 61.
4. Shut down the new z/OS LDAP server and add the TDBM database line to the server configuration file and restart the new z/OS LDAP server. The new z/OS LDAP server should now start with the newly copied Db2 database.

Setting up for SDBM

The LDAP server can provide remote LDAP access to the user, group, connection, and general resource profile information stored in RACF. It also supports setting RACF options that affect classes. See [Chapter 17, “Accessing RACF information,” on page 317](#) for details about how you can use this RACF information. When creating change log records for changes to RACF data, SDBM is required.

In order to configure your LDAP server to run with the SDBM backend of the LDAP server:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files” on page 54](#)).
- You must use the following lines in your `ds.conf` file:

```
database sdbm GLDBSD31/GLDBSD64
suffix "your_suffix"
```

where *your_suffix* is any valid DN (distinguished name). Be sure to provide a meaningful value for the suffix. Note that it is no longer required that the `syntax=ldap` attribute be present in the suffix. For example, a valid suffix line is:

```
suffix "cn=RACFA,o=IBM,c=US"
```

Note:

1. Only one SDBM backend can be defined in any given LDAP server.
2. The attributes and object classes used by SDBM are always in the LDAP server schema, except for any attributes needed for RACF custom fields.
3. The **enableResources** configuration option must be specified in your `ds.conf` file if you intend to display or manage RACF resource profiles and class options. This configuration option is also required if you want to create change log entries for changes to RACF resource profiles. See [“Configuration file options” on page 90](#) for more information.

Setting up for LDBM

The LDAP server provides a file-based backend to store directory information in a z/OS UNIX System Services file system. LDBM is a general-purpose backend that can store any type of directory information.

The amount of space that is needed to store an LDBM backend in a z/OS UNIX System Services file system is approximately four to six times the size of the expected input LDIF data. Generally, the space that is required to hold the LDBM backend data is two to three times the size of the expected input LDIF data. However, during the LDBM commit process each of the LDBM backend files is copied, therefore, resulting in occasionally needing twice the amount of file system space.

LDBM keeps its directory in storage in the LDAP address space while the LDAP server is running. See [“LDBM performance considerations” on page 578](#) for more information about LDBM storage usage.

When the LDAP server starts for the first time with a new LDBM backend configured, the server automatically creates the directories that are specified in the **databaseDirectory** server configuration option (or in `/var/ldap/ldb` if the configuration option is not specified). When the directories are created, the LDAP server's user ID is the owner of these directories. The permissions on these directories grant read, write, and execute access to the LDAP server's user ID. The group that the LDAP server's user

ID belongs to is granted read access to the directories. As part of the LDBM backend initialization process, the server creates **LDBM-x.db** files (where *x* is a number such as 1, 2, 3, and so on) for each suffix in the LDBM backend section, along with an **LDBM.ckpt** file. These files are created with the LDAP server's user ID as the owner. The default permissions on these files grant read and write access to the LDAP server's user ID while the group to which the LDAP server's user ID belongs is granted read access.

If the default LDBM backend file or directory permissions or ownership are not sufficient for your needs, they can be changed manually by issuing **chmod** and **chown** commands. The LDAP server retains any manual changes in the file or directory permissions or ownership. For additional information about the **chmod** and **chown** commands, see [chmod - Change the mode of a file or directory](#) and [chown - Change the owner or group of a file or directory](#) in *z/OS UNIX System Services Command Reference*.

To configure your LDAP server to run with the LDBM backend of the LDAP server:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files”](#) on page 54).
- You must use the following lines in your `ds.conf` file:

```
database ldbm GLDBLD31/GLDBLD64
suffix "your_suffix"
```

where *your_suffix* is any valid DN (distinguished name). Be sure to provide a meaningful value for the suffix.

Note:

1. Multiple LDBM backends can be configured in an LDAP server, but each must use a different file directory for storing its entries. If you are configuring multiple LDBM backends or do not want an LDBM backend to store its entries in the default file directory, then add the **databaseDirectory** option to the LDBM section of the configuration file. The **databaseDirectory** value must be different than the ones used by any other LDBM backends, file-based GDBM backend, or CDBM backend. The LDAP server must have read/write access to the file directory. See [“Setting up a user ID for your LDAP server”](#) on page 45 for more information.
2. The attributes and object classes that are used by LDBM depend on your usage of LDBM. It is possible that you must add schema to the LDAP server schema. See [“Setting up the schema for LDBM, TDBM, and CDBM”](#) on page 271 and [Chapter 15, “LDAP directory schema,”](#) on page 271 for more information about adding schema to the LDAP server.
3. The files that are contained in the directory that is specified by the **databaseDirectory** server configuration option are for use by the LDAP server only. Do not copy, rename, or add any additional files to the directory specified as unintended consequences could occur during commit processing. If the files in the directory must be backed up, copy the entire directory to another location that is not in use by the LDAP server.

Copying an LDBM backend

If you want to copy an existing LDBM backend to a new one, use the **ds2ldif** utility to unload the existing LDBM backend. Then, use the **ldapadd** utility to load the new LDBM backend. If you want to retain the existing `ibm-entryuuid` attribute values for the entries, the LDAP server must be put into maintenance mode. See [“Basic replication maintenance mode”](#) on page 463 and [“Advanced replication maintenance mode”](#) on page 518 for more information.

If the new LDBM backend is not on the same LDAP server as the existing one, the LDAP server schema for the target LDAP server must contain all the attributes and object classes used by the LDBM entries before they can be loaded into the new LDBM backend. You can use **ds2ldif** or **ldapsearch** to unload the LDAP server schema from the source LDAP server and then load the schema LDIF file into the target LDAP server using **ldapmodify**.

Setting up for CDBM

The LDAP server provides the CDBM backend to store configuration information, for example, for advanced replication and password policy. CDBM is file-based, storing its directory information in a UNIX System Services file system.

The amount of space that is needed to store a CDBM backend in a z/OS UNIX System Services file system is approximately four to six times the size of the expected input LDIF data. Generally, the space that is required to hold the CDBM backend data is two to three times the size of the expected input LDIF data. However, during the CDBM commit process each of the CDBM backend files is copied, therefore, resulting in occasionally needing twice the amount of file system space.

CDBM keeps its directory in storage in the LDAP address space while the LDAP server is running.

When the LDAP server starts for the first time with the CDBM backend configured, the server automatically creates the directories that are specified in the **databaseDirectory** server configuration option (or in the directory that is specified by the **schemaPath** configuration option or in `/var/ldap/schema` if **schemaPath** is not specified). When the directories are created, the LDAP server's user ID is the owner of these directories. The permissions on these directories grant read, write, and execute access to the LDAP server's user ID. The group that the LDAP server's user ID belongs to is granted read access to the directories. As part of the CDBM backend initialization process, the server creates `LDBM-1.db` and `LDBM-2.db` files for the `cn=configuration` and `cn=ibmpolicies` suffixes, along with an `LDBM.ckpt` file. These files are created with the LDAP server's user ID as the owner. The default permissions on these files grant read and write access to the LDAP server's user ID while the group to which the LDAP server's user ID belongs is granted read access.

If the default CDBM backend file or directory permissions or ownership are not sufficient for your needs, they can be changed manually by issuing **chmod** and **chown** commands. The LDAP server retains any manual changes in the file or directory permissions or ownership. For additional information about the **chmod** and **chown** commands, see `chmod - Change the mode of a file or directory` and `chown - Change the owner or group of a file or directory` in *z/OS UNIX System Services Command Reference*.

To configure your LDAP server to run with the CDBM backend of the LDAP server:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files”](#) on page 54).
- You must use the following line to your `ds.conf` file:

```
database cdbm GLDBCD31/GLDBCD64
```

Note:

1. Only one CDBM backend can be configured in an LDAP server. If the **databaseDirectory** option is not specified in the CDBM backend section, the CDBM backend stores its entries in the directory that is specified by the **schemaPath** configuration option. If the **schemaPath** configuration option is not specified, the CDBM backend data is stored in the default **schemaPath** directory that is `/var/ldap/schema`. The **databaseDirectory** value must be different than the ones used by any other LDBM backends or file-based GDBM backend. The LDAP server must have read/write access to the file directory. See [“Setting up a user ID for your LDAP server”](#) on page 45 for more information.
2. Depending on the types of entries you intend to add to the CDBM backend, you might have to add schema to the LDAP server schema for the attributes and objectclasses that are to be used. See [“Setting up the schema for LDBM, TDBM, and CDBM”](#) on page 271 for information about adding schema to the LDAP server.
3. The files that are contained in the directory that is specified by the **databaseDirectory** or **schemaPath** server configuration options are for use by the LDAP server only. Do not copy, rename, or add any additional files to the directory specified as unintended consequences might occur during commit processing. If the files in the directory must be backed up, copy the entire directory to another location that is not in use by the LDAP server.

Setting up for GDBM

The LDAP server can provide a change log containing information about changes to:

- RACF users, groups, user-group connections, and general resource profiles.
- TDBM, LDBM, and CDBM entries.
- LDAP server schema entry.

GDBM can be configured to store change log entries either in a z/OS UNIX System Services file system or in Db2.

Note:

1. Only one GDBM backend can be defined in any given LDAP server.
2. The attributes and object classes used by GDBM are always in the LDAP server schema.
3. See [Chapter 28, “Change logging,” on page 545](#) for additional configuration options that can be specified.
4. If you intend to create change log entries for changes to RACF data, you must also configure an SDBM backend and enable the LDAP Program Callable support. See [“Setting up for SDBM” on page 62](#) and [“Additional required configuration” on page 546](#) for more information.

Configuring file-based GDBM

The amount of space that is needed to store a GDBM (file-based) backend in a z/OS UNIX System Services file system depends on how many change log entries are going to be stored and the size of the change log entries. The number of change log entries can be controlled using the `changeLogMaxEntries` and `changeLogMaxAge` options in the GDBM section of the LDAP server configuration file. The size of a change log entry is related to the size of the LDIF when adding or modifying a TDBM, LDBM, or CDBM entry, because this LDIF is inserted into the change log entry. Generally, the space that is required to hold the GDBM backend data is:

$6 \times (\text{maximum number of GDBM entries}) \times (\text{largest add or modify LDIF} + 1000)$

This includes the extra space that is needed to copy the database files during GDBM commit processing.

When the LDAP server starts for the first time with a new GDBM (file-based) backend that is configured, the server automatically creates the directories that are specified in the `databaseDirectory` server configuration option (or in `/var/ldap/gdbm` if the configuration option is not specified). When the directories are created, the LDAP server's user ID is the owner of these directories. The permissions on these directories grant read, write, and execute access to the LDAP server's user ID. The group that the LDAP server's user ID belongs to is granted read access to the directories. As part of the GDBM (file-based) backend initialization process, the server creates an `LDBM-1.db` file for the changelog backend, along with an `LDBM.ckpt` file. These files are created with the LDAP server's user ID as the owner. The default permissions on these files grant read and write access to the LDAP server's user ID while the group to which the LDAP server's user ID belongs is granted read access.

If the default GDBM (file-based) backend file or directory permissions or ownership are not sufficient for your needs, they can be changed manually by issuing **chmod** and **chown** commands. The LDAP server retains any manual changes in the file or directory permissions or ownership. For more information about the **chmod** and **chown** commands, see [chmod - Change the mode of a file or directory](#) and [chown - Change the owner or group of a file or directory](#) in *z/OS UNIX System Services Command Reference*.

To configure your LDAP server to run with the GDBM (file-based) backend of the LDAP server:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files” on page 54](#)).
- You must use the following line in your `ds.conf` file:

```
database gdbm GLDBGD31/GLDBGD64
```


The default file directory that is used by the file-based GDBM backend to store its entries is `/var/ldap/gdbm`. If you do not want GDBM to use that file directory, then add the `databaseDirectory` option to the GDBM section of the configuration file. The file directory must be different than the ones used by any LDBM backends or the CDBM backend. The LDAP server must have read/write access to the file directory. See [“Setting up a user ID for your LDAP server” on page 45](#) for more information.

Note: The files that are contained in the directory that is specified by the `databaseDirectory` server configuration option are for use by the LDAP server only. Do not copy, rename, or add any additional files to the directory specified as unintended consequences might occur during commit processing. If the files in the directory must be backed up, copy the entire directory to another location that is not in use by the LDAP server.

Configuring Db2-based GDBM

In order to configure your LDAP server to run with the GDBM (Db2-based) backend of the LDAP server:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files” on page 54](#)).
- You must use the following lines in your `ds.conf` file:

```
database gdbm GLDBGD31/GLDBGD64
dbuserid userid
```

where *userid* is the GDBM database owner.

Note:

1. If the GDBM (Db2-based) backend is run in 64-bit mode, then Db2 version 9 with PTF UK50918 or Db2 version 10 or higher is required.
2. The `dbuserid` value must be different than the value used by any TDBM backends. If you specify the `dsnaoini` or `serverName` configuration option for GDBM, then you must also specify the option for each TDBM backend and the value must be the same.

Setting up for Policy Director extended operations

The use of the EXOP backend and the Policy Director extended operations are deprecated.

The LDAP server provides the EXOP backend to support extended operations that retrieve Policy Directory data. See [Chapter 22, “Using extended operations to access Policy Director data,” on page 411](#) for details about using this extended operations support. The EXOP backend is not needed when using any other extended operations, such as those used in advanced replication.

To configure your LDAP server to run with the EXOP backend:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files” on page 54](#)).
- You must use the following line in the global section of the `ds.conf` file to enable Program Call support:

```
listen ldap://:pc
```

- You must also add the following line after the global section of the `ds.conf` file:

```
database exop GLDXPD31/GLDXPD64
```

Setting up for sysplex

An LDAP server running in a sysplex environment supports multiple instances of the same server within a cross-system coupling facility group. Each server instance runs on a separate system but shares the same schema and optionally backend databases. This setup provides improved workload management when the TCP/IP sysplex distributor is used to route incoming connections to available LDAP servers within the sysplex. Because each server in the same group must be identical for the backends that are shared to the

other servers in the group, any server in the group can be used to satisfy a request. Authentication and authorization definitions are the same for all servers in the same group so that a client authenticated by one server in the group is assumed to be authenticated to all the servers in the group.

In order to configure your LDAP server to run in a sysplex:

- If you have not already done this, copy the configuration files from the `/usr/lpp/ldap/etc` directory to the `/etc/ldap` directory (see [“Copying the configuration files”](#) on page 54). When you want the same configuration on all LDAP servers within the sysplex group, you should ensure that they physically share the same configuration file. This setup eliminates the possible incorrect configuration of servers that exist within the same cross system coupling facility (XCF) group.
- Add the following line to the global section of your `ds.conf` file:

```
serverSysplexGroup group_name
```

where `group_name` specifies the cross-system coupling facility (XCF) group. All the LDAP servers sharing the same schema and backend databases must be a member of the same XCF group. LDAP sysplex support is activated when the `serverSysplexGroup` configuration option is specified.

- Each LDAP server in the XCF group must specify the same value for the `schemaPath` configuration option and must have read/write access to the specified directory or to `/var/ldap/schema` if the option is not specified. The schema directory used must exist within a shared z/OS UNIX file system and must be accessible to all servers in the XCF group. For information about setting up a shared z/OS UNIX file system, see [Sharing file systems in a sysplex in z/OS UNIX System Services Planning](#).
- For each LDBM, TDBM, CDBM, and GDBM backend that is to be shared, add the following line to the backend section of your `ds.conf` file:

```
multiserver on
```

Note: The `multiserver` configuration option is not supported by the SDBM backend. Sysplex support for the SDBM backend is provided by RACF and not the LDAP server.

Each LDBM, TDBM, CDBM, and GDBM backend can either be shared within the XCF group or not. To share a backend, specify `multiserver on` in the backend section in the configuration file of each LDAP server. If `multiserver off` is specified or if the `multiserver` option is not specified, then the backend is not shared and changes to the backend are not reflected in the other servers on the sysplex, even if they contain the same suffix. If GDBM or CDBM backends are configured, then all LDBM, TDBM, CDBM, and GDBM backends must be shared or they all must be not shared. If GDBM and CDBM backends are not configured, then some LDBM and TDBM backends can be shared while others are not shared.

When an LDBM, TDBM, CDBM, or GDBM backend is shared, the name parameter must be specified on the database option for that backend, and must be the same in the configuration file for each LDAP server. The configuration file on each LDAP server that is sharing a backend must specify the same suffixes for that backend. Do not specify these suffixes for a different backend. If sharing an LDBM, CDBM, or file-based GDBM database, each LDAP server must have read/write access to the z/OS UNIX directory containing the database files. When an LDBM, CDBM, or file-based GDBM backend is shared, the `databaseDirectory` configuration option must have the same value, exist within a shared z/OS UNIX file system, and must be accessible to all servers in the XCF group. Each server must have read/write access to the specified directory or to `/var/ldap/ldbm` (LDBM), `/var/ldap/schema` (CDBM - defaults to `schemaPath` configuration option setting), `/var/ldap/ldbm` (GDBM) if the `databaseDirectory` configuration option is not specified. For information about setting up a shared z/OS UNIX file system, see [Sharing file systems in a sysplex in z/OS UNIX System Services Planning](#).

If the z/OS UNIX file system owner accidentally leaves the XCF group, the shared file system is moved and unmounted by the recovery task. File access is not available during the recovery processing and the change of LDAP server sysplex owner might cause unexpected results. To avoid changing the LDAP sysplex owner to another LDAP server in the sysplex, do not run the LDAP server sysplex owner from the owner of the shared file system that contains the shared backend database directory file. If possible, mount the shared file system as sysplex-aware, and perform a soft shutdown of z/OS UNIX before the file system owner leaves the XCF group. For information about using zFS in a shared file system environment, see [Using zFS in a shared file system environment in z/OS File System Administration](#).

Modification requests for the LDAP server schema or for a shared backend can be directed to any LDAP server in the sysplex group. The modified schema or directory is seen by all servers within the group. Also, when performing a persistent search of a shared backend, only one persistent search request must be made to one of the LDAP servers in the sysplex. The sysplex support results in all the LDAP servers participating in the persistent search. The exception to this is if the target of the search is a TDBM backend when the `serverCompatLevel` configuration option is less than 4. In this case, an identical persistent search request must be issued to each LDAP server in the sysplex. See “[serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}](#)” on page 125 for more information about `serverCompatLevel`.

Setting up for SSL/TLS

The LDAP server contains the ability to protect LDAP access with Secure Sockets Layer (SSL) and Transport Layer Security (TLS). There are two types of connections that support secure communication:

- An SSL/TLS only secure connection. This connection requires that the first communication between the client and the server be the handshake that negotiates the secure communication. From that point on only secure communication can occur on the connection.
- A bimodal connection that supports secure and non-secure communication. The client is expected to begin communication in a non-secure mode. At some time during communication, the client might change to secure communication by sending a **StartTLS** extended operation after which the handshake to negotiate secure communication occurs followed by secure communication. The client might shut down secure communication causing a **StopTLS** alert to be sent and the server continues communication in a non-secure mode. At a later time, the client might restart secure communication by sending another **StartTLS** extended operation followed by the handshake.

Both types of connections require that SSL/TLS be configured for use by the LDAP server.

Using SSL/TLS protected communications

The Secure Sockets Layer (SSL) and Transport Layer Security (TLS) protocols use public-key infrastructure (PKI) algorithms to establish and maintain an encrypted communications path between a client and server. In z/OS, the ability to set up and communicate over SSL/TLS protected communication links is provided by the LDAP server with a set of services provided in z/OS (the z/OS Cryptographic Services System SSL set of services).

In order for the LDAP client to communicate with an LDAP server over an SSL/TLS-protected TCP/IP socket connection, the LDAP server must transmit a certificate to the LDAP client and, optionally, the client can transmit its certificate to the LDAP server. The LDAP client and server must verify that the certificates they received are valid. After the LDAP client and server have determined the validity of the certificates provided to them, SSL/TLS-protected communication occurs between the LDAP client and server.

The LDAP client and server verify that the certificates sent to them by using public-key digital signatures. The LDAP client and server take the certificates and compare the digital signature in the certificates with a signature that it computes based on having the public-key of the signer of the certificate. In order to do this, the LDAP client and server must have the public-key of the signer of the certificates. The LDAP client and server obtain this by reading a file that contains these public-keys. This file is called a key database.

A key database, RACF key ring, or PKCS #11 token contains the public-keys that are associated with signers of certificates. These public-keys are, in reality, contained in certificates themselves. Therefore, verifying that one certificate requires the use of a different certificate, the signers certificate. In this fashion, a chain of certificates is established, with one certificate being verified by using another certificate and that certificate being verified by yet another certificate, and so on. A certificate, and its associated public key, can be defined as a *root* certificate. A root certificate is self-signed, meaning that the public-key contained in the certificate is used to sign the certificate. Using a root certificate implies that the user trusts the root certificate.

The key databases, RACF key rings, or PKCS #11 tokens used by the LDAP client and server must contain enough certificates in order to verify the certificates sent by the LDAP client and server during the start of the SSL/TLS connection. If either certificate is self-signed, then that certificate must be stored in

the others key database. If the certificates are signed by some other certificate signer, then the signers certificate and any certificates that this certificate depends upon must be stored in the key databases. The key databases, RACF key rings, or PKCS #11 tokens used by the LDAP client and server must also contain the certificates that are transmitted to each other during the startup of the SSL/TLS-protected communications.

Creating and using key databases, key rings, or PKCS #11 tokens

The LDAP client and server use the System SSL functions provided in z/OS to set up SSL/TLS protected communications. The System SSL capability requires a key database, RACF key ring, or PKCS #11 token to be set up before SSL/TLS protected communications can begin.

The key database is a password protected file stored in the file system. This file is created and managed using a utility program provided with System SSL called **gskkyman**. For more information about the **gskkyman** utility, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*. The key database file that is created must be accessible by the LDAP server.

The key ring is maintained by RACF. This object is created and managed using the RACF Digital Certificate command, RACDCERT. Directions for using the RACDCERT command can be found in [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference*.

The user ID under which the LDAP server runs must be authorized by RACF to use RACF key rings. To authorize the LDAP server using ring-specific profile checking, you can use the RACF commands in the following example:

```
RDEFINE RDATALIB <ringowner>.<ringname>.LST UACC(NONE)
PERMIT <LDAPSRV>.<ringname>.LST CLASS(RDATALIB) ID(LDAPSRV) ACCESS(READ)
```

Note: In the example, ACCESS(READ) should be specified if the server certificate is owned by LDAPSRV. Otherwise, ACCESS(UPDATE) should be specified.

Remember to refresh RACF after doing the authorizations.

```
SETROPTS RACLIST(RDATALIB) REFRESH
```

Or to authorize the LDAP client using global profile checking,

```
RDEFINE FACILITY IRR.DIGTCERT.LISTRING UACC(NONE)
PERMIT IRR.DIGTCERT.LISTRING CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
```

Note: In the previous example, ACCESS(READ) should be specified if the server certificate is owned by LDAPSRV. Otherwise, ACCESS(UPDATE) should be specified.

Remember to refresh RACF after doing the authorizations.

```
SETROPTS RACLIST(FACILITY) REFRESH
```

Tip: Global profile checking applies to all key rings. Ring-specific profile checking applies to a specific key ring. Ring-specific checking has precedence over global profile checking. The method that is chosen must work with the methods of permitting and securing access to other key rings being used on your system. Because of the wide scope of coverage that global profile checking provides, ring-specific profile checking is typically the more appropriate method to use.

PKCS #11 tokens are stored and protected by ICSF. The **gskkyman** utility or the RACDCERT command can be used to create or modify PKCS #11 tokens. ICSF uses the CRYPTOZ SAF class to determine if the issuer of the **gskkyman** utility or the RACDCERT command is permitted to perform the operation against a z/OS PKCS #11 token. For more information about the **gskkyman** utility, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*. See [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference* for more information about the RACDCERT command.

The user ID associated with the LDAP server must be authorized by RACF to use the PKCS #11 token. To authorize the LDAP server, you can use the RACF commands in the following example (where NAME is the name of the PKCS #11 token).

```
SETROPTS CLASSACT(CRYPTOZ)
RDEFINE CRYPTOZ USER.NAME UACC(NONE)
RDEFINE CRYPTOZ SO.NAME UACC(NONE)
PERMIT USER.NAME CLASS(CRYPTOZ) ID(LDAPSRV) ACCESS(READ)
PERMIT SO.NAME CLASS(CRYPTOZ) ID(LDAPSRV) ACCESS(READ)
```

Remember to refresh RACF after doing the authorizations.

```
SETROPTS RACLIST(CRYPTOZ) REFRESH
```

For testing purposes, the LDAP server can use a self-signed certificate. In this case, the certificate of the LDAP server must also be stored in the key database, RACF key ring, or PKCS #11 token of the LDAP client in order for SSL/TLS protected LDAP communications to work between the client and server.

If the SSL certificate that the LDAP server is going to use is not marked as the default certificate in the key database, RACF key ring, or the PKCS #11 token then the **sslCertificate** server configuration option must be specified in order to determine which SSL certificate to use.

Obtaining a certificate

The LDAP server or client can obtain a certificate by contacting a certificate authority (CA) and requesting a certificate. Utilities to formulate a certificate request are provided by System SSL, **gskkyman**, and RACF, RACDCERT. This certificate request is typically passed to the CA with an electronic mail message or by an HTML form which is filled out using a web browser. When the CA verifies the information for the LDAP client or server, a certificate is returned to the requester, typically by an electronic mail message. The contents of the mail message are used to define the certificate in the key database, RACF key ring, or PKCS #11 token.

Enabling SSL/TLS support

Follow these steps to enable SSL/TLS support for LDAP. These steps assume that the LDAP server and z/OS Cryptographic Services System SSL are installed and configured. The data sets containing the LDAP and SSL code must be APF-authorized and available to the LDAP server.

1. Generate the LDAP server private key and server certificate. Mark the certificate as the default in the key database, RACF key ring, or PKCS #11 token or use its label on the **sslCertificate** option in the LDAP server configuration file.
2. Configure the LDAP server to the security options you want that are related to SSL/TLS secure communications. For more information, see [“Setting up the security options for the LDAP server” on page 70](#). Those topics are included.
 - Defining the acceptable SSL and TLS protocol levels.
 - Defining the acceptable cipher specifications.
 - Defining the secure sockets and bimodal sockets the server uses to listen for inbound client requests.
 - Defining the type of authentication wanted.
 - Defining the server certificate to be used, and where it is located.
 - Defining the FIPS mode that you want the server to run.
3. Restart the LDAP server.

Setting up the security options for the LDAP server

Several options that are related to the LDAP server SSL/TLS secure communications can be controlled by environment variables that are used by z/OS System SSL. The accepted protocol levels, the cipher suites, and suite B profile are all configured by using environment variables.

The z/OS LDAP server does not support SSL V2 protocol and disables it from being used. SSL V3, TLS V1.0, TLS V1.1, TLS V1.2, and TLS V1.3 protocols are supported. Environment variables and the z/OS System SSL defaults control which of these supported protocols are enabled or disabled.

- The environment variable GSK_PROTOCOL_SSLV3 can be set to ON to enable the SSL V3 protocol, or OFF to disable it.
- The environment variable GSK_PROTOCOL_TLSV1 can be set to ON to enable TLS V1.0 protocol, or OFF to disable TLS V1.0 protocol.

The TLS V1.1 and TLS V1.2, and TLS V1.3 protocols are disabled by default. To enable the TLS V1.1 protocol, set the environment variable GSK_PROTOCOL_TLSV1_1 to "ON". Similarly, to enable TLS V1.2 protocol, set the environment variable GSK_PROTOCOL_TLSV1_2 to "ON".

To enable TLS V1.3 protocol, you must set the following environment variables:

- GSK_PROTOCOL_TLSV1_3 to "ON".
- GSK_TLS_SIG_ALG_PAIRS for signature algorithm pair specification.
- GSK_CLIENT_TLS_KEY_SHARES for the key share option on the LDAP client side.
- GSK_SERVER_TLS_KEY_SHARES for the key share option on the LDAP server side.

The z/OS LDAP server allows the cipher suites that are used in SSL/TLS secure connections to be defined externally by using z/OS System SSL environment variables and default settings, or to be defined directly with the `sslCipherSpecs` configuration option in "bit-mask" form. The "bit-mask" form is discouraged, as this method is limited in its support and provided solely for compatibility with versions prior to z/OS V2R1. This is described more fully, later in this section. The preferred method is to specify the `sslCipherSpecs` configuration option as "`sslCipherSpecs GSK_V3_CIPHER_SPECS_EXPANDED`" in your z/OS LDAP server configuration file. In this case, the SSL cipher specifications are controlled externally in the environment, and you have all the control that is afforded by z/OS System SSL environment variables and defaults. You can either use the z/OS System SSL default settings by leaving the z/OS System SSL environment variable `GSK_V3_CIPHER_SPECS_EXPANDED` unset. Or you can set the z/OS System SSL environment variable `GSK_V3_CIPHER_SPECS_EXPANDED` to the list of 4-character cipher suites you want in order of preference. For example, to set the cipher suites to the following two in order:

C028

256-bit AES encryption with SHA-384 message authentication and ephemeral ECDH key exchange that is signed with an RSA certificate.

C027

128-bit AES encryption with SHA-256 message authentication and ephemeral ECDH key exchange that is signed with an RSA certificate.

Include this line in the general section of your LDAP server configuration file:

```
sslCipherSpecs      GSK_V3_CIPHER_SPECS_EXPANDED
```

Include this in your LDAP server environment variable file:

```
GSK_V3_CIPHER_SPECS_EXPANDED=C028C027
```

In some cases, other z/OS System SSL environment variables might define the SSL cipher specifications, such as `GSK_SUITE_B_PROFILE`. See [“Environment variables used by the LDAP server” on page 174](#) for more information on how to specify environment variables for the LDAP server.

If the only cipher specifications required are listed in [Table 6 on page 74](#)

To restrict the SSL/TLS secure connections that are used by the z/OS LDAP server to the Suite B Profile, you must set the `GSK_SUITE_B_PROFILE` environment variable to the appropriate setting. If the Suite B profile is enabled, this controls the acceptable SSL/TLS protocol levels and cipher suites, overriding the previously mentioned settings.

The following options for SSL/TLS can be set in the LDAP server configuration file. They are described in detail in [“Configuration file options” on page 90](#).

- listen
- sslAuth
- sslCertificate
- sslCipherSpecs
- sslFipsState
- sslKeyRingFile
- sslKeyRingFilePW
- sslKeyRingPWStashFile
- sslMapCertificate

Note:

1. The `replKeyRingFile` and `replKeyRingPW` options are no longer necessary or recognized by the LDAP server. These options should be removed from the configuration file.
2. The `security`, `port`, and `securePort` options are deprecated by the `listen` option. For more information, see the `listen` option.

LDAP can be configured for SSL/TLS in two ways:

- For secure only communication, specify one or more `listen` options for secure communications in the following format:

```
ldaps://[IP_address | hostname | INADDR_ANY | in6addr_any][:portNumber]
```

- For bimodal (non-secure/secure) communication, specify one or more `listen` options for non-secure communications in the following format:

```
ldap://[IP_address | hostname | INADDR_ANY | in6addr_any][:portNumber]
```

See the `listen` option for more information.

The `sslKeyRingFile` option specifies the name of the key database, the RACF key ring, or the PKCS #11 token that is used by the LDAP server. This key database, RACF key ring, or PKCS #11 token is also used for SSL/TLS protected replication. Because the replicating server might be acting as both a replica server and an LDAP server, the replica server's certificate (or CA certificate) must be contained in the replicating server's key database file, RACF key ring, or PKCS #11 token. When using a PKCS #11 token, the `sslKeyRingFile` configuration option must be set such as this (where NAME is the name of the PKCS #11 token): `*TOKEN*/NAME`

A key database requires a password. The password can be specified on the `sslKeyRingFile` option or the name of a password stash file can be specified on the `sslKeyRingPWStashFile` option in the LDAP server configuration file. Use of a stash file provides a method of specifying a password in a form that cannot be easily read by a human. The **gskkyman** utility provides a function to create the key database password stash file.

When a RACF key ring or PKCS #11 token is used instead of a key database, the `sslKeyRingFilePW` and `sslKeyRingPWStashFile` cannot be specified in the configuration file.

The LDAP server is configured to provide server and, optionally, client authentication. The `sslAuth` option controls this setting.

When using server authentication, by setting the `sslAuth` server configuration option to `serverAuth`, the LDAP server must have a digital certificate (based on the X.509 standard). This digital certificate is used to authenticate the LDAP server to the LDAP client application. The LDAP server supplies the client with the LDAP servers X.509 certificate during the initial SSL handshake. If the client validates the servers certificate, then a secure, encrypted communication channel is established between the LDAP server and the LDAP client application.

In addition, if the LDAP server is configured to use server and client authentication by setting the `sslAuth` server configuration option to `serverClientAuth` and the client sends a digital certificate

on the initial SSL handshake, it must be validated by the LDAP server before the secure encrypted communication channel is established between them. The certificate is used to establish the bind identity of the client. This identity is also affected by the `sslMapCertificate` configuration option. See [“Support of certificate bind” on page 76](#) for more information.

Note: If the LDAP server is configured for both server and client authentication but a client does not send a digital certificate, then the server acts as if configured for server authentication only. This is for compatibility with earlier versions of the LDAP server. In addition, System SSL can be configured to fail the SSL handshake if the client does not provide a certificate after the server requests client authentication. System SSL provides an environment variable, `GSK_CLIENT_AUTH_NOCERT_ALERT`, which indicates that a client certificate must be passed to the server to prevent the SSL handshake from failing.

The `sslMapCertificate` option specifies whether the server maps a certificate that is used in a SASL EXTERNAL bind to the RACF user that is associated with the certificate.

The `sslFipsState` option indicates whether the LDAP server runs in FIPS mode during secure communication. Turning this option on specifies that the SSL connection between the LDAP server and the LDAP client is required to meet the FIPS 140-2 and SP800-131A criteria. In order to meet the FIPS 140-2 and SP800-131A criteria, when executing the FIPS mode, it is more restrictive with respect to cryptographic algorithms, protocols, and key sizes that can be supported.

There are four enumerations that can be specified for this option.

OFF

FIPS mode is off.

LEVEL1

Utilizes 80-bit security strength for all operations.

LEVEL2

Utilizes 112-bit security strength when generating new keys, digital signatures, and RSA encryption.

LEVEL permits 80-bit security strength when performing digital signature verification and RSA decryption when processing previously protected information.

LEVEL3

Enforces FIPS mode to SP800-131A. A security strength with a size of 112 bit or higher is acceptable for all operations. However, 80 bit is not allowed for any operation.

The `sslCertificate` option indicates the label of the server certificate that is to be used. This option is needed if the default certificate has not been set in the key database, RACF key ring, or PKCS #11 token or if a certificate other than the default certificate is what you want.

The `sslCipherSpecs` configuration option can be specified in "bit-mask" form to directly define the cipher specifications that are accepted from clients when using SSL/TLS secure connections. The "bit-mask" form is discouraged, as this method is limited in its support and provided solely for compatibility with earlier versions before z/OS V2R1. It supports only a portion of the cipher suites available in z/OS System SSL, contains no 4-character cipher suites, and provides no order of preference. The preferred approach is to specify `sslCipherSpecs GSK_V3_CIPHER_SPECS_EXPANDED` and use the environment variable `GSK_V3_CIPHER_SPECS_EXPANDED` to define the list of 4-character cipher specifications, in order of preference, as described earlier in this section.

If the cipher specifications you want are included in [Table 6 on page 74](#), and if the order of preference matches the default order that is provided by z/OS System SSL, then the "bit-mask" form of the `sslCipherSpecs` configuration option may be used with any of the values described. See the [sslCipherSpecs](#) configuration option for more information.

Depending upon the level of System SSL support, the list of acceptable cipher specifications might be lowered because certain specifications might not be supported by System SSL for that level of the product. [Table 6 on page 74](#) lists the LDAP `sslCipherSpecs` mask values that are accepted by the `sslCipherSpecs` option, and the related decimal, hexadecimal, and keyword values. It also lists the System SSL cipher number.

Table 6. SSL ciphers supported by the sslCipherSpecs configuration option				
Cipher	Decimal value	Hexadecimal value	SSL value	Description
ALL	4294967295	xFFFFFFFF		All cipher suites
ANY	4294967295	xFFFFFFFF		All cipher suites
DES_SHA_EXPORT	512	x00000200	09	56-bit DES encryption with SHA-1 message authentication and RSA key exchange
DH_DSS_AES_128_SHA	1048576	x00100000	30	128-bit AES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with a DSS certificate
DH_DSS_AES_256_SHA	65536	x00010000	36	256-bit AES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with a DSS certificate
DH_DSS_DES_SHA	128	x00000080	0C	56-bit DES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with a DSS certificate
DH_DSS_TRIPLE_DES_SHA	8	x00000008	0D	168-bit 3DES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with a DSS certificate
DH_RSA_AES_128_SHA	2097152	x00200000	31	128-bit AES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with an RSA certificate
DH_RSA_AES_256_SHA	131072	x00020000	37	256-bit AES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with an RSA certificate
DH_RSA_DES_SHA	64	x00000040	0F	56-bit DES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with an RSA certificate
DH_RSA_TRIPLE_DES_SHA	4	x00000004	10	168-bit 3DES encryption with SHA-1 message authentication and fixed Diffie-Hellman key exchange that is signed with an RSA certificate
DHE_DSS_AES_128_SHA	4194304	x00400000	32	128-bit AES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with a DSS certificate
DHE_DSS_AES_256_SHA	262144	x00040000	38	256-bit AES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with a DSS certificate
DHE_DSS_DES_SHA	32	x00000020	12	56-bit DES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with a DSS certificate
DHE_DSS_TRIPLE_DES_SHA	2	x00000002	13	168-bit 3DES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with a DSS certificate

Table 6. SSL ciphers supported by the <code>sslCipherSpecs</code> configuration option (continued)				
Cipher	Decimal value	Hexadecimal value	SSL value	Description
DHE_RSA_AES_128_SHA	8388608	x00800000	33	128-bit AES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with an RSA certificate
DHE_RSA_AES_256_SHA	524288	x00080000	39	256-bit AES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with an RSA certificate
DHE_RSA_DES_SHA	16	x00000010	15	56-bit DES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with an RSA certificate
DHE_RSA_TRIPLE_DES_SHA	1	x00000001	16	168-bit 3DES encryption with SHA-1 message authentication and ephemeral Diffie-Hellman key exchange that is signed with an RSA certificate
RC2_MD5_EXPORT	4096	x00001000	06	40-bit RC2 encryption with MD5 message authentication and RSA key exchange
RC4_MD5_EXPORT	8192	x00002000	03	40-bit RC4 encryption with MD5 message authentication and RSA key exchange
RC4_MD5_US	2048	x00000800	04	128-bit RC4 encryption with MD5 message authentication and RSA key exchange
RC4_SHA_US	1024	x00000400	05	128-bit RC4 encryption with SHA-1 message authentication and RSA key exchange
RSA_AES_128_SHA	16384	x00004000	2F	128-bit AES encryption with SHA-1 message authentication and RSA key exchange
RSA_AES_256_SHA	32768	x00008000	35	256-bit AES encryption with SHA-1 message authentication and RSA key exchange
TRIPLE_DES_SHA_US	256	x00000100	0A	168-bit 3DES encryption with SHA-1 message authentication and RSA key exchange

Setting up an LDAP client

As with the LDAP server, the LDAP client that wants to use SSL/TLS protected communication needs access to a key database, RACF key ring, or PKCS #11 token. If the LDAP server you are going to contact is using a self-signed certificate (as is done frequently while testing SSL/TLS protected communications between an LDAP client and server), then the self-signed certificate of the LDAP server must be stored into the LDAP client's key database, RACF key ring, or PKCS #11 token.

If the target LDAP server is using a certificate that is signed by a certificate authority (CA), you must ensure that the LDAP client's certificate is also signed by a CA and is contained in the client's key database, RACF key ring, or PKCS #11 token. Use the Certificate Chain or signed certificate provided by the CA for obtaining the CA certificate. The certificate should be obtainable in a format that is acceptable to the **gskkyman** utility or RACDCERT command.

If the LDAP server is configured for server and client authentication and the client wants client authentication to occur, then the LDAP client must obtain its own certificate from a CA and store it in the client's own key database, RACF key ring, or PKCS #11 token and mark it as the default.

After the key database file, RACF key ring, or PKCS #11 token is created and contains the appropriate certificates, then the LDAP client is ready to perform SSL/TLS protected communications with an LDAP server. The LDAP client utilities (for example, **ldapsearch**) can be used to communicate securely with the LDAP server using a secure only connection. For more information about the utilities, see [LDAP client utilities](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

Using LDAP client APIs to access LDAP using SSL/TLS

The **ldap_ssl_client_init()** and **ldap_ssl_init()** APIs can be used to start a secure only connection to an LDAP server. A description of these APIs can be found in [z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

Support of certificate bind

The SASL bind mechanism of EXTERNAL is supported by the LDAP server. This means that the authentication on the bind is performed using the data obtained during the SSL/TLS client authentication that was performed on the SSL/TLS handshake with the client.

To use SASL EXTERNAL bind, the following steps must occur:

- The LDAP server must be configured and started with `sslAuth` set to `serverClientAuth` so that the server can authenticate the client.
- The client connects to the LDAP server and performs the SSL/TLS handshake. The handshake sends the client certificate to the LDAP server.
- The client performs a SASL bind with the mechanism of EXTERNAL.

At this point, the LDAP server considers the bind DN of the client for authorization purposes to be the client's DN as transmitted in the client's certificate on the handshake. The name specified in the BIND request must match the subject name in the client certificate or must be null.

The RACF RACDCERT command is used to associate a certificate with a RACF user ID. If `check`, `add`, or `replace` is specified on the `sslMapCertificate` configuration option, the LDAP server determines if the client certificate used during an EXTERNAL bind is associated with a RACF user ID, therefore, adds that RACF user ID to the bind information kept for this client.

After an EXTERNAL bind, the client can access LDBM, CDBM, TDBM, and GDBM backends based on the bind DN and the groups it belongs to. If the `sslMapCertificate` option is set to keep the associated RACF user ID in the bind information, the client can perform SDBM operations to access RACF data, under the context of the RACF user ID.

For more information about associating a certificate with a RACF user ID, see [Overview of digital certificates](#) in *z/OS Security Server RACF Security Administrator's Guide*.

Configuring for encryption or hashing

The LDAP server allows the **userPassword**, **secretKey**, **replicaCredentials**, **ibm-replicaKeyPw**, **ibm-slappedAdminPw**, and **ibm-slappedMasterPw** attribute values to be encrypted or hashed when stored in the directory. This prevents clear data from being accessed by users, including the system administrators. An administrator may configure the server to encrypt or hash **userPassword** or **ibm-slappedAdminPw** attribute values in either a one-way hashing format or a two-way symmetric encryption format. **secretKey**, **replicaCredentials**, **ibm-replicaKeyPw**, and **ibm-slappedMasterPw** attribute values can only be encrypted in a two-way symmetric encryption format. Besides encryption or hashing, access to data stored in the directory can be protected by the directory access control mechanism.

One-way hashing formats

The one-way hashing algorithms that are supported by the LDAP server are crypt, MD5, SHA, Salted SHA (SSHA), SHA-2, and Salted SHA-2. The SHA-2 and Salted SHA-2 hashing algorithms consists of the following methods: SHA224, SSHA224 (Salted SHA224), SHA256, SSHA256 (Salted SHA256), SHA384, SSHA384 (Salted SHA384), SHA512, and SSHA512 (Salted SHA512).

Restriction: If the LDAP server is configured to use any SHA-2 or Salted SHA-2 hashing method, the server compatibility must be 7 or greater and ICSF must also be installed because the LDAP server uses the ICSF PKCS #11 omnipresent token to perform the SHA-2 and Salted SHA-2 hashing. The user ID that runs the LDAP server must have READ access to the CSFPOWH profile in the CSFSERV class to perform the SHA-2 or Salted SHA-2 hashing. For more information, see [“Additional setup for using SHA-2 or Salted SHA-2 hashing”](#) on page 50.

During a simple bind, the bind password is hashed using the appropriate algorithm and compared with the stored hashed `userPassword` or `ibm-slapdAdminPw` attribute value. Assuming that a client is authorized using directory access controls to see the `userPassword` or `ibm-slapdAdminPw` attribute values on a search, the values are returned to the client in one of the following manners:

1. If the `pwSearchOutput` configuration option is set to **binary** and the `userPassword` or `ibm-slapdAdminPw` attribute value is hashed in MD5 or SHA, the LDAP server returns the encryption tag (either {MD5} or {SHA}) in UTF-8 followed by the binary hash.
2. If the `pwSearchOutput` configuration option is set to **base64** and the `userPassword` or `ibm-slapdAdminPw` attribute value is hashed in MD5 or SHA, the LDAP server returns the encryption tag (either {MD5} or {SHA}) in UTF-8 followed by the base64-encoded binary hash.
3. If the `userPassword` or `ibm-slapdAdminPw` attribute value is hashed in crypt, the LDAP server returns the encryption tag ({crypt}) in UTF-8 followed by the binary hash and sent over the wire in UTF-8. The `pwSearchOutput` configuration option has no bearing on the retrieval of crypt hashed password values.
4. If the `userPassword` or `ibm-slapdAdminPw` attribute value is hashed in SHA-2 (SHA224, SHA256, SHA384, or SHA512), the LDAP server returns the encryption tag (for example, {SHA224}) in UTF-8 followed by the base64-encoded binary hash. The `pwSearchOutput` configuration option has no bearing on the retrieval of SHA-2 hashed password values.
5. If the `userPassword` or `ibm-slapdAdminPw` attribute value is hashed in Salted SHA (SSHA) or Salted SHA-2 (SSHA224, SSHA256, SSHA384, or SSHA512), the LDAP server returns the encryption tag (for example, {SSHA}) in UTF-8 followed by the base64-encoded binary hash and salt value. The `pwSearchOutput` configuration option has no bearing on the retrieval of Salted SHA (SSHA) or Salted SHA-2 hashed password values.

The following are examples of retrieving the same SHA hashed `userPassword` attribute value, using the **ldapsearch** client utility with the `-L` option specified. For more information about the **ldapsearch** client utility, see [ldapsearch utility in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

When the `pwSearchOutput` configuration option is set to **binary**, the SHA hashed `userPassword` value is displayed by **ldapsearch** as follows:

```
userpassword:: e1NIQX2pmT42RwaBaro+JXF4UMJsnNDYnQ==
```

The `userPassword` attribute value that is returned above contains both the UTF-8 encryption tag, {SHA}, and the binary hashed data, but they have been base64-encoded by the **ldapsearch** client utility to present the value in a printable format.

When the `pwSearchOutput` configuration option is set to **base64**, the SHA hashed `userPassword` value is displayed by **ldapsearch** as follows:

```
userpassword: {SHA}qZk+NkcGgWq6PiVxeFDCbJzQ2J0=
```

The `userPassword` attribute value that is returned above is displayed as sent to the **ldapsearch** client utility because the hashed binary data after the {SHA} encryption tag has already been base64-encoded by the LDAP server.

For applications requiring retrieval of clear text passwords or data, such as middle-tier authentication agents, the directory administrator must configure the LDAP server to perform either a two-way encryption or no encryption of user passwords or data.

Two-way encryption formats

The supported two-way encryption formats include DES and AES. Two-way encryption allows the values of the **userPassword**, **secretKey**, **replicaCredentials**, **ibm-replicaKeyPw**, **ibm-slappedAdminPw**, or **ibm-slappedMasterPw** attributes to be retrieved as part of an entry in the original clear format. Some applications, such as middle-tier authentication servers, require passwords to be retrieved in clear text while installation security policies might prohibit storing clear passwords in secondary permanent storage. This option satisfies both requirements. An encrypted password can be used for password matching on a simple bind and can be decrypted for return as clear text on a search request. During simple bind, the stored encrypted **userPassword** or **ibm-slappedAdminPw** attribute values are decrypted and compared with the bind password. During a search, if the client is authorized using directory access controls to see the **userPassword**, **secretKey**, **replicaCredentials**, **ibm-replicaKeyPw**, **ibm-slappedAdminPw**, or **ibm-slappedMasterPw** attribute values, then they are decrypted and returned as clear text.

Symmetric encryption keys

The DES and AES encryption format use symmetric encryption keys. DES uses 56-bit (single length), 112-bit (double length), or 168-bit (triple length) keys while AES uses 128-bit, 192-bit, or 256-bit keys. DES or AES keys are stored in the ICSF CKDS or in a sequential or partitioned data set referenced by the LDAPKEYS DD statement. For AES keys, the LDAPKEYS data set only allows 256-bit keys.

For instructions on how to generate and store a key in the CKDS, see [Managing Cryptographic Keys Using the Key Generator Utility in z/OS Cryptographic Services ICSF Administrator's Guide](#).

The AES and DES keys supported by the LDAP server depends on the underlying hardware and ICSF support. AES and DES keys can be stored in the clear or encrypted in the CKDS. For more information about the AES and DES keys that are supported for your hardware and ICSF level, see *z/OS Cryptographic Services ICSF Overview*.

DES and AES keys can be stored in a sequential or partitioned data set referenced by the LDAPKEYS DD statement. The LDAPKEYS data set should be used with caution as all AES and DES keys are stored in the clear. The data set consists of fixed-length or variable-length records with a maximum record length of 255. The records are assumed to be in the IBM-1047 code page. Comment records begin with '#' or '*' and blank records are ignored. Each record in the data set defines a single key and has the following format:

```
key-label key-part-1 key-part-2 key-part-3 key-part-4
```

The fields are separated by one or more blanks. Each key part consists of 16 hexadecimal characters representing 8 bytes of the key. A DES key requires the key label and the one, two, or three key parts while an AES key requires the key label and all four key parts. In a DES key, the low-order bit in each byte is a parity bit. The parity bit must be set so that there is an odd number of 1s in each byte, but the bit is not used for encryption. Therefore, DES uses 56-bits out of each 8-byte key part for encryption. An AES key does not use parity bits, therefore, the entire key (256 bits) is used for encryption.

The LDAP server checks the LDAPKEYS data set first when looking for a key label. If the key label is not found, then the LDAP server attempts to locate an AES or DES key in the ICSF CKDS.

Configuring for user and administrator password encryption or hashing

The LDAP server allows prevention of unauthorized access to user or administrator passwords in the LDBM, TDBM, and CDBM backends. The **userPassword** and **ibm-slappedAdminPw** attribute values can be encrypted or hashed when stored in the directory, which prevents clear text passwords from being

accessed by any users, including the system administrators. Use of the terms "user password" and "password" pertain to the `userPassword` attribute. Use of the term "user entry" refers to an entry in LDBM, TDBM, or CDBM that contains a `userPassword` attribute. Use of the terms "administrator password" and "password" pertain to the `ibm-slapdAdminPw` attribute. Use of the term "administrator entry" refers to an entry in LDBM, TDBM, or CDBM that contains an `ibm-slapdAdminPw` attribute.

An administrator may configure the server to encrypt or hash `userPassword` and `ibm-slapdAdminPw` attribute values in either a one-way hashing format or a two-way, symmetric, encryption format. The `pwEncryption` configuration option in an LDBM, TDBM, or CDBM section of the LDAP server configuration file specifies the encryption method that is to be used to encrypt or hash the `userPassword` and `ibm-slapdAdminPw` attribute values in that LDBM, TDBM, or CDBM backend. For more information about the password encryption or hashing types, see the `pwEncryption` option at "`pwEncryption {none | crypt | MD5 | SHA | SSHA | DES:keylabel | AES:keylabel}`" on page 119.

After the server is configured and started, any user or administrator passwords for new user or administrator entries or modified passwords for existing user or administrator entries are encrypted or hashed before they are stored in either the LDBM, TDBM, or CDBM backend. The encrypted or hashed passwords are tagged with the encryption algorithm name so that passwords encrypted or hashed in different formats can coexist in the directory. If a tagged encrypted or hashed `userPassword` or `ibm-slapdAdminPw` attribute value is present on an add or modify operation, the attribute value is added as it is, with no additional encryption or hashing performed on the value even if the `pwEncryption` configuration option is set to a different type of encryption or hashing.

If the `pwEncryption` configuration option in an LDBM, TDBM, or CDBM backend is changed, existing passwords remain unchanged and continue to be usable. In other words, existing user and administrator password values are not automatically converted to the new encryption method or key label.

The **db2pwdn** utility is provided as a migration utility to encrypt or hash all unencrypted, AES encrypted, or DES encrypted `userPassword` attribute values in the encryption or hashing method specified by the `pwEncryption` configuration option in the LDBM, TDBM, or CDBM backend. The **db2pwdn** utility does not convert encrypted or hashed `ibm-slapdAdminPw` attribute values. For example, the **db2pwdn** utility allows an LDAP administrator to convert passwords from AES to DES, DES to AES, or AES to crypt. The **db2pwdn** utility is similar to the LDAP client utilities, such as **ldapsearch**, in that it acts such as a client to the LDAP server and has similar command-line parameters. For more information about the **db2pwdn** utility, "[The db2pwdn utility](#)" on page 221. The **db2pwdn** utility must be run by an LDAP administrator with the appropriate authority or a user with the authority to update `userPassword` values. See Chapter 9, "[Administrative group and roles](#)," on page 155 for more information about administrative role authority.

If the `pwEncryption` configuration option is changed from AES or DES encryption to another encryption or hashing method or to a different AES or DES key label, the LDAP server must have access to the original AES or DES key label so that decryption of existing `userPassword` and `ibm-slapdAdminPw` values still occurs on bind, search, and compare operations. If you want to remove the LDAP server's access to the original AES or DES key label, it is necessary to migrate all existing AES or DES `userPassword` values to the new encryption or hashing method or new AES or DES key label by using the **db2pwdn** utility. To migrate all existing AES or DES `ibm-slapdAdminPw` values to the new encryption method or new AES or DES key label, each entry that contains an `ibm-slapdAdminPw` value must be searched to obtain its value. Then, these entries must be manually modified using the **ldapmodify** utility to replace the existing value with the same value so that the new encryption or hashing method is used. After all AES or DES encrypted passwords are converted to the new encryption or hashing method or new AES or DES key label, the LDAP servers access to the original AES or DES key label can be removed.

A simple bind succeeds if the password provided in the bind request matches any of the multiple values of the `userPassword` attribute. A simple bind succeeds with an administrator entry if the password provided in the bind request matches the single `ibm-slapdAdminPw` attribute value. Note that depending on when `userPassword` or `ibm-slapdAdminPw` values are stored in the directory, different attribute values can be encrypted or hashed using different encoding methods.

When **ldif2ds** is used to load a TDBM backend, all clear text `userPassword` and `ibm-slapdAdminPw` attribute values in new entries are encrypted or hashed by the method specified on the `pwEncryption` configuration option in the LDAP server configuration file. If there is a tagged encrypted or hashed

userPassword or ibm-slapdAdminPw attribute value in an entry, the attribute value is added as it is, with no additional encryption or hashing performed on the value even if the pwEncryption configuration option is set to a different type of encryption or hashing.

For information about the unloading of userPassword and ibm-slapdAdminPw attribute values in the **ds2ldif** utility, see [“The ds2ldif utility”](#) on page 225.

Note:

1. The z/OS LDAP server does not permit userPassword or ibm-slapdAdminPw attributes in distinguished names.
2. Some important considerations for password encryption or hashing and basic replication are described in [“Data encryption or hashing and basic replication”](#) on page 458.

If userPassword or ibm-slapdAdminPw attribute values are replicated in an advanced replication environment, the attribute values are replicated in the clear no matter the pwEncryption configuration option setting. Use a secure SSL connection between the supplier and consumer servers to protect this sensitive data. See [“Replication agreements”](#) on page 483 for more information.

3. The **crypt()** algorithm, implemented across many platforms, accepts only the first eight characters of a password. As a result, any password supplied on an ldap_simple_bind() or ldap_compare() API that matches the first eight characters of a userPassword or ibm-slapdAdminPw attribute value hashed with the crypt algorithm in the directory matches.

Configuring for secret encryption

The LDAP server allows prevention of unauthorized access to data other than user passwords in the LDBM, TDBM, and CDBM backends. The **secretKey**, **replicaCredentials**, **ibm-replicaKeyPwd**, and **ibm-slapdMasterPw** attribute values can be encrypted when stored in the directory, which prevents clear text passwords and data from being accessed by any users, including the system administrators. Use of the term "secret encryption" refers to any entry in LDBM, TDBM, or CDBM that contains **secretKey**, **replicaCredentials**, **ibm-replicaKeyPwd**, or **ibm-slapdMasterPw** attributes.

The administrator may configure an LDBM, TDBM, or CDBM backend in the server to encrypt the secret encryption attribute values in DES or AES by specifying the **secretEncryption** option in the LDBM, TDBM, or CDBM backend section of the LDAP server configuration file. For more information about encrypting secret encryption attribute values, see the **secretEncryption** option at [“secretEncryption {none | DES:keylabel | AES:keylabel}”](#) on page 123.

After the server is configured and started, any secret encryption attribute values for new user entries or modified secret encryption attribute values for existing user entries are encrypted before they are stored in either the LDBM, TDBM, or CDBM backend. The encrypted secret encryption attribute values are tagged with the encryption algorithm name so that values encrypted in different formats can coexist in the directory.

If the **secretEncryption** configuration option in an LDBM, TDBM, or CDBM backend is changed, existing secret encryption attribute values remain unchanged and continue to be usable. In other words, existing secret encryption attribute values are not automatically converted to the new encryption method or key label.

If the **secretEncryption** configuration option is changed from AES to DES, DES to AES, or to a different AES or DES key label, the LDAP server must have access to the original AES or DES key label so that decryption of existing values still occurs on bind, search, and compare operations. If you want to remove the LDAP server's access to the original AES or DES key label, it is necessary to migrate all existing AES or DES encrypted secret encryption values to the new AES or DES key label. This is accomplished by using **ldapsearch** to retrieve all the entries that have secret encryption values. For each entry that is returned by **ldapsearch**, use **ldapmodify** to change the secret encryption to the same value returned on **ldapsearch**. By modifying secret encryption values in this manner, the LDAP server re-encrypts the values using the new AES or DES key label that is specified on the **secretEncryption** configuration option. After the conversion of all secret encryption values is completed, the LDAP server's access to the original AES or DES key label can be removed.

When **ldif2ds** is used to load a TDBM backend, all clear text secret encryption attribute values are encrypted by the method specified on the **secretEncryption** option in the LDAP server configuration file.

For information about the unloading of secret encryption attribute values, see [“The ds2ldif utility” on page 225](#).

Some important considerations for secret encryption or hashing and basic replication are described in [“Data encryption or hashing and basic replication” on page 458](#). If secret encryption attribute values are replicated in an advanced replication environment, the attribute values are replicated in the clear no matter the **secretEncryption** configuration option setting. Use a secure SSL connection between the supplier and consumer servers to protect this sensitive data. See [“Replication agreements” on page 483](#) for more information.

Configuring for securityLabel option

If you are configuring the **securityLabel** option, you must do one of the following:

- Ensure that the LDAP server user ID has read access to the BPX.POE resource in the FACILITY class.
- Assign the LDAP server user ID a UID of 0 when the BPX.POE resource is not defined.

For other LDAP server considerations in a multilevel security environment, see [z/OS Planning for Multilevel Security and the Common Criteria](#).

Chapter 8. Customizing the LDAP server configuration

The LDAP server configuration file, `ds.conf`, contains configuration options that are read once, when the LDAP server is started. Changes to this file are not put into effect until the LDAP server is restarted. The `ds.conf` file is also used by the **ds2ldif** and **ldif2ds** utilities. The following topics contain more information about the LDAP server configuration file and options that can be specified in it.

- [“Creating the ds.conf file” on page 83](#)
- [“Configuration file options” on page 90](#)
- [“Configuration considerations ” on page 143](#)
- [“Configuring the operational mode ” on page 145](#)
- [“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#)
- [“Example configuration scenarios” on page 152](#)

The CDBM backend contains configuration entries whose attributes represent configuration options. These configuration entries are read when the LDAP server is started. The attribute values can be changed dynamically by an LDAP modify command while the LDAP server is running. All changes take effect immediately, without restarting the LDAP server. The CDBM backend itself is configured in the LDAP server configuration file.

- [“CDBM backend configuration and policy entries” on page 137](#)

Creating the ds.conf file

This section contains information that is necessary for creating the `ds.conf` configuration file. You must restart the server to reflect the changes made to the `ds.conf` file as the file is only read in at server startup.

Locating ds.conf

All LDAP server runtime configuration is accomplished through the configuration file `ds.conf`, installed in the `/usr/lpp/ldap/etc` directory. If this is your first time installing the LDAP server, create a new copy of `ds.conf` with:

```
cp /usr/lpp/ldap/etc/ds.conf /etc/ldap/ds.conf
```

and edit `/etc/ldap/ds.conf`.

The default LDAP server configuration file is `/etc/ldap/ds.conf`. A different configuration file can be specified using the `-f` command-line parameter when starting the LDAP server, **ds2ldif**, and **ldif2ds** utilities.

The initial configuration contains default versions of some configuration settings. It does not contain a database suffix.

Configuration file format

The `ds.conf` file consists of the following sections:

Global section

Contains configuration options that apply to the LDAP server as a whole (including all backends).

SDBM backend-specific section

Contains configuration options that apply to the SDBM backend.

TDBM backend-specific section

Contains configuration options that apply to the TDBM backend. It is possible to have one or more of these sections depending on how many TDBM backends your installation uses.

GDBM (Db2-based) backend-specific section

Contains configuration options that apply to the Db2-based GDBM change log backend. The configuration of either type of GDBM change log backend is mutually exclusive. The LDAP server ends when a file-based GDBM backend and a Db2-based GDBM backend are both configured in the same configuration file.

LDBM backend-specific section

Contains configuration options that apply to the LDBM backend. It is possible to have one or more of these sections depending on how many LDBM backends your installation uses.

GDBM (file-based) backend-specific section

Contains configuration options that apply to the file-based GDBM change log backend. The configuration of either type of GDBM change log backend is mutually exclusive. The LDAP server ends when a file-based GDBM backend and a Db2-based GDBM backend are both configured in the same configuration file.

CDBM backend-specific section

Contains configuration options that apply to the file-based CDBM backend.

EXOP backend-specific section (deprecated)

Contains only the **database** statement necessary for the EXOP backend.

Figure 6 on page 84 shows the general format of `ds.conf`.

```
# Global options - these options apply to every database
<global configuration options>

# SDBM database definition and configuration options
database SDBM GLDBSD31/GLDBSD64
<configuration options specific to SDBM backend>

# TDBM database definition and configuration options
database TDBM GLDBTD31/GLDBTD64
<configuration options specific to TDBM backend>

# DB2-based GDBM database definition and configuration options
database GDBM GLDBGD31/GLDBGD64
<configuration options specific to DB2-based GDBM backend>

# LDBM database definition and configuration options
database LDBM GLDBLD31/GLDBLD64
<configuration options specific to LDBM backend>

# File-based GDBM database definition and configuration options
database GDBM GLDBGD31/GLDBGD64
<configuration options specific to file-based GDBM backend>

# CDBM database definition and configuration options
database CDBM GLDBCD31/GLDBCD64
<configuration options specific to CDBM backend>

# EXOP database definition and configuration options (deprecated)
database EXOP GLDXPD31/GLDXPD64
```

Figure 6. General format of `ds.conf`

Noted below are some rules for setting up `ds.conf`:

- The configuration file contains a global section containing options that apply to the entire LDAP server, followed by one or more database backend sections that contain options that apply to a specific backend. Each backend section begins with a **database** option and continues to the next **database** option. The global section starts at the beginning of the configuration file and ends at the first **database** option. The **sizelimit** and **timelimit** options can be either global or specific to a backend: they are global if they appear in the global section and are specific to a backend if they appear in a backend section.

See the `sizeLimit` configuration file option at “[sizeLimit num-limit](#)” on page 128 and the `timeLimit` configuration file option at “[timeLimit num-seconds](#)” on page 134 for more information.

- The configuration file must be in code page IBM-1047.
- The maximum length of a line in the configuration file is 1024 characters.
- Each configuration line consists of an option and a value separated by one or more blanks. Begin each configuration option in column one. The option is not case-sensitive. The value might not be case-sensitive depending upon the option. If an argument contains one or more blank spaces, the value is enclosed in double quotation marks (for example, “value one”). If a value contains a double quotation mark or a backslash character (\), the double quotation mark or backslash character is preceded by a backslash character (\).
- A line that begins with a space or tab character in column one is considered a continuation of the previous line. Everything after the space or tab character is appended to the previous line. The maximum length of the initial line plus all continuation lines is 1024 characters.
- A line that begins with a number sign (#) in column one is a comment line. Comment lines can be continued and are ignored.
- A number sign (#) can be used to add a comment to the end of a configuration line. The number sign (#) must be separated from the option value by at least one blank. Anything following the number sign (#) is ignored, including any continuation lines. A number sign (#) is not treated as the start of a comment if it occurs within a quoted value.
- Blank lines can be used to separate configuration lines.
- Options that expect a value of on or off also accepts yes, y, no, and n. The option value is not case-sensitive.
- For single-valued options that appear more than once, the last appearance in the `ds.conf` file is used.

Specifying a value for filename

For configuration file options that contain the *filename* value, the value can be specified in one of the following ways:

/pathname/filename

Specifies the full path name of a file in the z/OS UNIX System Services file system.

filename

Specifies a file name in the z/OS UNIX System Services file system that is relative to the current working directory of the LDAP server. The LDAP server sets the current working directory to the value of the HOME environment variable or to `/etc/ldap` if the HOME environment variable is not defined. This format is not suggested.

//'dataset.name'

Specifies the fully qualified name of a file stored in a sequential data set.

//'dataset.name(member)'

Specifies the fully qualified name of a file stored in a partitioned data set.

//DD:DDNAME

Specifies the DDNAME for a JCL DD statement that defines the file. The file might be in a z/OS UNIX System Services file system, a sequential data set, or a member of a partitioned data set.

Specifying a value for a distinguished name

The value for the following configuration options is a distinguished name (DN): **adminDN**, **krbLDAPAdmin**, **masterServerDN**, **peerServerDN**, **nativeAuthSubtree**, and **suffix**. Also, the **wlmExcept** configuration option optionally accepts a distinguished name (DN). Special characters (as identified in RFC 2253 (tools.ietf.org/html/rfc2253)) used in the DN must be properly escaped using two back slashes (\\). Note that the double back slashes are only needed in the configuration file; in all other usages, the special characters are typically prefixed by a single backslash. See Chapter 17, “Accessing RACF information,” on page 317 for exceptions to this when using SDBM. See RFC 2253 (tools.ietf.org/html/rfc2253) for valid

DN formats. Also, see [“Distinguished name syntax”](#) on page 268 for more information about distinguished name syntax.

For example, to use a RACF user ID #1admin as the LDAP root administrator defined in the configuration file, the **adminDN** configuration option might look like:

```
adminDN "racfid=\\#1admin,profiletype=user,cn=myRacf"
```

With LDAP V3 support, UTF-8 characters can be used for textual attributes stored in the directory. It is preferred to allow any UTF-8 character to appear in distinguished names, and in particular, the adminDN distinguished name. Because the LDAP configuration files are defined to hold information in the IBM-1047 character set, a solution is required for the configuration files that allows you to use distinguished names containing UTF-8 characters but using only the IBM-1047 character set. To solve this problem, an escape mechanism has been introduced for purposes of entering a DN. This escape mechanism allows the entry of UTF-8 characters while keeping the input string value to within the IBM-1047 character set. The escape mechanism employed requires that you express UTF-8 characters that are not within the X'00' - X'7F' range (7-bit ASCII that is the single-byte form of UTF-8 characters) in the form of a set of four character representations. This representation has the form "&nmm" where $0 < n < 3$ and $0 < m < 7$. You might recognize *nmm* as being an octal value for a byte of information. Therefore, if you want to create the following distinguished name:

```
cn=Peter <U umlaut>nger, o=Widgets, c=DE
```

specify the DN as:

```
cn=Peter &nmn&nmnger, o=Widgets, c=DE
```

Because the <U umlaut> is not within the 7-bit ASCII range, the value must be escaped to the octal representation of the UTF-8 multi-byte character. For <U umlaut>, the Unicode code point is X'00DC'. Converted to UTF-8, this character is a multi-byte sequence: X'C39C'. (See [“UTF-8 support”](#) on page 263 for conversion information.) Converted to the escaped form for input into the DN field, this character is represented as "&303&234" because X'C3' is octal 303 and X'9C' is octal 234. Therefore, the DN is entered as:

```
cn=Peter &303&234nger, o=Widgets, c=DE
```

If there is a case where you must enter a DN that contains the string "&nmm" where $0 < n < 3$ and $0 < m < 7$, then you must escape the ampersand by using its octal representation which is "046".

There are several restrictions concerning the attributes used in a DN:

1. The default matching rule for an attribute used in a DN that is not contained in the LDAP server schema is **caseIgnoreMatch**. This results in this part of the DN being normalized by using uppercase in the attribute value. If the attribute is later defined in the schema and the matching rule is not **caseIgnoreMatch**, that part of the DN might now be normalized differently. Therefore, the normalized version of the DN used in an operation might not match the normalized version of the DN in the configuration file, resulting in the failure of the operation.

In particular, if an attribute used in a suffix is not in the LDAP server schema and is later added to the schema with a different matching rule, then restart the LDAP server after the schema definition is added. Otherwise, operations using that suffix can fail.
2. Do not use an attribute with Integer syntax (1.3.6.1.4.1.1466.115.121.1.27) in a DN in the configuration file, especially in a suffix. Integer attribute values in a normalized DN have a special format that might cause problems within the LDAP server.

Configuration file checklist

Use the following table to determine which configuration file options you must use in your `ds.conf` file. Depending on the section in the configuration file (Global, SDBM, TDBM, GDBM, LDBM, CDBM, or EXOP), certain topics (SSL, schema, basic replication, and so on) have options that are required or optional.

Table 7. Checklist for the configuration file options

Section/topic	Options
Global	adminDN is required. These options are optional: adminPW , allowAnonymousBinds , altServer , armName , audit , blockedConnectionTimeout , commThreads , db2StartUpRetryInterval , db2StartUpRetryLimit , db2Terminate , digestRealm , dnCacheSize , healthcheck , idleConnectionTimeout , include , listen , maxConnections , operationsMonitor , operationsMonitorSize , pcIdleConnectionTimeout , pcThreads , plugin , pwSearchOutput , referral , schemaPath , schemaReplaceByValue , securityLabel , sendV3stringsoverV2as , serverCompatLevel , serverEtherAddr , sizeLimit , srvStartUpError , tcpTerminate , timeLimit , unbufferedEntryLimit , validateincomingV2strings , and wlmExcept .
SSL/TLS	sslKeyRingFile is required if a listen option is initialized for secure socket communications or a listen option is initialized for non-secure socket communications that is intended to support switching to secure socket communications when the connection is established. sslAuth , sslCertificate , sslCipherSpecs , sslFipsState , sslKeyRingFilePW , sslKeyRingPWStashFile , and sslMapCertificate are optional.
Sysplex	serverSysplexGroup is required.
Kerberos	supportKrb5 is required. krbKeytab , krbLDAPAdmin , and serverKrbPrinc are optional.
Activity logging	logfile is required. logFileFilter , logFileMicroseconds , logFileMsgs , logFileOps , logFileRecordType , logFileRolloverDirectory , logFileRolloverSize , logFileRolloverTOD , and logFileVersion are optional.
SDBM backend	database and suffix are required. enableResources , extendedSearch , include , readOnly , sizeLimit , and timeLimit are optional.
Kerberos	krbIdentityMap is required.
TDBM backend	database , dbuserid , and suffix are required. aclSourceCacheSize , attrOverflowCount , attrOverflowSize , changeLoggingParticipant , dnToEidCacheSize , dsnaoini , entryCacheSize , entryOwnerCacheSize , extendedGroupSearching , fetchSize , filterCacheBypassLimit , filterCacheSize , include , persistentSearch , readonly , serverName , sizeLimit , and timeLimit are optional.
Attribute encryption or hashing	pwCryptCompat , pwEncryption , and secretEncryption are optional.

Table 7. Checklist for the configuration file options (continued)

Section/topic	Options
Basic replication	Either peerServerDN or both masterServer and masterServerDN are required. peerServerPW and masterServerPW are optional.
Health check	If db2CheckHealth is on, the following keywords are optional: db2ExtentLimit, db2RRIPAppendInsertPct, db2RRIDeletesAbs, db2RRIDeletesPct, db2RRIInsertsAbs, db2RRIInsertsPct, db2RRILeafLimit, db2RRIMassDelLimit, db2RRINumLevelsLimit, db2RRIPseudoDeletePct, db2RRTDataSpaceRat, db2RRTDeletesAbs, db2RRTDeletesPct, db2RRTDisorgLOBPct, db2RRTIndRefLimit, db2RRTInsertsAbs, db2RRTInsertsPct, db2RRTMassDelLimit, db2RRTUnclustInsPct, db2SRIInsDelAbs, db2SRIInsDelPct, db2SRIMassDelLimit, db2SRTInsDelUpdAbs, db2SRTInsDelUpdPct, and db2SRTMassDelLimit.
Multi-server	multiserver is required.
Kerberos	krbIdentityMap is required.
Native authentication	useNativeAuth and nativeAuthSubtree are required. nativeUpdateAllowed is optional.
GDBM backend (Db2-based)	database and dbuserid are required. aclSourceCacheSize, attrOverflowSize, changeLogging, changeLoggingParticipant, changeLogMaxAge, changeLogMaxEntries, dnToEidCacheSize, dsnaoini, entryCacheSize, entryOwnerCacheSize, fetchSize, filterCacheBypassLimit, filterCacheSize, include, persistentSearch, readonly, serverName, sizeLimit, and timeLimit are optional.
Health check	If db2CheckHealth is on, the following keywords are optional: db2ExtentLimit, db2RRIPAppendInsertPct, db2RRIDeletesAbs, db2RRIDeletesPct, db2RRIInsertsAbs, db2RRIInsertsPct, db2RRILeafLimit, db2RRIMassDelLimit, db2RRINumLevelsLimit, db2RRIPseudoDeletePct, db2RRTDataSpaceRat, db2RRTDeletesAbs, db2RRTDeletesPct, db2RRTDisorgLOBPct, db2RRTIndRefLimit, db2RRTInsertsAbs, db2RRTInsertsPct, db2RRTMassDelLimit, db2RRTUnclustInsPct, db2SRIInsDelAbs, db2SRIInsDelPct, db2SRIMassDelLimit, db2SRTInsDelUpdAbs, db2SRTInsDelUpdPct, and db2SRTMassDelLimit.
Multi-server	multiserver is required.

Table 7. Checklist for the configuration file options (continued)

Section/topic	Options
LDBM backend	database and suffix are required. attrOverflowCount , changeLoggingParticipant , commitCheckpointEntries , commitCheckpointTOD , databaseDirectory , extendedGroupSearching , fileTerminate , filterCacheBypassLimit , filterCacheSize , include , persistentSearch , readOnly , sizeLimit , and timeLimit are optional.
Attribute encryption or hashing	pwCryptCompat , pwEncryption , and secretEncryption are optional.
Basic replication	Either peerServerDN or both masterServer and masterServerDN are required. peerServerPW and masterServerPW are optional.
Multi-server	multiserver is required.
Kerberos	krbIdentityMap is required.
Native authentication	useNativeAuth and nativeAuthSubtree are required. nativeUpdateAllowed is optional.
GDBM backend (file-based)	database is required. changeLogging , changeLoggingParticipant , changeLogMaxAge , changeLogMaxEntries , commitCheckpointEntries , commitCheckpointTOD , databaseDirectory , fileTerminate , filterCacheBypassLimit , filterCacheSize , include , persistentSearch , readOnly , sizeLimit , and timeLimit are optional.
Multi-server	multiserver is required.
CDBM backend	database is required. attrOverflowCount , changeLoggingParticipant , commitCheckpointEntries , commitCheckpointTOD , databaseDirectory , extendedGroupSearching , fileTerminate , filterCacheBypassLimit , filterCacheSize , include , persistentSearch , readOnly , sizeLimit , and timeLimit are optional.
Attribute encryption or hashing	pwCryptCompat , pwEncryption , and secretEncryption are optional.
Advanced replication	useAdvancedReplication is required.
Multi-server	multiserver is required.
Kerberos	krbIdentityMap is required.
Native authentication	useNativeAuth and nativeAuthSubtree are required. nativeUpdateAllowed is optional.
EXOP backend (deprecated)	database is required. include is optional.

Note: The adminDN configuration option is required and specifies the LDAP root administrator in the configuration file. The password for this LDAP root administrator can be specified in a directory entry or in the adminPW configuration option. See [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 for more information. Note the use of the adminPW configuration option is discouraged. Instead, an existing entry in the directory is designated as the adminDN.

If the distinguished name specified for the adminDN configuration option does not exist within a configured backend suffix and the password is specified in the adminPW configuration option, password policy is not supported for the LDAP root administrator defined in the configuration file.

Configuration file options

The following list is an alphabetic listing of the configuration file options. For each option, a table shows an X in the areas (Global, TDBM, LDBM, SDBM, GDBM, CDBM, and EXOP) of the configuration file where the option can be used.

Some GDBM options are specified only when GDBM is configured to be Db2-based and others are used only when GDBM is file-based. See [“Configuration file checklist ”](#) on page 86 for a list of which options can be configured for each type of GDBM configuration.

aclSourceCacheSize *num-entries*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies the maximum number of entries to store in the ACL Source cache. This cache holds information about ACL definitions within the database. Retrieval of information from this cache avoids database read operations when access permissions are being resolved.

The maximum size of this value is 2147483647. A value of 0 indicates that the cache is not used.

Default = 100

adminDN *dn*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

The distinguished name (DN) of the root administrator for this LDAP server. Typically, this DN has unrestricted access to all entries in the directory except for entries in backends that are read-only replicas. When the LDAP server is in maintenance mode, the LDAP root administrator has unrestricted access to all entries in the directory. Select a name that is descriptive of the person that knows and administers the LDAP server. The format of the name must be in DN format that is described in [Chapter 14, “Data model,”](#) on page 267. You might want the DN to have the same suffix as one of the suffix option values in the configuration file.

[“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 describes how to set up this root administrator DN. Additional root administrators can be defined by using the administrative group and assigning the root administrator role. For more information, see [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information.

For information about specifying a value for a distinguished name for this option, see [“Specifying a value for a distinguished name”](#) on page 85.

adminPW *string*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

The password of the root administrator (adminDN) for this server.

[“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#) describes how to set up your administrator password.

Use of the adminPW configuration option is discouraged in production environments. Instead, specify the adminDN option as the distinguished name of an existing entry in the directory information tree. This option eliminates passwords from the configuration file.

allowAnonymousBinds {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies whether an LDAP client can perform unauthenticated operations on the LDAP server. If `off`, clients must explicitly bind to the server with a distinguished name. If `on`, a client might access the server without binding with a distinguished name and have access to data as a member of the `cn=anybody` group. For more information about access control of directory data, see [Chapter 24, “Using access control,” on page 425](#).

Default = on

altServer *ldap_URL*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies an equivalent server to this LDAP server. It might not be a replica, but contains the same naming contexts. There is no required format for the value. However, LDAP URL format is most commonly used and supported by LDAP clients. See [“listen ldap_URL” on page 106](#) for a description of the LDAP URL format. The option might be specified multiple times to define more than one alternative server. The alternative servers are placed in the `altServer` attribute in the root DSE. Those alternative servers can be queried by LDAP clients to determine other servers that might be contacted in case this server is not available later.

In the following example, `myldap.server.com` is the hostname and 3389 is the port number of the LDAP directory URL:

```
altServer ldap://myldap.server.com:3389
```

In the following example,

```
5f1b:df00:ce3e:e200:20:800:2078:e3e3
```

is the IPv6 address and 389 is the port number of the LDAP URL:

```
altServer ldap://[5f1b:df00:ce3e:e200:20:800:2078:e3e3]:389
```

armName *name*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the name that the LDAP server uses when it is registering with the Automatic Restart Management (ARM) service. The name is 1-7 characters and can consist of letters, numbers, and the special characters \$ # @ _ . Lowercase letters are converted to uppercase. The first character can be a number. The system name is appended to form the element name. The `armName` configuration option must be specified if there are multiple instances of the LDAP server on the same system and ARM processing is enabled. For more information about the automatic restart manager, see [Using automatic restart management in z/OS MVS Setting Up a Sysplex](#).

For example, for system DCESEC4, specifying:

```
armName LDAP1
```

results in the element name LDAP1_DCESEC4.

The LDAP server registers with ARM using the element name formed from the `armName` configuration option, an element type of SYSLDAP, an element bind of CURJOB, and a termination type of ELEMTERM. For more information about these parameters and how to override them using the current ARM policy, see [IXCARM — Request Automatic Restart Management Services in z/OS MVS Programming: Sysplex Services Reference](#).

Default = GLDSRVR

attrOverflowCount count

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

For TDBM, specifies the number of attribute values that are required to store the attribute values in a long attribute value table. The choice of this value allows large multi-valued attributes such as group membership lists to be stored in a separate table with its own index.

For LDBM and CDBM, specifies the number of attribute values that are required to store the attribute values in an internal indexed table, providing quicker access to the values of large multi-valued attributes such as group membership lists.

The value must be either 0 or in the range 64 to 2147483647. A value of 0 disables attribute overflow that is based on the attribute value count.

Default = 512

attrOverflowSize num-of-bytes

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies, in bytes, the minimum size of an attribute value that is required to store the value in a long attribute value table. The choice of this value allows large attribute values (such as JPEG and GIF files) to be stored in a separate Db2 table in a separate Db2 table space. The maximum size of this value is 2147483647. A value of 0 disables attribute overflow that is based on attribute size.

Default = 255

audit {on | off | all,operations | error,operations | none,operations}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Turns LDAP auditing on or off and specifies which operations are to be audited and the associated audit level. When auditing is on, an LDAP SMF type 83 subtype 3 audit record is generated for an operation if the operation is specified on an `audit` option and the operation result matches the audit level.

This option can be specified multiple times, once to turn auditing on or off and once or more times for each audit level to specify the operations to audit for that level. Multiple operations can be specified for a level by either putting a + between them on the `audit` option or by specifying multiple `audit` options with the same level.

Operations can be audited all the time or only when they fail. The following audit levels are supported:

all

An LDAP audit record is generated for the specified operations.

error

An LDAP audit record is generated for the specified operations when they fail.

none

An LDAP audit record is not generated for the specified operations.

The supported values for *operations* can be one or more of: add, bind, compare, connect, delete, disconnect, exop, modify, modifydn, search, unbind.

If an operation is specified in more than one level, the last level is used for the operation. If an operation is not specified in any level, the level defaults to none for that operation.

The LDAP server AUDIT operator modify command can be used to change the audit settings and to turn audit on or off while the LDAP server is running. For more information, see [“LDAP server operator commands” on page 200](#).

Default = off

For example, the following `audit` options turn on auditing for modify, search, and bind failures and for all add operations. The other operations are not audited.

```
audit error,modify+search+bind
audit all,add
audit on
```

blockedConnectionTimeout *num-seconds*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the amount of time in seconds that the LDAP server waits for a blocked send operation to complete on a client connection. When a send operation times out, the client connection is dropped. This option is useful to avoid server `commThreads` from being used by client applications that fail and stop receiving responses. If too many, or all threads get blocked indefinitely, a denial of service condition occurs.

The blocked connection is detected when an `EWOULDBLOCK` condition is returned (or `GSK_WOULD_BLOCK` condition for SSL connections). This might not occur until some time after an errant client stops receiving data and the TCP buffers fill. Therefore, it is possible for a blocked connection to remain active slightly longer than the `blockedConnectionTimeout` value.

The value must be between 0 and 2678400 (equal to 31 days). A value of 0 indicates that a blocked connection remains active indefinitely.

Default = 0 (indefinitely)

changeLogging {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
				X		

Turns change logging on or off.

When change logging is on, all change logging operations are allowed. When change logging is off, change log entries can be searched, modified, and deleted, but no new change log entries can be created. Also, no automatic trimming of the change log is performed.

Default = on

changeLoggingParticipant {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X		X	X	

Allows or disallows change logging for changes that are made to entries in this backend. If it is specified in GDBM, changeLoggingParticipant controls the logging of modifications to the LDAP server schema entry.

This option does not turn on or off change logging. That is done by the changeLogging option.

Default = on

changeLogMaxAge *nnn*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
				X		

Specifies the maximum age in seconds of an entry in the change log. Change log entries are deleted when they have been in the change log longer than this value, except if changeLogging off is specified. Changes to changeLogMaxAge apply only to entries that were written after the change was made. For example, if you are using the default where records are not deleted and then update to 60 seconds, only new records are deleted after 60 seconds. Existing entries are not deleted after 60 seconds.

The value must be between 0 and 2147483647. A value of 0 indicates that there is no maximum.

Default = 0

changeLogMaxEntries *nnn*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
				X		

Specifies the maximum number of entries that the change log can contain. If the number of change log entries exceeds this value and changeLogging off is not specified, change log entries with the lowest change numbers are deleted. If the change log is Db2-based, change log entries are deleted until the number of remaining entries is 95% of the maximum. If the change log is file-based, change log entries are deleted until the number of remaining entries is the maximum. The value must be between 0 and 2147483647. A value of 0 indicates that there is no maximum.

Default = 0

commitCheckpointEntries *nnn*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
		X		X	X	

Specifies the maximum number of entries in the checkpoint file. An entry is added to the LDBM, CDBM, or file-based GDBM checkpoint file each time a directory entry is added, changed, deleted, or renamed. When the maximum number is reached, the entries in the checkpoint file are merged into the database file and the entries are removed from the checkpoint file. The value must be between 0 and 2147483647. A value of 0 indicates that there is no maximum.

Default = 10000

commitCheckpointTOD *hh:mm*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
		X		X	X	

Specifies a time of day at which the checkpoint file is merged into the database file. An entry is added to the LDBM, CDBM, or file-based GDBM checkpoint file each time a directory entry is added, changed, deleted, or renamed. Every day at the specified time, the entries in the checkpoint file are merged into the database file and the entries are removed from the checkpoint file. The value must be between 00:00 and 23:59. Specify a value outside this range to disable time of day checkpoint processing.

Default = 00:00

commThreads *num-threads*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the number of threads to be initialized for the communication thread pool. This thread pool handles the connections between the LDAP server and its clients. You might want to have commThreads set to approximately two times the number of processors that are running in your LPAR. However, this is a general rule depending upon the activity that your LDAP server experiences.

Default = 10

The commThreads option deprecates the maxThreads and waitingThreads options, that are no longer evaluated by the LDAP server.

database *dbtype dblibpath [name]*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X	X	X	X	X

Marks the beginning of a new database section. All global options must appear before the first database section. All options after the database option pertain to this backend until another database option is encountered.

- For *dbtype*:
 - Specify *tdbm* (Db2-based), *ldbm* (file-based), *sdbm* (RACF-based), *gdbm* (Db2-based or file-based), *cdbm* (file-based), or *exop* (extended operations).

Notes:

1. The server compatibility level must be at least 5 when the CDBM backend is configured. See “[serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}](#)” on page 125 for more information about the `serverCompatLevel` configuration option.

2. The EXOP backend is deprecated.

- For *dblibpath*:

- This is the file name of the shared library (DLL) containing the backend database code. Unless you have changed the names of the LDAP DLLs, specify `GLDBTD31/GLDBTD64` when *dbtype* is `tldb`, `GLDBTD31/GLDBTD64` when *dbtype* is `ldb`, `GLDBTD31/GLDBTD64` when *dbtype* is `sdb`, `GLDBTD31/GLDBTD64` when *dbtype* is `gdb`, `GLDBTD31/GLDBTD64` when *dbtype* is `cdb`, and `GLDBTD31/GLDBTD64` when *dbtype* is `exop`.

Notes:

1. Both DLL names must be specified for *dblibpath* as previously shown. For example, to use the SDBM backend, specify the following in the LDAP server configuration file:

```
database sdbm GLDBSD31/GLDBSD64
```

2. In the job log, the LDAP server writes the DLL name that is loaded by the LDAP server. For example, if the LDAP server is run in 31-bit mode with the SDBM backend enabled, the following is written to the job log:

```
database sdbm GLDBSD31 SDBM-0003
```

If the LDAP server is run in 64-bit mode with the SDBM backend enabled, the following is written to the job log:

```
database sdbm GLDBSD64 SDBM-0003
```

- For *name*:

- This value is a name that is used to identify this backend. You cannot specify `schema`, `rootDSE` or `Monitor` as the name. A name is generated if no name is specified for a backend. However, a name must be specified if the `multiserver` option is specified for this backend and the name must not be longer than 8 characters. In addition, when multi-server mode is active, the same name must be specified for each instance of the backend within the cross-system group.

databaseDirectory name

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
		X		X	X	

Specifies the name of the directory containing the data files that are used by the backend to store directory data. A fully qualified directory path must be specified. A unique directory must be specified for each backend. In addition, when multi-server mode is active, the same directory path must be specified for each instance of the backend within the cross-system group.

LDBM default = `/var/ldap/ldb`

GDBM default = `/var/ldap/gdb`

CDBM default = `/var/ldap/schema` if `schemaPath` not specified, else `schemaPath` option setting

dbuserid userid

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies a Db2 user ID that is the owner of the Db2 tables. When specified in a GDBM backend section, this option indicates that the GDBM backend is Db2-based and not file-based.

Note: The `dbuserid` value must be unique within the configuration file. Multiple backends on an LDAP server cannot share a database.

db2CheckHealth {on|off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

The `db2CheckHealth` option controls whether the TDS-Db2 health check is enabled for the current backend.

Default: `off`

The following options are related to the configuration option, `db2CheckHealth`:

<i>Table 8. Options for db2CheckHealth</i>					
Configuration option	Parameter	Utility	Space	Default	Description
<code>db2ExtentLimit</code>	<i>integer</i>	REORG	Index or Table	254	Specifies the number of physical extents.
<code>db2RRAppendInsertPct</code>	<i>double</i>	REORG	Index	20	Specifies the ratio of the number of index entries that were inserted with a key value greater than the maximum key value in the index space or partition, to the total number of index entries.
<code>db2RRIDeletesAbs</code>	<i>integer</i>	REORG	Index	0	Specifies the sum of the number of index entries deleted.
<code>db2RRIDeletesPct</code>	<i>double</i>	REORG	Index	30	Specifies the ratio of the sum of the number of index entries that were deleted, to the total number of index entries.
<code>db2RRInsertsAbs</code>	<i>integer</i>	REORG	Index	0	Specifies the sum of the number of index entries that were inserted.
<code>db2RRInsertsPct</code>	<i>double</i>	REORG	Index	30	Specifies the ratio of the total number of index entries that were inserted, to the total number of index entries.
<code>db2RRILeafLimit</code>	<i>double</i>	REORG	Index	10	Specifies the ratio of the number of index page splits, in which the higher part of the split page was far from the location of the original page, to the total number of active pages.

<i>Table 8. Options for db2CheckHealth (continued)</i>					
Configuration option	Parameter	Utility	Space	Default	Description
db2RRIMassDelLimit	<i>integer</i>	REORG	Index	0	Specifies the sum of the number of mass deletes of index entries.
db2RRINumLevelsLimit	<i>integer</i>	REORG	Index	0	Specifies the number of levels in the index tree that were added or deleted.
db2RRIPseudoDeletePct	<i>double</i>	REORG	Index	5 (Data sharing) or 10 (Non-data sharing)	Specifies the ratio of the number of index entries that were pseudo-deleted, to the total number of index entries.
db2RRTDataSpaceRat	<i>double</i>	REORG	Table	-1	Specifies the ratio of the space allocated, to the actual space used.
db2RRTDeleteAbs	<i>integer</i>	REORG	Table	0	Specifies the total number of delete operations.
db2RRTDeletesPct	<i>double</i>	REORG	Table	25	Specifies the ratio of the total number of delete operations, to the total number of rows.
db2RRTDisorgLOBPct	<i>double</i>	REORG	Table	50	Specifies the ratio of the number of imperfectly chunked LOBs, to the total number of rows.
db2RRTIndRefLimit	<i>double</i>	REORG	Table	5 (Data sharing) or 10 (Non-data sharing)	Specifies the ratio of the total number of overflow records that were created, to the total number of rows.
db2RRTInsertsAbs	<i>integer</i>	REORG	Table	0	Specifies the total number of insert operations.
db2RRTInsertsPct	<i>double</i>	REORG	Table	25	Specifies the ratio of total number of insert operations, to the total number of rows.
db2RRTMassDelLimit	<i>integer</i>	REORG	Table	0	Specifies the sum of the number of mass deletes.
db2RRTUnclustInsPct	<i>double</i>	REORG	Table	10	Specifies the ratio of the total number of unclustered insert operations, to the total number of rows.
db2SRIInsDelAbs	<i>integer</i>	RUNSTATS	Index	0	Specifies the total number of inserted and deleted index entries.

Table 8. Options for db2CheckHealth (continued)					
Configuration option	Parameter	Utility	Space	Default	Description
db2SRIDe1Pct	<i>double</i>	RUNSTATS	Index	20	Specifies the ratio of the total number of inserted and deleted index entries, to the total number of index entries.
db2SRIMassDelLimit	<i>integer</i>	RUNSTATS	Index	0	Specifies the sum of the number of mass deletes.
db2SRTInsDelUpdAbs	<i>integer</i>	RUNSTATS	Table	0	Specifies the number of insert, update, and delete operations.
db2SRTInsDelUpdPct	<i>double</i>	RUNSTATS	Table	20	Specifies the ratio of the total number of insert, update, or delete operations, to the total number of rows.
db2SRTMassDelLimit	<i>integer</i>	RUNSTATS	Table	0	Specifies the sum of the number of mass deletes.

For more information, see "Db2 for z/OS Managing Performance".

db2StartUpRetryInterval num-seconds

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the number of seconds the LDAP server waits before each Db2 connection retry attempt as a consequence of the initial Db2 connection failure.

During LDAP initialization, an initial attempt at establishing a Db2 connection is made if at least one Db2-based backend is defined. If the connection attempt is unsuccessful and the LDAP server is set up to wait for Db2, the LDAP server retries the connection for a specified number of times, waiting for db2StartUpRetryInterval seconds before each retry attempt. While waiting for a connection to Db2, the LDAP server does not receive requests. The value must be between 1 and 999.

Notes:

1. This option is ignored if no Db2-based backend (TDBM and Db2-based GDBM) is defined or if the db2StartUpRetryLimit configuration option has a zero value or is not specified.
2. When the server is started as a transition server (started in transition mode), this configuration option is ignored and the server ends if Db2 termination is detected before transition completes. Once transition completes, the setting in the configuration file takes effect. See [“Updating LDAP configurations settings in a sysplex without server outage” on page 205](#).

Default = 45

db2StartUpRetryLimit num-retries

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies a limit of the number of Db2 connection retries the LDAP server attempts as a result of the initial Db2 connection failure.

During LDAP initialization, an initial attempt at establishing a Db2 connection is made if at least one Db2-based backend is defined. If the connection attempt is unsuccessful and `db2StartUpRetryLimit` has a nonzero value, the LDAP server retries the connection for the specified `db2StartUpRetryLimit` times, waiting for the specified `db2StartUpRetryInterval` number of seconds before each retry attempt. When the number of retry attempts equals `db2StartUpRetryLimit` and a connection to Db2 still cannot be established, all backends that require Db2 fail to configure. While waiting for a connection to Db2, the LDAP server does not receive requests. The value must be between 0 and 99. A value of 0 indicates that no Db2 connection retries are to be attempted.

Notes:

1. This option is ignored if no Db2-based backend (TDBM and Db2-based GDBM) is defined.
2. When the server is started as a transition server (started in transition mode), this configuration option is ignored and set to 0 until the transition completes. Once transition completes, the setting in the configuration file takes effect. For more information about the transition server, see [“Updating LDAP configurations settings in a sysplex without server outage”](#) on page 205.

Default = 0

db2Terminate {terminate | recover | restore}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies how the LDAP server reacts to a termination of Db2 after the server successfully starts.

If set to `terminate`, the LDAP server shuts down.

If set to `recover`, the LDAP server disconnects from Db2 but remains running in order to allow access to non-Db2 backends (for example, SDBM, LDBM, CDBM, and file-based GDBM). When Db2 is once again active, the LDAP server reconnects to Db2. There is no access allowed to Db2-based backends (TDBM and Db2-based GDBM) during the time when Db2 is down. Client requests to those backend are rejected with the LDAP_UNAVAILABLE return code and a reason code message that includes "Db2 Unavailable".

Restore will behave the same as `recover` but is deprecated.

Notes:

1. This option is ignored and no Db2 monitoring is done if no Db2-based backend (TDBM and Db2-based GDBM) is configured.

If a sysplex distributor is used, this configuration option is set to `terminate`. This allows client requests to be routed to other LDAP servers in the sysplex who can connect to their databases.

2. When the server is started as a transition server (started in transition mode), this configuration option is ignored and the server ends if Db2 termination is detected before transition completes. Once transition completes, the setting in the configuration file takes effect. See [“Updating LDAP configurations settings in a sysplex without server outage”](#) on page 205.

Default = `recover`

digestRealm *hostname*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies a realm name to be used when doing DIGEST-MD5 or CRAM-MD5 SASL authentication binds to the LDAP server. The `digestRealm` option is used to help calculate a hash for DIGEST-MD5 and

CRAM-MD5 authentication binds. Make sure that the *hostname* is a DNS-host name and not an IP address.

Default = fully qualified hostname of the LDAP server if a DNS (domain name server) is active on the system. Otherwise, the default is the name of the host processor.

dnCacheSize num-entries

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the maximum number of entries to store in the Distinguished Name normalization cache. This cache holds information that is related to the mapping of Distinguished Names between their raw form and their canonical form. Retrieval of information from this cache reduces processing required to locate entries in the database.

The maximum size of this value is 2147483647. A value of 0 indicates that the cache is not used.

Default = 1000

dnToEidCacheSize num-entries

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies the maximum number of entries to store in the Distinguished Name to Entry Identifier mapping cache. This cache holds information that is related to the mapping of Distinguished Names in their canonical form and their Entry Identifier within the database. Retrieval of information from this cache avoids database read operations when locating entries within the database.

The maximum size of this value is 2147483647. A value of 0 indicates that the cache is not used.

Default = 1000

dsnaoini dsname

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies the name of the CLI Initialization file or sequential data set (or PDS member) you created in step “4” on page 20 in “Getting Db2 installed and set up for CLI and ODBC ” on page 19. This must be either a fully qualified data set name, a DD name, or a path name. A data set name is not enclosed in quotation marks or prefixed with "//", a DD name starts with "/*:", and a path name starts with "/" or "./".

There are three ways to specify the CLI initialization file and the search order is as follows:

1. The DSNAOINI DD statement in the JCL for the LDAP server started task
2. The DSNAOINI environment variable
3. The dsnaoini configuration option. If the dsnaoini configuration option is specified for a backend, the option must also be specified, with the same value, for all the TDBM and Db2-based GDBM backends in the configuration file.

“Running the LDAP server using data sets” on page 171 gives more information about this process. For information about specifying the CLI initialization file, see [Db2 for z/OS in IBM](#)

Documentation (www.ibm.com/docs/en/db2-for-zos). In order for the TDBM or GDBM backend to run, the initialization file must be specified in one of the indicated ways.

enableResources {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
			X			

Specifies whether the SDBM backend supports operations on RACF resources and classes. If **on**, SDBM accepts operations for the setopts, class, and resource profile entries. LDAP also accepts requests for creating a change log entry for a change to a RACF resource profile. If **off**, an SDBM search from the suffix does not return these entries and operations (including a change log request) involving these entries are rejected.

Default = **off**

entryCacheSize num-entries

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies the maximum number of entries to store in the Entry cache. This cache holds information that is contained within individual entries in the database. Retrieval of information from this cache avoids database read operations when processing entries within the database.

The maximum size of this value is 2147483647. A value of 0 indicates that the cache is not used.

Default = 5000

entryOwnerCacheSize num-entries

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies the maximum number of entries to store in the entry owner cache. This cache holds information about ACL definitions within the database. Retrieval of information from this cache avoids database read operations when resolving access permissions.

The maximum size of this value is 2147483647. A value of 0 indicates that the cache is not used.

Default = 100

extendedGroupSearching {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

Specifies whether a backend participates in extended group membership searching on a client bind request. If this option is **on**, group memberships are gathered from this backend during LDAP directory bind processing in addition to the backend in which the bind DN exists. If this option is **off**, group memberships are not gathered from this backend unless the bind DN exists in this backend.

See “[Associating DNs, access groups, and additional bind and directory entry access information with a bound user](#)” on page 446 for information about group gathering after a successful bind.

The server control `authenticateOnly` is supported by the LDAP server so that a client can override both `extendedGroupSearching` and group membership gathering from the backend where the DN exists. See [Appendix C, “Supported server controls,”](#) on page 653 for more information.

This option applies only to the backend in which it is defined.

Default = off

extendedSearch {off | basic | advanced}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
			X			

The `extendedSearch` option controls the SDBM backend search filters and 4096-line output restriction.

- If it is set to `off`, search requests are processed in traditional mode, which supports limited search filters and is subject to the RACF R_admin 4096-line output restriction.
- If it is set to `basic`, search requests are processed with basic extended search, which includes limited search filters and removes the 4096-line output restriction.
- If it is set to `advanced`, search requests are processed with advanced extended search. This mode supports all the search filters compliant with RFC 4515 (Lightweight Directory Access Protocol (LDAP): String Representation of Search Filters (tools.ietf.org/html/rfc4515)) in addition to the removal of the 4096-line output restriction. For more information about usable search filters, see [“SDBM search capabilities”](#) on page 343.

Default = off

fetchSize *num-of-bytes*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies, in bytes, the maximum buffer size that is used when multi-row fetch from Db2 is applicable. The actual buffer size that is used internally is adjusted to a multiple of the row size, and is no smaller than one row. For more information, see [“TDBM database tuning”](#) on page 584.

Default = 65536

fileTerminate {terminate | recover}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
		X		X	X	

Specifies whether the LDAP server ends when file system errors occur. If `terminate`, the LDAP server ends when a file system error is detected. If `recover`, the LDAP server continues processing, but the backend experiencing the file system error is set to read-only mode. No updates can be made to the directory controlled by this backend. When the problem is corrected, the backend can be reset to read/write mode using the LDAP server BACKEND operator `modify` command. See [“LDAP server operator commands”](#) on page 200 for information about the LDAP server BACKEND `modify` command.

Default = `recover`

When the server is started as a transition server (started in transition mode), this configuration option is ignored and the server ends if a file system error is detected before transition completes. Once transition completes, the setting in the configuration file takes effect. See [“Updating LDAP configurations settings in a sysplex without server outage”](#) on page 205.

filterCacheBypassLimit *num-entries*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X		X	X	

Specifies the maximum number of returned entries that are allowed in the result set of any individual search that is stored in the Search Filter cache. Search filters that match more than this number of entries are not added to the Search Filter cache. This option is useful for maintaining the effectiveness of the Search Filter cache and Entry cache. It can be used to prevent a few search requests with large result sets from dominating the contents of the Entry cache.

The value must be in the range of 1 to 250. This option is ignored when the filter cache is not in use.

Default = 100.

filterCacheSize *num-filters*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X		X	X	

Specifies the maximum number of filters to store in the Search Filter cache. This cache holds information that is related to the mapping of search request inputs and the result set. Retrieval of information from this cache avoids database read operations when processing search requests. Individual search requests that return more entries than specified in the `filterCacheBypassLimit` option are not placed in the cache.

The maximum size of this value is 2147483647. A value of 0 indicates that the cache is not used.

TDBM Default = 5000

LDBM Default = 5000

CDBM Default = 5000

GDBM Default = 0

healthcheck *checkName* [*checkParms*]

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

The `healthcheck` option defines a health check for the LDAP server.

checkName

Specifies DB2 to define the TDS-Db2 health check, allowing the check to run for any TDBM or Db2-based GDBM backend where you enable it by specifying: `db2HealthCheck on`.

Specify CONFIG to define the TDS-CONFIG health check.

checkParms

For `checkName` DB2, optionally specify `checkParms` as a time of day in the following form:

```
"TOD hh:mm"
```

Every day at the specified time, the TDS-Db2 health check is automatically run. The value must be between 00:00 and 23:59. If you specify a value outside of this range or do not specify a value at all, then the health check is not run automatically. The health check can be run manually with the LDAP server HEALTH operator modify command.

For `checkName config`, the `checkParms` is not supported and the LDAP server runs the TDS-CONFIG health check once after startup. The LDAP server HEALTH operator modify command can be used to run the check manually.

For more information, see [“Health checks supported by the LDAP server” on page 198](#).

The following are examples of how to define the supported health checks.

healthcheck DB2 "TOD 23:50"

Specifies the time of day when the check is run.

healthcheck DB2

No time of day specified.

healthcheck CONFIG

Specifies the CONFIG health check option.

idleConnectionTimeout *num-seconds*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the amount of time in seconds that the LDAP server waits for an idle connection or an idle paged search result set. When an idle connection times out, the client connection is dropped. A connection is not treated as idle if there is an active, long running request on it, or if there is an active persistent search on it, even if no messages have been sent or received on the connection in the **idleConnectionTimeout** period. When an idle paged search result set times out, the paged search result set is abandoned. Idle connections and idle paged search result sets are detected by the LDAP servers network monitor task, which checks for them every 30 seconds. Therefore, it is possible for an idle connection or idle paged search result set to remain active slightly longer than the `idleConnectionTimeout` value.

The value must be either 0 or between 30 and 2147483647. A value of 0 indicates that an idle connection or idle paged search results remains active indefinitely.

Default = 0 (indefinitely)

Suggested value = 1800 (30 minutes)

include *filename* [*systemName*]

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X	X	X	X	X	X	X

Specifies the path and file name of a file to be included as a part of the LDAP server configuration.

See [“Specifying a value for filename” on page 85](#) for information about specifying *filename*.

Note that the LDAP server does not detect loop conditions in a set of included files. Configuration might encounter errors or fail if the same file is processed more than once. While nested include files are supported, including the same file in such a way as to form a loop condition is not supported.

If the system name is specified, the include file is processed only on that system. This allows the LDAP server configuration files to be shared by multiple servers where each server runs on a different z/OS system. System-specific configuration information can then be placed in an include file that is processed only on the system that it applies.

krbIdentityMap {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X	X		X	

Specifies if this backend participates in Kerberos identity mapping. If it participates, then the server attempts to map the Kerberos identity that performed the bind to DN's that exist in this backend. The mapped DN's are then used for access control.

Default = off

krbKeytab {*krbKeytab* | none}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the Kerberos key table that is used by the LDAP server. The key table is used to obtain the encryption key for the Kerberos principal that is associated with the LDAP server. A key table must be provided if Kerberos authentication is used and the Kerberos KDC is not running on the same system as the LDAP server. However, a key table is not necessary if the Kerberos KDC is running on the same system as the LDAP server, the user ID associated with the LDAP server has a RACF KERB segment containing the server principal name, and the user ID associated with the LDAP server has read permission to the IRR.RUSERMAP facility class when the KRB5_SERVER_KEYTAB environment variable in the security server configuration file (**krb5.conf**) is set to 1. In these cases, the **krbKeytab** option is either omitted or set to none. Following is an example:

```
krbKeytab /home/users/u1/keytab
```

Default = no value

krbLDAPAdmin *kerberosIdentityDN*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the Kerberos identity that represents the LDAP root administrator. This option allows the root administrator to bind through Kerberos and still maintain administrative authority. The value for this option must be specified as a DN with the attribute type of **ibm-kn**. The **ibm-kn** attribute type is case-sensitive and must match the actual Kerberos identity. Following is an example:

```
krbLDAPAdmin ibm-kn=LDAPAdmin@MYREALM.COM
```

For information about specifying a value for a distinguished name for this option, see [“Specifying a value for a distinguished name”](#) on page 85.

listen *ldap_URL*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies, in LDAP URL format, the IP address (or hostname), and the port number where the LDAP server listens to incoming client requests. This option might be specified more than once in the configuration file.

Note the `listen` value might be established in the configuration file, or it might be established using the `-l` command-line parameter when starting the LDAP server (see [“Setting up and running the LDAP server”](#) on page 167).

Default = The server listens on all available and active IPv4 addresses, using port 389. This is equivalent to `ldap://:389`.

The format of `ldap_URL` for the `listen` option to listen on a TCP/IP socket interface is the following. This format is also used for other configuration options whose value is in LDAP URL format, such as **altServer**, **masterServer**, and **referral**.

```
{ldap:// | ldaps://}[IP_address | hostname | INADDR_ANY | in6addr_any]
[:portNumber]
```

The format of `ldap_URL` for the `listen` option to listen on the Program Call interface is the following:

```
ldap://:pc
```

where:

ldap://

Specifies that the server listen on nonsecure addresses or ports. Note if SSL/TLS is configured for the server, then once a connection is established, the client might switch to secure communication using the **Start TLS** extended operation. Consider specifying **INADDR_ANY** or **in6addr_any**, as this allows the z/OS Communications Server to determine the active interfaces rather than the LDAP server. This is preferable, especially in CINET environments with multiple TCP/IP stacks.

ldaps://

Specifies that the server listen on secure addresses or ports. When a connection is established to the server, the client must begin the SSL/TLS handshake protocol. The **sslKeyRingFile** option must also be specified when using this format. Consider specifying **INADDR_ANY** or **in6addr_any**, as this allows the z/OS Communications Server to determine the active interfaces rather than the LDAP server. This is preferable, especially in CINET environments with multiple TCP/IP stacks.

IP_address

Specifies either the IPv4 or IPv6 address.

hostname

Specifies the hostname. If the hostname is used for the `listen` option, all the IPv4 or IPv6 addresses associated with the hostname are obtained from the DNS (Domain Name Server) and the LDAP server listens on each of these active and available IP addresses.

INADDR_ANY

Specifies the **INADDR_ANY** interface. If specified, the z/OS Communications Server determines the active and available IPv4 TCP/IP interfaces on the system that the LDAP server binds and listens for requests. For more information about the **INADDR_ANY** interface, see *z/OS Communications Server: IP Configuration Guide* and [GLOBALCONFIG statement in z/OS Communications Server: IP Configuration Reference](#).

in6addr_any

Specifies the **in6addr_any** interface. If specified, the z/OS Communications Server determines the active and available IPv4 and IPv6 TCP/IP interfaces on the system that the LDAP server binds and listens for requests. For more information about the **in6addr_any** interface, see *z/OS Communications Server: IP Configuration Guide* and [GLOBALCONFIG statement in z/OS Communications Server: IP Configuration Reference](#).

portNumber

Specifies the port number. The `portNumber` is optional. If the port number is not specified for an `ldap://`, then the default of 389 is used for nonsecure connections. If the port number is not specified for an `ldaps://`, then the default of 636 is used for secure connections.

Range = 1 - 65536

If the `serverSysplexGroup` option is present in the configuration file, the port number that is specified for this server instance must be the same as the port number specified for all other members of the sysplex group for dynamic workload balancing to function properly.

It is advisable to reserve the port number or numbers that are chosen here in your TCP/IP profile data set. Also, be aware that port numbers less than 1024 might require more specifications. For more information, see *z/OS Communications Server: IP Configuration Guide* and *z/OS Communications Server: IP Configuration Reference*.

pc

Specifies that the LDAP server listens for program call (PC) calls from RACF change logging using the z/OS System Authorization Facility (SAF) interface. Only one LDAP server on a system can listen for PC calls.

Note when the `listen` option is initialized to listen for PC calls on the LDAP server, the `listen` parameter must not include an IP address or a hostname and you cannot specify **ldaps**.

Following are some examples of how you can specify `ldap_URL`.

- If you specify:

```
ldap://
```

the LDAP server binds and listens on all active and available IPv4 addresses on the system on the nonsecure default port of 389 for incoming client requests. Note this is not the same as `ldap://INADDR_ANY`, which listens specifically on the **INADDR_ANY** interface on the nonsecure default port of 389, or the `ldap://in6addr_any`, which listens specifically on the **in6addr_any** interface on the nonsecure default port of 389.

- If you specify:

```
ldap://us.endicott.ibm.com:489
```

the LDAP server binds and listens on all active and available IPv4 and IPv6 addresses associated with the hostname `us.endicott.ibm.com` on the nonsecure port of 489 for incoming client requests.

- If you specify:

```
ldap://9.130.77.27
```

the LDAP server binds and listens on IPv4 address `9.130.77.27` on the default nonsecure port of 389 for incoming client requests.

- If you specify:

```
ldaps://us.endicott.ibm.com
```

the LDAP server binds and listens on all active and available IPv4 and IPv6 addresses associated with the hostname `us.endicott.ibm.com` on the default secure port of 636 for incoming client requests.

- If you specify:

```
ldaps://9.130.77.27:736
```

the LDAP server binds and listens on IPv4 address `9.130.77.27` on the secure port of 736 for incoming client requests.

- If you specify:

```
ldap://:489
```

the LDAP server binds and listens on all active and available IPv4 addresses on the system on the nonsecure port of 489 for incoming client requests. Note that this is not the same as `ldap://`

INADDR_ANY:489, which listens specifically on the **INADDR_ANY** interface on the nonsecure port of 489, or `ldap://in6addr_any:489`, which listens specifically on the **in6addr_any** interface on the nonsecure port of 489.

- If you specify:

```
ldaps://:777
```

the LDAP server binds and listens on all active and available IPv4 addresses on the system on the secure port of 777 for incoming client requests. Note that this is not the same as `ldaps://INADDR_ANY:777`, which listens specifically on the INADDR_ANY interface on the secure port of 777, or `ldaps://in6addr_any:777`, which listens specifically on the **in6addr_any** interface on the secure port of 777.

- If you specify:

```
ldap://[5f1b:df00:ce3e:e200:20:800:2078:e3e3]:389
```

the LDAP server binds and listens on the IPv6 address `5f1b:df00:ce3e:e200:20:800:2078:e3e3` on the nonsecure port of 389 for incoming client requests.

- If you specify:

```
ldaps://[:ffff:9.130.77.75]:777
```

the LDAP server binds and listens on the IPv4 mapped IPv6 address `::ffff:9.130.77.75` on the secure port of 777 for incoming client requests.

- If you specify:

```
ldap://[::]
```

the LDAP server binds and listens on all active and available IPv4 and IPv6 addresses on the system on the nonsecure default port of 389 for incoming client requests. Note this is not the same as `ldap://INADDR_ANY`, which listens specifically on the INADDR_ANY interface on the nonsecure default port of 389, or `ldap://in6addr_any`, which listens specifically on the **in6addr_any** interface on the nonsecure default port of 389.

- If you specify:

```
ldap://:pc
```

the LDAP server binds and listens for PC calls from RACF change logging using the SAF interface in to the server.

Note: The `listen` parameter deprecates the `security`, `port`, and `securePort` options in the configuration file. If there is a `listen` option that is specified in the configuration file along with either `security`, `port`, or **`securePort`**, the `listen` option takes precedence over what has been specified for `security`, `port`, or `securePort`. If using an earlier version of the configuration file with `security`, `port`, or `securePort`, the LDAP server is configured to listen on the port numbers specified for `securePort`, `port`, or both depending upon the `security` setting. However, configure the LDAP server using the `listen` configuration option.

logfile *filename*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the location of the file where the activity log is written when logging is enabled. See [“Activity logging” on page 188](#) for more information.

See [“Specifying a value for filename” on page 85](#) for information about specifying the *filename*.

Default = /etc/ldap/gldlog.output

logFileFilter *filter*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies a client IP address filter that is used to determine the activity that is included or excluded from being logged in the activity log file. Client requests originating from IP addresses allowed by the filter are written to the activity log file specified in the logfile configuration option.

The only supported activity log filters are ones using the `ibm-filterIP` attribute type to designate the client IPv4 addresses or IPv6 addresses with no brackets that are to be included or excluded from the activity log file. hostnames and subnet masks are not supported in these filters. See [“Activity logging” on page 188](#) for more information.

Default = `ibm-filterIP=*`

logFileMicroseconds {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Controls all generated log records containing microseconds in their time stamps. This setting cannot be modified by a LOG operator **modify** command. The default does not include microseconds in the time stamps. If **on**, all activity log time stamps include microseconds. If **off**, microseconds are not included.

Default = `off`

The GLDLOG_MICROSECONDS environment variable, which can also control this behavior, is now deprecated. If both the keyword and the environment variable are set, the keyword setting is used.

logFileMsgs {msgs | noMsgs}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Controls log records that are generated when messages are created by the LDAP server. The supported options are:

msgs

Messages that are generated by the LDAP server are written to the activity log in addition to the normal target.

noMsgs

Indicates that messages generated by the LDAP server are not written to the activity log.

Default = **noMsgs**

The GLDLOG_MSG environment variable, which can also control this behavior, is now deprecated. If both the keyword and the environment variable are set, the keyword setting is used.

logFileOps {writeOps | allOps | summary | noOps}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Controls which operations generate log records. The supported options are:

writeOps

Log records are created for add, delete, modify, modifyn, and extended operations.

allOps

Log records are created for **writeops**, **bind**, **search**, **compare**, **abandon**, and **unbind** operations.

summary

Summary statistics are logged every hour. If any logging is collected, summary data is created hourly.

noOps

No log record is created.

Default = noOps

The GLDLOG_OPS environment variable, which can also control this behavior, is now deprecated. If both the keyword and the environment variable are set, the keyword setting is used.

logFileRecordType {begin | both | mergedRecord}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Controls when log records are generated. The supported options are:

begin

Log records are created at the beginning of requests.

both

Log records are created at the beginning and the end of requests.

mergedRecord

mergedRecord log records are created for all operations that are logged. These records are generated when the operation ends and contain additional information fields that are also provided in the audit log.

Default = begin

The GLDLOG_TIME environment variable, which can also control this behavior, is now deprecated. If both the keyword and the environment variable are set, the keyword setting is used.

If set when using the GLDLOG_TIME environment variable, the possible values are time, notime, and mergedRecord.

logFileRolloverDirectory *name*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the name of the z/OS UNIX System Services file system directory where the activity log files are archived or rolled over or the Generated Data Group (GDG) base data set. If a z/OS UNIX System Services file system directory is specified, it must be a fully qualified directory path. If a GDG base data set name is specified, the **logfile** configuration option must specify the same GDG base data set name. If the **logfile** configuration option specifies a file that exists in a z/OS UNIX System Services file system directory and this option is not specified, the archived or rolled over activity log file is kept in the same directory. See [“Activity logging” on page 188](#) for more information about activity log archiving or rollover.

Default = Directory that is specified by the **logfile** configuration option.

logFileRolloverSize *nnn*[K | M | G]

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the maximum size in bytes of the activity log file. When the maximum size is reached, the activity log file is rolled over or archived. The value *nnn* can be followed by a K, M, or G to indicate kilobytes, megabytes, or gigabytes, in that order, and must be at least 10K (10240) but no larger than:

18446744073709551615
18014398509481983K
17592186044415M
17179869183G

Specify 0 to disable activity log file archiving or rollover based on size. See [“Activity logging” on page 188](#) for more information about activity log archiving or rollover.

Default = 0

logFileRolloverTOD *hh:mm*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the time of day when the activity log file is archived or rolled over. Every day at the specified time, the current activity log file is rolled over or archived. The value must be between 00:00 and 23:59. Specify a value outside this range to disable activity log file archiving or roll over based on time of day. See [“Activity logging” on page 188](#) for more information about activity log archiving or roll over.

Default = 24:00

logFileSync *num-seconds*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the log file synchronization in seconds. A nonzero value enables the asynchronous activity logging mode, the log records will be stored in cache temporarily and periodically be written to the log file. The interval stands for the number of seconds that the LDAP server waits before next writing.

The value must be either 0 or between 30 and 600. A value of 0 indicates that asynchronous activity logging will be disabled and client activities log will be immediately written to file without cache.

Default = 0

logFileVersion {0 | 1}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the activity log version. The versions are 0 and 1. See [“Activity logging” on page 188](#) for more information about the activity log version.

Default = 0

masterServer *ldap_URL*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X				

Specifies for this backend the location of this replicas master server for basic replication. There is no required format for the value, however the z/OS LDAP client can only follow a **masterServer** value if it is in LDAP URL format. See [“listen ldap_URL”](#) on page 106 for a description of LDAP URL format. The presence of this option indicates that this LDAP server is a basic replication read-only replica for this backend and receives updates from a master LDAP server. Any other update requests for this backend received directly by the LDAP server is redirected to the master server. You must also specify the **masterServerDN** option in this section of the configuration file. The master server must contain all the suffixes that are defined for this backend.

The **masterServer** option can be specified multiple times if there are multiple master servers. In this case, the LDAP client attempts to contact each server in the list until it is able to establish a connection with one of the servers.

The `masterServer` option indicates that basic replication is configured for this backend section. Therefore, the `masterServer` configuration option cannot be specified if the `useAdvancedReplication` configuration option is set to **on** in the CDBM backend database section.

In the following example, `myldap.server.com` is the hostname and 3389 is the port number of the LDAP URL:

```
masterServer ldap://myldap.server.com:3389
```

In the following example, the IPv6 address of `5f1b:df00:ce3e:e200:20:800:2078:e3e3` is the IP address and 389 is the port number of the LDAP URL.

```
masterServer ldap://[5f1b:df00:ce3e:e200:20:800:2078:e3e3]:389
```

masterServerDN dn

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X				

Specifies the distinguished name (DN) can always make updates to this basic replication read-only replica backend. The value must be in DN format that is described in Chapter 14, “Data model,” on page 267. The presence of this option indicates that this LDAP server is a read-only replica for this backend and receives updates from a master LDAP server using the specified DN. The specified DN is a special entry that is only used when replicating to this read-only replica backend. The DN has unrestricted update, compare, and search access for all entries in the backend on this server, even if the LDAP server is in maintenance mode. When in maintenance mode, only this DN and an LDAP root administrator can access and update the entries in this backend. All other update operations for this backend received by the replica server are redirected to the master server. Care must be taken when updating this backend to ensure that the replica server remains synchronized with the master server.

You must also specify the **masterServer** option in this section of the configuration file. You cannot specify the **peerServerDN** option.

The `masterServerDN` option indicates that basic replication is configured for this backend section. Therefore, the `masterServerDN` configuration option cannot be specified if the `useAdvancedReplication` configuration option is set to **on** in the CDBM backend database section.

You might want the DN to have the same suffix as one of the `suffix` option values in the configuration file. [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 describes how to set up your master server DN.

For information about specifying a value for a distinguished name for this option, see [“Specifying a value for a distinguished name”](#) on page 85.

masterServerPW string

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X				

Specifies the password for the masterServerDN that can make updates for this backend. This option is only applicable for a basic replication read-only LDAP server. See [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 for additional information about the master server password.

Note:

1. Use of the masterServerPW configuration option is discouraged in production environments. Instead, specify your masterServerDN as the distinguished name of an existing entry in the directory information tree, including a userpassword attribute. This eliminates passwords from the configuration file.
2. Password policy does not apply to the entry specified in the **masterServerDN** configuration option when the password is specified in the **masterServerPW** configuration option.

Note:

The masterServerPW option indicates that basic replication is configured for this backend section. Therefore, the masterServerPW configuration option cannot be specified if the useAdvancedReplication configuration option is set to **on** in the CDBM backend database section.

maxConnections num-connections

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the maximum number of concurrently connected clients that the LDAP server allows.

Range = 30 to 65535

Default = operating system maximum

The LDAP server limits the number of client connections by restricting the number of file and socket descriptors that are used by the LDAP server. Some of the descriptors are used by the LDAP server for its own file descriptors and passive socket descriptors. The value that is specified for this option takes into account that the server uses approximately 10 descriptors for internal functions and uses more depending upon the number of additional sockets that are used as passive sockets for connection attempts by clients.

The maximum number of client connections is further restricted by:

- The maximum number of files a single process can have concurrently active.

The MAXFILEPROC statement for BPXPRMxx and the FILEPROCMAX option on the RACF **altuser** command are used to set the limit. Only processes with superuser authority can adjust the limit beyond the limit that is specified by MAXFILEPROC and FILEPROCMAX. Attempts to exceed this limit by non-superuser processes might be audited by the security manager.

- The maximum number of sockets that are allowed by the TCP/IP socket file system.

The MAXSOCKETS option on the NETWORK statement for BPXPRMxx sets this limit.

Setting these limits too high can affect system performance by using too many resources and deprive other functions of their share of the same resources.

multiserver {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X		X	X	

Indicates the operating mode that the LDAP server runs for this backend. Specifying **on** indicates the server runs in multi-server mode for this backend (see [“Configuring the operational mode”](#) on page 145). In multi-server mode, the LDAP server shares directory data with other instances of the LDAP server running within the sysplex. The **serverSyplexGroup** configuration option must also be specified when running in multi-server mode. Specifying **off** indicates the server runs in single-server mode for this backend.

Default = **off**

You can configure a backend to operate in single-server mode while another backend operates in multi-server mode except when GDBM or CDBM is configured. When CDBM or GDBM is configured, all TDBM, LDBM, GDBM, and CDBM backends must be configured to use the same operating mode.

nativeAuthSubtree {all | dn}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

Specifies the distinguished name of a subtree where all of its entries are eligible to participate in native authentication. This option can appear multiple times to specify all subtrees that use native authentication. If this option is omitted or is set to **all**, then the entire directory is subject to native authentication. This option is ignored if **useNativeAuth selected** or **all** is not specified.

For information about specifying a value for a distinguished name for this option, see [“Specifying a value for a distinguished name”](#) on page 85.

Default = **all**

nativeUpdateAllowed {on | off | reset}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

When set to **on** or **reset**, enables native password or password phrase changes in the security server to occur through a modify request to the TDBM, LDBM, or CDBM backend if the **useNativeAuth selected** or **all** option is specified.

When set to **reset**, this option also allows a bind to the backend to succeed even if the specified native authentication password is expired, if the **PasswordPolicy** control is included in the bind request. After the bind, only the special delete-add modification of the bound user's `userpassword` attribute can be performed to reset the native authentication password. Once complete, other LDAP operations can be performed.

This option does not affect the ability to change a native password or password phrase during a bind operation.

Note: z/OS LDAP password policy does not apply to entries participating in native authentication.

Default = off

operationsMonitor {ip | ipAny | all}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the search patterns that are monitored by the LDAP server. Operations monitor supports search patterns of **searchStats** and searchIPStats. A **searchStats** pattern consists of the search parameters (search base, scope, filter, and attributes to be returned) and status (SUCCESS or FAILURE). A searchIPStats pattern consists of the same elements as in the **searchStats** pattern, but also includes the client IP address. If operations monitor is enabled, LDAP monitors search statistics for the types of search patterns that are configured. See [“Operations monitor” on page 575](#) for more information about operations monitor.

If set to **ip**, then only searchIPStats patterns are monitored. This option setting is useful in determining if there are any specific clients spamming the LDAP server.

If set to **ipAny**, then only **searchStats** patterns are monitored. This option is useful for evaluating the performance of search patterns.

If set to **all**, the operations monitor monitors both **searchStats** and searchIPStats patterns. Therefore, each search is included in search patterns and matches the **searchStats** pattern and one matches the searchIPStats pattern.

Default = ipAny

operationsMonitorSize *num-entries*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the maximum number of search patterns for which the operations monitor gathers statistics. The value must be between 0 and 2147483647. A value of 0 indicates that the operations monitor is turned off. When the operations monitor is turned off, the cn=operations,cn=monitor entry is not returned on a cn=monitor search.

Default = 1000

pcIdleConnectionTimeout *num-seconds*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the amount of time in seconds that an idle connection remains valid over the LDAP PC (program call) callable interface. After the specified time, the PC connection is considered no longer in use and any resources that are associated with the connection are released. Idle connections are detected when the LDAP server receives a new PC connection or a request on an existing PC connection.

The value must be either 0 or between 30 and 2147483647. A value of 0 indicates that an idle connection remains indefinitely.

Default = 0 (indefinitely)

Suggested value = 0

pcThreads *num-threads*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the number of threads to be initialized to handle incoming program call (PC) calls using the z/OS SAF interface into the LDAP server. No threads are used if the program call interface is not active. The value must be in the range of 2 to 2147483647.

Default = 10

peerServerDN *dn*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X				

Specifies the distinguished name (DN) that can make updates to this basic replication peer replica backend. The value must be in DN format that is described in [Chapter 14, “Data model,”](#) on page 267. The presence of this option indicates that this LDAP server is a peer replica for this backend, and can receive updates from another peer LDAP server using the specified DN and processing updates that are received from clients. The specified DN is a special entry that is only used when replicating to this peer replica backend. The DN has unrestricted update, compare, and search access for all entries in the backend on this server, even if the LDAP server is in maintenance mode. When in maintenance mode, only this DN and an LDAP root administrator can access and update the entries in this backend.

Update operations for this backend received from you bound as **peerServerDN** (or as an LDAP root administrator when in maintenance mode) are performed on the local database and are not sent to any peer and read-only replica servers. When not in maintenance mode, all other update operations for this backend are performed on the local database and are sent to the other peer and read-only replica servers. Update operations from a peer or a master are never replicated. It does not matter if you are in maintenance mode or not. Updates that are made by an LDAP root administrator are replicated unless the server is in maintenance mode.

You cannot also specify the **masterServerDN** option in this section of the configuration file.

The **peerServerDN** option indicates that basic peer-to-peer replication is configured for this backend section. Therefore, the **peerServerDN** configuration option cannot be specified if the **useAdvancedReplication** configuration option is set to **on** in the CDBM backend database section.

You might want the DN to have the same suffix as one of the **suffix** option values in the configuration file. [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 describes how to set up your peer replica DN.

For information about specifying a value for a distinguished name for this option, see [“Specifying a value for a distinguished name”](#) on page 85.

peerServerPW *string*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X				

Specifies the password for the peerServerDN that can make updates for this backend. This option is only applicable for a basic replication peer replica LDAP server. See [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 for additional information about the peer server password.

Note:

1. Use of the `peerServerPW` configuration option is discouraged in production environments. Instead, specify your `peerServerDN` as the distinguished name of an existing entry in the directory information tree, including a `userpassword` attribute. This eliminates passwords from the configuration file.

The **peerServerPW** option indicates that basic peer-to-peer replication is configured for this backend section. Therefore, the **peerServerPW** configuration option cannot be specified if the **useAdvancedReplication** configuration option is set to **on** in the CDBM backend database section.

2. Password policy does not apply to the entry specified in the **peerServerDN** configuration option when the password is specified in the **peerServerPW** configuration option.

persistentSearch {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X		X	X	

Allows or disallows persistent search for changes that are made to entries in a backend. When **off** is specified, persistent search requests for this backend are rejected. See [“PersistentSearch” on page 660](#) for more information about persistent search.

Default = off

plugin pluginType pluginName pluginInit [pluginParameters]

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Defines a plug-in extension to the LDAP server. Writing an LDAP server plug-in and using the SLAPI service routines are described in *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS*. A sample plug-in and its makefile are included in `/usr/lpp/ldap/examples`. Building and using the sample plug-in are described in *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS*.

- For *pluginType*:
 - Specify **preOperation**, **clientOperation**, or **postOperation**. A **preOperation** plug-in is called by the LDAP server before a client request is processed. A **clientOperation** plug-in is called to process a client request. A **postOperation** plug-in is called after a client request is processed. A **clientOperation** plug-in is called when a client request matches a distinguished name suffix or extended operation object identifier that is registered for the plug-in.
- For *pluginName*:
 - Specify the name of the shared library (DLL) containing the plug-in code. A plug-in that supports both 31-bit and 64-bit addressing modes specifies both file names that are separated by a slash, `"/`, such as `plugin31/plugin64`. A plug-in that supports only 31-bit addressing mode specifies one file name, such as `plugin31`.
- For *pluginInit*:
 - Specify the name of the plug-in initialization routine. This plug-in routine is called by the LDAP server to allow the plug-in to initialize. The plug-in initialization routine registers supported message types, distinguished name suffixes, and extended operation object identifiers that are supported by the plug-in.
- For *pluginParameters*:
 - Optionally, specify plug-in parameters. The plug-in can retrieve these parameters using the **slapi_pblock_get()** routine.

The ICTX and remote crypto plug-ins are plug-in extensions that are shipped by the z/OS LDAP server that provide more function.

- The ICTX plug-in allows resource managers that do not exist on z/OS to centralize authorization decisions and security event logging requests by using RACF. This enables consolidation of security authorization and auditing functions. See [ICTX plug-in](#) for more information.
- The remote crypto plug-in allows remote applications the ability to access PKCS#11 or CCA callable services that are implemented within ICSF. PKCS#11 is one of the cryptographic standards of Public-Key Cryptographic Standards (PKCS) that defines a platform-independent programming interface to cryptographic tokens. CCA is regarding the IBM Common Cryptographic Architecture. See [Remote crypto plug-in](#) for more information.

port num-port

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Note: The port option has been deprecated by the listen option. See [“listen ldap_URL”](#) on page 106 for information about the listen option.

Specifies the TCP/IP port used by the LDAP server for non-SSL communications. The value must be in the range of 1 to 65535.

Default = 389

If the serverSysplexGroup option is present in the configuration file, the port number that is specified for this server instance must be the same as the port number specified for all other members of the sysplex group for dynamic workload balancing to function properly.

The port number might be established in the configuration file, or it might be established using the -p command-line parameter when starting the LDAP server (see [“Setting up and running the LDAP server”](#) on page 167).

It is advisable to reserve the port number that is chosen here in your TCP/IP profile data set. Also, be aware that port numbers less than 1024 might require additional specifications. For more information, see *z/OS Communications Server: IP Configuration Guide* and *z/OS Communications Server: IP Configuration Reference*.

pwCryptCompat {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

Specifies whether to use an EBCDIC version or a UTF-8 version of the crypt() algorithm to hash passwords when **pwEncryption crypt** is contained in this section of the configuration file. If **on**, the EBCDIC version of the crypt() algorithm is used. This is what the z/OS Integrated Security Services LDAP server used. If **off**, the UTF-8 version is used. Note ASCII is a subset of UTF-8. When sharing LDAP directory data between z/OS and an ASCII-based platform, specify **pwCryptCompat off** to ensure that the hashed value is the same on both platforms.

Default = **on**

pwEncryption {none | crypt | MD5 | SHA | SSHA | DES:keylabel | AES:keylabel}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

Specifies what encryption or hashing method to use when storing the `userPassword` and **ibm-slapdAdminPw** attribute values in the backend of the directory.

none

Specifies no encryption. The `userPassword` and **ibm-slapdAdminPw** attribute values are stored in clear text format. The stored values are prefixed with the tag `{none}`. The original value, without the tag, is returned for a search request.

crypt

Specifies that `userPassword` and **ibm-slapdAdminPw** attribute values are hashed by the `crypt()` algorithm before they are stored in the directory. The stored values are prefixed with the tag `{crypt}`. The versions of the `crypt()` algorithm are: an EBCDIC-based version and a UTF-8-based version. See the **pwCryptCompat** option and the following notes for information about selecting which version to use. The original password value cannot be retrieved in clear text format. The tag and the hashed value are returned for a search request.

MD5

Specifies that `userPassword` and **ibm-slapdAdminPw** attribute values are hashed by the MD5 hashing algorithm before they are stored in the directory. The stored values are prefixed with the tag `{MD5}`. The original password value cannot be retrieved in clear text format. The tag and the hashed value are returned for a search request.

SHA

Specifies that `userPassword` and **ibm-slapdAdminPw** attribute values are hashed by the SHA hashing algorithm before they are stored in the directory. The stored values are prefixed with the tag `{SHA}`. The original password value cannot be retrieved in clear text format. The tag and the hashed value are returned for a search request.

SSHA

Specifies that `userpassword` and **ibm-slapdAdminPw** attribute values are hashed by the Salted SHA (SSHA) hashing algorithm before they are stored in the directory. The stored values are prefixed with the tag `{SSHA}`. The original password value cannot be retrieved in clear text format. The tag and the base64-encoded hashed and salt values are returned for a search request.

SHA224, SHA256, SHA384, SHA512

Specifies that `userpassword` and **ibm-slapdAdminPw** attribute values are hashed by the specified SHA-2 hashing algorithm before they are stored in the directory. The stored values are prefixed with the specified tag (for example, `{SHA224}`). The original password value cannot be retrieved in clear text format. The tag and the base64-encoded hashed value are returned for a search request.

SSHA224, SSHA256, SSHA384, SSHA512

Specifies that `userpassword` and **ibm-slapdAdminPw** attribute values are hashed by the specified Salted SHA-2 hashing algorithm before they are stored in the directory. The stored values are prefixed with the specified tag (for example, `{SSHA224}`). The original password value cannot be retrieved in clear text format. The tag and the base64-encoded hashed and salt values are returned for a search request.

DES:keylabel

Specifies that `userpassword` and **ibm-slapdAdminPw** attribute values are encrypted by the DES algorithm before they are stored in the directory. The stored values are prefixed with the tag `{DES:keylabel}`. The original password value, without the tag, is returned for a search request. The key label must refer to either a valid data-encrypting key that is generated by the KGUP utility and stored in the ICSF CKDS or to an entry in the data set referenced by the LDAPKEYS DD statement. See “Symmetric encryption keys” on page 78 for more information.

AES:keylabel

Specifies that `userPassword` and **ibm-slapdAdminPw** attribute values are encrypted by the AES algorithm using the specified key label before they are stored in the directory. The stored values are prefixed with the tag `{AES:keylabel}`. The original password value without the tag is returned for a search request. The key label must refer to either a valid data-encrypting key that is generated by the KGUP utility and stored in the ICSF CKDS or to an entry in the data set

referenced by the LDAPKEYS DD statement. See [“Symmetric encryption keys”](#) on page 78 for more information.

Note:

1. When a password is stored in a TDBM, LDBM, or CDBM backend, it is prefixed with the appropriate encryption tag so that when a clear text password is sent on an LDAP API simple bind it can be encrypted or hashed in that same method for password verification.
2. The crypt algorithm, which is implemented across many platforms, accepts only the first 8 characters of a password. As a result, any password that is supplied on a bind or compare operation that matches the first 8 characters of a userPassword attribute value that is hashed with the crypt algorithm in the directory matches.
3. When the **pwCryptCompat** option is set to on, the values hashed using the crypt algorithm are not portable to other X/Open-conformant systems if the userpassword and **ibm-slapdAdminPw** attribute values are unloaded using the **ds2ldif** utility with the -t command-line parameter and loaded by another platform's load utility. If the **pwCryptCompat** option is set to off, the values hashed using the crypt algorithm are portable to other X/Open-conformant systems if the userpassword and **ibm-slapdAdminPw** attribute values are unloaded using the **ds2ldif** utility with the -t command-line parameter. The output LDIF file from **ds2ldif** can then be loaded using another platform's load utility.
4. If a tagged encrypted or hashed userpassword and **ibm-slapdAdminPw** attribute values is included in an add or modify operation, the attribute value is added as it is with no additional encryption or hashing performed on the value even if the **pwEncryption** configuration option is set to a different type of encryption or hashing.

Default = **none**

pwSearchOutput {binary | base64}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the format of MD5 and SHA hashed userpassword and **ibm-slapdAdminPw** attribute values when retrieved on a search operation. This option does not affect the retrieval of Salted SHA (SSHA), SHA-2, or Salted SHA-2 hashed userpassword and **ibm-slapdAdminPw** attribute values on a search operation.

If set to **binary** and userpassword or **ibm-slapdAdminPw** attribute value is hashed in MD5 or SHA, the LDAP server returns the encryption tag (either {MD5} or {SHA}) in UTF-8 followed by the binary hash.

If set to **base64** and userpassword or **ibm-slapdAdminPw** attribute value is hashed in MD5 or SHA, the LDAP server returns the encryption tag (either {MD5} or {SHA}) in UTF-8 followed by the base64-encoded binary hash.

For an example of using this option, see [“One-way hashing formats”](#) on page 77.

Default = binary

radminAuthCheck {yes | no}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
			X			

Specifies whether RACF FACILITY class authorization is requested when SDBM backend invokes the R_admin callable service. If this option is set to yes, RACF FACILITY class authorization check is

performed for each user bound to the SDBM backend. If this option is set to no, then authorization check is bypassed. Yes is the more secure option.

Default = yes

readOnly {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X	X	X	X	

Specifies the ability to modify the database. The LDAP server BACKEND operator modify command can be used to change the backend database to read/write or read-only mode while the LDAP server is running. Any attempt to use the LDAP server to modify the database fails if readOnly is turned on.

Note:

1. For GDBM, change log entries are not created and are not trimmed (deleted) by the LDAP server when readOnly is **on**.
2. When running in multi-server mode, the **readOnly** configuration option is the same for all LDAP servers in the cross-system group because any LDAP server can potentially handle update requests.
3. For SDBM, **readOnly on** does not prevent changing a RACF password during a bind operation, using the *currentvalue/newvalue* format. However, it does prevent changing the password by using a modify operation of the **racfpassword** attribute.
4. When LDBM, TDBM, or CDBM is using native authentication, the RACF password can be changed during bind even though **readOnly on** is specified. The RACF password cannot be changed by using the LDBM, TDBM, or CDBM native authentication modify of the *userpassword* attribute.
5. If authenticating or comparing an LDBM, TDBM, or CDBM entry that is subject to password policy in the LDAP server, **readOnly on** does not prevent the password policy operational attributes from being updated in the entry.

Default = off

referral ldap_URL

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the referral to pass back when the target of a client request is not included in any suffix within the LDAP server. It is also known as the default referral. The **referral** option can appear multiple times and lists equivalent servers. There is no required format for the value, however, the z/OS LDAP client can only follow a referral value if it is in LDAP URL format. See [“listen ldap_URL” on page 106](#) for a description of LDAP URL format.

A default referral is not returned to the client if the client request includes the managedDsaIT control. See [“manageDsaIT” on page 657](#) for more information about this control.

In the following example, `myldap.server.com` is the hostname and 3389 is the port number of the LDAP directory URL:

```
referral ldap://myldap.server.com:3389
```

In the following example, the IPv6 address `5f1b:df00:ce3e:e200:20:800:2078:e3e3` is the IP address and 389 is the port number of the LDAP URL:

```
referral ldap://[5f1b:df00:ce3e:e200:20:800:2078:e3e3]:389
```


schemaPath name

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the name of the file directory containing the LDAP schema database. A fully qualified directory path must be specified. When multi-server mode is active, the same schema path must be specified for each LDAP server within the cross-system group. The schema database file is automatically created during LDAP server initialization if it does not exist. The LDAP server must have write access to the schema directory. This configuration option also determines the directory that is used by CDBM to store its data if the CDBM backend is configured and the `databaseDirectory` configuration option is not specified in the CDBM backend configuration section.

Default = `/var/ldap/schema`

schemaReplaceByValue {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Determines the behavior of modify operations with replace values of the schema entry. When **schemaReplaceByValue off** is specified, a modify operation with replace values for an attribute in the schema entry behaves like a typical modify operation: all the values currently in the attribute are replaced by the values that are specified in the modify operation. When **schemaReplaceByValue on** is specified, individual values in an attribute in the schema entry can be replaced without removing all the other values currently in the attribute. Except in several specific cases, the values of the attribute that are in the initial LDAP server schema cannot be changed or removed. See [“Updating the schema” on page 291](#) for more information about modifying the schema.

The **schemaReplaceByValue** configuration option can be overridden on a specific modify operation by including the **schemaReplaceByValueControl** control in the modify request.

Default = **on**

secretEncryption {none | DES:keylabel | AES:keylabel}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

Specifies the encryption method to use when storing the **secretKey**, **replicaCredentials**, **ibm-replicaKeyPwd**, and **ibm-slappedMasterPw** attribute values in this backend. Applications might use the **secretKey** attribute type to store sensitive data that must be encrypted in the directory and to retrieve the data in clear text format. This encryption method is used to protect the **replicaCredentials** attribute values in this backend when basic replication is enabled. This encryption method also protects the **ibm-replicaKeyPwd** and **ibm-slappedMasterPw** attribute values in this backend when advanced replication is enabled.

none

Specifies no encryption. The **secretKey**, **replicaCredentials**, **ibm-replicaKeyPwd**, and **ibm-slappedMasterPw** attribute values are stored in clear text format. The stored value is prefixed with the tag `{none}`. This is the default if the **secretEncryption** option is not specified. The attribute value without the tag is returned for a search request.

DES:keylabel

The **secretKey**, **replicaCredentials**, **ibm-replicaKeyPwd**, and **ibm-slappedMasterPw** attribute values are encrypted by the DES algorithm before it is stored in the directory. The stored value is prefixed with the tag `{DES: keylabel}`. The original value without the tag is returned for a search request.

The key label must refer to either a valid data-encrypting key that is generated by the KGUP utility and stored in the ICSF CKDS or to an entry in the data set that is referenced by the LDAPKEYS DD statement. See [“Symmetric encryption keys” on page 78](#) for more information.

AES:keylabel

The secretKey, replicaCredentials, ibm-replicaKeyPwd, and ibm-slapdMasterPw attribute values are encrypted by the AES algorithm before it is stored in the directory. The stored value is prefixed with the tag {AES:keylabel}. The original value without the tag is returned for a search request. The key label must refer to either a valid data-encrypting key that is generated by the KGUP utility and stored in the ICSF CKDS or to an entry in the data set referenced by the LDAPKEYS DD statement. See [“Symmetric encryption keys” on page 78](#) for more information.

Default = none

securePort num-port

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Note: The securePort option has been deprecated by the listen option. See [“listen ldap_URL” on page 106](#) for information about the listen option.

Specifies the TCP/IP port that is used by the LDAP server for SSL communications. The value must be in the range of 1 to 65535.

Default = 636

If the serverSysplexGroup option is present in the configuration file, the secure port number that is specified for this server instance must be the same as the secure port number specified for all other members of the sysplex group for dynamic workload balancing to function properly.

The secure port number might be established in the configuration file, or it might be established using the -s command-line parameter when starting the LDAP server (see [“Setting up and running the LDAP server” on page 167](#)).

It is advisable to reserve the port number that is chosen here in your TCP/IP profile data set. Also, be aware that port numbers less than 1024 might require additional specifications. For more information, see *z/OS Communications Server: IP Configuration Guide* and *z/OS Communications Server: IP Configuration Reference*.

security {ssl | sslonly | none | nossl}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Note: The security option has been deprecated by the listen option. See [“listen ldap_URL” on page 106](#) for information about the listen option.

Specifies what type of communications is accepted by the LDAP server. The ssl setting indicates that the server listens on the secure port and the non-secure port. The sslonly setting means that the server listens only on the secure port. The none or nossl settings indicate that the server listens only on the non-secure port. The sslKeyRingFile option must also be specified when the ssl or sslonly settings are used.

Default = none

securityLabel {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Determines if the security label processing is activated with bound LDAP clients. When on, the security labels that are associated with the LDAP client and LDAP server are verified during the authentication process. Security labels are recorded in all LDAP audit records. When off, no security label processing is done.

Default = off

Use this option when configuring the LDAP server in a multilevel security environment. For more information about configuring a z/OS system for multilevel security and how to configure an LDAP server in that environment, see *z/OS Planning for Multilevel Security and the Common Criteria*.

sendV3stringsoverV2as {UTF-8 | ISO8859-1}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the output data format to use when sending UTF-8 information over the LDAP Version 2 protocol.

Default = UTF-8

See “UTF-8 data over the LDAP Version 2 protocol” on page 571 for more detailed information about the use of this setting.

serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the server compatibility level. This value can be used to limit the functions that are supported by the server so that the server can be compatible with older versions of LDAP servers when they are sharing directory data in a sysplex group. To produce consistent results, all the LDAP servers in the same sysplex group name must support the same functions. If fallback is required to a lower server compatibility level than is being used, it is necessary to remove all exploitation of function that is available at the current compatibility level but not at the lower level. The server might not start at the lower level until this is complete. If fallback is necessary with a server that is using the TDBM or Db2-based GDBM backend, see “Fallback from a TDBM or Db2-based GDBM backend in z/OS IBM Tivoli Directory Server to an earlier z/OS IBM Tivoli Directory Server version” on page 204 for fallback procedures.

Notes:

1. If there are Db2-based backends that are configured in the LDAP server, the `serverCompatLevel` value also sets the `DB_VERSION` value in the Db2 `DIR_MISC` table for the backend. The `DB_VERSION` value is queried at LDAP server initialization to verify that the Db2-based backend is running on a supported level for the z/OS release. Therefore, it is especially important to set this value appropriately when running in multi-server mode and sharing Db2-based backends to the earliest z/OS LDAP server release that is to be shared.
2. Updating the `serverCompatLevel` configuration option without a server outage is supported for z/OS Version 2 Release 2 and later. For more information about the transition server, see “Updating LDAP configurations settings in a sysplex without server outage” on page 205.
3. When the server is started as a transition server (started in transition mode), the `serverCompatLevel` of the sysplex group owner is used. Once transition completes, the setting in the configuration file takes effect.

Use these `serverCompatLevel` values.

- 3 limits the sharing of data in a sysplex to TDBM backends, Db2-based GDBM backends, and schema. Basic replication is supported from (but not into) the sysplex. Dynamic and nested groups are supported, as is schema replace by value. Specify this value when a z/OS Integrated Security Services (ISS) LDAP server is running in the sysplex.

Level 3 is deprecated from z/OS Version 2 Release 2.

- 4 enables cross-system coupling facility (XCF) messaging support for TDBM and Db2-based GDBM backends in the sysplex group and supports basic replication from and into the sysplex. When the schema, LDBM, and file-based GDBM backends are shared in a sysplex, XCF messaging is used to communicate between the LDAP servers in the same sysplex group no matter the `serverCompatLevel` setting.

Specify this value when the sysplex group contains a z/OS IBM Tivoli Directory Server server running on z/OS V1R10 or earlier and there are no ISS LDAP servers in the sysplex.

- 5 enables advanced replication and allows the CDBM backend to be configured. Schema and all backends can be shared in the sysplex. Specify this value when the sysplex group only contains z/OS IBM Tivoli Directory Server servers running on z/OS V1R11 or later.
- 6 enables ACL filters, password policy, Salted SHA (SSHA) password hashing, and usage of additional schema syntaxes and matching rules. Specify this value when the sysplex group only contains z/OS IBM Tivoli Directory Server servers running on z/OS V1R12 or later.
- 7 enables usage of group search limits, administrative roles, and hashing `userpassword` attribute values using the SHA-2 and Salted SHA-2 algorithms. It also supports hashing and encrypting `ibm-slapdAdminPw` attribute values using the same algorithms as for `userpassword` attribute values. Specify this value when the sysplex group only contains z/OS IBM Tivoli Directory Server servers running on z/OS V1R13 or later.
- 8 enables usage of the read-only replica password policy replication support. Specify this value when the sysplex group only contains z/OS IBM Tivoli Directory Server servers running on z/OS Version 2 Release 2 or later. See [“Replicating password policy operational attributes”](#) on page 380 for more information.

Default = 8 if not running in a sysplex (the `serverSysplexGroup` configuration option is not specified).

Default = 4 if running in a sysplex (the `serverSysplexGroup` configuration option is specified)

`serverEtherAddr` *mac_address*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the Media Access Control (MAC) address that is used for entry UUID generation. This value must be unique for all LDAP servers in your enterprise. You must specify the MAC address if multiple LDAP servers run on a (hardware) system. This applies if your LDAP servers are on different LPARs and also if two LDAP servers are on the same LPAR. You do not need to specify this field if this is the only LDAP server that runs on this (hardware) system.

The MAC address consists of 12 hexadecimal digits. The suggested form of the *mac_address* is:

```
4xmmmmssssss
```

Where:

x

Is a one-character LDAP directory number. If more than one LDAP server is operating on a processor, specify a different x value for each server. If more than 16 LDAP servers are wanted, then use a serial number and model number from a processor that is not running an LDAP server.

If another processor is not available, then set the *x*, *mmmm*, and *sssss* values from the MAC address on an old Ethernet card that is no longer being used or not used to run an LDAP server.

mmmm

Is the four-digit model number of the processor.

sssss

Is the six-digit serial number of the processor.

It is not necessary to follow this convention if you specify the **serverEtherAddr** option for all LDAP servers in your enterprise. In this case, you can specify any combination of 12 hexadecimal digits if each LDAP server has a unique value.

Following is an example:

```
serverEtherAddr 4A123401234D
```

Default = The LDAP server uses the hardware model and serial numbers to generate a MAC address.

serverKrbPrinc *kerberosIdentity*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the Kerberos principal name that is assigned to the LDAP server that was created in “[Defining the Kerberos identity](#)” on page 49. This value becomes the server name in Kerberos service tickets. The principal name must consist of characters that can be represented in the ISO8859-1 code page. The format for *kerberosIdentity* is:

```
ldap_prefix/primary-dns-name@krbRealmName
```

Where

ldap_prefix

Is ldap or LDAP. Use ldap to assure interoperability with all LDAP clients. LDAP is accepted, but this value is not usable with many non-z/OS LDAP clients.

primary-dns-name

Is the canonical hostname returned by the DNS name service.

krbRealmName

Is the Kerberos defined realm that the LDAP server operates. For more information about setting up a Kerberos realm on z/OS, see [z/OS Integrated Security Services Network Authentication Service Administration](#).

Following are examples:

```
serverKrbPrinc LDAP/myhost.realm.com@MYREALM.COM
serverKrbPrinc ldap/myhost.myrealm.com@MYREALM.COM
```

Default = **ldap/primary-dns-hostname@default-krbRealmName**

serverName *string*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X			X		

Specifies the name of the Db2 server location that manages the tables for the LDAP server. This value must match the name of one of the DATA SOURCE stanzas that must be specified in the ODBC initialization data set that is specified by the dsnaoini option in the configuration file. For a description of the contents of the DSNAOINI ODBC initialization data set, see [Db2 for z/OS in IBM](#)

Documentation (www.ibm.com/docs/en/db2-for-zos). Using the example DSNAOINI file in [Figure 2](#) on [page 21](#) the value of *string* for *serverName* is LOC1.

If the **serverName** configuration option is specified for a backend, the option must also be specified, with the same value, for all the TDBM and Db2-based GDBM backends in the configuration file.

Default = The default data source is used. This is the Db2 subsystem that is specified by the MVSDEFAULTSSID record in the DSNAOINI file.

serverSysplexGroup name

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies that this LDAP server is participating in data sharing in a sysplex and indicates the name of the cross-system coupling facility (XCF) group. All LDAP servers in the sysplex that specify the same group name share the LDAP server schema and the directories of backends that specify the **multiserver on** option. The group name is 1-8 characters and consists of letters (A-Z), numbers (0-9), and special characters (@, #, and \$). The special characters must be in the IBM-1047 code page.

sizeLimit num-limit

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X	X	X	X	X	X	

Specifies the maximum number of entries to return from a search operation. The maximum number can be modified on a specific search request.

Range = 0 - 2147483647

0 = no limit

Default = 500

This option applies to all backends, except EXOP, unless specifically overridden in a backend definition or in group search limits. Specifying this before a database line in the configuration file sets the option for all backends, except EXOP. Specifying it after a database line sets the option just for the backend that is defined by the database line. Specifying a size limit using group search limits sets the limit only for the members of that group. See [“Managing group search limits” on page 416](#) for more information about group search limits.

A limit on the number of entries returned can also be specified by the client on a search request. Note that the following behavior is used when determining the size limit for a search request.

- If the client has not bound as an administrator:
 - If a group search size limit exists for the requester, then the size that is used to limit the search is the smaller of the size limit that is passed by the client and the group search size limit. If the client does not specify a size limit on the search, then the group search size limit is used.
 - If a group search size limit does not exist for the requester, then the size that is used to limit the search is the smaller of the size limit that is passed by the client and the size limit that is determined by the server from the **sizeLimit** configuration options in the configuration file. If the client does not specify a size limit, then the server size limit is used.
- If the client has bound as an administrator, the size limit is the value that is passed by the client. If the client does not specify a limit, then the number of entries that are returned is unlimited. The size limits from the configuration file and from group search limits are ignored when the client has bound as an administrator.

When accessing the z/OS LDAP server support for RACF (the SDBM backend), the number of entries that are returned might be further restricted by limits that are imposed by RACF. See [Chapter 17, “Accessing RACF information,”](#) on page 317 for more information:

- The limit is the smaller of the limit that is passed by the client and the limit that is read by the server from the **sizeLimit** option in the configuration file (which defaults to 500). If the client does not specify a limit, then the server limit is used. It does not matter how the client has bound.
- The number of entries that are returned might be further restricted by limits that are imposed by RACF. See [Chapter 17, “Accessing RACF information,”](#) on page 317 for more information.

There are additional considerations for size limit when performing a subtree search from the root DSE (a NULL-based search). See [“Root DSE search with subtree scope \(Null-based subtree search\)”](#) on page 570 for more information.

srvStartupError {terminate | ignore}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies whether the LDAP server stops if a backend or plug-in fails to initialize after the configuration file is read. If **terminate**, the server ends when any backend or plug-in fails to initialize. If **ignore**, the LDAP server continues processing if the schema successfully initializes. The option also applies to failures when initializing the LDAP PC callable support interface if that has been configured and initializing WLM support. Note a configuration error that occurs before backend or plug-in initialization begins always causes the server to end.

Note: When the server is started as a transition server (started in transition mode), this configuration option is ignored and the server behaves as if **srvStartupError** is set to **terminate**.

Default = **terminate**

sslAuth {serverAuth | serverClientAuth}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the SSL/TLS authentication method. The **serverAuth** method allows the LDAP client to validate the LDAP server on the initial contact between the client and the server.

The **serverClientAuth** method allows the LDAP client to validate the LDAP server. In addition, the LDAP server validates the LDAP client if the client sends its digital certificate on the initial contact between the client and the server.

Note: In order for clients to perform **SASL EXTERNAL** binds to the LDAP server, it is necessary to configure the server with **sslAuth serverClientAuth**.

See [“Setting up for SSL/TLS”](#) on page 68 for more SSL/TLS information.

Default = **serverAuth**

sslCertificate {certificateLabel | none}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the label of the certificate that is used for LDAP server authentication. If a key database file is used, the certificate is created and managed using the **gskkyman** utility. If using a RACF key ring, the certificate is created and managed using the RACDCERT command. If using a PKCS #11 token, the certificate can be created and managed by using either the **gskkyman** utility or the RACDCERT command.

- For information about the **gskkyman** utility, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*.
- For more information about RACDCERT, see [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference*.
- For more information about SSL/TLS, see [“Setting up for SSL/TLS”](#) on page 68.

Default = **none**

If the value is **none** (by default or by specification), the default certificate, marked in the key database file, the RACF key ring, or the PKCS #11 token, is used for server authentication.

sslCipherSpecs {string | GSK_V3_CIPHER_SPECS_EXPANDED | ANY}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the SSL Version 3.0 and TLS Version 1.0 cipher specifications that the LDAP server accepts from clients. Use of this option to specify the specific cipher suites is limited, and provided only for compatibility with earlier versions. It supports only a portion of the cipher suites available in z/OS System SSL, contains no 4-character cipher suites, and provides no order of preference. The preferred approach is to set the option to GSK_V3_CIPHER_SPECS_EXPANDED and then set the environment variable GSK_V3_CIPHER_SPECS_EXPANDED to the list of 4-character cipher specifications you want, in order of preference.

If the cipher specifications you want are included in Table 6 on page 74 and if the order of preference matches the default order that is provided by z/OS System SSL, then the sslCipherSpecs option may be used with any of the values that are described.

In this case, the cipher specification is a blank delimited string that represents an ORed bit-mask indicating the SSL/TLS cipher specifications that are accepted from clients. Clients that support any of the specified cipher specifications are able to establish an SSL/TLS connection with the server. Table 6 on page 74 lists the CipherSpec mask values and the related decimal, hexadecimal, and keyword values. See *z/OS Cryptographic Services System SSL Programming* for a description of supported cipher specifications.

The cipher specification might be specified as follows:

- A decimal value (for example, 256)
- A hexadecimal value (for example, x100)
- A keyword (for example, TRIPLE_DES_SHA_US)
- A construct of those values using plus and minus signs to indicate inclusion or exclusion of a value. For example,
 - 256+512 is the same as specifying 768, or x100+x200, or TRIPLE_DES_SHA_US+DES_SHA_EXPORT
 - 52992 is the same as specifying ALL - RC2_MD5_EXPORT - RC4_MD5_EXPORT

Depending upon the level of System SSL support installed, some ciphers might not be supported. System SSL ignores the unsupported ciphers. See the System SSL documentation to determine the specific ciphers that your installation supports.

See [“Setting up for SSL/TLS”](#) on page 68 for more SSL/TLS information.

Default = GSK_V3_CIPHER_SPECS_EXPANDED

sslFipsState {Off | Level1 | Level2 | Level3}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

The **sslFipsState** option specifies the FIPS mode that is enabled on the LDAP server. When FIPS mode is turned on, the system is more restrictive regarding cryptographic algorithms, protocols, and key sizes that are supported. The mode options are OFF, LEVEL1, LEVEL2, and LEVEL3 as defined by z/OS System SSL.

When executing in FIPS mode, the usage of only TLS V1.0, TLS V1.1, and TLS V1.2 protocols are allowed. SSL V2 and SSL V3 protocols are not supported and are ignored, if specified.

For more information about using FIPS mode in System SSL, see [z/OS Cryptographic Services System SSL Programming](#).

sslKeyRingFile *name*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the path and file name of the SSL/TLS key database file, the name of the RACF key ring, or the name of the PKCS #11 token to be used by the LDAP server. SSL/TLS connections are not available if this option is not specified.

When a key database file is used, the file path and name that is specified here must match the path and name of the key database file that was created using the **gskkyman** utility. For more information about the **gskkyman** utility, see [gskkyman overview](#) in [z/OS Cryptographic Services System SSL Programming](#). Also, see [“Setting up for SSL/TLS”](#) on page 68 for more SSL/TLS information.

The LDAP server supports the use of a RACF key ring. Specify the RACF key ring name for the **sslKeyRingFile** and comment out the **sslKeyRingFilePW** and **sslKeyRingPWStashFile** configuration options to use this support.

The LDAP server also supports the use of a PKCS #11 token. Specify the PKCS #11 token on the **sslKeyRingFile** configuration option in the following format (where *name* is the name of the PKCS #11 token): *TOKEN*/*name*. Ensure that the **sslKeyRingFilePW** and **sslKeyRingPWStashFile** configuration options are commented out to use this support.

See [“Creating and using key databases, key rings, or PKCS #11 tokens”](#) on page 69 for more information.

sslKeyRingFilePW *string*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the password protecting access to the SSL/TLS key database file. The password string must match the password to the key database file that was created with the **gskkyman** utility. For more information about the **gskkyman** utility, see [gskkyman overview](#) in [z/OS Cryptographic Services System SSL Programming](#). Also, see [“Setting up for SSL/TLS”](#) on page 68 for more SSL/TLS information.

Note: Use of the **sslKeyRingFilePW** configuration option is discouraged. As an alternative, use either a RACF key ring, a PKCS #11 token, or specify the **sslKeyRingPWStashFile** configuration option.

Comment out the **sslKeyRingFilePW** and **sslKeyRingPWStashFile** configuration options if you are using a RACF key ring or PKCS #11 token.

sslKeyRingPWStashFile name

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies a file system file name where the password for the servers key database file is stashed. Use the full path name of the stash file in the file system for *name*.

If this option is present, then the password from this stash file overrides the **sslKeyRingFilePW** configuration option, if present. Use the **gskkyman** utility with the **-s** option to create a key database password stash file. See [“Setting up for SSL/TLS” on page 68](#) for more SSL/TLS information.

Comment out the **sslKeyRingFilePW** and **sslKeyRingPWStashFile** configuration options if you are using a RACF key ring or PKCS #11 token.

sslMapCertificate {off | check | add | replace} {fail | ignore}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the server maps a certificate used in a SASL EXTERNAL bind to the RACF user that is associated with the certificate.

When **check**, **add**, or **replace** is specified for the first value, RACF is searched for the user ID associated with the certificate used during a SASL certificate bind. The **sslKeyRingFile** configuration option must be specified to indicate which key database, RACF key ring, or PKCS #11 token to use to do this. If there is no RACF user ID associated with the certificate and **fail** is specified for the second value, then the SASL EXTERNAL bind fails. If there is no associated RACF user ID and **ignore** is specified for the second value, the bind continues without mapping the certificate to a RACF user.

If an associated RACF user ID is found and **add** or **replace** is specified for the first value, a distinguished name (DN) is created based on the user ID and the SDBM suffix. For **add**, this mapped DN is added to the list of DNs associated with the bind DN that was created from the subject's name in the certificate. For **replace**, this mapped DN replaces the bind DN that was created from the subject's name in the certificate. The mapped DN is used when gathering the groups in which the bound user exists and when checking authorization for LDAP operations, including SDBM operations. SDBM must be configured when **add** or **replace** is specified.

When **off** is specified for the first value, RACF is not searched for the user ID associated with the certificate and no certificate mapping is performed. In this case, it does not matter what the second value is (**fail** or **ignore**).

Default = **off fail**

suffix dn_suffix

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X	X			

Denotes the distinguished name of the root of a subtree in the namespace that is managed by this backend within the LDAP server. This option might be specified more than once to indicate all the

roots of the subtrees within this backend except for the SDBM backend. The SDBM backend must have only one suffix. Note a suffix cannot be specified for the GDBM, CDBM, and EXOP backends. When the GDBM backend is configured, the `cn=changelog` suffix is reserved. When the CDBM backend is configured, the `cn=configuration` and `cn=ibmpolicies` suffixes are reserved. The special suffix, `cn=localhost`, can be placed in any TDBM or LDBM backend and is exempt from replication when advanced replication is used.

Identical and overlapping suffixes cannot be specified in the LDAP server configuration file, even if the suffixes are within different backends. These suffixes create confusion and can result in unexpected results. An example of overlapping suffixes is:

```
suffix ou=Server Group, o=IBM
suffix o=IBM
```

See “[Specifying a value for a distinguished name](#)” on page 85 for information about specifying special characters and restrictions on attributes in the suffix.

Domain Component naming as specified in [RFC 2247](https://tools.ietf.org/html/rfc2247) (tools.ietf.org/html/rfc2247) is also supported in the LDAP server. For example, the domain name `ibm.com` could be specified as the following suffix in the configuration file:

```
suffix "dc=ibm,dc=com"
```

supportKrb5 {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies if the LDAP server participates in Kerberos GSS API Authentication. If it participates, then Kerberos GSS API binds are accepted and information is stored in the servers root DSE.

Default = off

tcpTerminate {terminate | recover}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies whether the LDAP server ends when network interfaces are not active. The LDAP server periodically polls the network interfaces it is using to determine when they go down and come back up. If an interface fails but the LDAP server still has at least one active interface, the server continues processing and reestablishes a failed interface when it detects that it has become active. If all interfaces fail and **tcpTerminate terminate** is specified, the LDAP server ends. If **tcpTerminate recover** is specified, then the LDAP server remains active and attempts to reestablish network interfaces when it detects they have become active. All client operations targeted to the LDAP server fail until a network interface can be reconnected. The frequency of polling can be set using the `LDAP_NETWORK_POLL` environment variable. See “[Environment variables used by the LDAP server](#)” on page 174 for more information.

The **tcpTerminate** option is also used to determine whether the LDAP server ends if SSL or Kerberos initialization fails during server initialization. If **terminate** is specified, the LDAP server ends. If **recover** is specified, the LDAP server continues initialization, but the failed interface (SSL or Kerberos) cannot be used until the error is fixed and the LDAP server is restarted.

Default = **recover**

Note:

When the server is started as a transition server (started in transition mode), this configuration option is ignored and the server ends if network interface inactive is detected before transition completes.

Once transition completes, the setting in the configuration file takes effect. See [“Updating LDAP configurations settings in a sysplex without server outage”](#) on page 205.

timeLimit num-seconds

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X	X	X	X	X	X	

Specifies the maximum number of seconds (in real time) the LDAP server spends answering a search request. This maximum number can be modified on a specific search request. If a request cannot be processed within this time, a result indicating an exceeded time limit is returned to the client. It can also be found in the activity log and any active debug trace.

Range = 0 - 2147483647

0 = no limit

Default = 3600

This option applies to all backends, except EXOP, unless specifically overridden in a backend definition or in group search limits. Specifying this before a database line in the configuration file sets the option for all backends, except EXOP. Specifying it after a database line sets the option just for the backend defined by the database line. Specifying a time limit using group search limits sets the limit only for the members of that group. See [“Managing group search limits”](#) on page 416 for more information about group search limits.

A limit on the amount of time can also be specified by the client on a search request. The following behavior is used when determining the time limit for a search request.

- If the client has not bound as an administrator:
 - If a group search time limit exists for the requester, then the time used to limit the search is the smaller of the time limit passed by the client and the group search time limit. If the client does not specify a time limit on the search, then the group search time limit is used.
 - If a group search time limit does not exist for the requester, then the time that is used to limit the search is the smaller of the time limit that is passed by the client and the time limit that is determined by the server from the timeLimit configuration options in the configuration file. If the client does not specify a time limit, then the server time limit is used.
- If the client has bound as an administrator, the time limit is the value passed by the client. If the client does not specify a limit, then the amount of time is unlimited. The time limits from the configuration file and from group search limits are ignored when the client has bound as an administrator.

When accessing the z/OS LDAP server support for RACF (the SDBM backend):

- The limit is the smaller of the limit passed by the client and the limit read by the server from the timeLimit option in the configuration file (which defaults to 3600). If the client does not specify a limit, then the server limit is used. It does not matter how the client has bound.

When the z/OS LDAP server with a DB2 backend is used:

- DB2 has a global parameter IRLMRWT, which is specified in ZPARM, that is the DB2 equivalent to the timeLimit option. If the time that is specified in IRLMRWT is met, DB2 stops the search. The following message is written to the job log (REASON 00C9008E representing a timeout):

```
DSNT408I SQLCODE = -911, ERROR: THE CURRENT UNIT OF WORK HAS BEEN  
ROLLED BACK DUE TO DEADLOCK OR TIMEOUT. REASON 00C9008E ...
```

The timeLimit option must be set to a lower value than IRLMRWT or it will be ignored by any backends that are using DB2.

There are additional considerations for time limit when performing a subtree search from the root DSE (a NULL-based search). See [“Root DSE search with subtree scope \(Null-based subtree search\)”](#) on page 570 for more information.

unbufferedEntryLimit *num-entries*

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the maximum number of returned search entries that are sent immediately over the network before the LDAP server begins buffering results for an individual request. By default, returned search entries are sent immediately over the network as they are found during backend processing.

When a search request returns a large result set containing many entries, server processing can be delayed. Network buffers can also be filled if the requesting client does not process the returned data fast enough. This can cause the LDAP server communication thread to wait while locks are held in the backend, especially for LDBM, CDBM, and file-based GDBM backends. Setting this option to a small number can help avoid lock contention, but may increase server storage and processing time.

The value must be between 0 and 2147483647. A value of 2147483647 indicates that no search results are buffered. A value of 0 indicates that all search results are buffered.

Default = 2147483647

useAdvancedReplication {on | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
					X	

Specifies if the LDAP server supports advanced replication. If advanced replication is active, then the **masterServer**, **masterServerDN**, **masterServerPW**, **peerServer**, **peerServerDN**, and **peerServerPW** configuration options cannot be specified in any LDBM, TDBM, or CDBM backends.

Note:

- The LDAP server does not start when **useAdvancedReplication on** is specified and entries with an objectclass of **replicaObject** are present in a TDBM, LDBM, or CDBM backend. If entries with an objectclass of **replicaObject** are attempted to be added or modified in this configuration, the add or modify request is rejected.
- The LDAP server does not start when **useAdvancedReplication off** is specified and entries with an objectclass of **ibm-replicationAgreement**, **ibm-replicationContext**, **ibm-replicationGroup**, or **ibm-replicationSubEntry** are present in a TDBM, LDBM, or CDBM backend. If entries with these objectclass values are attempted to be added or modified in this configuration, the add or modify request is rejected.

See Chapter 26, “Advanced replication,” on page 473 for additional information about advanced replication.

The server compatibility level must be at least 5 when **useAdvancedReplication on** is specified. See the **serverCompatLevel** configuration option at [“serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}”](#) on page 125 for more information about the server compatibility level.

Default = off

useNativeAuth {selected | all | off}

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
	X	X			X	

Enables native authentication in the backend. If the value is:

- **selected**, only entries with the **ibm-nativeId** attribute that are within the native subtrees (see **nativeAuthSubtree** option at [“nativeAuthSubtree {all | dn}”](#) on page 115) use native authentication.
- **all**, all entries within native subtrees use native authentication. These entries can contain the **ibm-nativeId** or **uid** attribute to specify the RACF ID.
- **off**, no entries participate in native authentication.

Note: z/OS LDAP password policy does not apply to entries participating in native authentication.

Default = off

validateincomingV2strings {on | off }

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies whether the incoming strings are validated. If set to on, this setting limits the format of incoming string data that is sent over the LDAP Version 2 protocol to the IA5 character set (X'00'-X'7F' or "7-bit ASCII"). With this setting, textual data that is received on operations outside of the IA5 character set causes the operations to fail with LDAP_PROTOCOL_ERROR.

Default = on

Note while supported, it is suggested not to run with this data filtering disabled.

wlmExcept name [IP_address] [dn]

Global	TDBM	LDBM	SDBM	GDBM	CDBM	EXOP
X						

Specifies the Workload Management (WLM) transaction name that is used for client requests originating from an IP address or a bound user's distinguished name (DN). The **wlmExcept** configuration option can be specified multiple times to allow the routing of different LDAP client requests to the same or different WLM transaction names. The order of the **wlmExcept** configuration options in the LDAP server configuration file determines the order the LDAP server uses to match incoming client requests and route them to the WLM transaction name. During LDAP server initialization, a WLM enclave is created for each unique name. See [“Workload Management \(WLM\)”](#) on page 575 for more information about configuring the LDAP server to use WLM.

name

Specifies the WLM transaction name that is used for this enclave. The name must be 1-8 characters long and can consist of letters, numbers, and the special characters \$, #, or @. The WLM transaction name must be configured in WLM. Multiple **wlmExcept** configuration options with the same name use the same enclave.

IP_address

Specifies the client's IPv4 or IPv6 address to be associated with this WLM enclave.

dn

Specifies the bind user's distinguished name to be associated with this WLM enclave. For information about specifying a value for a distinguished name for this option, see [“Specifying a value for a distinguished name”](#) on page 85.

Note:

1. If both the **IP_address** and **dn** values are not specified with the **wlmExcept** configuration option, a WLM enclave is created with the transaction value **name**. However, the enclave is not associated with any client requests until a WLMEXCEPT modify command is issued.

2. If both *IP_address* and *dn* are specified, only incoming client requests originating from that *IP_address* and bound as the *dn* are routed to the WLM transaction name specified.

Default = GENERAL

By default, the WLM transaction name, GENERAL, is used by the LDAP server for client requests originating from IP addresses or bind distinguished names that are not specified on `wlmExcept` configuration options. The WLM transaction name GENERAL must be configured in WLM.

For more information about configuring WLM, see *z/OS MVS Planning: Workload Management*.

Deprecated options

The **database** option deprecates the use of the database type **exop**.

The **listen** option deprecates the **security**, **port**, and **securePort** options in the configuration file. If a **listen** option is specified in the configuration file with either **security**, **port**, or **securePort**, the **listen** option takes precedence over what was specified for the deprecated **security**, **port**, and **securePort** options. If using an earlier version of the configuration file that contains the **security**, **port**, or **securePort** options, the LDAP server is configured to listen on the port numbers that are specified for **securePort**, **port**, or both, depending upon the security setting. However, you might want the LDAP server to be configured using the **listen** option. See the description of the **listen** option at [“listen ldap_URL” on page 106](#) for more information.

Ignored options

The **replKeyRingFile** and **replKeyRingPW** options are no longer necessary or evaluated by the LDAP server. These options are removed from the configuration file. Use the **sslKeyRingFile** configuration option to specify the key database file, RACF key ring, or PKCS #11 token. The **sslKeyRingPWStashFile** configuration option is used to specify the password stash file for the key database file while the **sslKeyRingFilePW** configuration option is used to specify the password of the key database file.

The **maxThreads** and **waitingThreads** options are no longer necessary or evaluated by the LDAP server. These options are also removed from the configuration file. Use the **commThreads** option to set the number of threads initialized at server start-up for communicating with the clients. See the description of the **commThreads** option at [“commThreads num-threads” on page 95](#) for more information.

The **databasename** and **verifySchema** options are no longer necessary or evaluated by the LDAP server. These options are removed from the configuration file.

The **sysplexGroupName** and **sysplexServerName** options are no longer necessary or evaluated by the LDAP server. These options are removed from the configuration file. Use the **serverSysplexGroup** option to identify the cross-system coupling facility (XCF) group.

CDBM backend configuration and policy entries

When the CDBM backend is configured in the LDAP server configuration file, configuration related entries are stored in the `cn=configuration` suffix while policy entries are stored in the `cn=ibmpolicies` suffix. These entries contain attributes that represent configuration options. The attribute values can be changed dynamically by an LDAP modify command while the LDAP server is running. All changes take effect immediately, without needing to restart the server. By default, the CDBM backend only allows an LDAP root administrator to modify the configuration and policy entries, but access can be changed by modifying the ACL on these entries. Some administrative roles allow modifying configuration and policy entries in the CDBM backend without modifying ACLs. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information about administrative roles authority.

When the LDAP server starts, the configuration and policy entries that do not exist are created with each attribute assigned to its default value. If an attribute value is deleted, the default value is used. The deleting and renaming of advanced replication configuration entries is only supported when **useAdvancedReplication off** is specified in the CDBM backend. The deleting of the `cn=pwdpolicy,cn=ibmpolicies` entry is only supported when the server compatibility is set to less than 6.

This section contains information about the entries that exist under the `cn=configuration` and `cn=ibmpolicies` suffixes and the attribute values in these entries that affect the configuration of the LDAP server.

cn=configuration

`cn=configuration` is a container entry that is used to define dynamic configuration attributes.

Table 9. cn=configuration entry attribute descriptions
Attribute description and default
<p>cn Specifies the common name of the configuration entry. This attribute is never interpreted by the server.</p> <p>Default: Configuration</p>
<p>ibm-slapdLog</p> <p>Specifies the z/OS UNIX System Services file name and directory location for the lost and found log file. The lost and found log file is created by the consumer server the first time a replication conflict occurs. Any entries that are deleted because of a replication conflict are stored in LDIF format in this file. The directory path that is specified in this attribute value must exist before the file is created, otherwise replication conflicts are not written to the lost and found log file.</p> <p>This value cannot be deleted when advanced replication is configured. If this value is modified, the original value is still used until the LDAP server is restarted.</p> <p>Default: /var/ldap/logs/lostandfound.log</p>
<p>ibm-slapdSAFSecurityDomain</p> <p>Specifies the high-level component of the resource profile names that are used to define LDAP-related information in the z/OS security manager. This high-level qualifier is used to define administrative roles in the z/OS security manager. It is also used for securing LDAP server console operator commands. The value cannot contain a blank, comma, parenthesis, semicolon, asterisk, percent sign, or ampersand. Since resource profile names are limited to 246 bytes in length, this value must be short enough so that the generated profile names for the functions you use adhere to the limit. The maximum length of this value is as follows:</p> <ul style="list-style-type: none"> • 228 bytes if you use administrative roles. The LDAP server will not allow a length longer than 228. • 227 bytes if you are securing LDAP server operator commands. <p>You should limit the length of this attribute to 100 bytes to allow for future LDAP server enhancements, which might generate longer profile names and reduce the acceptable length of this attribute.</p> <p>See Chapter 9, “Administrative group and roles,” on page 155 for more information about configuring administrative roles in the z/OS security manager. See “Additional setup for LDAP console commands” on page 48 for more information about securing the LDAP server console operator commands.</p> <p>Default: GLDSEC</p>
<p>ibm-slapdAdminGroupEnabled</p> <p>A Boolean (true or false) used to specify whether the administrative group is enabled. If set to true and the server compatibility level is 7 or greater, the administrative group is enabled and the LDAP root administrator can delegate server administration authority. If set to false, the administrative group cannot be enabled in the LDAP server.</p> <p>Default: False.</p> <p>Note: This is a user-modifiable operational attribute and is only returned on a search request when specifically listed in the list of return attribute types or a '+' is specified in the list of returned attribute types.</p>

<i>Table 9. cn=configuration entry attribute descriptions (continued)</i>
Attribute description and default
<p>ibm-slapdPagedResAllowNonAdmin</p> <p>A Boolean (true or false) used to indicate whether the server allows non-administrators to request paged search results. If set to true, the server accepts any paged search request, including those submitted by a user binding anonymously. If set to false, the server only accepts paged search requests submitted by a user with administrator authority. In this case, the criticality of the pagedresults server control determines how the server handles a paged search request from non-administrator users. If the control is specified as critical, the request is rejected with an LDAP_INSUFFICIENT_ACCESS return code. If the control is specified as noncritical, the search is performed, but all results are returned without paging.</p> <p>The ibm-slapdPagedResLmt attribute must be set to a value greater than zero to enable paged search results.</p> <p>Default: False.</p> <p>Note: This is a user-modifiable operational attribute and is only returned on a search request when listed in the list of return attribute types or a '+' is specified in the list of returned attribute types.</p>
<p>ibm-slapdPagedResLmt</p> <p>Specifies the maximum number of outstanding paged search requests allowed simultaneously on a single connection. If the maximum number of outstanding paged search requests is exceeded, the criticality of the pagedresults server control determines how the server handles the paged search request. If the control is specified as critical, the request is rejected with an LDAP_ADMIN_LIMIT_EXCEEDED return code. If the control is specified as noncritical, the search is performed but all results are returned without paging.</p> <p>The value must be between 0 and the maximum integer size. A value of 0 indicates that paged search results are not supported.</p> <p>Default: 0</p> <p>Note: This is a user-modifiable operational attribute and is only returned on a search request when listed in the list of return attribute types or a '+' is specified in the list of returned attribute types.</p>
<p>ibm-slapdServerID</p> <p>Specifies a short descriptive name of this server in an advanced replication environment. This server name is used when configuring the relationships among LDAP servers in an advanced replication environment and therefore a unique ibm-slapdServerID value is chosen for each server in the replication topology. This value is displayed as the ibm-serverID attribute value in the root DSE entry.</p> <p>The ibm-slapdServerID value is used in the replica subentry attribute ibm-replicaServerID, therefore, this value cannot be modified once replica subentries are created in the directory. This value cannot be deleted if advanced replication is configured.</p> <p>Default: A randomly generated attribute value like an ibm-entryUUID attribute value that is created when the CDBM backend is first initialized.</p>

<i>Table 9. cn=configuration entry attribute descriptions (continued)</i>
Attribute description and default
<p>ibm-slapdSortKeyLimit</p> <p>Specifies the maximum number of sort keys that can be included on a single sorted search request. If the maximum number of sort keys is exceeded, the criticality of the SortKeyRequest server control determines how the server handles the sorted search request. If the control is specified as critical, the request is rejected with an LDAP_UNAVAILABLE_CRITICAL_EXTENSION return code. If the control is specified as noncritical, the search is performed, but unsorted results are returned and an LDAP_ADMIN_LIMIT_EXCEEDED sort result code is returned in the SortKeyResponse server control.</p> <p>The value must be between 0 and the maximum integer size. A value of 0 indicates that sorted search results are not supported.</p> <p>Default: 0</p> <p>Note: This is a user-modifiable operational attribute and is only returned on a search request when specifically listed in the list of return attribute types or a '+' is specified in the list of returned attribute types.</p>
<p>ibm-slapdSortSrchAllowNonAdmin</p> <p>A Boolean (true or false) used to indicate whether the server allows non-administrators to request sorted search results. If set to true, the server accepts any sorted search request, including those submitted by a user binding anonymously. If set to false, the server only processes sorted search requests submitted by a user with administrator authority. In this case, the criticality of the SortKeyRequest server control determines how the server handles a sorted search request from non-administrator users. If the control is specified as critical, the request is rejected with an LDAP_UNAVAILABLE_CRITICAL_EXTENSION return code. If the control is specified as noncritical, the search is performed but unsorted results are returned and an LDAP_INSUFFICIENT_ACCESS sort result code is returned in the SortKeyResponse server control.</p> <p>The ibm-slapdSortKeyLimit attribute must be set to a value greater than zero to enable sorted search results.</p> <p>Default: False.</p> <p>Note: This is a user-modifiable operational attribute and is only returned on a search request when listed in the list of return attribute types or a '+' is specified in the list of returned attribute types.</p>

cn=Replication,cn=configuration

This entry is used to configure many aspects of advanced replication such as the maximum number of pending or failed replication changes displayed for a replication agreement. See [Chapter 26, “Advanced replication,”](#) on page 473 for more information.

<i>Table 10. cn=replication,cn=configuration entry attribute descriptions</i>
Attribute description and default
<p>cn</p> <p>Specifies the common name of the configuration entry. This attribute does not affect advanced replication configuration.</p> <p>Default: Replication.</p>
<p>ibm-replicationOnHold A Boolean (true or false) value that is used to indicate whether replication is suspended from all replication agreements in the server. If set to true, replication from all replication agreements is suspended and updates are queued. If set to false, replication updates are handled normally by each replication agreement.</p> <p>Default: False.</p>

Table 10. **cn=replication,cn=configuration** entry attribute descriptions (continued)

Attribute description and default

ibm-slapdMaxPendingChangesDisplayed

Specifies the maximum number of pending replication changes and the maximum number of failed replication changes that are displayed when searching a replication agreement on a supplier server. Increase this value if more pending and failed changes must be displayed for each replication agreement. The pending replication changes are stored in the replication agreement entry in the **ibm-replicationPendingChanges** multi-valued operational attribute. The failed replication changes are stored in the **ibm-replicationFailedChanges** multi-valued operational attribute. See [Table 83 on page 526](#) for more information about these operational attributes.

The value must be between 0 and the maximum integer size. A value of 0 indicates that no pending changes are displayed for each replication agreement.

Default: 200

ibm-slapdReplConflictMaxEntrySize

Specifies the maximum length (in bytes) for all attribute values in an entry for replication conflict resolution to occur. If a replication conflict occurs on the consumer server and the total attribute value length for all values in an entry is less than or equal to this number, the entry is resent to the consumer server to automatically correct the replication conflict. Otherwise, the entry is not resent to the consumer server. This value applies to each replication agreement in the server.

The value must be between 0 and the maximum integer size. A value of 0 indicates that all entries are resent to the consumer server regardless of the size of the entry.

Default: 0

ibm-slapdReplContextCacheSize

Specifies the maximum size of each advanced replication context cache, in bytes. An advanced replication context cache is used to store pending replication updates for each replication context in the server. This cache reduces the number of queries to the backends to find the same information. Increase the size of the cache when replicating more and larger entries, such as large group entries.

This value must be between 0 and the maximum integer size. A value of 0 indicates that there are no replication context caches in the server.

Default: 100000

ibm-slapdReplMaxErrors

Specifies the maximum number of advanced replication failures that are logged for each backend in the server. If there are multiple replication agreement entries in a backend, each agreement shares the maximum number of replication failures allowed for the backend. The failed replication changes are stored in the replication agreement entry in the **ibm-replicationFailedChanges** multi-valued operational attribute. When the number of replication failures exceeds this value, advanced replication for this agreement stalls. See [“Monitoring and diagnosing advanced replication problems” on page 525](#) for more information about recovering from out of sync and stall conditions.

This value must be between -1 and the maximum integer size. A value of 0 indicates that advanced replication failures are not logged for any replication agreements, therefore, replication stalls at the first failed replication update. A value of -1 indicates that an unlimited number of advanced replication failures are logged for all replication agreements.

Default: 0

<i>Table 10. cn=replication,cn=configuration entry attribute descriptions (continued)</i>
Attribute description and default
<p>ibm-slapdReplRestrictedAccess</p> <p>A Boolean (true or false) value that is used to control access to replication topology entries (replication contexts, groups, subentries, and agreements). This attribute provides a way to limit access to the replication topology entries in the LDAP server. If set to true, only LDAP root, directory data, or replication administrators, and the master server DN have access to replication topology entries. If set to false, non-administrator users must have the proper authority to access the replication topology entries.</p> <p>Default: False.</p> <p>Note: This is a user-modifiable operational attribute and is only returned on a search request when listed in the list of return attribute types or a '+' is specified in the list of returned attribute types.</p>
<p>ibm-slapdReplicateSecurityAttributes</p> <p>Enables replication of security attributes between the read-only replica and master so that password policy for account lockout can be enforced in replication topologies.</p> <p>Restriction: This capability is only supported for bind operations that use simple authentication, and authentication that is done with compare operations that involve the userPassword attribute.</p> <p>Default: False.</p>

cn=Log Management,cn=Configuration

This is a container entry that does not contain any attribute values that affect the configuration of the LDAP server.

cn=Replication,cn=Log Management,cn=Configuration

This entry is used by advanced replication to specify the location of the lost and found log file. See Chapter 26, “Advanced replication,” on page 473 for more information.

<i>Table 11. cn=Replication,cn=Log Management,cn=Configuration entry attribute descriptions</i>
Attribute description and default
<p>cn</p> <p>Specifies the common name of the configuration entry. This attribute does not affect advanced replication configuration.</p> <p>Default: Replication</p>
<p>ibm-slapdLog Specifies the z/OS UNIX System Services file name and directory location for the lost and found log file. The lost and found log file is created by the consumer server the first time a replication conflict occurs. Any entries that are deleted because of a replication conflict are stored in LDIF format in this file. The directory path that is specified in this attribute value must exist before the file is created, otherwise replication conflicts are not written to the lost and found log file.</p> <p>This value cannot be deleted when advanced replication is configured. If this value is modified, the original value is still used until the LDAP server is restarted.</p> <p>Default: /var/ldap/logs/lostandfound.log</p>

cn=admingroup,cn=configuration

This is a container entry that does not contain any attribute values that affect the configuration of the LDAP server.

cn=safadmingroup,cn=configuration

This entry is used to define administrative group members whose roles are defined in RACF. Group members are added to the entry by adding the optional member attribute to the entry and roles are defined in RACF. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information.

Table 12. cn=safadmingroup,cn=configuration entry attribute descriptions	
Attribute description and default	
cn	<p>A required attribute that specifies the common name of the SAF administrative group entry. This attribute does not affect administrative role processing.</p> <p>Default: safadmingroup</p>
member	<p>An optional attribute that specifies a distinguished name (DN) leading to a SAF user ID. Examples of these DNs are: SDBM entries, DNs from an SSL client certificate, DN of a TDBM or LDBM entry participating in native authentication, and a Kerberos mapped DN.</p> <p>This DN is checked against each administrative role defined in the LDAP general resource class in RACF to see if the user has READ authority to the profile. If the user has READ access to the profile, the user is granted that administrative role.</p> <p>Default: None.</p>

cn=ibmpolicies

This is a container entry that does not contain any attribute values that affect the configuration of the LDAP server.

cn=pwdpolicy,cn=ibmpolicies

This entry is used to configure the global password policy. When the global password policy is activated, this policy applies to all entries that have passwords stored in the LDBM, TDBM, and CDBM backends unless there is an overriding individual or group password policy in effect. See [Table 46 on page 365](#) for the attribute descriptions of the cn=pwdpolicy, cn=ibmpolicies entry and the default values in this entry.

Configuration considerations

The following table shows all the different options you have and the decisions you must make for your LDAP server configuration. It also shows where you can find the associated reference information to help you make these decisions.

Table 13. Configuration considerations	
Dependency	More information
Operational mode You must determine the type of operational mode your LDAP server runs in. For example, single-server mode or multi-server mode.	“Configuring the operational mode ” on page 145
TDBM backend You can use a TDBM backend database based on Db2.	“Setting up for TDBM” on page 61

Table 13. Configuration considerations (continued)

Dependency	More information
<p>SDBM backend</p> <p>You can use an SDBM backend database based on RACF.</p>	<p>“Setting up for SDBM” on page 62</p>
<p>LDBM backend</p> <p>You can use an LDBM backend database based on a z/OS UNIX System Services file system.</p>	<p>“Setting up for LDBM” on page 62</p>
<p>GDBM backend</p> <p>You can use a GDBM backend database based on Db2 or based on a z/OS UNIX System Services file system to log changes to entries within the LDAP server and to RACF user, group, connection, and general resource profiles.</p>	<p>“Configuring file-based GDBM” on page 65</p>
<p>CDBM backend</p> <p>You can use a CDBM backend database based on a z/OS UNIX System Services file system for configuration information.</p>	<p>“Setting up for CDBM” on page 64</p>
<p>EXOP backend</p> <p>You can use an EXOP backend to retrieve Policy Director data.</p> <p>Use of the EXOP backend is deprecated.</p>	<p>Chapter 22, “Using extended operations to access Policy Director data,” on page 411</p>
<p>Plug-in extension</p> <p>You can use a plug-in to extend the capabilities of the LDAP server.</p>	<p>z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</p>
<p>SSL/TLS</p> <p>If you want to protect LDAP access with Secure Socket Layer (SSL) or Transport Layer Security (TLS), your LDAP server can be configured to provide server and, optionally, client authentication.</p>	<p>“Setting up for SSL/TLS” on page 68</p>
<p>Encryption or hashing</p> <p>Your LDAP server can prevent unauthorized access to ibm-slapdMasterPw, ibm-replicaKeyPw, ibm-slapdAdminPw, userPassword, secretKey, and replicaCredential values in a TDBM, LDBM, or CDBM backend database.</p>	<p>“Configuring for encryption or hashing” on page 76</p>
<p>Kerberos authentication</p> <p>You can enable GSS API Kerberos binds and configure identity mapping.</p>	<p>Chapter 19, “Kerberos authentication,” on page 389</p>
<p>Native authentication</p> <p>You can enable and configure your directory to perform authentication using the Security Server.</p>	<p>Chapter 20, “Native authentication,” on page 397</p>
<p>CRAM-MD5 and DIGEST-MD5 authentication</p> <p>The LDAP server can be configured to perform CRAM-MD5 and DIGEST-MD5 authentication binds.</p>	<p>Chapter 21, “CRAM-MD5 and DIGEST-MD5 authentication,” on page 407</p>

Table 13. Configuration considerations (continued)

Dependency	More information
<p>Administrator DN and replica server DN and passwords</p> <p>Determine how to set up your root administrator in the configuration file and password. Also determine how to set up your master or peer server DN and password, if you are using basic replication.</p>	<p>“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150</p>
<p>Basic replication</p> <p>To keep multiple databases in sync, you can use basic replication.</p>	<p>Chapter 25, “Basic replication,” on page 457 or “Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150</p>
<p>Advanced replication</p> <p>The LDAP server can be configured to replicate only portions of a backend to another LDAP server. This keeps multiple databases on different LDAP servers in sync.</p>	<p>Chapter 26, “Advanced replication,” on page 473</p>
<p>Referrals</p> <p>To refer clients to additional directory servers, use referrals.</p>	<p>Chapter 29, “Referrals,” on page 555</p>
<p>Password policy</p> <p>Passwords stored in the LDBM, TDBM, and CDBM backends can be configured for password policy to control how passwords are used and administered.</p>	<p>Chapter 18, “Password policy,” on page 363</p>
<p>Administrative group and roles</p> <p>An LDAP root administrator can delegate administrative functions by creating the administrative group and roles.</p>	<p>Chapter 9, “Administrative group and roles,” on page 155</p>

[“Example configuration scenarios” on page 152](#) has various examples showing different LDAP server configurations.

Configuring the operational mode

When the software has been installed, you are ready to configure it for use at your site. The LDAP server might be configured to run in one of several operational modes when a TDBM, LDBM, CDBM, or GDBM backend is configured.

- Single-server mode.

In single-server mode, only a single instance of the LDAP server might use a given TDBM, LDBM, CDBM, or GDBM database to store directory data. This server might perform basic or advanced replication (see [Chapter 25, “Basic replication,” on page 457](#) or [Chapter 26, “Advanced replication,” on page 473](#)) of TDBM, LDBM, or CDBM database changes to other servers (on the same host system or on another host system).

For more information, see [“Single-server mode” on page 147](#).

- Multiple single-server mode.

In multiple single-server mode LDAP server mode, two or more LDAP servers, each in single-server mode, can be run on the same system with different TDBM, LDBM, CDBM, or GDBM backends. This server might perform basic or advanced replication (see [Chapter 25, “Basic replication,” on page 457](#) or [Chapter 26, “Advanced replication,” on page 473](#)) of TDBM, LDBM, or CDBM database changes to other

servers (on the same host system or on another host system). However, each server must have its own separate set of replica servers.

For more information, see [“Multiple single-server mode” on page 147](#).

- Multi-server mode.

In multi-server mode, multiple concurrent instances of the LDAP server use the same TDBM, LDBM, CDBM, or GDBM database to store directory data. The LDAP servers might run on the same host system or on different host systems. In both cases, XCF messaging (Parallel sysplex support) is used to communicate between the LDAP servers. A parallel sysplex is a collection of z/OS systems that cooperate, by using certain hardware and software products, to process work. A parallel sysplex enables high-performance, multisystem data sharing across multiple Central Processor Complexes and Db2 images, and dynamic workload balancing across constituent systems in the sysplex. These servers might perform basic or advanced replication of TDBM, LDBM, or CDBM database changes to other servers (on the same host system or on another host system). However, each server must have the same set of replica servers. For more information, see [Chapter 25, “Basic replication,” on page 457](#) or [Chapter 26, “Advanced replication,” on page 473](#).

Multi-server mode is intended for use in an environment where high transactional volume is common, or where maximum availability is required. This mode provides improved availability, fault tolerance, improved resource utilization, and improved performance. These benefits are achieved by enabling concurrent running of multiple servers that are functionally equivalent and that provide access to the same LDAP directory data.

For more information, see [“Multi-server mode” on page 147](#).

After the operational mode is determined for your site, the server compatibility features that are enabled in the z/OS LDAP server is determined by the setting of the `serverCompatLevel` configuration option in the LDAP server configuration file. The server compatibility setting is especially important in multiserver mode when backends are shared among LDAP servers running on different releases. In these environments, the `serverCompatLevel` option must be set to the earliest z/OS LDAP server release that is shared. See [“serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125](#) for more information about server compatibility and the supported features at each compatibility level.

If there are Db2-based (TDBM and GDBM) backends in the LDAP server configuration file, the `serverCompatLevel` configuration option or its default value sets the `DB_VERSION` value in the `DIR_MISC` table. If there is a difference between the `DB_VERSION` and `serverCompatLevel` values when the LDAP server is started, the `DB_VERSION` value is set to the `serverCompatLevel` configuration option value. Therefore, it is important to set the `serverCompatLevel` configuration option appropriately when sharing Db2-based backends among LDAP servers running on different releases.

The following operational mode can be used with any of the supported modes.

- The Program call (PC) callable support mode.

The Program call (PC) callable support mode can be used with any of the supported modes. Its callable support in the LDAP directory provides a program call interface to the LDAP directory change log backend (GDBM). This interface is only available with the z/OS SAF interfaces that are designed to allow RACF to log changes to RACF data in the LDAP change log.

For more information, see [“PC callable support mode” on page 149](#).

In any of these modes, all combinations of TDBM (one or more), LDBM (one or more), SDBM, GDBM, CDBM, and EXOP backends are supported. The GDBM backend requires the SDBM backend to create change log entries for changes to RACF data.

Note:

1. A single LDAP server instance can have one SDBM backend, one GDBM backend, and one CDBM backend, but it can have multiple TDBM and LDBM backend instances.
2. If multiple single-server mode LDAP servers are being used on the same system, only one of the LDAP servers can be configured for PC callable support.

3. If multi-server mode is being used and RACF data is accessed from both servers, then the RACF database is also shared across the systems where the LDAP servers run. The sharing ensures consistency of SDBM operations. For more information about setting up a shared RACF database, see [z/OS Security Server RACF System Programmer's Guide](#).

Single-server mode

For the LDAP server to operate in single-server mode, the server configuration file might contain any of the previously documented options except the `serverSysplexGroup` option (the presence that causes the LDAP server to operate in multi-server mode). If the `multiserver` option is present, its value must be set to `off`.

Restrictions for single server mode

If one LDAP server instance using a given Db2-based backend to store directory information is operating in single-server mode, it must be the only instance of the LDAP server using that backend. Configuring more than one LDAP server instance to use the same Db2 database might yield unpredictable results if one or more of those server instances is configured in single-server mode. If you want to access the same Db2-based backend from more than one server instance, all server instances using the same backend must be configured to operate in multi-server mode.

Multiple single-server mode

For the LDAP server to operate in multiple single-server mode, there must be two or more LDAP servers running on the same system, each running in single-server mode. The server configuration file might contain any of the previously documented options except the `serverSysplexGroup` option (the presence that causes the LDAP server to operate in multi-server mode). If the `multiserver` option is present, its value must be set to `OFF`.

Restrictions for multiple server mode

The LDAP servers cannot share TDBM, LDBM, CDBM, or GDBM backends and cannot share the LDAP server schema. This means that each server must have unique values for the **databaseDirectory** configuration option (for an LDBM, file-based GDBM, or CDBM backend), the **dbuserid** configuration option (for a TDBM or Db2-based GDBM backend), and the **schemaPath** configuration option (for the schema).

Setting up multiple LDAP servers with Db2-based backends

In order to set up two or more LDAP servers on the same system with different Db2-based backends, do the following:

- Follow the steps outlined in [“Creating the Db2 database and table spaces for TDBM or GDBM” on page 55](#) and be sure to:
 1. Modify the SPUFI file that creates tables and indexes. Change `-DB_USERID-` (database owner) and `-DB_NAME-` (database name) to a different value and submit the SPUFI. A separate set of Db2 tables is created.
 2. Update the **dbuserid** configuration option with the `-DB_USERID-` value from step “1” on page 147.

Multi-server mode

For the LDAP server to operate in multi-server mode, the global section of the server configuration file must contain the `serverSysplexGroup` option. This option specifies the name of the cross-system coupling facility (XCF) group and activates the LDAP sysplex support. All the LDAP servers in the sysplex that specify the same group name share the LDAP server schema and the directories of backends that specify `multiserver` on in their backend section of the server configuration file. Each LDAP server in the XCF group must specify the same value for the `schemaPath` option and must have read/write access to the specified directory or to `/var/ldap/schema` if the option is not specified. The schema

directory that is used must exist within a shared z/OS UNIX System Services file system and must be accessible to all servers in the XCF group. An LDBM, CDBM, or file-based GDBM backend is shared when `multiserver` on is specified in the backend section. When an LDBM, CDBM, or file-based GDBM backend is shared, the **databaseDirectory** configuration option must have the same value, exist within a shared z/OS UNIX System Services file system, and must be accessible to all servers in the XCF group. Each server must have read/write access to the specified directory or to `/var/ldap/ldbm` (LDBM default), `/var/ldap/schema` (CDBM default if `schemaPath` is not specified), `/var/ldap/gdbm` (GDBM default) if the `databaseDirectory` configuration option is not specified. For information about setting up a shared z/OS UNIX System Services file system, see [Sharing file systems in a sysplex in z/OS UNIX System Services Planning](#).

The port specified in the `listen`, `port`, and `securePort` options must be the same on each LDAP server in the sysplex group for dynamic workload balancing to function properly in the sysplex.

When you are using referrals, multiple default referrals defined for other servers can be set up to point to each of the multiple server instances. Similarly, any referral objects defined in other servers that point to the multiple server instances can have multi-valued `ref` attributes set up, each of which is an LDAP directory URL pointing to the corresponding server instances.

When LDAP servers in a sysplex group are started, the first server to start becomes the sysplex owner of all the shared backends, including the schema. The LDAP server `DISPLAY XCF operator modify` command can be used to determine the active servers in the sysplex group and shows which one is the owner. See [“Displaying performance information and server settings” on page 179](#) for more information.

The sysplex owner is responsible for making all updates to the schema and to any shared LDBM or CDBM backends. If changes to the schema, LDBM, or CDBM entry are directed to another server in the sysplex group, that server uses XCF to forward the change to the sysplex owner. The sysplex owner makes the change, both in memory and in the database checkpoint file, and then uses XCF to broadcast the change to the other servers. The other servers update their directory in memory.

For a shared TDBM backend, any server in the sysplex group can update a TDBM entry in the database in Db2. That server then notifies all the other servers (including the sysplex owner) by way of XCF that a change has taken place. These servers refresh their various caches so that out-of-date contents are not used. This sysplex support for caches is only available when the `serverCompatLevel` configuration option is set to 4 or higher. If the `serverCompatLevel` configuration option is not at this level or higher, the servers in the sysplex do not support caching in the shared TDBM backend.

All replication is handled by the sysplex owner. If a shared backend is replicated, the sysplex owner creates the necessary replication information for a change to an entry in that backend and sends it to the replica or consumer servers.

If the GDBM backend is shared, GDBM is contacted to create a change log record on the server that makes the change. GDBM processing depends on how GDBM is configured. If GDBM is file-based, it handles the change log request like LDBM: the change log request is forwarded to the sysplex owner, who creates the change log record in GDBM and notifies the other servers. When GDBM is Db2-based, it handles the request such as TDBM: the Db2 database is updated locally and the other servers are notified.

If the LDAP server that is the sysplex owner ends, another LDAP server in the sysplex group becomes the owner.

Dependencies for multiple server mode

When sharing a Db2-based backend on multiple systems in a sysplex, the Db2 subsystems that each server instance attaches to must be configured on each of the images as members of the same Db2 data sharing group. For information about planning, installing, and setting up Db2 for data sharing, CLI and ODBC, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](#). For information about planning and installing a parallel sysplex, see [z/OS MVS Setting Up a Sysplex](#).

Restrictions for multiple server mode

Each LDAP server in the XCF group must specify the same value for the `schemaPath` configuration option and must have read/write access to the specified directory or to `/var/ldap/schema` if the option is not specified. The schema directory that is used must exist within a shared z/OS UNIX System Services file system and must be accessible to all servers in the XCF group. For information about setting up a shared z/OS UNIX System Services file system, see [Sharing file systems in a sysplex in z/OS UNIX System Services Planning](#).

You can configure one backend to be shared (**multiserver on**) while another backend is not shared (**multiserver off**) except when GDBM or CDBM is configured. When GDBM or CDBM is configured, all TDBM, LDBM, CDBM, and GDBM backends must be configured to be shared or all must be not shared.

Note: The following restrictions apply to the backend section of the configuration file on each LDAP server that is sharing the backend:

- The name parameter must be specified on the database option and must have the same value on each server.
- The values of the `suffix` option must be the same on each server.
- For a Db2-based backend, the `dbuserid` option must have the same value.
- For a file-based backend, the **databaseDirectory** configuration option must have the same value, exist within a shared z/OS UNIX System Services file system, and must be accessible to all servers in the XCF group. Each server must have read/write access to the specified directory or to `/var/ldap/ldbm` (LDBM default), `/var/ldap/schema` (CDBM default if the `schemaPath` configuration option is also not specified), `/var/ldap/gdbm` (GDBM default) if the **databaseDirectory** configuration option is not specified.
- The SDBM backend does not support the **multiserver** configuration option. RACF provides the sysplex sharing support for the RACF database. For information about setting up a shared RACF database, see [Shared RACF databases in z/OS Security Server RACF System Programmer's Guide](#).

PC callable support mode

The program call (PC) callable support in the LDAP server provides a program call interface to the LDAP server change log backend (GDBM). This interface is only available using the z/OS SAF interfaces designed to allow RACF to log changes to RACF data in the LDAP server change log. The PC callable support is initialized in an LDAP server when the appropriate `listen` option is included in the configuration file or specified when starting the server. An LDAP server can be dedicated to running just the PC callable support or it can run the PC callable support in addition to its typical socket interfaces.

Running the PC callable support has two interactions with the system:

- The address space of the LDAP server is made nonswappable when the PC callable support is initialized. The LDAP server will remain nonswappable until it is terminated. As a result, resources used by that address space can significantly affect system performance.
- Because the PC callable support connects its PC table to a system index, the address space identifier of the LDAP server address space is not reusable until the next IPL. If the system is configured with a low limit on the number of address spaces, it is possible to run out of address space identifiers, preventing new address spaces from being started. This problem is more likely to occur if the LDAP server running PC callable support is frequently brought down and restarted.

At most, one LDAP server in a system can activate PC callable support. If an LDAP server tries to initialize PC callable support after another LDAP server has already tried (successfully or unsuccessfully) to initialize PC callable support, the initialization fails. The first LDAP server that tries to initialize the PC callable support locks the access to the PC callable support until that LDAP server has been shut down. If you are running the LDAP server in a sysplex, configure one LDAP server on each system in the sysplex to run the PC callable support. Each system shares the GDBM, CDBM, and RACF databases to ensure that they return the same results.

Establishing the root administrator DN and basic replication replica server DN and passwords

There are several ways that the LDAP root administrator and replica server distinguished names and password values can be configured. One of these ways must be used because an LDAP root administrator DN and password are required for the LDAP server and some other LDAP directory programs to operate:

- A root administrator DN must be specified in the global section of the configuration file using the `adminDN` configuration option (see “Configuration file options” on page 90). The password for this root administrator DN can optionally (this is not suggested) be placed in the configuration file using the `adminPW` configuration option (see “Configuration file options” on page 90) or can be held in the namespace managed by this instance of the LDAP server.
- If a replica is being established for a backend, the `masterServerDN` or **peerServerDN** configuration option must be specified in the backend section of the configuration file. The `masterServerPW` or **peerServerPW** configuration option can optionally be specified. (This is also not suggested.) All the options described below are applicable for `adminDN` and the first three options described below are applicable for `masterServerDN` and **peerServerDN**.

The LDAP root administrator can delegate server administrator responsibility by defining the administrative group, adding members, and assigning administrative roles. Administrative roles can be defined in LDAP by an LDAP root administrator or in RACF by a RACF administrator. See [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information.

- Root administrator DN and password in configuration file

The simplest but least secure method is to select a root administrator DN that is outside of the scope of suffixes managed by this server (see the `suffix` configuration option, “Configuration file options” on page 90). In other words, choose a root administrator DN such that it does not fall within the portion or portions of the namespace managed by this server. Selection of this type of root administrator DN requires that the password is placed in the configuration file using the `adminPW` configuration option (see “Configuration file options” on page 90). There is no password policy support for the root administrator DN when the password is defined in the configuration file.

For example, you might choose a simple DN, such as “cn=Admin” for the root administrator DN and a simple password such as `secret`. The configuration file options might be:

```
adminDN "cn=Admin"
adminPW secret
```

Do not use the example without changing the password value, and the actual distinguished name.

When a program or user binds using this root administrator DN, the LDAP server verifies that the password supplied on the request matches the value provided in the configuration file for the `adminPW` option.

Note: When first configuring a TDBM, LDBM, or CDBM backend, it might be necessary to use this approach until the schema supporting the directory entries is loaded. When the schema is loaded and the entry representing the root administrator is added, the `adminDN` can be changed to the entry DN (see the next list item regarding “Root administrator DN and password as a TDBM, LDBM, or CDBM entry”). The server must be restarted to pick up the new `adminDN`.

- Root administrator DN and password as a TDBM, LDBM, or CDBM entry

In this method, the root administrator DN is established as an entry managed by a TDBM, LDBM, or CDBM backend. The `userPassword` attribute is used to hold the password for the root administrator DN in this case. There is LDAP password policy support for the root administrator DN when the entry contains a **userPassword** attribute value in the LDBM, TDBM, or CDBM backend.

Alternatively, the password or password phrase can be stored in the z/OS security manager if native authentication is configured. The LDAP password policy support does not apply to the root administrator DN when the password or password phrase exists in the z/OS security manager. The

z/OS security manager provides the authentication rules and enforcement of its own password policy. See [Chapter 20, “Native authentication,”](#) on page 397 for more information about using native authentication.

For example, if the TDBM or LDBM backend is managing the portion of the namespace "o=Your Company", one root administrator DN that could be selected is "cn=LDAP Admin,o=Your Company".

The configuration file includes the following options:

```
adminDN "cn=LDAP Admin,o=Your Company"
...
database tdbm GLDBTD31/GLDBTD64
...
suffix "o=Your Company"
```

The LDIF-format entry to be added to the database through **ldapadd** or **ldif2ds** might be:

```
dn: cn=LDAP Admin,o=Your Company
objectclass: person
cn: LDAP Admin
description: Administrator DN for o=Your Company server
sn: Administrator
uid: admin
userpassword: secret
```

Do not use this example without changing the password value, and the actual distinguished name.

If this entry is contained in a file system file called `admin.ldif`, it can be loaded using **ldapadd**:

```
ldapadd -h ldaphost -p ldapport -D binddn -w passwd -f admin.ldif
```

Note: The **ldapadd** example assumes that the LDAP server is running and that the suffix entry (entry with the name "o=Your Company") exists. Furthermore, the *binddn* is assumed to exist and have sufficient authority to add the entry. When initially setting up the LDAP server, one way to satisfy the assumption is to first configure the LDAP server using the *adminDN* and *adminPW* configuration options. Then, start the LDAP server, load the suffix entry and the root administrator DN entry, using the *adminDN* and *adminPW* configuration values for *binddn* and *passwd* respectively. After the add operations complete, stop the LDAP server, change the *adminDN* configuration option value to the name of the entry just added and **remove** the *adminPW* configuration option. Then restart the LDAP server.

For a TDBM backend, you can use the load utility, **ldif2ds**, to load the root administrator DN entry.

When a program or user binds using this root administrator DN, the LDAP server verifies that the password supplied on the request matches the value of the `userPassword` attribute stored in the entry.

CRAM-MD5 and DIGEST-MD5 authentication binds with the **adminDN** are supported if the entry exists in a TDBM, LDBM, or CDBM backend. The **adminDN** entry must contain a **uid** attribute value that is used as the user name by a client application when attempting a CRAM-MD5 or DIGEST-MD5 authentication bind. See [Chapter 21, “CRAM-MD5 and DIGEST-MD5 authentication,”](#) on page 407 for more information.

- Root administrator DN and password in RACF

This method requires that the LDAP server is configured to use the RACF support provided in the SDBM backend. The root administrator DN can be established as a RACF-style DN based upon a RACF user ID. (See [“RACF-style distinguished names”](#) on page 268 for more information.) In this case, the password for the root administrator DN is the RACF user IDs password or password phrase, and is stored and verified by RACF. The LDAP password policy support does not apply to the root administrator DN when the password or password phrase is stored in RACF. RACF provides the authentication rules and enforcement of its own password policy.

For example, if you configure the LDAP server with RACF support where the portion of the namespace held by RACF is "sysplex=Sysplex1,o=Your Company", and the RACF user ID that is used for the administrator is g1admin, the configuration file includes these options:

```
adminDN "racfid=g1admin,profiletype=user,sysplex=Sysplex1,o=Your Company"
...
database sdbm GLDBSD31/GLDBSD64
suffix "sysplex=Sysplex1,o=Your Company"
```

When a program or user binds using this root administrator DN, the LDAP server makes a request to RACF to verify that the password supplied on the request matches the RACF password or password phrase for RACF user ID g1admin.

Note the RACF user ID specified must have an OMVS segment defined and an OMVS UID present.

- **krbLDAPAdmin** option in the configuration file

You might want to configure the root administrator to be able to bind to the server through Kerberos. In this case, you must create a Kerberos identity for the user and also add this value to the configuration file. You cannot use the **krbLDAPAdmin** configuration option to provide a Kerberos identity for the **masterServerDN** or **peerServerDN** option. There is no LDAP password policy support for the Kerberos LDAP root administrator because there is not a **userPassword** attribute value stored in an LDBM, TDBM, or CDBM backend for the Kerberos identity.

For example, if the RACF user ID associated with the LDAP root administrator is **LDAPADM** and this identity is configured in Kerberos to be ldapadm@realm1.com, then your configuration file contains the following:

```
krbLDAPAdmin ibm-kn=ldapadm@realm1.com
```

This allows the administrator to bind to the server through Kerberos authentication rather than by performing a simple bind.

Example configuration scenarios

This section shows scenarios of LDAP server configurations. Only some of the options that can be specified for each section of the LDAP server configuration file are shown. See [Table 7 on page 87](#) for a complete list of the options that are available for each section.

Configuring a TDBM backend with SSL/TLS and password encryption or hashing

The configuration example in this section uses the TDBM backend and shows a sample configuration file.

Sample ds.conf for TDBM, SSL/TLS, and password encryption or hashing:

```
# Filename ds.conf

# Global section
sizelimit 500
timelimit 3600
adminDn "cn=LDAP Administrator,o=Your Company"

listen ldaps://:636
sslAuth serverClientAuth
sslCertificate none
sslCipherSpecs 15104
sslKeyRingFile /u01/ldapsrv/ldapsrv.kdb
sslKeyRingPWStashFile /u01/ldapsrv/ldapsrv.sth

# TDBM backend section
database tdbm GLDBTD31/GLDBTD64 LocalDirectory
suffix "o=Your Company"
servername LOC1
dbuserid GLDSRV
attrOverflowSize 500
pwEncryption MD5
```

Configuring SDBM and GDBM (Db2-based) backends

The configuration example in this section uses SDBM and GDBM backends and shows a sample configuration file. In this example, the GDBM backend is based on Db2.

Sample `ds.conf` for SDBM and GDBM:

```
# Filename ds.conf

# Global section
sizelimit 500
timelimit 3600
adminDn "racfid=ldadmin,profiletype=user,cn=myRACF"
listen ldap://:pc
listen ldap://:389

# SDBM backend section
database sdbm GLDBSD31/GLDBSD64
suffix "cn=myRACF"
enableResources on

# GDBM backend section
database gdbm GLDBGD31/GLDBTD64
servername LOC1
dbuserid GLDSRV
attrOverflowSize 500
```

Configuring SDBM and TDBM backends

The configuration example in this section uses both SDBM and TDBM backends and shows a sample configuration file.

Sample `ds.conf` for SDBM and TDBM:

```
# Filename ds.conf

# Global section
sizelimit 500
timelimit 3600
adminDn "racfid=ldadmin,profiletype=user,cn=myRACF"
listen ldap://:389

# SDBM backend section
database sdbm GLDBSD31/GLDBSD64
suffix "cn=myRACF"
enableResources on

# TDBM backend section
database tdbm GLDBTD31/GLDBTD64
suffix "o=Your Company"
servername LOC1
dbuserid GLDSRV
attrOverflowSize 500
```

Configuring LDBM with native authentication and GDBM (file-based) backends

The configuration example in this section uses both LDBM and GDBM backends and shows a sample configuration file.

The GDBM backend is based on the z/OS UNIX System Services file system.

Sample `ds.conf` for LDBM and GDBM:

```
# Filename ds.conf

# Global section
sizelimit 500
timelimit 3600
adminDn "cn=LDAP Administrator,o=My Company"
listen ldap://:389
```

```
# GDBM backend section
database gdbm GLDBGD31/GLDBGD64

# LDBM backend section
database ldbm GLDBLD31/GLDBLD64
suffix "o=My Company"
usenativauth all
nativeauthsubtree all
```

Configuring LDBM and CDBM backends with advanced replication and password policy

The configuration example in this section uses both CDBM and LDBM backends and shows a sample configuration file. Password policy is supported because CDBM is configured and the server compatibility level is 6 or higher (by default).

Sample `ds.conf` for CDBM and LDBM:

```
# Filename ds.conf

# Global section
sizelimit 500
timelimit 3600
adminDn "cn=LDAP Administrator,o=My Company"
listen ldap://:389

# LDBM backend section
database ldbm GLDBLD31/GLDBLD64
suffix "o=My Company"

# CDBM backend section
database cdbm GLDBCD31/GLDBCD64
useAdvancedReplication on
```

Configuring an EXOP backend

The configuration example in this section uses an EXOP backend and shows a sample configuration file. Use of the EXOP backend is deprecated.

Sample `ds.conf` for EXOP:

```
# Filename ds.conf

# Global section
listen ldap://:pc

# EXOP backend section
database exop GLDXPD31/GLDXPD64
```

Chapter 9. Administrative group and roles

The administrative group enables 24 hour administrative capabilities without needing to share a single user ID and password among the administrators. It is a way for the LDAP root administrator defined in the configuration file to delegate a limited set of administrative tasks to one or more individual user accounts. Administrative group members are users that are added to the administrative group and assigned one or more administrative roles. These roles define the tasks that a group member is authorized to perform. The roles are assigned in the LDAP administrative group member entry or alternately the roles are assigned in RACF.

The administrative roles supported in the z/OS LDAP server are:

- **Directory data administrator** is allowed to administer all TDBM and LDBM backend entries and entries that exist under the `cn=ibmpolicies` suffix in the CDBM backend.
- **No administrator** is intended to quickly revoke the administrative group member's administrative privileges.
- **Operational administrator** is allowed to specify the **PersistentSearch** control on search requests.
- **Password administrator** is allowed to administer user passwords; for example, allowing a help desk to reset a user's password in the LDBM and TDBM backends.
- **Replication administrator** is allowed to administer advanced replication configurations.
- **Root administrator** is a super user (sum of all administrative roles, excluding no administrator role). This authority is equivalent to the authority of the **adminDN** in the LDAP server configuration file.
- **Schema administrator** is allowed to administer the schema.
- **Server configuration group member** is allowed to administer entries under and including the `cn=configuration` suffix in the CDBM backend.

See “Administrative roles” on page 155 for more information.

Administrative roles

Whether administrative roles are defined for administrative group members in LDAP or in RACF, the administrative role categories and what they can do are the same. Administrative roles are gathered at authentication time and retained until the user reauthenticates. Therefore, any changes to the roles are not reflected until a new authentication or bind takes place. Group gathering is not performed for administrative group members. The following are the administrative role categories supported in the z/OS LDAP server.

Directory data administrator

Users assigned this role have unrestricted access to the entries in the LDBM and TDBM backends and the `cn=ibmpolicies` suffix in the CDBM backend. **aclEntry** values are ignored if the bound user has this administrative role. ACL filters are still applied, but cannot augment any permissions explicitly denied by this role definition. The directory data administrator has the following authority in the directory:

- Add, modify, and delete access to master server DN and advanced replication supplier entries of a consumer server when also assigned the schema administrator and server configuration group member administrative roles.

Note: This does not apply to the users specified in the **masterServerDN** or **peerServerDN** configuration options.

- Complete access to the `cn=replication`, `cn=configuration` entry in the CDBM backend.
- Modify access to the **ibm-slapdAdminPW** attribute in their own configuration entry in the CDBM backend.

- Complete access to entries in the TDBM and LDBM backends. However, for setting the password of any entry, the directory data administrator must abide by the normal password policy rules (if there are any). Users in this role cannot change the password of other administrative group members that exist in the directory.
- Read, search, and compare access to all entries in and under the `cn=configuration` suffix in the CDBM backend.
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW** and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - passwords of advanced replication supplier server credential entries (master server DNs).
- Read access to the `cn=schema` entry
- Cannot add or delete entries under the `cn=replication,cn=configuration` entry
- Update access to changelog (GDBM) entries

No administrator

Users assigned this role have no administrative privileges. By defining this role the LDAP root administrator revokes all the administrative privileges of the administrative group member. The no administrator has the following authority in the directory:

- Modify access to the **ibm-slappedAdminPW** attribute in their own configuration entry in the CDBM backend
- Read, search, and compare access to all entries in and under the `cn=configuration` suffix in the CDBM backend except for
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW** and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - passwords of advanced replication supplier server credential entries (master server DNs).
- Read access to the `cn=schema` entry
- Access to entries in the LDBM and TDBM backends through normal ACL evaluation. ACL filters are still applied, but cannot augment any permissions explicitly denied by this role definition. See [Chapter 24, “Using access control,”](#) on page 425 for more information.
- Read access to changelog (GDBM) entries

Operational administrator

Users assigned this role can perform persistent searches. **aclEntry** values are ignored when processing this role. ACL filters do not apply. The operational administrator has the following authority in the directory:

- Ability to include the **PersistentSearch** control on search requests
- Modify access to **ibm-slappedAdminPW** attribute in their own configuration entry in the CDBM backend
- Read access to all entries in and under the `cn=configuration` suffix in the CDBM backend except for
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW** and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - passwords of advanced replication supplier server credential entries (master server DNs)
- Read access to the `cn=schema` entry

- Read access to entries in the LDBM and TDBM backends and entries under and including the `cn=ibmpolicies` suffix in the CDBM backend
- Read access to changelog (GDBM) entries

Password administrator

Users assigned this role can unlock the accounts of other users or change passwords of users in the LDBM or TDBM backends. Password policy constraints set by the server do not apply to users assigned the password administrator role. This role has access to the LDBM and TDBM backends through normal ACL evaluation. ACL filters are still applied, but cannot augment any permissions explicitly denied by this role definition. See [Chapter 24, “Using access control,” on page 425](#) for more information. The password administrator has the following authority in the directory:

- Modify access to the **ibm-slappedAdminPW** attribute in their own configuration entry in the CDBM backend
- Read, search, and compare access to all the entries in and under `cn=configuration` except
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW** and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - passwords of advanced replication supplier server credential entries (master server DNs)
- Read, search, and compare access to the `cn=schema` entry
- Ability to unlock user accounts or set the password without the following normal password policy rules for all the users in backends except global administrative group members. This means users with the password administrator role have:
 - Read, write, and search access to the **userpassword** attribute and read, write, search, and compare access to the **pwdChangedTime** attribute
 - Ability to add, delete, and modify the **ibm-pwdAccountLocked** attribute only if the new value of the attribute is false
 - Ability to delete **pwdFailureTime**, **pwdAccountLockedTime**, **pwdExpirationWarned**, and **pwdGraceUseTime** attribute values for all users
- Read access to changelog (GDBM) entries

Replication administrator

Users assigned the replication administrator role can update advanced replication topology entries. This role has access to entries in the LDBM and TDBM backends (including basic replication **replicaObject** entries) through normal ACL evaluation. ACL filters are still applied, but cannot augment any permissions explicitly denied by this role definition. See [Chapter 24, “Using access control,” on page 425](#) for more information. The replication administrator has the following authority in the directory:

- no access to master server DN and advanced replication supplier entries in a consumer server
- Read, write, search, and compare access to the `cn=replication`, `cn=configuration` entry in the CDBM backend
- Modify access to the **ibm-slappedAdminPW** attribute in their own configuration entry in the CDBM backend
- Read access to all the entries in and under `cn=configuration` except
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW** and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - passwords of advanced replication supplier server credential entries (master server DNs).

- Ability to issue the following advanced replication extended operations: Cascading control replication, Control replication queue, Control replication, Control replication error log, Quiesce or unquiesce context, and Replication topology.
- Read access to the cn=schema entry
- Read access to changelog (GDBM) entries
- Read, write, search, compare, add, and delete access to all advanced replication topology entries in the backends. The determination of replication entries is based on the presence of following objectclasses in the entry: **ibm-replicationcontext** (replication context), **ibm-replicagroup** (replica group), **ibm-replicasubentry** (replica subentry), **ibm-replicationAgreement** (replication agreement), **ibm-replicationCredentials** (credentials entry), **ibm-replicationCredentialsSimple** (credentials entry), **ibm-replicationCredentialsExternal** (credential entry), **ibm-replicationWeeklySchedule** (replication schedule), **ibm-replicationDailySchedule** (replication schedule), and **ibm-replicationFilter** (replication filter).

Root administrator

Users assigned this role have the same access to data in the LDAP server as the LDAP root administrator (**adminDN** in the LDAP server configuration file). This role has permissions of all other roles except the no administrator role.

Schema administrator

Users assigned this role have unrestricted access to the cn=schema entry only. This role has access to the LDBM and TDBM backends through normal ACL evaluation. ACL filters are still applied, but cannot augment any permissions explicitly denied by this role definition. See [Chapter 24, “Using access control,” on page 425](#) for more information. The schema administrator has the following authority in the directory:

- Modify access to the cn=schema entry
- Add, modify, and delete access to the master server DN and replication supplier entries (cn=configuration in the CDBM backend) of a consumer replica when the user also has the directory data administrator and server configuration group member roles
- Modify access to the **ibm-slappedAdminPW** attribute in their own configuration entry in the CDBM backend
- Read access to all the entries in and under cn=configuration except
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW** and **ibm-slappedAdminGroupEnabled** attributes under the cn=configuration entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - passwords of advanced replication supplier server credential entries (master server DNs)
- Read, write, search, and compare access to the cn=schema entry
- Read access to changelog (GDBM) entries

Server configuration group member

Users assigned this role have restricted update access to the cn=configuration entries in the CDBM backend. This role has access to entries in the LDBM and TDBM backends through normal ACL evaluation. ACL filters are still applied, but cannot augment any permissions explicitly denied by this role definition. See [Chapter 24, “Using access control,” on page 425](#) for more information. The server configuration group member has following authority in the directory:

- add, modify, and delete access to all cn=configuration entries in the CDBM backend, except the following:

- **ibm-slappedAdminDN** and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
- Entries under the `cn=admingroup,cn=configuration` entry
- add, modify, and delete access to the master server DN and replication supplier entries in the `cn=configuration` entry in the CDBM backend of a consumer replica when the user is also assigned directory data administrator and schema administrator roles
- Modify access to the **ibm-slappedAdminPW** attribute in its own configuration entry in the CDBM backend
- Read access to all the entries in and under `cn=configuration` except
 - **ibm-slappedAdminDN**, **ibm-slappedAdminPW**, and **ibm-slappedAdminGroupEnabled** attributes under the `cn=configuration` entry
 - **ibm-slappedAdminPW** attribute under other local administrative group member entries, and
 - Passwords of advanced replication supplier server credential entries (master server DNs).
- Read access to the `cn=schema` entry
- Read access to changelog (GDBM) entries

Enabling the administrative group and roles

The server compatibility level must be 7 or greater and the CDBM backend must be configured to use the administrative group and roles. See “[serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}](#)” on page 125 for more information about the **serverCompatLevel** configuration option. When the LDAP server compatibility level is 7 or greater, the following entries are automatically created in the CDBM backend, if they do not exist:

- `cn=admingroup,cn=configuration`
- `cn=safadmingroup,cn=configuration`

By default, the administrative group is not enabled in the LDAP server because the **ibm-slappedAdminGroupEnabled** attribute is set to **false** automatically in the `cn=configuration` entry, if the attribute does not exist. If the **ibm-slappedAdminGroupEnabled** attribute is set to **true**, group members can be added to member entries under the `cn=admingroup,cn=configuration` entry or added as **member** attribute values to the `cn=safadmingroup,cn=configuration` entry. If the **ibm-slappedAdminGroupEnabled** attribute is deleted, the LDAP server treats the attribute as if it is set to **false**. The **member** attribute can be used to specify a RACF group as an administrative group member. This allows RACF administrators to assign administrative roles to all members of a RACF group.

The following **ldapsearch** utility command can be used to query the status of the **ibm-slappedAdminGroupEnabled** attribute value in the `cn=configuration` entry:

```
ldapsearch -D binddn -w passwd -s base -b cn=configuration "objectclass=*" ibm-slappedAdminGroupEnabled
```

The following **ldapmodify** utility command can be used to set the **ibm-slappedAdminGroupEnabled** attribute value to **true** in the `cn=configuration` entry. When successful, this activates the administrative group and roles feature:

```
ldapmodify -D binddn -w passwd -f file.ldif
```

where, the *file.ldif* contents are:

```
dn: cn=configuration
changetype: modify
replace: ibm-slappedAdminGroupEnabled
ibm-slappedAdminGroupEnabled: true
```

See “[CDBM backend configuration and policy entries](#)” on page 137 for more information about the entries and attribute values that affect the administrative group and roles configuration.

Defining administrative group and roles

The administrative group member entry is defined in the LDAP server in the CDBM backend, however, the roles that are assigned to members of these groups can exist either in the LDAP server or in RACF. This section describes the necessary entries for defining the administrative group and roles in the LDAP server or in RACF.

Note: When the administrative group is enabled by using **ibm-slapdadmingrouponabled** that is set to **true**, there are special rules that protect the list of members that are defined in CDBM. See “Administrative roles” on page 155 for the rules. When the administrative group is not enabled, regular ACLs protect the list of members that are defined in CDBM.

Administrative roles defined in LDAP

An LDAP root administrator creates the administrative group member entry in LDAP for each administrative user under the `cn=admingroup,cn=configuration` entry in the CDBM backend. The administrative group member entry must have an object class value of **ibm-slapdAdminGroupMember**. The entry contains the distinguished name of the member and one or more administrative roles the user is allowed to have in the LDAP server. See [Table 14 on page 160](#) for the optional and required attribute types.

Table 14. <i>ibm-slapdAdminGroupMember</i> objectclass schema definition (optional and required attributes)	
Attribute description and example	
ibm-slapdAdminDN	
A required single-valued attribute that specifies the bind distinguished name (DN) for this administrative group member.	
If this distinguished name points to an entry that exists in the LDBM, TDBM, or SDBM backend and a simple, CRAM-MD5, or DIGEST-MD5 bind is done, the password specified in that entry is checked during authentication. If this distinguished name does not exist in an entry in the LDBM, TDBM, or SDBM backend and a Kerberos or EXTERNAL bind is done, the alternate DN from a Kerberos or EXTERNAL bind or the DN extracted from the client's SSL certificate are checked during authentication. The ibm-slapdAdminPW attribute value must be specified if the distinguished name specified does not exist in the LDBM, TDBM, or SDBM backend and a simple authentication is being performed.	
Example:	
<code>ibm-slapdAdminDN: cn=dAdmin</code>	
ibm-slapdAdminPW	
This optional single-valued attribute specifies the bind password for the distinguished name specified in the ibm-slapdAdminDN attribute value. If password policy is activated in the LDAP server, password policy rules do not apply to this password value.	
This password value is encrypted or hashed if it is added or modified when the pwEncryption configuration option is set to a value other than none in the CDBM backend. If pwEncryption is set to a value other than none , directory security improves because the password is no longer stored in the directory in clear text.	
This value should not be specified if the distinguished name specified in the ibm-slapdAdminDN attribute value exists in an LDBM, TDBM, or SDBM backend. Also, do not specify this value if the ibm-slapdAdminDN is an alternate DN from a Kerberos or SASL EXTERNAL bind or the DN from a client SSL certificate.	
Note: This value is only used if the entry specified in the ibm-slapdAdminDN attribute value does not exist under a configured suffix in the LDAP server.	
Example:	
<code>ibm-slapdAdminPW: secret</code>	

Table 14. *ibm-slapdAdminGroupMember* objectclass schema definition (optional and required attributes) (continued)

Attribute description and example

ibm-slapdAdminRole

A multi-valued attribute that specifies the administrative roles associated with the administrative group member. The valid values are:

- **DirDataAdmin** (for Directory administrator)
- **NoAdmin** (for No administrator)
- **OperationalAdmin** (for Operational administrator)
- **PasswordAdmin** (for Password administrator)
- **ReplicationAdmin** (for Replication administrator)
- **RootAdmin** (for Root administrator)
- **SchemaAdmin** (for Schema administrator)
- **ServerConfigGroupMember** (for Server configuration group member)

If more than one role must be specified for this member, the **ibm-slapdAdminRole** attribute must be specified for each role. See [“Administrative roles” on page 155](#) for more information about administrative roles.

Example:

```
ibm-slapdAdminRole: DirDataAdmin
ibm-slapdAdminRole: SchemaAdmin
```

Note: The distinguished name of any created LDAP administrative group member entry cannot have the same value as the **adminDN**, **masterServerDN**, or **peerServerDN** configuration options or the distinguished names of any basic or advanced replication master server or advanced replication supplier server distinguished names. Also, these distinguished names cannot match any **member** attribute values in the `cn=safadmingroup,cn=configuration` entry. A member that is an alternate DN is compared against other administrative group members.

Administrative roles defined in RACF

An LDAP root administrator adds the user to the `cn=safadmingroup,cn=configuration` entry as a **member** attribute value. The multi-valued **member** attribute must specify a distinguished name (DN) that eventually leads to a SAF user ID and is a member of the SAF administrative group. Examples of these distinguished names are: SDBM entries, DN from an SSL client certificate, DN of a TDBM or LDBM entry participating in native authentication, and a Kerberos mapped DN. These users must then be given READ access to one or more administrative roles defined to RACF in LDAP general resource class. See [Table 12 on page 143](#) for more information about the optional and required attribute types for the `cn=safadmingroup,cn=configuration` entry. The **member** attribute can also be used to specify a RACF group as an administrative group member. This allows RACF administrators to assign administrative roles to all members of a RACF group.

Note: The **member** attribute in the SAF administrative group member entry is not allowed to be set to values of the **adminDN**, **masterServerDN**, or **peerServerDN** configuration options or the distinguished names of any basic or advanced replication master server or supplier distinguished names. Also, the **member** attribute is not allowed to be set to any distinguished names that are created under the `cn=admingroup,cn=configuration` entry. A member that is an alternate DN is compared against other administrative group members.

When administrative group members are defined in the `cn=safadmingroup,cn=configuration` entry, the administrative roles associated with each member must also be defined in RACF profiles under the RACF supplied LDAP class. The LDAP class profiles must be defined as:

Domain_Name.ADMINROLE.role where:

- **Domain_Name** is the value specified in the **ibm-slapdSAFSecurityDomain** attribute of the **cn=configuration** entry. The LDAP server uses the value in this attribute as the first part of the RACF defined administrative role when it does SAF authorization checking on security-related profiles for the administrative roles. By default, the **ibm-slapdSAFSecurityDomain** attribute is set to **GLDSEC**. An LDAP root administrator is allowed to modify the **ibm-slapdSAFSecurityDomain** attribute to a new value. The value is converted to uppercase during SAF authorization checking. See [“cn=configuration” on page 138](#) for more information about the **ibm-slapdSAFSecurityDomain** attribute.
- **ADMINROLE** – This value must be the second value in the RACF profile name to indicate that it is an administrative role. A period must precede and follow this value.
- **role** - contains the assigned administrative role value. Values can be any of the following predefined values:
 - **CONFIG** (for Server configuration group member)
 - **DIRDATA** (for Directory data administrator)
 - **NOADMIN** (for No administrator)
 - **OPER** (for Operational administrator)
 - **PASSWD** (for Password administrator)
 - **REPL** (for Replication administrator)
 - **ROOT** (for Root administrator)
 - **SCHEMA** (for Schema administrator)

The SAF users that are to be granted administrative roles must be granted READ access to the corresponding resource profile within the LDAP class. See [“Administrative group member examples” on page 162](#) for an example of defining administrative roles in RACF. Any attempts that are made to access the administrative roles resource are recorded to the SMF data set in the manner that is specified in the profile that is protecting the resource.

Administrative group member examples

The following example adds the administrative group member under the **cn=admingroup,cn=configuration** entry and assigns password administrator and directory administrator roles to the member, **cn=dpAdmin**, that has a password value of **secret**. This example uses the **ldapadd** utility to add the **cn=admindp,cn=AdminGroup,cn=configuration** entry.

```
ldapadd -D "cn=admin" -w xxxx -f admingroup.ldif
```

where **admingroup.ldif** contains:

```
dn: cn=admindp,cn=AdminGroup,cn=configuration
changetype: add
objectclass: ibm-slapdAdminGroupMember
ibm-slapdAdminDN: cn=dpAdmin
ibm-slapdAdminPW: secret
ibm-slapdAdminrole: dirDataAdmin
ibm-slapdAdminrole: PasswordAdmin
```

The following example adds the administrative group member, **racfid=pAdmin,profiletype=user,cn=myracf**, to the **cn=safadmingroup,cn=configuration** entry and assigns the password administrator role to the member. The user ID, **pAdmin**, is an existing SAF user ID. Also, this illustrates an example when using native authentication and using RACF to assign roles. See [“Example of setting up native authentication” on page 401](#) for more information. This example uses the **ldapmodify** utility to modify the **cn=safadmingroup,cn=configuration** entry.

```
ldapmodify -D "cn=admin" -w xxxx -f modSafAdminGroup.ldif
```

where **modSafAdminGroup.ldif** contains:

```
dn: cn=safadmingroup,cn=configuration
changetype: modify
```



```
add: member
member: racfid=pAdmin,profiletype=user,cn=myracf
member: cn=User1,ou=END,o=IBM,c=US
```

and the cn=User1,ou=END,o=IBM,c=US entry contains ibm-nativeId set to pAdmin.

If the **ibm-slapdSAFSecurityDomain** attribute in the cn=configuration entry is set to GLDSEC, the following profile in the LDAP class must be created in RACF for the password administrative role:

```
RDEFINE LDAP GLDSEC.ADMINROLE.PASSWD UACC(NONE)
AUDIT(SUCCESS(READ))
```

The audit level indicates that the authorized READ attempts are logged to the SMF data set. If the profile exists, use the **ralter** RACF command to change the audit settings:

```
RALTER LDAP GLDSEC.ADMINROLE.PASSWD AUDIT(SUCCESS(READ))
```

The pAdmin ID must be granted READ access to this profile to have the password administrator role:

```
PERMIT GLDSEC.ADMINROLE.PASSWD CLASS(LDAP) ID(pAdmin) ACCESS(READ)
```

The following example adds all members of a RACF group, **pAdGrp**, to the administrative group. The DN for that group is: racfid=pAdGrp,profiletype=group,cn=myracf. It must be added to the cn=safadmingroup,cn=configuration entry. The group ID, pAdGrp, is an existing RACF group ID. This example uses the **ldapmodify** utility to modify the cn=safadmingroup,cn=configuration entry.

```
ldapmodify -D "cn=admin" -w xxxx -f modSafAdminGroup2.ldif
```

where modSafAdminGroup2.ldif contains:

```
dn: cn=safadmingroup,cn=configuration
changetype: modify
add: member
member: racfid=pAdGrp,profiletype=group,cn=myracf
```

The pAdGrp ID must be granted READ access to this profile to have the password administrator role:

```
PERMIT GLDSEC.ADMINROLE.PASSWD CLASS(LDAP) ID(pAdGrp) ACCESS(READ)
```

Note: If the **dsconfig** utility was used to configure the z/OS TDS server and the RACF job was run, the following commands were run:

```
SETROPTS GENERIC(LDAP)
RDEFINE LDAP GLDSEC.ADMINROLE.* UACC(NONE)
RDEFINE LDAP GLDSEC.ADMINROLE.NOADMIN UACC(NONE)
SETROPTS CLASSACT(LDAP)
```

Administrative roles and extended operations

Table 15 on page 163 lists the LDAP server's supported extended operations and the administrative roles. The intersection specifies whether a specific administrative role has authority for the extended operation. An LDAP root administrator and master server DN (advanced replication) have authority to all extended operations. See [Appendix C, "Supported server controls," on page 653](#) and [Appendix D, "Supported extended operations," on page 669](#) for more information about the supported server controls and extended operations.

Table 15. Administrative roles authorized to issue various extended operations and controls								
Extended operation or control	Directory admin	Replication admin	Schema admin	Server configuration group member	Password admin	No admin	Operational admin	Root admin
Account status extended operation	Yes	No	No	No	No	No	No	Yes
Cascading control replication extended operation	Yes	Yes	No	No	No	No	No	Yes
ChangeLogAddEntry extended operation	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes

Table 15. Administrative roles authorized to issue various extended operations and controls (continued)								
Extended operation or control	Directory admin	Replication admin	Schema admin	Server configuration group member	Password admin	No admin	Operational admin	Root admin
Control replication extended operation	Yes	Yes	No	No	No	No	No	Yes
Control replication error log extended operation	Yes	Yes	No	No	No	No	No	Yes
Control replication queue extended operation	Yes	Yes	No	No	No	No	No	Yes
Effective password policy extended operation	Yes	No	No	No	Yes	No	No	Yes
GetDnforUserid extended operation	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
GetEffectiveACL extended operation	Yes	No	Yes	Yes	No	No	No	Yes
GetPrivileges extended operation	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
PersistentSearch control	No	No	No	No	No	No	Yes	Yes
Quiesce or unquiesce context extended operation	Yes	Yes	No	No	No	No	No	Yes
Remote auditing extended operation	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*
Remote authorization extended operation	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*
RemoteCryptoCCA extended operation	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*
RemoteCryptoPKCS#1 extended operation	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*	Yes*
Replication topology extended operation	Yes	Yes	No	No	No	No	No	Yes
Start TLS extended operation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
unloadRequest extended operation	Yes	No	Yes, only if unloading schema	No	No	No	No	Yes
User type extended operation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

*The administrative roles have no effect on the authority to run the Remote auditing, Remote authorization, RemoteCryptoCCA, or RemoteCryptoPKCS#11 extended operations. The bound user must map to a RACF user that has the appropriate authority. See [ICTX plug-in](#) and [Remote crypto plug-in](#) for more information.

Administrative group and roles-related extended operation

The **User type** extended operation is provided to allow a user to determine their user type and user roles. The **ldapexop** utility enables the call to the **User type** extended operation. Table 16 on page 164 summarizes the extended operation. See “The ldapexop utility” on page 253 for more information.

Table 16. Administrative group and roles extended operation		
Ldapexop operation	Ldapexop description	Overview
getusertype	User type extended operation	This extended operation is used by a user to determine their user type and user roles.

User type extended operation examples

In this example, an LDAP root administrator, cn=admin, issues the **User type** extended operation:

```
ldapexop -D cn=admin -w secret -op getusertype
```

```
User      : root_administrator
Role(s)   : operational_administrator schema_administrator replication_administrator
           password_administrator directory_data_administrator server_config_administrator
```

In this example, cn=barb, o=acme, c=us issues the **User type** extended operation, is a member of the administrative group, and is assigned the no administrative role.

```
ldapexop -D cn=barb,o=acme,c=us -w barbpw -op getusertype
```

```
User : admin_group_member  
Role(s) : no_administrator
```

In this example, an unauthenticated user issues the **User type** extended operation:

```
ldapexop -op getusertype  
  
User      : ldap_user_type  
Role(s)   : ldap_user_role
```

Chapter 10. Running the LDAP server

This topic describes what is necessary to get the LDAP server running.

Setting up the PDSE for the LDAP server DLLs

The LDAP server searches for and loads a number of dynamic load libraries (DLLs) during its startup processing. All DLLs for the LDAP server are shipped in PDSE format only. In order for these DLLs to be located by the LDAP server at run time, the PDSE which contains these DLLs (SYS1.SIEALNKE) must be in the LNKLIST (the default installation) or referenced in a STEPLIB DD card. In addition, the SYS1.SIEALNKE data set must be APF-authorized. If a STEPLIB DD statement is used, all data sets in the concatenation must be APF-authorized. The LDAP server also requires the *hlq*.SCEERUN and *hlq*.SCEERUN2 data sets. Both of these data sets must be APF-authorized.

Setting up and running the LDAP server

The LDAP server must be run as a started task. To do this, you must define the started task for the LDAP server and then you can run the LDAP server by using JCL. The LDAP server can be run in 31-bit mode or 64-bit mode.

Defining the started task for the LDAP server

After you create the LDAPSRV user ID (described in “Requirements for a user ID that runs the LDAP server” on page 46), you must define the DSSRV started task. The examples and the sample startup procedure use the name DSSRV for this task, but you can use any name for it.

To define the started task for the user ID you created, you can use the following RACF commands.

```
RDEFINE STARTED DSSRV.** STDATA(USER(LDAPSRV))
SETROPTS RACLIST(STARTED) REFRESH
```

Note: When using **dsconfig** to configure the LDAP server, the started task is already defined.

Running the LDAP server using the sample JCL

The JCL needed to run the LDAP server as a started task is provided with the product as a procedure. This JCL can be found in the DSSRV member of *GLDHLQ*.SGLDSAMP on the system where the LDAP server is installed. If you are using the z/OSMF portable software instance (ServerPac) for installation, *GLDHLQ* is GLD. Use DSSRV for starting the LDAP server in 31-bit or 64-bit mode. The JCL procedure can be started in the System Display and Search Facility (SDSF) or from the operator's console after the sample JCL is placed into the installation-specific library for procedures.

The JCL must be tailored before it can be run. In particular, you must change the program name to GLDSRV31 to run the LDAP server in 31-bit mode or GLDSRV64 to run in 64-bit mode. When you are using 31-bit mode, make sure the REGION= parameter is the appropriate size. When you are using 64-bit mode with one or more LDBMs, make sure the MEMLIMIT= parameter is coded with the appropriate size. If it is too small, then the server might not start and the following messages are issued:

```
GLD1106E LDBM backend initialization failed for backend named LDBM-0001.
GLD1101A Unable to load the database backends.
GLD1007I LDAP server is stopping.
```

See “LDBM performance considerations” on page 578 for size estimates.

For 64-bit mode, the MEMLIMIT= parameter should be coded such that if an LDBM (or more) is included, then the MEMLIMIT size needs to be considered.

To start the LDAP server in SDSF, enter:

```
/s dssrv
```

To start the LDAP server from the operator's console, enter:

```
s dssrv
```

The LDAP server has the following optional command-line parameters. One or more of these might be specified when starting the LDAP server.

-f *pathname*

Name of LDAP server configuration file to be read. The file name is case-sensitive unless it refers to a data set or DD statement. A data set is indicated by `// 'dataset-name'` while a DD statement is indicated by `//DD:dd-name`. The configuration data set specified by the CONFIG DD statement is used if the `-f` parameter is not specified. The `/etc/ldap/ds.conf` configuration file is used if the `-f` parameter is not specified and the CONFIG DD statement is not defined.

-l *ldap_URL*

Hostname or IP address and port number on which the LDAP server binds and listen for incoming requests. See the `listen` parameter at [“listen ldap_URL” on page 106](#) for information about the `ldap_URL` parameter. The `-l` parameter can be specified multiple times to add more `ldap_URL` values. The values that are specified using the `-l` command line parameter override the values that are specified for the `listen` option in the LDAP server configuration file.

You should reserve the port number or numbers that are chosen here in your TCP/IP profile data set. Port numbers less than 1024 might require additional specification. For more information, see *z/OS Communications Server: IP Configuration Guide*.

-m

Start the server in maintenance mode rather than normal mode. Maintenance mode severely restricts access to the server. See [“Basic replication maintenance mode” on page 463](#) or [“Advanced replication maintenance mode” on page 518](#) for more information.

-p *port*

Note: The `port` option is deprecated when the `listen` option is specified. See [“listen ldap_URL” on page 106](#) for information about the `listen` option.

Port number where the LDAP server listens for nonsecure communications. If you specify this parameter, it overrides the `port` value that might be in the LDAP server configuration file if there are not any `listen` values that are specified in the configuration file or `-l` parameters on the command line.

-s *secureport*

Note: The `secureport` option is deprecated when the `listen` option is specified. See [“listen ldap_URL” on page 106](#) for information about the `listen` option.

Port number where the LDAP server listens for secure communications. If you specify this parameter, it overrides the `secureport` value that might be in the LDAP server configuration file if there are not any `listen` values specified in the configuration file or `-l` parameters on the command line.

-d *debug_level*

The debug level is a mask that might be specified as follows:

- A decimal value (for example, 32)
- A hexadecimal value (for example, x20 or X20)
- A keyword (for example, FILTER)
- A construct of those values using plus and minus signs to indicate inclusion or exclusion of a value. For example:
 - '32768+8' is the same as specifying 'x8000+x8', or 'ERROR+CONNS'
 - '2147483647-16' is the same as specifying 'x7FFFFFFF-x10' or 'ANY-BER'

- By beginning the debug level with a minus sign, you can deactivate debug collection for a debug level. For example, "-CONNS" modifies an existing debug level by deactivating connection traces.
- By beginning the debug level with a plus sign, you can activate debug collection for a debug level. For example, "+CONNS" modifies an existing debug level by activating connection traces.

Note: Specifying the debug level by using decimal or hex values with a plus or minus sign is not necessarily the same as specifying the sum or difference as the debug level. For example, specifying '7+1' activates the 'TRACE', 'PACKETS', and 'ARGS' debug levels, while specifying '8' activates only the 'CONNS' debug level. Similarly, specifying '16-1' activates only the 'BER' debug level, while specifying '15' activates 'TRACE', 'PACKETS', 'ARGS', and 'CONNS'.

Table 17 on page 169 lists the debug levels and related decimal, hexadecimal, and keyword values. Keywords can be abbreviated using the uppercase characters for each keyword.

Table 17. LDAP debug levels			
Keyword	Decimal	Hexadecimal	Description
OFF	0	0x00000000	No debugging
TRACe	1	0x00000001	Entry and exit from routines
PACKets	2	0x00000002	Packet activity
ARGS	4	0x00000004	Data arguments from requests
CONNs	8	0x00000008	Connection activity
BER	16	0x00000010	Encoding and decoding of data, including ASCII and EBCDIC translations, if applicable
FILTer	32	0x00000020	Search filters
MESSage	64	0x00000040	Messaging subsystem activities and events
ACL	128	0x00000080	Access Control List activities
STATs	256	0x00000100	Operational statistics
THREAd	512	0x00000200	Threading activities
REPLication	1024	0x00000400	Replication activities
PARSe	2048	0x00000800	Parsing activities
PERFormance	4096	0x00001000	Performance statistics
SDBM	8192	0x00002000	Backend activities (SDBM)
REFErral	16384	0x00004000	Referral activities
ERROR	32768	0x00008000	Error conditions
SYSPLex	65536	0x00010000	Sysplex/WLM activities
MULTIServer	131072	0x00020000	Multi-server activities
LDAPBE	262144	0x00040000	Connection between a frontend and a backend
STRBuf	524288	0x00080000	UTF-8 support activities
TDBM	1048576	0x00100000	Backend activities (TDBM)
SCHEma	2097152	0x00200000	Schema support activities
BECApabilities	4194304	0x00400000	Backend capabilities
CACHe	8388608	0x00800000	Cache activities

Table 17. LDAP debug levels (continued)			
Keyword	Decimal	Hexadecimal	Description
INFO	16777216	0x01000000	General processing information
LDBM	33554432	0x02000000	Backend activities (LDBM)
PLUGin	67108864	0x04000000	Plug-in extension activities
ANY	2147483647	0x7FFFFFFF	All levels of debug
ALL	2147483647	0x7FFFFFFF	All levels of debug
Note: The minimum abbreviation for each keyword is shown in uppercase letters.			

The debug level for the server can be set at a number of different times.

- The initial debug level is OFF.
- Before you start the server, the LDAP_DEBUG environment variable might be set. The server uses this value first. For example,

```
export LDAP_DEBUG='ERROR+TRACE'
```

- When you start the server, the -d parameter might be specified. The debug level that is specified on this parameter replaces, adds to, or deletes from the preceding debug level. For example,

```
- s dssrv,parms='-d ERROR'
```

replaces the current debug level that is off or was set by the LDAP_DEBUG environment variable with the new debug level of only ERROR.

```
- s dssrv,parms='-d +ERROR'
```

adds the ERROR debug level to the current debug level that is off or was set by the LDAP_DEBUG environment variable.

```
- s dssrv,parms='-d -ERROR'
```

removes the ERROR debug level from the current debug level that is off or was set by the LDAP_DEBUG environment variable.

- It is possible to change the debug level when the server is running. See [“Dynamic debugging” on page 177](#) for more information.

-t transition mode

Starts the server in transition mode. Transition mode is used to update the server compatibility level, or to add or remove shared backends in a sysplex configuration without incurring a complete LDAP service outage. The server running in transition mode provides uninterrupted LDAP services while other servers are being updated and are unavailable.

Notes:

1. Only one server can be started and running with transition mode in the whole sysplex.
2. Transition mode is a temporary work mode used during sysplex level configuration updates. Transition mode is removed and changed to normal work mode automatically when this server becomes sysplex owner and the configuration updates complete.
3. Transition mode is supported for z/OS Version 2 Release 2 and later. See [“Updating LDAP configurations settings in a sysplex without server outage” on page 205](#) for more information.

When the LDAP server is started and is ready, GLD1004I is displayed:


```
GLD1004I LDAP server is ready for requests.
```

“Running the LDAP server using data sets” on page 171 contains information about using a data set for the LDAP server configuration file. To specify the configuration file as a data set name or a DD name in SDSF, some special syntax is necessary.

To specify a full data set name, it might be necessary to be in the expanded input screen for SDSF. This is accomplished by entering a slash (/) in SDSF. On the expanded screen, it is then possible to specify a data set name for the configuration file. Assuming that the configuration file has been established in data set MYUSERID.DS.CONF, the start command for the LDAP server in expanded input SDSF or the console is:

```
s dssrv,parms='-f //'MYUSERID.DS.CONF''
```

or, if more parameters are needed:

```
s dssrv,parms='-f //'MYUSERID.DS.CONF'' -l ldap://:999'
```

If a DD name, CONFIG, was established in the DSSRV procedure, as follows:

```
CONFIG DD DSN=MYUSERID.DS.CONF,DISP=SHR
```

the LDAP server can be started from expanded input SDSF or the console by entering:

```
s dssrv,parms='-f //DD:CONFIG'
```

To stop the LDAP server in SDSF, enter:

```
/p dssrv
```

To stop the LDAP server from the operator's console, enter:

```
p dssrv
```

This command causes the LDAP server to shut down.

Restriction: If the PC callable service is configured with the z/OS LDAP server, you cannot use the REUSASID parameter when restarting the server. For more information, see [“PC callable support mode” on page 149](#).

LDAP server messages and debug output

The LDAP server writes messages to stdout and stderr. Messages sent to stdout and stderr appear in DD:DSOUT in the provided JCL when running the LDAP server. DSOUT appears in the started task log for the LDAP server and can be viewed through SDSF. For information about how to use SDSF, see *z/OS SDSF Operation and Customization*.

Output from the LDAP server debug facility is directed to the file specified by the LDAP_DEBUG_FILENAME environment variable. If this environment variable is not set, the output is sent to stdout, which is redirected to DSOUT.

Running the LDAP server using data sets

Note: Using the LDAP configuration utility (**dsconfig**) to configure your server creates all the necessary files in a partitioned data set.

The LDAP server accepts several of its files as data sets. Data set versions of the configuration file and the environment variables file are not shipped with the LDAP server, but can be created by using the OGET command to copy the file system versions of the files into data sets. For information about the OGET command, see [OGET - Copy z/OS UNIX files into an MVS data set](#) in *z/OS UNIX System Services Command Reference*.

The default data set characteristics for record format and record length (V 255) which OGET uses when creating a new data set are not acceptable for JCL when submitting for batch processing. In order to avoid this, allocate the MYUSER.DSNTIJCL sequential data set to be fixed block 80 before performing the OGET operation.

A data set version of the DSNAOINI file needed for the TDBM and GDBM (when Db2-based) backends can be created by copying and editing the default file provided by Db2. See step “4” on page 20. The DSNAOINI file name can be specified in the dsnaoini option in the LDAP server configuration file, in a DSNAOINI DD statement in the DSSRV procedure, or in a DSNAOINI environment variable. The DD statement takes precedence, followed by the environment variable, and then the configuration option.

Note: Be sure that use of sequence numbers is turned off when editing this data set.

When the data set versions of these files are available, they can be specified in the DSSRV procedure. The configuration file can be specified by using the CONFIG DD statement, the environment variables file can be specified by using the ENVVAR DD statement, and the DSNAOINI file can be specified by using the DSNAOINI DD statement.

Verifying the LDAP server

The following examples show how you can verify your LDAP server by using the **ldapsearch** utility. You can use any LDAP client to do this.

Task	Method
Verifying TDBM and LDBM	<p>In the following command, substitute the suffix value from your LDAP server configuration file for the -b parameter. The command can be run multiple times to verify each suffix defined in the configuration file.</p> <pre>ldapsearch -h 127.0.0.1 -s base -b "o=Your Company" "objectclass=*"</pre> <p>Note:</p> <ol style="list-style-type: none"> 1. If allowAnonymousBinds off is specified in the LDAP server configuration file, you must specify a distinguished name to bind with using the -D and -w options on the ldapsearch utility. 2. The LDAP search returns the message "No such object" if the suffix entries have not been loaded into the directory. The TDBM or LDBM suffix entries can be added by using the steps outlined in “Finalizing setup of LDAP backends” on page 173 and then this LDAP search can be tried again to verify that the entry is correctly added.
Verifying SDBM	<p>For SDBM, you must bind with a valid RACF style DN to perform the search. Substitute a RACF ID of your choice in the racfid portion of the DN on the -D and the -b parameters. Also, replace cn=myRacf with your SDBM suffix in the DN on the -D and -b parameters. The RACF password for the user ID used in the -D parameter must be specified in the -w parameter.</p> <pre>ldapsearch -h 127.0.0.1 -D racfid=IBMUUSER,profiletype=user,cn=myRacf -w password_for_IBMUUSER -b racfid=IBMUUSER,profiletype=user,cn=myRacf "objectclass=*"</pre>
Verifying GDBM	<p>For GDBM, you must bind with the LDAP root administrator DN or another DN authorized to search the change log.</p> <pre>ldapsearch -h 127.0.0.1 -D binddn -w passwd -s base -b cn=changelog "objectclass=*"</pre>

Task	Method
Verifying CDBM	<p>For CDBM, you must bind with the LDAP root administrator DN or another DN authorized to search the cn=ibmpolicies and cn=configuration CDBM suffixes.</p> <pre>ldapsearch -h 127.0.0.1 -D binddn -w passwd -s base -b cn=ibmpolicies "objectclass=*" ldapsearch -h 127.0.0.1 -D binddn -w passwd -s base -b cn=configuration "objectclass=*"</pre>

The previous **ldapsearch** examples assume a default port of 389. If your port is not 389, use the `-p` parameter to specify the correct port.

Be sure to substitute the correct TCP/IP hostname or TCP/IP address for the 127.0.0.1 after the `-h` parameter. The `-b` parameter specifies the starting point for the search. The use of the quotation marks around the filter prevents the asterisk (*) from being interpreted by the shell.

Note this can be done from TSO also by substituting LDAPSRCH for ldapsearch.

For more information about **ldapsearch**, see [ldapsearch utility](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

Finalizing setup of LDAP backends

To finalize setup of LDAP backends, follow these steps:

1. If you have configured an LDBM or TDBM backend, modify the LDAP server schema entry to contain the schema needed for your usage of these backends. The **schema.user.ldif** and **schema.IBM.ldif** files found in the `/usr/lpp/ldap/etc` directory might contain the schema you need. **schema.IBM.ldif** requires that you first load **schema.user.ldif**. Additional schema might also be needed by the applications that are going to use the LDBM or TDBM directory. See [Chapter 15, "LDAP directory schema,"](#) on page 271 for more information.

Note:

- a. The distinguished name (DN) of the LDAP server schema is cn=schema. If the ldif file containing your schema has a DN of cn=schema, *suffix*, then update the file to change the DN to cn=schema.
 - b. Do not add any additional schema to use the GDBM, CDBM, or SDBM backends unless you are using SDBM to access RACF customized fields or adding user-defined entries to CDBM. The initial schema built into the LDAP server is typically sufficient for these backends.
2. Load the suffix entries for each configured LDBM and TDBM backend. Do not try to load a suffix entry for the GDBM, CDBM, or SDBM backend. The GDBM, CDBM, and SDBM suffix entries are generated automatically by the LDAP server.

Note: If you intend to load large amounts of data in LDIF format into a TDBM directory, see ["The ldif2ds utility"](#) on page 235 for instructions on using the **ldif2ds** utility. In this case, do not load the suffix entry separately. Include the suffix instead with the rest of the entries to be loaded by **ldif2ds**.

Use the **ldapadd** utility to load the suffix entry.

```
ldapadd -h ldaphost -p ldapport -D binddn -w passwd -f file
```

where *file* is a file containing the entries to be loaded in LDIF format. For example, if `suffix.ldif` contains the following suffix entry:

```
dn: o=Your Company
objectclass: organization
o: Your Company
```

then the suffix entry can be added by **ldapadd** utility as follows:

```
ldapadd -h myhost -p 389 -D cn=admin -w secret -f suffix.ldif
```

For more information about the **ldapadd** utility, see [ldapmodify and ldapadd utilities](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

3. Load additional entries into the LDBM, TDBM, or CDBM backend, as you want. You can use the **ldapadd** utility to load entries into these backends. For loading many entries into TDBM, consider using the **ldif2ds** utility. See [“The ldif2ds utility” on page 235](#) for more information. You must load entries in hierarchical order and an entry cannot be loaded before its parent entry is loaded.

You can also add entries to SDBM (using **ldapadd**), but this results in adding profiles to RACF. See [Chapter 17, “Accessing RACF information,” on page 317](#) for more information. You cannot load entries into the GDBM backend. GDBM entries are only created by the LDAP server itself.
4. If GDBM is configured, set an appropriate ACL for controlling access to change log entries in the GDBM backend. See [Chapter 28, “Change logging,” on page 545](#) for more information.
5. If CDBM is configured, set an appropriate ACL for controlling access to the cn=ibmpolicies suffix because, by default, all users have access to that suffix. The ACL set on the cn=configuration suffix only allows access to the LDAP root administrator or an administrator with the appropriate authority. See [“Administrative roles” on page 155](#) for more information about administrative role authority. Also, see [Chapter 26, “Advanced replication,” on page 473](#) and [Chapter 18, “Password policy,” on page 363](#) for more information.
6. After initial set-up of the LDAP server, you might want to remove the adminPW configuration option from the LDAP server configuration file. See [“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#) for more information.

Environment variables used by the LDAP server

There are a number of environment variables that are processed by the LDAP server and utilities. Except for LDAP_DS_ENVVARS_FILE, they can be specified in the environment variables file for the LDAP server. By default, the file name is /etc/ldap/ds.envvars. The name can be reset by using the LDAP_DS_ENVVARS_FILE environment variable or, if that is not set, by the ENVVAR DD in the procedure that is used to start the LDAP server. Environment variables are read once, during LDAP server initialization. The LDAP server must be stopped and restarted to put a change to an environment variable into effect.

Following are some rules for setting up the environment variables file:

- The file must be in code page IBM-1047.
- An environment variable line consists of *name=value*, starting in column one. Blanks at the end of each line are removed, but no other blanks are removed.
- A line can be continued by putting a backslash (\) as the last non-blank character on the line. The backslash is removed and the next line is appended to the previous line. The maximum length of the initial line plus all continuation lines is 1024 characters.
- The *value* can be entirely enclosed in quotation marks (') or double quotation marks (") to include trailing blanks and to process a trailing backslash as part of the value. The quotation marks are removed from the value.
- A line that begins with a # in column one is a comment line and is ignored. A trailing backslash (\) on a comment line is ignored and the comment line is not continued.
- If the *name* corresponds to an environment variable that is already set and *value* is specified, the new value is ignored and the existing value is not changed. If *value* is not specified, the environment variable is deleted.
- Processing continues with the next line if any error occurs.

The following list describes the environmental variables for the LDAP server.

GLDLOG_MICROSECONDS=ON | *anything_else*

Controls whether all generated activity log records contain microseconds in their timestamps. Microseconds are added to the timestamp if the value is set to ON. Microseconds are not included if the value is not ON or if the environment variable is not specified. The GLDLOG_MICROSECONDS environmental variable is deprecated. See [“Activity logging” on page 188](#) or the **logFileMicroseconds** configuration option at [“Configuration file options” on page 90](#) for more information.

GLDLOG_MSG=MSG | NOMSG

Controls whether activity log records are generated when messages are created by the LDAP server. Messages are not written to the log if the environment variable is not specified. The **GLDLOG_MSG** environmental variable is deprecated. See [“Activity logging” on page 188](#) or the **logFileMsgs** configuration option at [“Configuration file options” on page 90](#) for more information.

GLDLOG_OPS=WRITEOPS | ALLOPS | SUMMARY

Controls which operations generate LDAP server activity log records. No operations are logged if the environment variable is not specified. The GLDLOG_OPS environmental variable is deprecated. See [“Activity logging” on page 188](#) or the **logFileOps** configuration option at [“Configuration file options” on page 90](#) for more information.

GLDLOG_TIME=TIME | NOTIME | MERGEDRECORD

Controls whether log records for LDAP server activity are generated when the operation being logged ends. Log records are not generated when an operation ends if this environment variable is not specified or is set to **NOTIME**. The GLDLOG_TIME environmental variable is deprecated. See [“Activity logging” on page 188](#) or the **logFileRecordType** configuration option at [“Configuration file options” on page 90](#) for more information.

IBMSLDAPD_REPL_UPDATE_EXTRA_SECS=*interval*

Specifies, in seconds, how long the advanced replication engine waits for a replication operation to complete before setting an LDAP_TIMEOUT error code. By default, the advanced replication engine waits 60 seconds.

LDAP_ADVREPL_CLEANUP_INTERVAL=*interval*

Specifies, in seconds, how often backends participating in advanced replication delete replicated updates. If an incorrect value or 0 is specified, the value is set to 900 (delete replicated updates every 15 minutes). This is also the value that is used if the environment variable is not specified.

LDAP_COMPAT_FLAGS=*level*

Specifies the needed compatibility level setting. The value for LDAP_COMPAT_FLAGS is a mask that you can specify in the following ways:

- A decimal value (for example, 1)
- A hexadecimal value (for example, x02 or X02)
- A keyword (for example, SDBM_MIXEDDN)
- A construct of these values using plus and minus signs to indicate inclusion or exclusion of a value.

See [“LDAP_COMPAT_FLAGS environment variable” on page 204](#) for more information.

LDAP_CONSOLE_LEVEL=I | W | E | A

Specifies the message severity level for sending a message that is created by the LDAP server to the operator console. Messages with a severity equal to or higher than the specified severity are sent to the operator console in addition to the normal output destination. Some LDAP server messages are always written to the operator console and are not affected by this value. Messages with a severity of E or higher are sent to the operator console if the environment variable is not specified.

LDAP_CTRACE_BUFSIZE=*size*

Sets the amount of storage that allocates for CTRACE records within the LDAP server. The minimum value that can be specified is 1024000 bytes. This is also the value that is used if an incorrect value is specified or if the environment variable is not specified. On the average, each CTRACE record is about 120 bytes long. See [“CTRACE in-memory trace records” on page 177](#) for more information.

LDAP_DEBUG=*level*

Specifies the needed debug level. The value for LDAP_DEBUG is a mask that you can specify in the following ways:

- A decimal value (for example, 32)
- A hexadecimal value (for example, x20 or X20)
- A keyword (for example, FILTER)
- A construct of these values by using plus and minus signs to indicate inclusion or exclusion of a value.

See [Table 17](#) on page 169 for more information.

LDAP_DEBUG_FILENAME=*filename* | CTRACE_ONLY

Specifies the fully qualified name of the LDAP debug output file. The debug output is written to stdout if this environment variable is not specified. The debug file is not used if LDAP debugging is not active. If using an output file, make sure that the file is not being used for any other purpose.

The current process identifier is included as part of the debug file name when the name contains a percent sign (%).

Example: If LDAP_DEBUG_FILENAME is set to /tmp/ldap.%.trc and the current process identifier is 247, the debug file name is /tmp/ldap.247.trc.

If the value is CTRACE_ONLY, then all debug output is only written to the internal CTRACE buffers.

LDAP_DS_ENVVARS_FILE=*filename*

Specifies the name of the environment variables file for the LDAP server. The file name in the ENVVAR DD in the start procedure for the LDAP server is used if the environment variable is not specified. If the ENVVAR DD is not specified, the file name defaults to /etc/ldap/ds.envvars.

LDAP_ERROR_LOGGING=STDOUT | STDERR | BOTH

Specifies how error messages are logged. The following values can be specified:

STDOUT

Error messages are written to standard output as specified by the LDAP_STDOUT_FILENAME environment variable.

STDERR

Error messages are written to standard error as specified by the LDAP_STDERR_FILENAME environment variable.

BOTH

Error messages are written to both standard output and to standard error.

Error messages are written to standard error if this environment variable is not specified.

LDAP_NETWORK_POLL=*interval*

Specifies, in minutes, how often the LDAP server polls a network interface to determine whether it failed or becomes active. If 0 is specified, the value is set to 5 (poll every 300 seconds). This is also the value that is used if the environment variable is not specified.

LDAP_PRINT_CONFIG=1 | *anything_else*

Controls whether the configuration options used by the LDAP server are displayed when the LDAP server is started. The options are displayed if the value is 1 and are not displayed for any other value. The options are displayed if the environment variable is not specified.

LDBM_SHUTDOWN_FAST=1 | *anything_else*

Controls how a file-based backend (LDBM, CDBM, and file-based GDBM) in the LDAP server stops. Server shutdown typically frees all storage that is allocated and held by each backend. This can potentially be a large amount of storage for LDBM because it holds all its entries in memory, therefore, can be very time consuming. When the value is set to 1, storage that is allocated by the LDBM backend is not released before the LDAP server stops (the storage is eventually released by the operating system). When the value is not 1, the storage is freed before the LDAP server stops. This is also the processing that occurs if the environment variable is not specified.

LDAP_STDERR_FILENAME=*filename*

Specifies the fully qualified name of the file to receive standard error messages generated using LDAP message services. Messages are written to **stderr** if this environment variable is not specified. Make sure that the output file is not being used for any other purpose.

LDAP_STDOUT_FILENAME=*filename*

Specifies the fully qualified name of the file to receive standard output messages generated using LDAP message services. Messages are written to **stdout** if this environment variable is not specified. Make sure that the output file is not being used for any other purpose.

LDAP_TDBM_CACHEDELAY=*interval*

Specifies the number of seconds the LDAP server delays before it examines a TDBM Db2 database to detect out-of-date caches, rather than checking on every LDAP request. This can be used to reduce the cost of checking for up-to-date cache information. The caches affected are the referral cache, ACL (access control list) caches, and group cache. This environment variable is only used for a TDBM backend that is running in multiserver mode with a Db2 database that can be shared with a z/OS Integrated Security Services LDAP server (therefore, the DB_VERSION value of the database is less than '4.0' or the **serverCompatLevel** configuration option is **3**).

The valid range for the value is 0 to 2147483647. A value of 0 (zero) causes the Db2 database to be examined once per request. This is the default behavior if this environment variable is not specified.

This environment variable should not be set if there are applications that cannot tolerate temporarily out-of-date cache information in the LDAP server. It is best suited when most LDAP operations are search requests and the directory information is mostly static. It can also be useful even if there are many LDAP update operations, if the updates do not affect referrals, ACLs, or nested and dynamic groups.

LDAP_USE_INTERNAL_RNG=0 | *anything_else*

Specifies which random byte generator the LDAP server uses for the creation of the salt value for Salted SHA (SSHA) and Salted SHA-2 hashing and the generation of random data bytes for CRAM-MD5 and DIGEST-MD5 authentication binds. The LDAP server uses the SSL random byte generator that is provided in the `gsk_generate_random_bytes()` routine if the value is 0 or the environment variable is not specified. When the value is not 0, the LDAP server uses an internal random byte generator.

Dynamic debugging

When the LDAP server is running it is possible to dynamically turn the debugging facility on and off. You can also replace the current debug levels, add to the current debug levels, or remove from the current debug levels. The following command can be sent to the LDAP server from the SDSF or the operator's console. Note if the command is entered from SDSF, it must be preceded by a slash (/). In the command:

```
f dssrv,debug debug_level
```

the *debug_level* is a mask that specifies the needed debug level. See [Table 17 on page 169](#) for an explanation of the debug level values.

Debug information is added to the output associated with the LDAP server.

To turn the debug tracing off, enter the same command providing the value zero (0) for *debug_level*.

CTRACE in-memory trace records

CTRACE provides an in-memory tracing interface that is common with other z/OS products. The LDAP CTRACE support captures the following LDAP server output:

- All messages
- All debug message output for the ERROR debug level, regardless of debug level setting
- All debug message output for active debug levels. See [Table 17 on page 169](#) for more information about debug levels

By always capturing ERROR debug output, the CTRACE support provides FFDC (First Failure Data Capture) to assist in problem debugging without the performance overhead of running with the debug facility enabled.

The default size of the storage used for the in-memory trace table is 1024000 bytes, which holds about 8000 CTRACE entries. The table wraps when the end is encountered, overwriting the oldest CTRACE

entries. The trace table size can be increased by setting the **LDAP_CTRACE_BUFFSIZE** environment variable before the LDAP server is started. See [“Environment variables used by the LDAP server”](#) on page 174 for more information. There is no maximum trace table size except that imposed by the availability of system storage.

The LDAP CTRACE support is initialized during LDAP server startup. If CTRACE initialization fails, an error message is issued and server startup continues without CTRACE support. The LDAP CTRACE support cannot be turned off.

When the debug facility is active, debug output by default goes to both the CTRACE in-memory table and the output file indicated by the **LDAP_DEBUG_FILENAME** environment variable (or **stdout** if the environment variable is not set). If **LDAP_DEBUG_FILENAME=CTRACE_ONLY** is set, the debug output is only sent to CTRACE. The LDAP server **DEBUG** operator modify command can be used when the LDAP server is running to change whether debug output is sent only to CTRACE or to both CTRACE and the debug output file.

To direct debug output to CTRACE only, issue:

```
f dssrv,debug output=memory
```

To direct debug output to both CTRACE and to the debug output file, issue:

```
f dssrv,debug output=both
```

Viewing LDAP server CTRACE output

The LDAP server CTRACE component name is GLDSRVR. The LDAP server creates a subnode under GLDSRVR, identified by the hex address space identifier (ASID) of the LDAP server. Each LDAP server running on the system has its own subnode. The subnode is deleted when the LDAP server terminates as it typically does. To see the current subnodes, issue the following command from SDSF or the operator console:

```
d trace,comp=gldsrvr,sublevel,n=20
```

The results are like:

```
D TRACE,COMP=GLDSRVR,SUBLEVEL,N=20
IEE843I 13.49.52 TRACE DISPLAY
          SYSTEM STATUS INFORMATION
ST=(ON,0256K,00512K) AS=ON BR=OFF EX=ON MT=(ON,064K)
TRACENAME
=====
GLDSRVR
          MODE BUFFER HEAD SUBS
          =====
          OFF          HEAD    1
          NO HEAD OPTIONS
SUBTRACE  MODE BUFFER HEAD SUBS
-----
ASID(004E) OFF
ASIDS      *NOT SUPPORTED*
JOBNAMES   *NOT SUPPORTED*
OPTIONS    *NONE*
WRITER     *NOT SUPPORTED*
```

To view CTRACE records, an SDUMP, SADMP, or SYSMDUMP dump must be performed for the LDAP server address space. The CTRACE records in the resulting dump can be processed by the IPCS CTRACE facility, using the LDAP format table, GLDSCTFT, that resides in SYS1.SIEAMIGE. See [z/OS MVS IPCS Commands](#) for more information about IPCS. Here is an excerpt of the LDAP server CTRACE output (the message lines are wrapped here to fit on the page):

```
ctrace comp(gldsrvr) sub((asid(004e))) full

COMPONENT TRACE FULL FORMAT
COMP(GLDSRVR) SUBNAME((ASID(004E)))
**** 05/20/2005
```


SYSNAME	MNEMONIC	ENTRY ID	TIME STAMP	DESCRIPTION
DCESET3	ERROR	00000001	18:49:47.517060	LDAP_TRACE_ERROR
060615 14:49:47.516866 GLD06012E Unable to open database file /usr/include/LDBM-1.db: 141/05620060 - EDC5141I Read-only file system..				
DCESET3	ERROR	00000001	18:49:47.520275	LDAP_TRACE_ERROR
060615 14:49:47.520124 GLD1106E GDBM backend initialization failed..				

Displaying performance information and server settings

The LDAP server provides a DISPLAY operator modify command that is used to display information about the server, including performance information. The output of the display command goes to the operator console.

The syntax of the DISPLAY command for LDAP is:

```
f dssrv,display report
```

Where *report* is the name of an LDAP server report.

The LDAP server provides a RESET operator modify command that is used to reset the statistics that are shown in some of the reports.

The syntax of the RESET command for LDAP is:

```
f dssrv,reset report
```

Where *report* is the name of an LDAP server report.

The following is a description of each of the LDAP server reports. Where applicable, the reset processing is also described.

AUDIT

This option shows the current audit settings. It shows if auditing is ON or OFF and what level of auditing is active for each event.

Following is sample output if you request an AUDIT report:

```
GLD1190I Audit status
Option      Setting
AUDIT       ON
ERROR       BIND
ALL         ADD CONNECT DELETE DISCONNECT MODIFY SEARCH
NONE        MODIFYDN
```

BACKENDS

This option shows the current state of all configured GDBM, LDBM, CDBM, SDBM, and TDBM backends.

The state is composed of two parts:

- The first part indicates whether the backend allows entries to be updated (READWRITE) or is read only (READONLY).
- The second part indicates the backend processes requests (AVAILABLE), is not available because Db2 is down (UNAVAILABLE), is disabled because it is not able to load its directory (DISABLED), or the database files cannot be written because of a file system error (UNWRITABLE).

The state is set to FAILED CONFIGURATION if the backend fails to start.

Following is sample output if you request a BACKENDS report:

```
GLD1224I Backend status
Backend      State
mycdbm       READWRITE,AVAILABLE
GDBM-001     READWRITE,AVAILABLE
```

TDBM-002	READWRITE,UNAVAILABLE
myTDBM	FAILED CONFIGURATION
Dept1LDBM	READONLY,AVAILABLE
Dept2LDBM	READWRITE,DISABLED
SDBM-003	READWRITE,AVAILABLE
Dept3LDBM	READONLY,UNWRITABLE

DEBUG

This option shows the current DEBUG setting.

Following is sample output if you request a DEBUG report with debug set to THREAD+PERF+TDBM:

```
GLD1226I Debug settings
THREAD
PERFORMANCE
TDBM
DEBUGSECRET      ON
```

FIPS

This option shows the current FIPS mode for SSL/TLS protected connections.

Following is sample output if you request a FIPS report:

```
GLD1351I LDAP server SSL FIPS Mode is Level 1
```

HEALTH

This option shows the current health check status. It shows the enablement and a specified check time for each health check defined in the LDAP server.

Following is sample output if you request a HEALTH report:

```
GLD1347I LDAP health check settings
Name      State      Parms
DB2       ON         TOD 05:48
CONFIG    OFF        N/A
```

LEVEL

This option shows the current server version, including service level and serverCompatLevel setting.

Following is sample output if you request a LEVEL report:

```
GLD1001I LDAP server version 4.4, Service level 0Axxxxx.
GLD1315I LDAP server compatibility level 7.
```

The following table shows the service level for the associated z/OS release.

Table 18. Service levels for the associated z/OS release	
z/OS release	Service level
z/OS 2.4	4.4
z/OS 2.5	4.4
z/OS 3.1	5.1
z/OS 3.2	5.1

LOCKS

This option shows current server lock contention. The output indicates how often there has been contention on a lock and the average duration of contention (in seconds). If a lock is held, the output indicates what function and thread are holding the lock and how long the lock has been held.

Following is sample output if you request a LOCKS report:

```
GLD1126I Server lock statistics
Lock                                     Shared      Exclusive
SRV WLM                                0 0.000000000 0 0.000000000
```

LDBM Replicate	0	0.000000000	0	0.000000000
LDBM - Filter Cache	0	0.000000000	0	0.000000000
LDBM Filter Cache	205	0.000072722	29	0.000043733
LDBM URL Cache	0	0.000000000	0	0.000000000
LDBM Database	0	0.000000000	0	0.000000000
TDBM - DN to EID Cache	0	0.000000000	0	0.000000000
TDBM - Entry Cache	0	0.000000000	0	0.000000000
TDBM - Filter Cache	0	0.000000000	0	0.000000000
TDBM - Entry Owner Cache	0	0.000000000	0	0.000000000
TDBM - ACL Source Cache	0	0.000000000	0	0.000000000
TDBM DB2 Runstats	0	0.000000000	0	0.000000000
TDBM Replication	0	0.000000000	0	0.000000000
TDBM Group Cache	0	0.000000000	0	0.000000000
TDBM ACL Cache	0	0.000000000	0	0.000000000
TDBM Filter Cache	292	0.000113473	39	0.000066862
TDBM Alias Cache	0	0.000000000	0	0.000000000
TDBM Referral Cache	0	0.000000000	0	0.000000000
TDBM DN Cache	10	0.000026578	14	0.000030035
TDBM Entry Cache	7155	0.000060481	1036	0.000090300
TDBM EID Assignment	0	0.000000000	0	0.000000000
TDBM Schema Lookup	0	0.000000000	0	0.000000000
SRV Operations Monitor	0	0.000000000	7671	0.000272925
Schema - DN Cache	0	0.000000000	0	0.000000000
DN Cache	277	0.000036916	318	0.000030820
Activity Log	0	0.000000000	0	0.000000000
Schema	0	0.000000000	0	0.000000000
Message	0	0.000000000	0	0.000000000
Monitor	0	0.000000000	0	0.000000000

The lock statistics can be reset to 0 by using the RESET LOCKS command.

LOG

This option shows the current activity log settings.

Following is sample output if you request a LOG report:

```
GLD1290I Activity log status
Option:          Setting
OPERATIONS      ALLOPS
TIME            NOTIME
MESSAGES        NOMSGS
MICROSECONDS    MICRO
FILTER          (|(ibm-filterIP=192.1.1.*) (ibm-filterIP=193.1.*))
```

MAINTMODE

This option shows if maintenance mode is ON or OFF for the LDAP server.

Following is sample output if you request a MAINTMODE report:

```
GLD1225I Maintenance Mode status
Maintenance mode  OFF
```

MONITOR

This option shows the monitor report. This report provides operational statistics for both the server and for each backend that successfully started, including information about the number of specific operations that are targeted at the LDAP server or to a given backend. This information can be used to better tune backend caches for improved performance.

The operations monitor statistics are not returned in this report. These statistics can be retrieved by performing an LDAP search of the operations monitor. See [“Monitoring performance with cn=monitor”](#) on page 585 for more information.

Following is sample output if you request a MONITOR report:

```

          Monitor Statistics
-----
Server Version:      z/OS Version 2 Release 4 IBM Tivoli Directory
                      Server LDAP Server
```

Current Time: Thu May 23 17:53:37.145092 2019
 Start Time: Thu May 23 14:28:48.835516 2019
 Last Reset Time: Thu May 23 14:28:48.835516 2019
 Number of Resets: 0

Server Totals:

Description	Count
Config Max Connections	24982
System Max Connections	25000
Total Connections	31927
Current Connections	0
MaxReached Connections	2
Timed Out Connections	0
Timed Out result Sets	0
Paged Entries Cached	0
Paged Searches	844
Sorted Searches	3423
Group Gathering Events	31645
Search Entries Sent	332905
Message Bytes Sent	83801792
Search References Sent	0
Search Pages Sent	1688

Operation	Requested	Completed
Abandons	0	0
Adds	7013	7013
AllOps	113783	113783
Binds	31927	31927
Compares	133	133
Deletes	7013	7013
ExtOps	333	333
Modifies	14058	14058
ModifyDNs	1290	1290
Searches	17093	17093
Unbinds	31926	31926
Unknown	0	0

Backend Statistics: cdbm

Naming Context: CN=CONFIGURATION
 Naming Context: CN=IBMPOLICIES

Description	Count
Group Gathering Events	0
Search Entries Sent	0
Message Bytes Sent	14
Search References Sent	0

Operation	Requested	Completed
Abandons	0	0
Adds	0	0
AllOps	2	2
Binds	0	0
Deletes	0	0
ExtOps	0	0
Modifies	2	2
ModifyDNs	0	0
Searches	0	0
Unbinds	0	0
Unknown	0	0

Cache Name	Size	Entries	Hits	Misses	Pct Hit	Refresh Count	Refresh AvgEnts
Filter	5000	2	0	13	0.0%	8	1

Filter Bypass Limit: 100

Backend Statistics: TDBM-0001

```
-----
Naming Context:    DC=YOURCOMPANY2,DC=COM
Naming Context:    C=TDBM
Naming Context:    CN=MOVER
Naming Context:    CN=MOVING
```

Description	Count
Group Gathering Events	24101
Search Entries Sent	167330
Message Bytes Sent	42446210
Search References Sent	0

Operation	Requested	Completed
Abandons	0	0
Adds	4980	4980
AllOps	32623	32623
Binds	0	0
Compares	133	133
Deletes	4980	4980
ExtOps	0	0
Modifies	10098	10098
ModifyDNs	874	874
Searches	11558	11558
Unbinds	0	0
Unknown	0	0

Cache Name	Size	Entries	Hits	Misses	Pct Hit	Refresh Count	Refresh AvgEnts
ACLSource	100	0	239594	12715	95.0%	0	0
DnToEID	1000	0	30724	11957	72.0%	0	0
Entry	5000	0	0	253043	0.0%	0	0
EntryOwner	100	0	252060	249	99.9%	0	0

Filter Bypass Limit: 100

Backend Statistics: LDBM-0002

```
-----
Naming Context:    C=DE
Naming Context:    DC=YOURCOMPANY,DC=COM
Naming Context:    C=CA
Naming Context:    C=AU
Naming Context:    C=LDBM
```

Description	Count
Group Gathering Events	7544
Search Entries Sent	81472
Message Bytes Sent	20424224
Search References Sent	0

Operation	Requested	Completed
Abandons	0	0
Adds	2033	2033
AllOps	13968	13968
Binds	0	0
Compares	0	0
Deletes	2033	2033
ExtOps	0	0
Modifies	3956	3956
ModifyDNs	416	416
Searches	5530	5530
Unbinds	0	0
Unknown	0	0

Cache Name	Size	Entries	Hits	Misses	Pct Hit	Refresh Count	Refresh AvgEnts
------------	------	---------	------	--------	---------	---------------	-----------------

```

-----
Filter          5000          0      5529          1 100.0%      8438          0

Filter Bypass Limit: 100

Backend Statistics: SDBM-0003
-----
Naming Context:      CN=MYRACF

Description                      Count
-----
Search Entries Sent              0
Message Bytes Sent                0
Search References Sent            0

Operation    Requested    Completed
-----
Abandons      0          0
Adds          0          0
AllOps        0          0
Binds         0          0
Compares      0          0
Deletes       0          0
ExtOps        0          0
Modifies      0          0
ModifyDNs     0          0
Searches      0          0
Unbinds       0          0

Backend Statistics: Monitor
-----
Naming Context:      CN=MONITOR

Description                      Count
-----
Search Entries Sent              2
Message Bytes Sent              2700
Search References Sent            0

Operation    Requested    Completed
-----
Abandons      0          0
Adds          0          0
AllOps        2          2
Binds         0          0
Compares      0          0
Deletes       0          0
ExtOps        0          0
Modifies      0          0
ModifyDNs     0          0
Searches      2          2
Unbinds       0          0
Unknown       0          0

Backend Statistics: Schema
-----
Naming Context:      CN=SCHEMA

Description                      Count
-----
Search Entries Sent              0
Message Bytes Sent               28
Search References Sent            0

Operation    Requested    Completed
-----
Abandons      0          0
Adds          0          0
AllOps        2          2
Binds         0          0
Compares      0          0

```

Deletes	0	0
ExtOps	0	0
Modifies	2	2
ModifyDNs	0	0
Searches	0	0
Unbinds	0	0
Unknown	0	0

Cache Name	Size	Entries	Hits	Misses	Pct Hit	Refresh Count	Refresh AvgEnts
Dn	1000	84	300676	117	100.0%	2	18

Backend Statistics: RootDSE

Description	Count
Search Entries Sent	3
Message Bytes Sent	4039
Search References Sent	0

Operation	Requested	Completed
Abandons	0	0
Adds	0	0
AllOps	3	3
Binds	0	0
Compares	0	0
Deletes	0	0
ExtOps	0	0
Modifies	0	0
ModifyDNs	0	0
Searches	3	3
Unbinds	0	0
Unknown	0	0

Note: Some statistics might exceed the width of the report columns. In this case, a suffix is appended indicating the number is expressed in larger units. These suffixes are as follows:

```
k - kilo - displayed number times 10(3)
M - mega - displayed number times 10(6)
G - giga - displayed number times 10(9)
T - tera - displayed number times 10(12)
P - peta - displayed number times 10(15)
```

The monitor statistics can be reset by using the RESET MONITOR command. The reset statistics are reflected in future DISPLAY MONITOR reports and cn=monitor searches. RESET MONITOR has no effect on the values reported in the Activity Log. When monitor statistics are reset:

- **Last Reset Time** is set to **Current Time**, **Number of Resets** is incremented, and **MaxReached Connections** is set to the value of **Current Connections**.
- **Search Entries Sent**, **Message Bytes Sent**, **Search References Sent**, **Group Gathering Events**, **Timed Out Connections**, **Timed Out result Sets**, **Paged Searches**, **Sorted Searches**, **Search Entries Sent**, **Search Pages Sent**, and all Operation **Requested** and **Completed** values are reset to zero for both the **Server Totals** and **Backend Statistics**.
- Cache statistics **Hits**, **Misses**, **Pct Hit**, **Refresh Count**, and **Refresh AvgEnts** for each cache are reset to zero.

The RESET MONITOR> command also resets operations monitor statistics. See [“Monitoring performance with cn=monitor”](#) on page 585 for more information.

Resetting the monitor statistics has no effect on the Cache **Size** for each cache, nor on the **Filter Bypass Limit**, because these are configured values. It also has no effect on the Cache **Entries** for each cache, because the contents of the caches are not altered by a reset of statistics. In addition, **Paged Entries Cached** are not affected by a monitor reset.

Some caches might get invalidated and refreshed because of directory update operations. When this occurs, Cache **Refresh Count** is incremented and the Cache **Entries** is set to zero to reflect the refreshed, or empty, cache. The Cache statistics **Hits**, **Misses**, and **Pct Hit** values are accumulated across cache invalidation and refresh.

The same statistics in this report can also be obtained by using the **ldapsearch** utility to do a subtree search of the cn=monitor entry.

See [“Monitoring performance with cn=monitor” on page 585](#) for more information about searching by using cn=monitor.

NETWORK

This option shows the current state of all configured network interfaces. If the interface IP address is 0.0.0.0, it indicates that the LDAP server is listening on the INADDR_ANY interface. If the interface IP address is ::, it indicates that the LDAP server is listening on the **in6addr_any** interface.

Following is sample output if you request a NETWORK report:

```
GLD1084I Network interface status
Interface      Port  Status
127.0.0.1      3389  ACTIVE
127.0.0.1      389   ACTIVE
127.0.0.1      1492  ACTIVE
9.12.47.95     3389  ACTIVE
9.12.47.95     389   ACTIVE
9.12.47.95     1492  ACTIVE
0.0.0.0        489   ACTIVE
::             589   ACTIVE
```

REPLICAS

This option behaves differently if basic replication or advanced replication are enabled.

If basic replication is configured, this option shows the current state of each replication replica. The report indicates how many updates are currently in each replication queue, how many updates have been successfully replicated, and how many failed replication attempts have been set aside. This information can be used to determine whether replication has stalled for a certain replica, and, if it has, can determine how many updates remain to process for that replica.

Following is sample output if you request a REPLICAS report and are using basic replication:

```
GLD1163I Replication status
Backend  Replica      Queued/total/Set Aside
TDBM1    ldap2.ibm.com:389  10 /134 /0
TDBM1    ldap1.ibm.com:389  0  /134 /0
```

If advanced replication is configured, this option gives a view of the advanced replication topology configured. This includes basic state information for each replication context and replication agreement. Operational attributes retrievable from replication context and agreement entries can provide more detailed information about the state of advanced replication on the server.

Following is the sample output if you request a REPLICAS report and are using advanced replication:

On the system console:

```
GLD1296I Display Replica completed.
```

In LDAP server's job log:

```
090827 12:38:31.577855 GLD8502I Replication context CN=IBMPOLICIES
  replica type: SUPPLIER
  context state: NORMAL
  ibm-serverID: 9AB14000-7BF1-1807-9F7F-4020940EC8E0
  ibm-subentryDN: CN=MASTER,IBM-REPLICAGROUP=DEFAULT,CN=IBMPOLICIES
  agreements: 1 agreements defined
  referrals: NULL

090827 12:38:31.578651 GLD8506I Replication agreement
  CN=ZFORWARDER,CN=MASTER,IBM-REPLICAGROUP=DEFAULT,CN=IBMPOLICIES
  context DN: CN=IBMPOLICIES
  state: on hold
```



```

ibm-replicaURL: ldap://localhost:2492
ibm-replicaCredentialsDN: CN=ZFORWARDER SIMPLE,CN=REPLICATION,O=SAMPLELDBM
ibm-replicationFilterDN: NULL
ibm-replicaScheduleDN: NULL
bind-info: bind_dn "cn=admin2", method SIMPLE
connection-status: connected=BOUND, connection type=CLEAR
agreement-status: last changeID sent=8, errors logged=1, on hold=TRUE
pending change count: 4

```

THREADS

This option shows the current activity statistics for the communication threads in the LDAP server. These threads are used to handle the network communications between the LDAP server and clients and to process LDAP operations that are requested by the clients.

The values that are returned for a **THREADS** report are:

commThreads defined

number of communication threads. This is the value of the **commThreads** option in the LDAP server configuration file.

current active commThreads

number of communication threads currently active

max concurrent commThreads

largest number of communication threads that have been active at the same time

average thread activity

percentage of time that the communication threads have been active

current active LDAP operations

number of communication threads that are currently processing LDAP operations

max concurrent LDAP operations

largest number of communication threads that have been processing LDAP operations at the same time

LDAP operations per second

average number of LDAP operations processed per second

client network connections per second

average number of LDAP client connections processed per second

Following is sample output if you request a THREADS report:

```

GLD1109I Server activity statistics
20 commThreads defined
2 current active commThreads
16 max concurrent commThreads
20.59% average thread activity
2 current active LDAP operations
15 max concurrent LDAP operations
39.66 LDAP operations per second
13.22 client network connections per second

```

These statistics, except for the 'commThreads defined' value, are reset to 0 using the RESET THREADS command.

XCF

This option shows the current state of all servers in the sysplex group. This report indicates which server is the group owner, what servers are currently active in the group, and which server is a transition server. For more transition server information, see [“Updating LDAP configurations settings in a sysplex without server outage” on page 205](#).

Following is sample output if you request an XCF report:

```

GLD1135I Sysplex status
Server          System          Status
DCEIMGVV0066-BF31AD8E-2EFB4F4E DCEIMGVV0066 ACTIVE/REPLICA/TRANSITION
DCEIMGVV004E-BF31AD83-ACE95202 DCEIMGVV004E ACTIVE/OWNER

```

The System name for an LDAP server in a sysplex group is displayed in message GLD1146I when the server is started.

Size limitations

If any of the reports exceeds 256 lines of output, the report is truncated and the following message is displayed as the last line of the output:

```
GLD1086I Maximum number of lines displayed.
```

If the MONITOR report is truncated, the complete output can be found in the LDAP server job log. The same statistics can also be obtained by using **ldapsearch** to do a subtree search of the `cn=monitor` entry. See “Monitoring performance with `cn=monitor`” on page 585 for more information about searching `cn=monitor`.

Activity logging

The LDAP server supports logging client activity in an activity log file. The activity log file can be analyzed for LDAP server load analysis to determine the client operations that are handled by the server. The activity log records can contain information about operations that are handled by the server, client IP addresses, messages that are generated by the server, and hourly activity summary statistics. The LDAP server activity logging support has a number of features that allow the LDAP root administrator to customize the client activity to be logged.

The available versions of activity logging are version 0 and version 1. Activity log version 1 is the enhanced activity logging version. It includes more features to help debug DAP issues and inappropriate user operations of the LDAP server in addition to all features in version 0. For example, the addition of logging attributes in the add and modify requests allows you to detect when and who modified the critical attributes. The connect and disconnect records allow the detection of software configuration errors or denial of service attacks. The abandon record shows when a request is abandoned and the `msgid` of the request that is abandoned.

The activity logging function has two logging modes, *synchronous mode* and *asynchronous mode*.

- In synchronous mode, the log records are immediately written to file during client activities. Because each worker thread will write logs to file during requests handling, thread contention might be excessive, especially during high currency situations.
- In asynchronous mode, the resource contention can be relieved by using logging cache mechanism. Log records are stored in cache temporarily and are periodically written to file. Asynchronous mode can be enabled when the `logFileSync` configuration option is configured with a nonzero value. That value represents the number of seconds that the LDAP server waits before next writing. When `logFileSync` is configured with a value of 0, the synchronous mode is enabled.

The asynchronous mode has a constraint. When LDAP server abends or stops abnormally, if there are records in cache that are not written to file yet, these records might be lost.

The features for version 0 include the following ones:

- Logging the start or end of a client operation.
- Logging only client update operations (add, delete, modify, extended operations, and `modifydn`).
- Logging all client operations (add, bind, compare, delete, extended operations, modify, `modifydn`, search, and `unbind`).
- Logging messages that are generated by the server.
- Logging hourly client activity summary statistics.
- Logging only requests from certain client IP addresses.
- Activity log file archiving or rollover that copies the current activity log file to another location for load analysis.

The features for version 1 include:

- Logging the start or end of a client operation.
- Logging only client update operations (add, delete, modify, extended operations, and modifydn).
- Logging all client operations (add, bind, compare, delete, extended operations, modify, modifydn, search, and unbind).
- Logging messages that are generated by the server.
- Logging hourly client activity summary statistics.
- Logging only requests from certain client IP addresses.
- Activity log file archiving or rollover that copies the current activity log file to another location for load analysis.
- A configuration keyword that enables the new version, thus users that want the previous behavior are not affected.
- Logging the start and end of a connection.
- Logging abandon requests.
- Adding the msgid to requests that can be abandoned so that abandon requests can be matched to the requests they affect. The requests include: add, bind, compare, delete, exop, modify, rename, and search.
- Logging the attribute names in the add request records.
- Logging the attribute names and an indication of the attribute being added, deleted, or replaced in the modify request records.
- Logging requests unknown to the activity log.

Start and end connection logging

The following is an example of version 1 merged activity log records containing connection start and connection end messages:

```
Thu Oct 8 08:37:59 2009 mergedRecord Connect: connid = 1374, clientIP = 1.2.3.4,
listen = ldap://[fe00::f4f7:0:0:7442:7510]:389
Thu Oct 8 08:50:59 2009 mergedRecord Disconnect: connid = 1374, clientIP = 1.2.3.4,
bind = 'cn=john', cause = 1
```

The following is an example of version 1 non-merged activity log records containing connection start and connection end messages:

```
Thu Oct 8 08:43:43.424715 2009 Connect: connid = 1, listen =
ldap://[fe00::f4f7:0:0:7442:7510]:389, IP = 1.2.3.4,
Thu Oct 8 08:49:45.424716 2009 Disconnect: connid = 1, DN = 'cn=john', cause = 1,
IP = 1.2.3.4
```

Abandon request

The following is an example of a version 1 merged activity log record for an abandon request:

```
Thu Oct 8 08:37:59 2009 mergedRecord Abandon : connid = 1374,
clientIP = 9.12.47.67, time = 711usec, msgid = 123, targetmsgid = 456
```

The following is an example of version 1 non-merged activity log records for an abandon request:

```
Thu Oct 8 08:43:43.424715 2009 Abandon: connid = 1, msgid = 123, targetmsgid = 456,
IP = 1.2.3.4
Thu Oct 8 08:49:45.424716 2009 End Abandon: connid = 1, msgid = 123,
targetmsgid = 456, IP = 1.2.3.4
```

Attribute names in add request records

Attribute names is a string of attribute names that are separated by spaces. The following is an example of a version 1 merged activity log record for an add request:

```
Thu Oct 8 08:37:59 2009 mergedRecord Add: connid = 1374, clientIP = 1.2.3.4,
bind = 'cn=john,ou=zos,o=ibm,c=us', rc = 0, time = 49268usec,
controls = 1.3.6.1.4.1.42.2.27.8.5.1, target = ou=zos,o=ibm,c=us, msgid = 789,
attrs = cn objectclass description, rsn = NA
```

The following is an example of a version 1 non-merged activity log record for an add request:

```
Thu Oct 8 08:43:43.424715 2009 Add: connid = 1, DN = 'cn=john,ou=zos,o=ibm,c=us', msgid = 789,
IP = 1.2.3.4
Thu Oct 8 08:49:45.424716 2009 End Add: connid = 1, DN = cn=john,ou=zos,o=ibm,c=us, rc = 0,
msgid = 789, attrs = cn objectclass description, IP = 1.2.3.4
```

Attribute names in modify request records

Version 1 of activity logging provides attribute names and an indication of the attribute being added, deleted, or replaced in the modify request records.

Attribute names in a modify request record is a string with an indication of:

- the action taken separated by spaces, ended by a comma.

- "-" indicates that the attribute is deleted.

- "+" indicates that the attribute is added.

- "!" indicates that the attribute is replaced.

The following is an example of a version 1 merged activity log record for a modify request:

```
Thu Oct 8 08:37:59 2009 mergedRecord Modify: connid = 1374, clientIP = 1.2.3.4,
bind = 'cn=john,ou=zos,o=ibm,c=us', rc = 0, time = 49268usec,
controls = 1.3.6.1.4.1.42.2.27.8.5.1, target = 'ou=zos,o=ibm,c=us', msgid = 789,
attrs = -telephone +mobilephone !socsecuritynumber, rsn = NA
```

The following is an example of a version 1 non-merged activity log record for a modify request:

```
Thu Oct 8 08:43:43.424715 2009 Modify: connid = 1, DN = 'cn=john,ou=zos,o=ibm,c=us', msgid =
789,
IP = 1.2.3.4
Thu Oct 8 08:49:45.424716 2009 End Modify: connid = 1,
DN = 'cn=john,ou=zos,o=ibm,c=us', rc = 0, msgid = 789, attrs = -telephone +mobilephone
!socsecuritynumber, IP = 1.2.3.4
```

Logging requests unknown to activity logging

The following is an example of a version 1 merged activity log record for an unknown request:

```
Thu Oct 8 08:37:59.424715 2009 mergedRecord Unknown: type = 25, connid = 1, clientIP =
9.12.47.67,
bind = 'cn=Admin', rc = 0, time = 711usec, controls = , msgid = 2, rsn = NA
```

The following is an example of a version 1 non-merged activity log record for an unknown request:

```
Tue Oct 9 02:16:23.822710 2009 Unknown: type = 25, connid = 1, msgid = 2, IP = 9.12.47.67
Tue Oct 9 02:16:23.822789 2009 End Unknown: type = 25, connid = 1, msgid = 2, IP = 9.12.47.67
```

Configuring the activity log support

The logfile configuration option in the global section of the LDAP server configuration file specifies the location of the z/OS UNIX System Services file or data set where activity log records are written. If a z/OS UNIX System Services file is specified for the logfile configuration option, a fully qualified name must be specified. You should use a sequential data set if you want to use data set for the activity log file. If you must use a partitioned data set, make sure that the record length of the data set is large enough to contain all possible activity log records. Otherwise, the LDAP server fails to write the specific activity log record and the activity log is disabled.

Note: For synchronous mode, MVS multi-volume data sets or potential multi-volume data sets (those with Dynamic Volume Count) cannot be used for the activity log file. Similarly, GDG data sets are allowed to

be used for activity logs, but they cannot be multivolume or potential multivolume data sets. An error message is produced if an attempt is made to roll over the activity log is rolled to a new GDG data set if it was created as multivolume. For example,

```
GLD1221E Unable to write to file //'LDAP.ACTLOG.': 24/C0200011 - EDC5024I
An attempt is made to close a file that is opened on another thread
```

But for asynchronous mode, MVS multi-volume data sets or potential multi-volume data sets are supported.

The following code is an example of a logfile configuration option that specifies a z/OS UNIX System Services file:

```
logfile /etc/ldap/ldap.activity.log
```

If the logfile configuration option is not specified, the default location of the activity log file is /etc/ldap/gldlog.output. A partitioned or sequential data set can be specified in the logfile configuration option by using a DDNAME JCL card or as a specific data set. If a data set is to be used for the activity log, create it before it is used because the LDAP server uses system defaults to create the data set. Those system defaults might not be correct for the activity log. If a GDG (Generated Data Group) data set is used for the activity log, the GDG base must be specified for the logfile configuration option. The base must also be created before the server is started. The following sample JCL creates a base GDG named GLD.GDGBASE that might contain up to three generated data sets.

```
//STEP1      EXEC PGM=IDCAMS
//SYSPRINT   DD SYSOUT=*
//SYSIN      DD *
              DEFINE GDG(
                  NAME(GLD.GDGBASE)    -
                  LIMIT(3)              -
                  NOEMPTY               -
                  SCRATCH)
/*
//
```

Figure 7. GDG JCL example

You do not need to create a model GDG because the LDAP server ignores any model that is associated with the activity log's GDG when new generation data sets are created. The LDAP server uses the Storage Management Subsystem (SMS) defaults for that high-level qualifier when it creates the generation data sets. See [“Configuration file options” on page 90](#) for more information about the logfile configuration option.

The following are examples of specifying data sets for the activity log file:

```
logfile //DD:LOGOUT
logfile //'GLD.ACTLOG'
logfile //'GLD.MYLOG(OUT)'
logfile //'GLD.GDGBASE'
```

The LDAP server supports automatic activity log file rollover or archiving based on the time of day or the size of the log file. The activity log archiving is only supported when the log file is a z/OS UNIX System Services file or a GDG (Generated Data Group) data set. When the logfileRolloverTOD configuration option has a value between 00:00 and 23:59, it indicates the time each day when the current activity log file is archived. See [“Configuration file options” on page 90](#) for more information about the logfileRolloverTOD configuration option. When the logfileRolloverSize configuration option has a nonzero size, it indicates the size in bytes, megabytes, kilobytes, or gigabytes that the activity log file is required to have before it is archived or rolled over. See [“Configuration file options” on page 90](#) for more information about the logfileRolloverSize configuration option. When the activity log file reaches one of these thresholds or is manually rolled over with the LOG server operator modify command, the following occurs if the log file is a z/OS UNIX file:

- The current activity log file is renamed with the current Coordinated Universal Time stamp that is appended to the end of the file name.

- If the `logFileRolloverDirectory` configuration option is specified, the archived log file is moved to that directory. Otherwise, the archived activity log file is left in the same directory as the current activity log file. Use activity log archiving or rollover only when the underlying z/OS UNIX file system is the same between the directory in the specified `logfile` configuration option and the directory that is specified in the `logFileRolloverDirectory`. For more information about the `logFileRolloverDirectory` configuration option, see [“Configuration file options”](#) on page 90.
- After the archiving completes, the server opens a new activity log file with the name that is specified in the `logfile` configuration option.

When archiving by using data sets, specify the same Generated Data Group (GDG) base name for both the `logfile` and `logFileRolloverDirectory` configuration options. When logging is first activated, a new data set generation in the GDG is created and log records are written to that data set. Each time rollover or archiving occurs, the current activity log file is closed, and a new data set generation is used.

Note: When archiving using a GDG, no more than 255 new data set generations can be created during the life of the server. If the limit is exceeded, the old generations are reused and the log data is overwritten. To avoid exceeding this limit, you should plan the rollover strategy and data set capacity. Alternatives include:

- Archive once per day by using `logFileRolloverTOD`, if your server is restarted more often than every 255 days. Ensure the data set allocations accommodate a full day's worth of activity log records.
- Archive based on data set size, make the `logFileRolloverSize` large enough such that 255 generations do not occur before the server is restarted. Ensure that the data set allocations accommodate the size that is chosen.
- Consider logging and archiving using z/OS UNIX System Services files instead because they are not constrained by this limitation.

Activity log file rollover or archiving is not supported when the `logfile` or `logFileRolloverDirectory` configuration options specify a partitioned data set, sequential data set, or a DD card.

When the activity log is configured to log client operations and is active, the LDAP server logs all client operations from all IP addresses. However, the activity log can be configured to include or exclude client operations from certain IP addresses by using the `logFileFilter` configuration option or the LOG operator modify command. See [“Configuration file options”](#) on page 90 for more information about the `logFileFilter` configuration option. An IETF RFC 2254 (tools.ietf.org/html/rfc2254) compliant LDAP search filter can be specified in the `logFileFilter` configuration option or the LOG operator modify command using only the `ibm-filterIP` attribute type in the filters. The following example `logFileFilter` configuration option specifies to only log client operations from IP addresses starting with 1.2.3* or 1.2.4*.

```
logFileFilter (|(ibm-filterIP=1.2.3*)(ibm-filterIP=1.2.4*))
```

The default data collection setting is to collect no data in the activity log. The default is modified by environment variables or through the usage of the LDAP server LOG operator modify command. The environment variables are read as the server starts when the LOG operator modify command can be specified after the server has started. You can use the LOG operator modify command to modify the `logFileFilter` configuration option.

To enable the version 1 features of the activity log, specify the `logFileVersion` configuration option in the configuration file, with the value of 1. For more information about how to configure the version, see [“Configuration file options”](#) on page 90 for the `logFileVersion` configuration option.

An operator modify command can be sent to the LDAP server from the SDSF or the operator's console. Note if the command is entered from SDSF, it must be preceded by a slash (/). The format of the LDAP server LOG operator modify command is:

```
F DSSRV, LOG { WRITEOPS | ALLOPS | SUMMARY | TIME | NOTIME | MERGEDRECORD | MSGS |  
NOMSGS | FLUSH | STOP | ROLLOVER | FILTER,filter }
```

where one of the options in the { } must be specified. No more than one option in the { } is allowed to be specified at a time on the LOG operator modify command and the { } should not be specified as part of the command.

If the activity log must be restarted with logging the beginning and end of all operations, specify the following LOG operator modify commands:

```
F DSSRV, LOG ALLOPS
```

then,

```
F DSSRV, LOG TIME
```

The logFileOps configuration option and the LOG operator modify command can be used to control which operations generate log records. Before specifying an operation setting, no operation logging is performed. For more information, see the logFileOps configuration option in [“Configuration file options” on page 90](#).

Summary records are created on an hourly basis, when rollover or archiving occurs, or when an LDAP server LOG operator modify command is processed.

Note: If activity logging is not active, summary records are not created.

The summary log records contain information about the operations that the server has processed.

Following is an example of the summary log records:

```
Tue Jun 15 14:26:43.785091 2010 total operations started = 113780
Tue Jun 15 14:26:43.785165 2010 total operations completed = 113780
Tue Jun 15 14:26:43.785185 2010 total binds completed = 31926
Tue Jun 15 14:26:43.785202 2010 total unbinds completed = 31925
Tue Jun 15 14:26:43.785221 2010 total searches completed = 17092
Tue Jun 15 14:26:43.785238 2010 total modifies completed = 14058
Tue Jun 15 14:26:43.785254 2010 total adds completed = 7013
Tue Jun 15 14:26:43.785270 2010 total deletes completed = 7013
Tue Jun 15 14:26:43.785286 2010 total modifydns completed = 1290
Tue Jun 15 14:26:43.785302 2010 total compares completed = 133
Tue Jun 15 14:26:43.785318 2010 total abandons completed = 0
Tue Jun 15 14:26:43.785334 2010 total extendedops completed = 3330
Tue Jun 15 14:26:43.785349 2010 total unknown completed = 0
Tue Jun 15 14:26:43.785355 2010 total group gatherings completed = 98876
Tue Jun 15 14:26:43.785366 2010 total search entries sent = 332904
Tue Jun 15 14:26:43.785381 2010 total bytes sent = 83800442
Tue Jun 15 14:26:43.785396 2010 total search references sent = 0
Tue Jun 15 14:26:43.785411 2010 total search pages sent = 1688
Tue Jun 15 14:26:43.785427 2010 total paged searches completed = 844
Tue Jun 15 14:26:43.785445 2010 total sorted searches completed = 3423
Tue Jun 15 14:26:43.785459 2010 total connections processed = 31926
Tue Jun 15 14:26:43.785476 2010 current connections = 0
Tue Jun 15 14:26:43.785491 2010 connection high water mark = 2
Tue Jun 15 14:26:43.785506 2010 connections timed out = 0
Tue Jun 15 14:26:43.785521 2010 paged result sets timed out = 0
```

The logFileRecordType configuration option and the LOG operator modify command can be used to control when log records are generated. For more information, see the logFileRecordType configuration option at [“Configuration file options” on page 90](#).

The following are examples of activity log records containing start and end records:

```
Thu Oct 8 07:41:08 2009 Bind SIMPLE: connid = A, DN = cn=john,ou=zos,o=ibm,c=us, IP = 1.2.3.4
Thu Oct 8 07:41:08 2009 End Bind SIMPLE: connid = A, DN = cn=john,ou=zos,o=ibm,c=us, safid = , rc = 0,
IP = 1.2.3.4, policyUpdated = T
Thu Oct 8 07:41:08 2009 Search: connid = A, base = ou=zos,o=ibm,c=us, filter = (objectclass=*), scope = 2,
attrs = , IP = 1.2.3.4, searchFlags = 0
Thu Oct 8 07:41:08 2009 End Search: connid = A, base = ou=zos,o=ibm,c=us, filter = (objectclass=*), scope = 2,
count = 4, rc = 0, IP = 1.2.3.4, searchFlags = 0
Thu Oct 8 07:41:08 2009 Unbind: connid = A, DN = cn=john,ou=zos,o=ibm,c=us, IP = 1.2.3.4
Thu Oct 8 07:41:08 2009 End Unbind: connid = A, DN = cn=john,ou=zos,o=ibm,c=us, IP = 1.2.3.4
```

The following are examples of activity log records merged records:

```

Thu Oct 8 08:37:59 2009 mergedRecord Bind: connid = 1374, clientIP = 1.2.3.4, bind = cn=john,ou=zos,o=ibm,c=us,
rc = 0, time = 49268usec, controls = 1.3.6.1.4.1.42.2.27.8.5.1, listen = ldap://
[fe00::f4f7:0:0:7442:7510]:389, seclabel = , mech = SIMPLE, saf = , policyUpdated = T, rsfn=NA
Thu Oct 8 08:37:59 2009 mergedRecord Search: connid = 1374, clientIP = 1.2.3.4, bind = cn=john,ou=zos,o=ibm,c=us,
rc = 0, time = 1437usec, controls = , target = ou=zos,o=ibm,c=us, filter = (objectclass=*), scope = 2, attrs = ,
count = 4, searchFlags = 0, rsfn=NA
Thu Oct 8 08:37:59 2009 mergedRecord Unbind: connid = 1374, clientIP = 1.2.3.4, bind = cn=john,ou=zos,o=ibm,c=us,
rc = 0, time = 6usec, controls = , listen = ldap://[fe00::f4f7:0:0:7442:7510]:389, seclabel = , saf = , rsfn=NA

```

See Appendix F, “Activity log records,” on page 707 for a description of the different fields that are present in activity log records.

Note: When the client connects to the LDAP server over the PC interface, the IP address is reported as PC. If a request is handled by the cross-system facility (XCF), the IP address is reported as XCF.

The logFileMicroseconds configuration option controls if all generated log records contain microseconds in their time stamps. You cannot use the LOG operator modify command to modify this section. The default does not include microseconds in the time stamps. For more information, see the logFileMicroseconds configuration option at “Configuration file options” on page 90.

The following examples show activity log records that contain microseconds:

```

Thu Oct 8 08:43:43.424715 2009 Bind SIMPLE: connid = 1, DN = cn=tom,ou=zos,o=ibm,c=us, IP = 1.2.3.4
Thu Oct 8 08:43:43.455011 2009 End Bind SIMPLE: connid = 1, DN = cn=tom,ou=zos,o=ibm,c=us, safid = , rc = 0, IP = 1.2.3.4,
policyUpdated = F
Thu Oct 8 08:43:43.466558 2009 Search: connid = 1, base = cn=tom,ou=zos,o=ibm,c=us, filter = (objectclass=*), scope = 2,
attrs = , IP = 1.2.3.4, searchFlags = 0
Thu Oct 8 08:43:43.471836 2009 End Search: connid = 1, base = cn=tom,ou=zos,o=ibm,c=us, filter = (objectclass=*), scope = 2,
count = 1, rc = 0, IP = 1.2.3.4, searchFlags = 0
Thu Oct 8 08:43:43.478053 2009 Unbind: connid = 1, DN = cn=tom,ou=zos,o=ibm,c=us, IP = 1.2.3.4
Thu Oct 8 08:43:43.478181 2009 End Unbind: connid = 1, DN = cn=tom,ou=zos,o=ibm,c=us, IP = 1.2.3.4

```

The logFileMsgs configuration option and the LOG operator modify command can be used to control if log records are generated when messages are created by the LDAP server. For more information, see the logFileMsgs configuration option at “Configuration file options” on page 90.

The following example shows an activity log record containing a message:

```

Thu Oct 8 08:43:24.748429 2009 GLD1059I Listening for requests on 127.0.0.1 port 389.

```

To update the activity log filter that is specified in the logFileFilter configuration option, issue a LOG operator modify command. The following command updates the server to only log client requests originating from IP address 1.2.4.5.

```

F DSSRV, LOG FILTER, (IBM-FILTERIP=1.2.4.5)

```

The current activity log can be manually rolled over or archived by using the process described earlier in this section by issuing the following LOG operator modify command:

```

F DSSRV, LOG ROLLOVER

```

As the log records are produced, some buffering of the output is performed by the system. The buffers are flushed before the server shuts down. However, you can force the server to flush the buffers by issuing the following LOG operator modify command:

```

F DSSRV, LOG FLUSH

```

To have the server stop collecting activity data, issue the following LOG operator modify command:

```

F DSSRV, LOG STOP

```

To restart activity logging, specify a LOG operator modify command with a new setting.

```

F DSSRV, LOG ALLOPS

```

To query the current activity log settings, issue the following DISPLAY operator modify command:

```

F DSSRV, DISPLAY LOG

GLD1290I Activity log status
Option:          Setting
LOGGING         YES

```


FILE NAME	/etc/ldap/gldlog.output
FILE SYNC	NO
ROLLOVER	YES
ROLLOVER DIR	N/A
ROLLOVER SIZE	10K
ROLLOVER TOD	N/A
LOG VERSION	0
LOG FILTER	N/A
LOG OPERATION	ALL
LOG TIME	YES
LOG MESSAGE	NO
LOG MICROSECOND	NO

LDAP SMF auditing

The LDAP server can be configured to generate SMF type-83 subtype three audit records. The SMF type-83 log records containing LDAP events can be unloaded by using the RACF SMF data Unload utility for further analysis by auditing tools. These audit records contain information that is provided on LDAP client operation requests. The LDAP server can be configured to write audit records when the operation successfully completes, when the operation fails or for either case. SMF type-83 subtype 3 audit records are not created by the LDAP server when a request is handled by a plug-in. The LDAP server uses the **R_auditx** callable service to write the record to SMF. See [“Additional setup for generating audit records”](#) on page 50 for setup information.

Auditing events

Auditing of LDAP operations can be set up by using the `audit` option in the LDAP server configuration file. See [“audit {on | off | all,operations | error,operations | none,operations}”](#) on page 92 for more information.

When the LDAP server is running, auditing can be turned on or off and the specifications of which operations are to be audited and their associated audit level can be changed by using the LDAP server AUDIT operator modify command. The format of the AUDIT operator modify command is:

```
f dssrv,audit on | off | all,operations | error,operations | none,operations
```

When auditing is on, an LDAP SMF type 83 subtype three audit record is generated for an operation if the operation is specified on an audit level and the operation result matches the audit level.

A separate `audit` configuration option or AUDIT operator modify command must be issued to turn auditing on or off and to set each audit level. Multiple operations can be specified for a level by putting a + between them on the `audit` option or AUDIT command, or by specifying multiple `audit` options or AUDIT commands with the same level.

Operations can be audited all the time or only when they fail. The following audit levels are supported:

all

An LDAP audit record is generated for the specified operations.

error

An LDAP audit record is generated for the specified operations when they fail.

none

An LDAP audit record is not generated for the specified operations.

The supported values for operations can be one or more of: abandon, add, bind, compare, connect, delete, disconnect, exop, modify, modifydn, search, unbind

If an operation is specified in more than one level, the last level is used for the operation. If an operation is not specified in any level, the level defaults to none for that operation. Turning off auditing does not change the setting for the audit levels. If auditing is later turned on, the audit levels remains as they last were.

For example, the following AUDIT operator modify commands turn auditing on for modify and search operation failures and for all bind operations. The other operations are not audited.

```
f dssrv,audit error,modify+search+bind
f dssrv,audit all,bind
f dssrv,audit on
```

The current audit settings can be displayed by using the following LDAP server DISPLAY operator modify command:

```
f dssrv,display audit
```

The results for the AUDIT operator modify commands are:

```
GLD1190I Audit status
Option      Setting
AUDIT       ON
ERROR       MODIFY SEARCH
ALL         BIND
NONE
```

Working with audit records

The LDAP events are logged in an SMF data set as type 83 subtype 3 records. The audit record is a mixture of binary and EBCDIC data. For information about the general format of SMF type 83 records, see [Record type 83: Security events in z/OS Security Server RACF Macros and Interfaces](#).

The RACF SMF Unload utility can be used to reformat the LDAP SMF type 83 subtype 3 records for easier analysis. These audit records can be reformatted in the following different forms:

- A tabular format, suitable for import to a relational database manager.
- eXtensible Markup Language (XML) documents

For information about the RACF SMF Unload utility, see [The RACF SMF data unload utility in z/OS Security Server RACF Auditor's Guide](#). This document describes how the reformatted data can further be processed by Db2, DFSORT, and XML applications.

Three samples are shipped with the LDAP server to use with the RACF SMF Unload utility to reformat the LDAP audit records. The samples can be found in *GLDHLQ.SGLDSAMP*.

Two samples are used to create the tabular format. LDAPDBTB defines the Db2 table spaces and tables that are needed to contain the LDAP audit records and LDAPDBLD loads the formatted audit records into the tables.

A single sample is used to create the XML format. GLDLPSC provides an XML schema to define the XML tag language that is used to reformat the LDAP audit records.

For the format and content of the LDAP SMF Audit records and the RACF SMF unload utility tabular description, see [Appendix E, "SMF records," on page 693](#).

Monitoring LDAP server resources

The LDAP server monitors the basic resources that it uses to ensure that they are still available. If a resource becomes not available, the LDAP server can be configured to end or to operate without the resource until the resource becomes available.

Server backends and plug-ins during startup

When the LDAP server is started, the server processes the LDAP server configuration file and then initializes each of the backends or plug-ins that are configured. If an error is detected during initialization of a backend or plug-in, that backend or plug-in is not usable. Based on the **srvStartUpError** option in the LDAP server configuration file, the LDAP server shuts itself down or continues running with those backends or plug-ins that successfully start. After the problem encountered during backend or plug-in initialization is fixed, the LDAP server must be restarted to make that backend or plug-in available. See [Chapter 8, "Customizing the LDAP server configuration," on page 83](#) for the description of the **srvStartUpError** configuration option. The option does not apply to resource problems encountered after

the LDAP server backends or plug-ins have started. The LDAP server response to those problems is described below.

Db2

The LDAP server uses Db2 to store the directory information for the TDBM and GDBM (when Db2-based) backends. If one of these backends is configured, the LDAP server attempts to connect to Db2 when the server is started. If it is not available, the LDAP server, based on the `db2StartUpRetryLimit` and `db2StartUpRetryInterval` configuration options in the LDAP configuration file, can periodically try again to connect to Db2. If the connection cannot be established, the LDAP server can, based on the `srvStartUpError` configuration option, shut itself down or continue running without access to TDBM and GDBM (when Db2-based). See [Table 8 on page 97](#) for the descriptions of the `db2StartUpRetryLimit`, `db2StartUpRetryInterval`, and `srvStartUpError` configuration options.

When the LDAP server has connected to Db2 and a TDBM or Db2-based GDBM backend is running, the LDAP server monitors and detects when it shuts down. Based on the `db2Terminate` option in the LDAP server configuration file, the Db2 LDAP server shuts itself down or continues running without access to the TDBM and GDBM backends and reconnects to Db2 when it becomes available. If the LDAP server is configured to continue running when Db2 terminates, connection errors such as -923 and -924 errors might be reported as the LDAP server reacts to Db2 terminating. However, these messages do not affect the running of the server. See [“db2Terminate {terminate | recover | restore}” on page 100](#) for the description of the `db2Terminate` configuration option.

Network communications

The LDAP server uses TCP/IP for its client communications, except for applications using the LDAP Program Call support. The LDAP server also monitors TCP/IP and detects when one of the network interfaces in use by the server has failed. Based on the **`tcpTerminate`** option in the LDAP server configuration file, the LDAP server can shut itself down or try to reestablish the failed interface. See [“tcpTerminate {terminate | recover}” on page 133](#) for the description of the **`tcpTerminate`** configuration option.

The **`tcpTerminate`** option also controls the LDAP server response to a failure when initializing the SSL and Kerberos interfaces if they have been configured. The LDAP server can stop or continue processing but does not use the failed interface. After the problem is fixed, the LDAP server must be restarted to make that interface available.

Similarly, the **`srvStartUpError`** option also covers a failure when initializing the LDAP PC callable support interface if that has been configured. The LDAP server terminates or continues processing but does not use the PC support. After the problem is fixed, the LDAP server must be restarted to make the PC interface available. Note that only one LDAP server on a system can try to activate the PC interface. If another LDAP server has already tried to initialize (successfully or unsuccessfully) the PC interface, stop that server before starting this server with PC support configured.

Client connections

As the number of concurrent client connections approaches the maximum number of client connections that are allowed on the LDAP server, the LDAP server issues warning messages to the console when additional clients attempt to bind to the LDAP server. To avoid overloading the console with messages, these warning messages are issued, at most, once per minute for a maximum of 60 times when the number of concurrent client connections remains at a high level. If the number of concurrent client connections on the LDAP server falls under a safe threshold, another console message is issued stating that the number of concurrent client connections is now at a safe level. After this, the cycle of warning messages can begin again if the number of concurrent client connections again approaches the maximum number of connections that are allowed on the LDAP server.

The issuance of these console warning messages on a fairly regular basis might signify that the `maxConnections` option in the LDAP server configuration file is set to a low value and should be increased. Also, the `MAXFILEPROC` statement or the `MAXSOCKETS` option on the `NETWORK` statement

within BPXPRMxx might need to be adjusted upward to support a higher value of maxConnections. The activity log on the LDAP server can be used to monitor the number of client connections. For more information about activity logging, see [“Activity logging”](#) on page 188.

Another way of controlling the number of clients concurrently connected to the LDAP server is by using the `idleConnectionTimeout` option in the LDAP server configuration file. This option controls the amount of time that the LDAP server allows a client connection to remain connected to the server when the client is not actively sending or receiving data on the connection. When the `idleConnectionTimeout` setting is exceeded, the LDAP server severs the idle LDAP client connection, which then frees the resource for a new client connection. For more information, see [“idleConnectionTimeout num-seconds”](#) on page 105.

Outside of LDAP, timeouts can be configured system-wide in the TCPIP PROFILE by using the `CONNECTTIMEOUT` value on the `TCPCONFIG` statement to configure timeouts. To set a shorter time, use the `select()` call with a non-blocking socket. The actual timeout might be longer than the configured value, depending on what the `CONNECTINITINTERVAL` value is set to. For more information about the `TCPCONFIG` statement, see [TCPCONFIG statement](#) in *z/OS Communications Server: IP Configuration Reference*.

File system

The LDAP server uses the z/OS UNIX System Services file system to store the directory information for the LDBM, CDBM, GDBM (file-based) backends. The LDAP server detects when file system errors occur, such as no space available or inability to write to required files or file directories, and writes these errors to the console and job log. Based on the `fileTerminate` option in the LDAP server configuration file, the LDAP server shuts itself down or continues running with the affected LDBM, GDBM, or CDBM backend in read-only mode. Updates to the directory are rejected.

When the file system problem has been dealt with, the operator can use the LDAP server `BACKEND` operator modify command to change the LDBM, GDBM, or CDBM backend back to read/write mode. See Chapter 8, [“Customizing the LDAP server configuration,”](#) on page 83 for the description of the `fileTerminate` configuration option.

LDAP server abnormal termination

The LDAP server registers itself with the z/OS Automatic Restart Management (ARM) service if the `armName` option is specified in the LDAP server configuration file. ARM can be set up to automatically restart the LDAP server if it stops unexpectedly. See [“Configuration file options”](#) on page 90 for the description of the `armName` configuration option. For more information about ARM, see [Using automatic restart management](#) in *z/OS MVS Setting Up a Sysplex*.

Health checks supported by the LDAP server

The LDAP server supports the following health check functions:

- The TDS-Db2 health check to report on proper Db2 maintenance, if either TDBM backend or Db2-based GDBM backend is defined.
- The TDS-CONFIG health check to report LDAP server configuration settings that are not recommended.

TDS-Db2 Health Check

The LDAP server supports health check functions for Db2 maintenance, if either TDBM backend or Db2-based GDBM backend is defined. The check, (IBMTDS, TDS_DB2_MAINTENANCE), is registered to the IBM Health Checker for z/OS during LDAP server startup if the `healthCheck_DB2` configuration option is specified in the general section of the LDAP server configuration file. You must ensure that the state of the check is ACTIVE (ENABLED) in the SDSF Health Checker Display.

If the TDS-Db2 health check is enabled, a daily check can be scheduled according to the parameter specified as "TOD *hh:mm*" in the LDAP server configuration file. For example:

```
healthCheck DB2 "TOD 23:55"
```

The check can also be run manually by the following console command:

```
f dssrv,health db2=run
```

The check result can be found in the OUTPUT DISPLAY of TDS_DB2_MAINTENANCE in the SDSF CK panel.

Notes:

1. The check, (TDS_DB2_MAINTENANCE), is shared by all of the LDAP servers, but only the output from the last check run by any server is held in the message buffer at any one time. When running the check for multiple LDAP servers, it is recommended you use a log stream to retain a historical record of check results. Otherwise, you must run the separate LDAP server checks at different times, allowing sufficient time to examine results. Even if you use a log stream, you may want to schedule each server's check at slightly different times to avoid contention and retain consistent order of output. For more information, see [Optionally define log streams to keep a record of the check output in IBM Health Checker for z/OS User's Guide](#).
2. Each time the LDAP server runs the TDS-Db2 health check, Db2 statistics cached inside the LDAP server are refreshed. For more information, see ["Db2 tuning" on page 581](#).

The check, (TDS_DB2_MAINTENANCE), is registered as a one-time check-in IBM Health Checker for z/OS and is designed to be run automatically by the LDAP server. Therefore, the user should not run this check manually by the IBM Health Checker for z/OS console command.

To disable the TDS-Db2 health check for a specific LDAP server, use the LDAP server HEALTH operator modify command. When the following console command is issued, the LDAP server turns off the TDS-Db2 health check support, and no longer sends check data to the IBM Health Checker for z/OS.

```
f dssrv,health db2=off
```

Note: This command does not make any changes to the check, (TDS_DB2_MAINTENANCE), and other LDAP servers can still use the check.

To enable the TDS-Db2 health check for a specific LDAP server, use the following command:

```
f dssrv,health db2=on
```

If there is no TDBM backend or Db2-based GDBM backend defined with db2HealthCheck on specified in its backend section of the LDAP server configuration file, the TDS-Db2 health check support is unavailable and cannot be enabled with a console command.

TDS-CONFIG health check

The LDAP server supports health check functions for server configurations. The TDS-CONFIG health check only checks the sslCipherSpecs option. The check, (IBMTDS,TDS_CONFIGURATION), is registered to IBM Health Checker for z/OS during LDAP server startup, if the healthCheck config configuration option is specified in the general section of the LDAP server configuration file. Also ensure that the check state is ACTIVE (ENABLED) in the SDSF CK panel.

The LDAP server runs the TDS-CONFIG check once after startup. The LDAP administrator can also run the check manually using the following console command:

```
f dssrv,health config=run
```

LDAP server operator commands

The following LDAP server commands can be entered by using the operator modify command. For example, if the LDAP server started task is DSSRV, the operator command is:

```
f dssrv,cmd-name cmd-options
```

The following list describes the supported LDAP server operator commands and their command options:

AUDIT audit_controls

Turn LDAP server auditing on or off and control what server activities result in creating an audit record. See [“LDAP SMF auditing” on page 195](#) for more information about controlling LDAP server usage of audit.

BACKEND backendName=RDWR | READ

Change a specific backend to read/write (normal) mode or read-only mode. The LDAP server can place a file-based backend into read-only mode if the LDAP server cannot access its checkpoint or database files. After correcting the access problem, the operator can use this command to reset the backend to read/write mode.

COMMIT

Force all the file-based backends to commit their changes to the database files by merging in the changes from the checkpoint files. The changes are removed from the checkpoint files. This can be done to prevent the checkpoint files from growing too large.

DEBUG level | OUTPUT=MEMORY | OUTPUT=BOTH

Set the level of debugging. See [“Dynamic debugging” on page 177](#) for more information about setting the debug levels. The command can also control where debug output is sent: to just the internal CTRACE table or to the CTRACE table and the normal debug output destination.

DEBUGSECRET ON | OFF

Turn LDAP server debug secret on or off. If it is turned on, potential sensitive data content such as **userPassword** values might be included in the debug trace. Additional setup is required to allow this command. See [“Additional setup for LDAP console commands” on page 48](#) for more information.

DISPLAY AUDIT | BACKENDS | DEBUG | FIPS | HEALTH | LEVEL | LOCKS | LOG | MAINTMODE | MONITOR | NETWORK | REPLICAS | THREADS | XCF

Display various information about the LDAP server. See [“Displaying performance information and server settings” on page 179](#) for a description of the DISPLAY output.

HEALTH DB2®=ON | DB2=OFF | DB2=RUN | CONFIG=ON | CONFIG=OFF | CONFIG=RUN

Change the LDAP server health check settings. See [“Health checks supported by the LDAP server” on page 198](#) for more information.

LOG WRITEOPS | ALLOPS | SUMMARY | TIME | NOTIME | MERGEDRECORD | MSGS | NOMSGS | FLUSH | STOP | ROLLOVER | FILTER, filter

Turn LDAP server activity logging on or off and control what server activities are logged. See [“Activity logging” on page 188](#) for more information.

MAINTMODE ON | OFF

Change the LDAP server between normal mode and maintenance mode. Access to the LDAP server is restricted to certain users when in maintenance mode, therefore, this mode can be used to “fix” the LDAP server. See [“Basic replication maintenance mode” on page 463](#) or [“Advanced replication maintenance mode” on page 518](#) for more information.

REFRESH DB2RUNSTATS | SSL

When **DB2RUNSTATS** is specified, refresh the TDBM or GDBM (Db2-based) database statistics. This causes the LDAP server to reexamine the current database statistics that are recorded in the Db2 catalog by the RUNSTATS utility. This is useful if the catalog statistics have been changed by running the **RUNSTATS** utility after the LDAP server completed initialization. See Chapter 31, [“Performance tuning,” on page 573](#) for detailed information about running the Db2 RUNSTATS utility.

When **SSL** is specified, initialize the SSL environment again. This might be necessary, for example, if SSL replaces expired certificates.

RESET LOCKS | MONITOR | THREADS | WLMEXCEPT [,*opid*]

If **LOCKS**, **MONITOR**, or **THREADS** are specified, then various counters that are maintained by the LDAP server are reset. See [“Displaying performance information and server settings” on page 179](#) for the counters that are reset.

If **WLMEXCEPT** is specified without an *opid* (Operations Monitor ID), the LDAP server defaults to using only the initial **wlmExcept** configuration option settings. If an *opid* is specified, this command undoes all previous **WLMEXCEPT** operator modify commands that are issued for this particular *opid*. The LDAP server defaults to using the **wlmExcept** configuration options for this particular *opid* only.

SNAP

Take a SNAP dump of the LDAP server. The dump is taken using the following options:

```
THR(ALL) TRACE NOFILE NOVAR NOBLOCK NOSTOR FNAME(CEEDUMP)
```

This command is only valid when the LDAP server is started in 31-bit mode.

UNLOCK ADMIN

Unlocks the LDAP root administrator entry in an LDBM, TDBM, or CDBM backend when the password has expired or the maximum number of failed bind attempts in the effective password policy has been exceeded.

After successful completion of this command, the LDAP root administrator must change their password before authenticating to the LDAP server. This command is only valid for unlocking the LDAP root administrator that is specified in the configuration file (**adminDN** configuration option) and exists as an LDBM, TDBM, or CDBM backend entry with a **userPassword** value. This command is not valid when the LDAP root administrator's entry is participating in native authentication, resides in the SDBM backend, or the password is specified in the configuration file in the **adminPW** configuration option.

WLMEXCEPT *tname,opid*

Associate a search pattern in the operations monitor entry to a WLM transaction name.

The *tname* specifies the WLM transaction name as the *opid* specifies the Operations Monitor ID value from the operations monitor entry. The *opid* indicates which search pattern is used from the operations monitor entry. This command causes any client search request matching the specified search pattern to run under the enclave with the specified WLM transaction name. Each time the **WLMEXCEPT** operator modify command is issued, the new association is added before any of the configured **wlmExcept** configuration options or previously issued **WLMEXCEPT** operator modify commands. See [“Workload Management \(WLM\)” on page 575](#) for more information about running the LDAP server with WLM.

Chapter 11. Migrating to z/OS

This topic contains information about migration issues. Your plan for migrating to z/OS should include information from various sources. These sources of information describe topics such as coexistence service and optional migration actions. See *z/OS Upgrade Workflow* on how to migrate from various z/OS releases. Also, see *z/OS Release Upgrade Reference Summary* for interface changes.

The following documentation, which is supplied with your product order, provides information about installing your z/OS system. In addition to specific information about the LDAP server, this documentation contains information about all the z/OS elements.

- *z/OS Planning for Installation*

This information describes the installation requirements for z/OS at a system and element level. It includes hardware, software, and service requirements for both the driving and target systems. It also describes any coexistence considerations and actions.

- *z/OS Program Directory* in the *z/OS Internet library* (www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary)

This document, which is provided with your z/OS product order, leads you through the specific installation steps for the LDAP server and the other z/OS elements.

Within this topic, you can find information about the specific updates and considerations that apply to this release of z/OS LDAP.

- *“Migration roadmap” on page 208*

This section identifies the migration paths that are supported with the current level of the LDAP server. It also describes the additional publications that can assist you with your migration to the current level.

- *“z/OS Version 2 Release 3 overview” on page 208*

This section describes the specific updates that were made to LDAP. For each item, this section provides an overview of the change, a description of any migration and coexistence tasks that might be considered, and where you can find more detailed information in the z/OS LDAP library or other element libraries.

Actions required for migrations from previous releases of z/OS

The following is a list of general migration actions to be considered when upgrading to a new release of z/OS LDAP:

- If any release or PTF since your current LDAP server's level has supplied new configuration options, it is recommended you copy these commented options and their block comments from the new sample into your existing configuration file. This will keep your file up to date for any potential needs in the future.
- If any release or PTF since your current LDAP server's level has supplied schema changes, you may have to follow the special instructions.
- If you are upgrading from any level prior to z/OS V2R4, APAR OA55857 should be installed during server setup if an old schema is being migrated in order to maintain schema integrity.

For specific release to release migration actions, refer to *z/OS Upgrade Workflow*.

Fallback from a TDBM or Db2-based GDBM backend in z/OS IBM Tivoli Directory Server to an earlier z/OS IBM Tivoli Directory Server version

You might find it necessary to return to an earlier z/OS IBM Tivoli Directory Server version after migrating to the current version of z/OS IBM Tivoli Directory Server. Follow these procedures before you run on a previous version of the server that is using the TDBM or Db2-based GDBM backends.

1. Determine the value that you have for the `serverCompatLevel` configuration option. If it is specified and is not later than the highest available level for the release to which you will fall back, go to Step 5. (To see which versions were available for that release, refer to the `serverCompatLevel` description in “Configuration file options” on page 90.)
2. Stop the server, if it is running.
3. Set the `serverCompatLevel` configuration option to the highest level available for the release to which you will fall back.
4. Restart the server on the current z/OS release and then stop it again.
5. You are now ready to run on a previous version or release of the server.

LDAP_COMPAT_FLAGS environment variable

The `LDAP_COMPAT_FLAGS` environment variable provides a server compatibility knob that can be set temporarily while migrating from the z/OS Integrated Security Services LDAP server to IBM TDS for z/OS or from an earlier IBM TDS for z/OS release to the current release. This environment variable provides some limited support for restoring behavior that existed in the z/OS Integrated Security Services LDAP server or an earlier IBM TDS for z/OS release. This environment variable is only meant for temporary use when LDAP client applications rely on data being returned in a certain format. Ultimately these LDAP client applications must be updated to support IBM TDS for z/OS behavior.

The `LDAP_COMPAT_FLAGS` level is a mask that you can specify in the following ways:

- A decimal value (for example, 1)
- A hexadecimal value (for example, x02 or X02)
- A keyword (for example, SDBM_MIXEDDN)
- A construct of these values by using plus and minus signs to indicate inclusion or exclusion of a value. For example:
 - ‘1+2’ is the same as specifying ‘x01+x02’, or ‘SDBM_MIXEDDN+SDBM_ISS_SEARCH’
 - ‘2147483647-16’ is the same as specifying ‘x7FFFFFFF-x00000001’ or ‘ANY-SDBM_MIXEDDN’

Table 19 on page 204 includes the **LDAP_COMPAT_FLAGS** levels and the related decimal, hexadecimal, and keyword values.

Table 19. LDAP_COMPAT_FLAGS levels and support			
Keyword	Decimal level	Hexadecimal level	Description
OFF	0	0x00000000	No compatibility level setting

Table 19. **LDAP_COMPAT_FLAGS** levels and support (continued)

Keyword	Decimal level	Hexadecimal level	Description
SDBM_MIXEDDN	1	0x00000001	<p>On SDBM backend search responses, attribute values that are DN-type attribute values are returned in mixed case format, which is how the z/OS Integrated Security Services LDAP server returned these attribute values. By default, IBM TDS for z/OS returns these attribute values in uppercase format.</p> <p>The SDBM attribute types and values affected by this setting are: racfNotify, racfGroupUserids, racfConnectGroupName, racfDefaultGroup, racfSubGroupName, racfSuperiorGroup, racfConnectOwner, racfOwner, racfStddataUser, racfStddataGroup, racfAudit, racfCdtInfoGroup, racfCdtInfoMember, racfClassAct, racfGenCmd, racfGeneric, racfGenList, racfGlobal, racfLogoptionsAlways, racfLogoptionsDefault, racfLogoptionsFailures, racfLogoptionsNever, racfLogoptionsSuccesses, racfRacList, and racfStatistics</p> <p>Mixed case format examples with the SDBM suffix set to cn=sdbm:</p> <pre>racfid=X,profiletype=USER,cn=sdbm racfid=Y,profiletype=GROUP,cn=sdbm racfuserid=X+racfgroupid=Y, profiletype=CONNECT,cn=sdbm profilename=TMP,profiletype=FACILITY,cn=sdbm</pre> <p>Uppercase (default) format examples with the SDBM suffix set to cn=sdbm:</p> <pre>RACFID=X,PROFILETYPE=USER,CN=SDBM RACFID=Y,PROFILETYPE=GROUP,CN=SDBM RACFUSERID=X+RACFGROUPID=Y, PRFILETYPE=CONNECT,CN=SDBM PROFILENAME=TMP,PROFILETYPE=FACILITY,CN=SDBM</pre>
SDBM_ISS_SEARCH	2	0x00000002	<p>For SDBM base or subtree level searches where the base DN is an SDBM user that does not exist, the LDAP server sets the LDAP return code to LDAP_OTHER and reason code message to ICH30001I. This is for compatibility purposes with the z/OS Integrated Security Services LDAP server. By default in this situation, IBM TDS for z/OS sets the LDAP return code to LDAP_NO_SUCH_OBJECT, a reason code of R004071, and a matchedDN set to "profiletype=user,SDBM_suffix".</p> <p>Also, this setting affects the format of the returned objectclass attribute values for the SDBM suffix entry, entries under and including the profiletype=user,SDBM_suffix, profiletype=group,SDBM_suffix, and profiletype=connect,SDBM_suffix to be in mixed case format. This is for compatibility purposes with the z/OS Integrated Security Services LDAP server. By default, IBM TDS for z/OS returns these objectclass attribute values in uppercase format.</p>
ANY	2147483647	0xFFFFFFFF	Turns on all compatibility settings.
ALL	2147483647	0xFFFFFFFF	Turns on all compatibility settings.

Updating LDAP configurations settings in a sysplex without server outage

This section describes updating configuration option settings for the LDAP servers that run in a sysplex without server outage. For example, you can update the `serverCompatLevel` configuration option to change supported functions.

In general, for those options that are not sysplex-related, you can change them and restart this specific server for changes to take effect, and the sysplex service is not impacted. However, you might want some sysplex level configuration changes such as:

- Upgrade the server compatibility level.
- Revert to an earlier version of the server compatibility level.
- Add new backends.
- Remove existing backends. This does not include SDBM, which is not sysplex-related

To ensure that the entire sysplex is able to handle LDAP requests during the update, a new server needs to be started in transition mode. For more information about how to start a server in transition mode, see [“Setting up and running the LDAP server” on page 167](#). For the convenience of description, the server that is running in transition mode is called a transition server. The entire task when you update the configuration options setting in a sysplex is called transition work. The transition server that is running in transition mode is in a special intermediate state to handle the LDAP requests while other LDAP servers in the sysplex group are having updates done to their configurations. The transition server is restored to normal work mode after the entire sysplex update completes.

The steps to take are:

1. Back up your database files.
2. Prepare the new configuration file that contains the new setting of the options you want to update.
3. Start a new LDAP server in transition mode as the transition server with the updated configuration file. You can also shut down an existing LDAP server of the sysplex and restart it as the transition server. For the transition server, the `serverCompatLevel` configuration option must be set even if you want to upgrade the backends with the same compatibility level as before. The current setting can be found in the startup messages of the sysplex owner.

The transition server starts with the old `serverCompatLevel` and does not apply the new `serverCompatLevel` until it becomes the sysplex owner, but the new backend configurations take effect immediately. The transition server cannot process requests for the removed backends. The other servers cannot process requests for the new backends until they are restarted with the new backends defined in the configuration. Therefore, do not initiate any LDAP requests that target the updated backends until transition completes.

4. Shut down the non-owner servers first, and then the current sysplex owner server to avoid unnecessary owner switching. The transition server then becomes owner and begins processing requests by using the new `serverCompatLevel` and backend configurations.
5. Start other servers with updated configurations.
6. Shut down the transition server, or restart it in normal (non-transitional) mode and transition completes.

Notes:

1. Select the time with the least number of client requests that are handled by the LDAP server to do sysplex level updates.
2. The prerequisite to do transition work is that all servers in the target sysplex group are to be run with z/OS Version 2 Release 2 or higher, including the transition server itself and compatibility level of 4 or higher. If not, you must upgrade to the appropriate z/OS release and compatibility level first.
3. If you want to undo the transition or lower the server compatibility level, any DIT-related updates that result from the compatibility level upgrade must be undone manually.
4. If the transition involves removing backends from the configuration, any LDAP request for the eliminated backends fails if it is directed into the transition server before the transition server becomes the owner. Also, it fails no matter which server it is directed to when the transition completes. If any error occurs during the transition, the transition server terminates, and is an LDAP service outage.
5. If any error occurs during the transition, the transition server ends and an LDAP service outage occurs.
6. ARM is not enabled after the transition completes, even though it was enabled before the transition.
7. Not all configuration options support sysplex level updates without outages. The transition server is not able to join the current sysplex group when the following options are updated:
 - `schemaPath`
 - `serverName`
 - `serverSysplexGroup`

Notes:

- The **schemaPath** must be set with the same value within the whole sysplex.
 - The **serverName** must be the same for all TDBM and Db2-based GDBM backends.
8. Because changing the suffixes (except TDBM), the database path or dbuserid for the existing backends are not supported for the transition. The transition server fails to start if any change is detected for an existing backend name. If you want to remove one or more backends and add new backends, do not reuse the backend names of any that are removed.
 9. If advanced replication is defined, examine each replication queue to ensure many pending changes are not awaiting replication. To avoid a long time of transition, commit the pending changes and clean up the replication queue before starting to use the transition mode.
 10. If the transition involves removing backends from the configuration, make sure that there are no replication topologies that are related to the backends that are removed. Otherwise, delete the corresponding replication topologies first.

If you remove replication topology entries under the `cn=localhost` suffix such that this suffix is no longer needed, and the suffix is in an LDBM backend that is not being removed, you cannot remove the suffix from the configuration in transition mode. To remove a suffix from an LDBM backend, all servers in the target sysplex group must be taken down simultaneously.

Updating the schema and reinitializing the schema database

When updates to the built-in schema are necessary (for example, when applying the fix from APAR OA55857), reinitializing the schema database is required. The following steps apply to a single server environment:

1. Unload the schema database (`cn=schema`) with the **ds2ldif** utility.
2. Shut down the LDAP server and apply the fix.
3. Comment out all the backend definitions in the server configuration file.
4. Rename the schema database file (`schema.db`), and start the LDAP server to generate a new schema database file.
5. Reload the schema definitions that were unloaded in Step 1 with the **ldapmodify** utility.
6. Shut down the LDAP server and uncomment the backend definitions in the server configuration file that were commented out in Step 3.
7. Start the LDAP server.

The following steps apply to the sysplex environment:

Note: Because of the shared schema database file, a service outage is unavoidable.

1. Unload the schema database (`cn=schema`) with the **ds2ldif** utility.
2. Shut down all the LDAP servers and apply the fix.
3. Comment out all the backend definitions in the server configuration file.
4. Rename the schema database file (`schema.db`), and start an LDAP server to generate a new schema database file.
5. Reload the schema definitions that were unloaded in Step 1 with the **ldapmodify** utility.
6. Shut down the LDAP server and uncomment the backend definitions in the server configuration file that were commented out in Step 3.
7. Start all the LDAP servers.

Checking file ownership for the LDAP server

APAR OA43909 introduces checking of file ownership for the LDAP server and includes the **ds2ldif** and **ldif2ds** utilities. LDAP backend directories and their files are checked before the files are opened.

After this APAR is applied, make sure that:

- The z/OS UNIX System Services directories and files are owned by the user ID that runs the LDAP server or the user ID must be in the group that owns the directory and its files.
- Before the LDAP server is restarted, ensure that the user ID that runs the LDAP server owns the directories and their files.
- Before the **ds2ldif** or **ldif2ds** utilities are run, ensure that the user ID that runs the utilities is in the group that owns directories and their files.

For more information about file ownership, see:

- [“Additional setup for user ID that runs the LDAP server” on page 47](#)
- [“Setting up a user ID for your LDAP server” on page 45](#)
- [“The ds2ldif utility” on page 225](#)
- [“The ldif2ds utility” on page 235](#)

Migration roadmap

This section describes the migration paths that are supported by the current release of z/OS .

z/OS Version 2 Release 3 update summary

The following table summarizes the updates introduced in z/OS Version 2 Release 3. If you are migrating from releases before z/OS Version 2 Release 3, review the information in the detailed section for each item.

z/OS Version 2 Release 3 overview

This section describes the new and changed server functions introduced for z/OS Version 2 Release 3. The information about each item includes:

- Description.
- Summary of the z/OS server tasks or interfaces that might be affected.
- Coexistence considerations, if any, that are associated with the item.
- Migration procedures, if any, that are associated with the item.
- References to other publications that contain additional detailed information.

<i>Table 20. Summary of IBM TDS updates for z/OS Version 2 Release 3</i>	
For information about:	See topic:
Multi-factor Authentication Support	“Associating LDAP attributes to RACF fixed fields” on page 320 and “SDBM operational behavior” on page 333
Multi-row Fetch	“Configuration file options” on page 90 and “TDBM database tuning” on page 584
TDBM Health Checks	“Configuration file options” on page 90 , “Displaying performance information and server settings” on page 179 , “Health checks supported by the LDAP server” on page 198 , and “Db2 tuning” on page 581
LDAP Server Configuration Health Checks	“TDS-CONFIG health check” on page 199

Table 20. Summary of IBM TDS updates for z/OS Version 2 Release 3 (continued)

For information about:	See topic:
FIPS Compliant	“Enabling SSL/TLS support” on page 70 , “Setting up the security options for the LDAP server” on page 70 , “Configuration file options” on page 90 , and the following utilities: “The db2pwwden utility” on page 221 “The ds2ldif utility” on page 225 “The ldapexop utility” on page 253
Support Db2 Partitioning by Growth for ITDS TDBM and GDBM databases	“Partitioning Db2 table spaces” on page 58 , “Partition-by-range Db2 table spaces for TDBM” on page 59 , and “Partition-by-growth Db2 table spaces for TDBM or GDBM” on page 60
Prevent visibility of sensitive data in debug trace	“Additional setup for LDAP console commands” on page 48

Multi-factor Authentication Support

Description

Multi-Factor Authentication (MFA) support provides the following abilities:

- Input MFA credentials to RACF through LDAP simple bind.
- Manipulate MFA data in a user profile through SDBM.
- Manipulate MFA policy data in a resource profile through SDBM.

What this change affects

The MFA enhancement of RACF can be used through LDAP.

Dependencies

RACF and MFA is required.

Coexistence considerations

None.

Migration tasks

None.

For more information

See *z/OS Security Server RACF Command Language Reference* and *z/OS Security Server RACF Security Administrator's Guide*.

Multi-Row Fetch

Description

This support provides a performance enhancement to the LDAP server. A new configuration file option is included to enable the specification of a fetch size value in the retrieval of data from the TDBM database. To reduce the ODBC costs, a Db2 query can enable a multi-row fetch rather than a single row fetch.

What this change affects

The LDAP server can fetch multiple rows each time if multi-row fetch is applicable.

Dependencies

TDBM and Db2-based GDBM backend must be defined.

Coexistence considerations

None.

Migration tasks

None.

For more information

See *Db2 for z/OS ODBC Guide and Reference*, available from the [Db2 for z/OS in IBM Documentation](http://www.ibm.com/docs/en/db2-for-zos) (www.ibm.com/docs/en/db2-for-zos).

TDBM Health Checks

Description

A health check, (IBMTDS, TDS_DB2_MAINTENANCE), is added to IBM Health Checker for z/OS to evaluate the need of doing REORG and RUNSTATS for TDBM/Db2-based GDBM backend related database.

What this change affects

Notify the LDAP administrator if the database requires REORG or RUNSTATS.

Dependencies

- TDBM/Db2-based GDBM backend must be defined.
- Db2 V10 or a later version is required.
- IBM Health Checker for z/OS must be active.
- The established Workload Management application environment for the DSNACCOX stored procedure must be configured.
- Resource Recovery Services must be active.

Coexistence considerations

If multiple LDAP servers on the same z/OS enable this feature, each server should have a different scheduled check time to avoid contention. It is also suggested to enable System Logger to save historical check reports to avoid overwriting.

Migration tasks

None.

For more information

See the following publications:

- *IBM Health Checker for z/OS User's Guide*
- *z/OS MVS Planning: Workload Management*
- *Db2 for z/OS Managing Performance*, available from the [Db2 for z/OS in IBM Documentation](http://www.ibm.com/docs/en/db2-for-zos) (www.ibm.com/docs/en/db2-for-zos).

LDAP Server Configuration Health Checks

Description

A health check, (IBMTDS, TDS_CONFIGURATION), is added to IBM Health Checker for z/OS to examine the LDAP server settings. `sslCipherSpecs` is the only configuration option that is currently checked, but the configuration health check can be extended to support other server configuration options if needed.

For more information about the health check, see [“TDS-CONFIG health check” on page 199](#).

What this change affects

Notify the LDAP administrator if the **`sslCipherSpecs`** value is not set to the suggested value, `GSK_V3_CIPHER_SPECS_EXPANDED`.

Dependencies

- SSL support is enabled.
- IBM Health Checker for z/OS must be active.

Coexistence considerations

If multiple LDAP servers on the same z/OS enable this feature, consider enabling System Logger to save historical check reports to avoid overwriting.

Migration tasks

None.

For more information

See the following publications:

- *IBM Health Checker for z/OS User's Guide*

FIPS Compliant

Description

The z/OS IBM Tivoli Directory Server, the client C-API, and the command line utilities that are used by the client C-API are enhanced to support current z/OS System SSL capabilities to be FIPS compliant.

What this change affects

Increased security is available for the SSL connections that are used to communicate between z/OS IBM Tivoli Directory Server and client.

Dependencies

ICSF must be active for most of the encryption methods that are used by SSL.

Coexistence considerations

In multiple server environments, it is expected for all servers to communicate using the same SSL/TLS options.

Migration tasks

Not all of the cryptographic algorithms, key sizes, and SSL protocols that are used in secure communication are supported in FIPS mode. Therefore, certificate and key database files, with key sizes and algorithms that are valid in FIPS mode, need to be added or replaced if the LDAP server is running in FIPS mode.

For more information

For information about all cryptographic hardware dependencies, see *z/OS Cryptographic Services System SSL Programming* and any ICSF-related documentation.

Support Db2 Partitioning by Growth for ITDS TDBM and GDBM databases

Description

This support allows Db2 partitioning by Growth for TDBM and GDBM databases. A partition-by-growth table space is useful for those table spaces whose tables do not have a suitable partitioning key, but are expected to exceed the 64 GB limit that applies to simple or segmented table spaces. A partition-by-growth (PBG) table space can grow up to 128 TB.

What this change affects

TDBM table spaces can now be partitioned by growth or by range, although range is still preferred. GDBM table spaces can now be partitioned by growth

Dependencies

None.

Coexistence considerations

None.

Migration tasks

None.

For more information

See [“Partitioning Db2 table spaces”](#) on page 58, [“Partition-by-range Db2 table spaces for TDBM”](#) on page 59, and [“Partition-by-growth Db2 table spaces for TDBM or GDBM”](#) on page 60.

Prevent visibility of sensitive data in debug trace

Description

This support provides a new approach to prevent the potential disclosure of sensitive data. With the appropriate security controls in place, a new console command allows these sensitive trace points to be enabled if the data is needed for diagnostic purposes.

What this change affects

The existing trace points that are at risk of exposing sensitive data are now disabled by default.

Dependencies

None.

Coexistence considerations

None.

Migration tasks

None.

For more information

See [“Additional setup for LDAP console commands”](#) on page 48.

z/OS Version 2 Release 2 update summary

The following table summarizes the updates introduced in z/OS Version 2 Release 2. If you are migrating from releases before z/OS Version 2 Release 2, review the information in the detailed section for each item.

z/OS Version 2 Release 2 overview

This section describes the new and changed server functions introduced for z/OS Version 2 Release 2. The information about each item includes:

- Description
- Summary of the z/OS server tasks or interfaces that might be affected
- Coexistence considerations, if any, that are associated with the item
- Migration procedures, if any, that are associated with the item
- References to other publications that contain additional detailed information.

Table 21. Summary of IBM TDS updates for z/OS Version 2 Release 2	
For information about:	See topic:
Compatibility level upgrade without an LDAP outage	“Updating LDAP configurations settings in a sysplex without server outage” on page 205
Activity logging	“Activity logging” on page 188
Dynamic group performance and scalability	“User groups considerations in large directories” on page 594
Replication of password policy attributes	“Replicating password policy operational attributes” on page 380

Compatibility level upgrade without an LDAP outage

Description

This support allows improved availability when migrating new function across a sysplex. To update the **serverCompatLevel** or backends in a sysplex group without LDAP service outage, a run mode (transition mode) is now added. The LDAP instance can now be started in transition mode and continue to be operational while others are updated and recycled. In transition mode, the server can be started successfully with the updated **serverCompatLevel** or backends configurations. Transition mode is a temporary work mode that is used during sysplex level configuration updates.

What this change affects

Migration of new function across LDAP servers in a sysplex can be done with improved availability. A rolling migration to a new server compatibility level can be accomplished without a complete outage of all LDAP servers in the sysplex group.

Dependencies

Migration activity using transition mode requires that all servers in the sysplex group that are active during the transition be running on z/OS Version 2 Release 2 or later.

Coexistence considerations

None.

Migration tasks

None.

For more information

See [“Updating LDAP configurations settings in a sysplex without server outage”](#) on page 205.

Activity logging

Description

z/OS Version 2 Release 2 enhancements to activity logging are:

- Additional client events are now logged. This includes connect, disconnect, abandon requests, and unknown requests.
- Additional data is provided in existing log records. This includes attribute names in add requests, attribute names, and modification operation type in modify requests, and message ID in all request records.
- Improved consistency between the data that is captured in activity logging and SMF auditing.
- Versioning of the activity log record contents to avoid compatibility and migration issues when functional enhancements change the data contents of the activity log.
- Additional configuration options, eliminating the need to use environment variables to control some of the configuration options.

What this change affects

Additional details are available in activity logging related to client events.

Dependencies

None.

Coexistence considerations

None.

Migration tasks

None.

For more information

See [“Activity logging”](#) on page 188.

Dynamic group performance and scalability

Description

The support for dynamic groups is redesigned to improve performance when determining a user's groups. Scalability is improved, allowing administrators to define a large number of dynamic groups without experiencing performance issues.

This improvement is automatically enabled. No configuration task is necessary.

What this change affects

Performance is improved when gathering groups after a bind operation or when retrieving the **ibm-allGroups** operational attribute on a search or compare operation.

Dependencies

None.

Coexistence considerations

None.

Migration tasks

None.

For more information

See [“User groups considerations in large directories”](#) on page 594.

Replication of password policy attributes

Description

Read-only replica password policy replication support provides consistent replication updates of password policy operational attributes on all servers when they are updated in a read-only server in a replication topology. As a result, this new feature reduces the opportunity for circumvention of password policies while it ensures functional equivalence across Tivoli Directory Server distributed and z/OS. A new attribute, **ibm-slapedReplicateSecurityAttributes**, is added to `cn=replication, cn=configuration` for it to enable this feature.

What this change affects

Password policy operational attributes in user entries are maintained more consistently across replicas when using advanced replication.

Dependencies

A server compatibility level of 8 or higher is required to replicate password policy operational attribute updates that occur on read-only replicas during authentication.

Coexistence considerations

None.

Migration tasks

None.

For more information

See [“Replicating password policy operational attributes”](#) on page 380.

Chapter 12. Running and using the LDAP server utilities

Utility programs are provided to assist in initializing, backing up, and synchronizing the data managed by the LDAP server.

Operation	Server utility
Encrypt passwords in a backend directory	db2pwdn
Unload data from backend directory to an LDIF file	ds2ldif
Load data into backend directory	ldif2ds (TDBM only)
Identify differences between two directory subtrees on two different servers and optionally synchronize the servers	ldapdiff
Perform extended operations	ldapexop

The **db2pwdn**, **ds2ldif**, **ldif2ds**, and **ldapexop** utilities can be run in the z/OS shell, as jobs using JCL and procedures, or from TSO. The **ldapdiff** utility can only be run in the z/OS shell.

Format and usage information for the utilities are in:

- “The db2pwdn utility” on page 221
- “The ds2ldif utility” on page 225
- “The ldif2ds utility” on page 235
- “The ldapdiff utility” on page 245
- “The ldapexop utility” on page 253

See “Creating the Db2 database and table spaces for TDBM or GDBM” on page 55 for information about the permissions necessary to run the **ds2ldif** and **ldif2ds** utilities with a TDBM backend.

Running the LDAP server utilities in the z/OS shell

The **ds2ldif**, **ldapdiff**, and **ldif2ds** server utilities can be run from the shell using sample script files shipped in /usr/lpp/ldap/sbin. The **db2pwdn** and **ldapexop** utilities are shipped as executable files in /usr/lpp/ldap/sbin.

See Table 22 on page 217 for sample script file names and descriptions:

Table 22. Sample script file	
z/OS script file names	Description
ds2ldif31	Used to unload data from an LDBM, TDBM, CDBM, or schema backend in 31-bit mode
ds2ldif64	Used to unload data from an LDBM, TDBM, CDBM, or schema backend in 64-bit mode
ldapdiff	Used to compare data between a master and replica server and to synchronize replica servers
ldif2ds or ldif2ds31	Used to bulk load LDIF data into a TDBM backend in 31-bit mode
ldif2ds64	Used to bulk load LDIF data into a TDBM backend in 64-bit mode

Before running these server utilities, modify the sample script files in [Table 22 on page 217](#) for your environment. You should set STEPLIB to SYS1.SIEALNKE, if the PDS has not been placed in LNKLST. If you are loading or unloading entries in a Db2-based backend and your runtime libraries for Db2 are not in LNKLST or LPA on the system, you must specify the Db2 high-level qualifier for your Db2 installation in the exported STEPLIB in the `ldif2ds`, `ldif2ds31`, `ldif2ds64`, `ds2ldif31`, and `ds2ldif64` script files. These script files require access to the DB2HLQ.SDSNLOAD data set. In addition, access to the DB2HLQ.SDSNLOAD2 data set is required for `ldif2ds64` and `ds2ldif64`.

After the sample script files are updated, update the PATH environment variable to specify `/usr/lpp/ldap/sbin:/usr/sbin` to enable easy access to the script files and server utility executables shipped in the LDAP server.

If you are using the **ldif2ds** utility to add an entry containing `userPassword`, `secretKey`, `ibm-replicaKeyPwd`, `replicaCredentials`, `ibm-slapdMasterPw`, or `ibm-slapdAdminPw` attribute values that are encrypted or hashed using ICSF, the LIBPATH variable might need to be set. See [“Installing ICSF for encryption, hashing, or SSL/TLS” on page 21](#) for more information.

If you are using the **ds2ldif** or **ldif2ds** utilities and the `dsnaoini` option is not specified in the LDAP server configuration file, the DSNAOINI environment variable might need to be exported before running these utilities. If the DSNAOINI DD card is specified in the LDAP server procedure, set the DSNAOINI environment variable to the same data set before using the **ds2ldif** or **ldif2ds** utilities.

When started, **db2pwwden**, **ds2ldif31**, **ds2ldif64**, **ldif2ds**, **ldif2ds31**, and **ldif2ds64** read an environment variables file. The default file is `/etc/ldap/ds.envvars`. This default can be changed by setting the environment variable, `LDAP_DS_ENVVARS_FILE`, to the fully qualified z/OS UNIX System Services path name, the sequential data set, or the partitioned data set. Some of the environment variables that can be set are NLSPATH and LANG.

Running the LDAP server utilities from JCL

Sample JCL for running **db2pwwden**, **ds2ldif**, **ldif2ds**, and **ldapexop** from batch is provided with the LDAP server. Installations must modify the included JCL inline procedure to ensure that the appropriate load modules can be found. It might also be necessary to modify the JOB card for installation-specific requirements. These jobs can be run by editing the JCL member of the `GLDHLQ.SGLDSAMP` data set and entering the submit command. The member names are DB2PW DEN (for **db2pwwden**), **DS2LDF31** (for using **ds2ldif** in a 31-bit server environment), **DS2LDF64** (for using **ds2ldif** in a 64-bit mode), **LDF2DS** or **LDF2DS31** (for using **ldif2ds** in 31-bit mode), **LDF2DS64** (for using **ldif2ds** in 64-bit mode), and **LDAPLEXOP** (for **ldapexop**).

If you are loading or unloading entries in a Db2-based backend and your runtime libraries for Db2 are not in LNKLST or LPA on the system, you must specify the Db2 high-level qualifier for your Db2 installation in a STEPLIB DD card in the LDF2DS, LDF2DS31, LDF2DS64, DS2LDF31, or DS2LDF64 batch job. These batch jobs require access to the DB2HLQ.SDSNLOAD data set. In addition, access to the DB2HLQ.SDSNLOAD2 data set is required for LDF2DS64 and DS2LDF64.

Running the LDAP server utilities in TSO

The **db2pwwden**, **ds2ldif**, **ldapexop**, and **ldif2ds** server utilities can be run from TSO. In order to do this, some elements of the environment must be set up to locate the LDAP programs. Following are the steps to do this:

1. The PDS (SYS1.SIEALNKE) where the LDAP server load modules were installed must be accessible through LNKLIB, LPALIB, or specified on the TSOLIB command.

```
tsolib act dsn('SYS1.SIEALNKE')
```

2. The PDS (`GLDHLQ.SGLDEXEC`) containing the CLISTs needed to run the utilities must be available in SYSEXEC:

```
alloc f(SYSEXEC) da('GLDHLQ.SGLDEXEC') shr
```


3. The default environment variable settings for the utilities **db2pwwden**, **ds2ldif**, and **ldif2ds** can be changed by creating a data set to hold the environment variables. The format of the data in this file is the same format of the LDAP server environment file. For more information, see [“Environment variables used by the LDAP server”](#) on page 174. The data set should then be allocated to the filename ENVVAR by using the TSO **alloc** command as shown:

```
alloc f(ENVVAR) da('datasetname') shr
```

For the **ldapexop** utility, there is no provision to set environment variables in the REXX exec that is provided. Instead, XL C/C++ mechanisms can be used for the LDAP client utilities as described in [Running the LDAP client utilities in TSO in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

If you want to specify an LDAP server configuration file that is a data set, you can specify the **-f** option on the command. For example:

```
ds2ldf31 -f "'datasetname'" -o /tmp/ldif.1
```

Alternately, to specify the LDAP server configuration file by associating it with a DD name, enter in TSO:

```
alloc da('datasetname') fi(config) shr
```

and then start the utility without specifying the **-f** option.

After this setup is complete, running these utilities follows the same syntax as would be used if running them in z/OS, except that the program names are eight characters or less. See [“Running the LDAP server utilities in the z/OS shell”](#) on page 217 for more information. To run these utilities from TSO, use the following names:

Table 23. Names for running LDAP server utilities from TSO	
z/OS shell name	TSO name
db2pwwden	db2pwwden
ds2ldif31	ds2ldf31
ds2ldif64	ds2ldf64
ldapexop	ldapexop
ldif2ds	ldf2ds
ldif2ds31	ldf2ds31
ldif2ds64	ldf2ds64

SSL/TLS information for LDAP utilities

The contents of a client's key database file is managed with the **gskkyman** utility. For more information about the **gskkyman** utility, see [gskkyman overview in z/OS Cryptographic Services System SSL Programming](#). The **gskkyman** utility is used to define the set of trusted certificate authorities (CAs) that are to be trusted by the client. By obtaining certificates from trusted CAs, storing them in the key database file, and marking them as trusted, you can establish a trust relationship with LDAP servers that use certificates issued by one of the CAs that are marked as trusted.

If the LDAP servers accessed by the client use server authentication, it is sufficient to define one or more trusted root certificates in the key database file. With server authentication, the client can be assured that the target LDAP server has been issued a certificate by one of the trusted CAs. In addition, all LDAP transactions that flow over the SSL/TLS connection with the server are encrypted, including the LDAP credentials that are supplied on the **ldap_sasl_bind_s()** API.

For example, if the LDAP server is using a high-assurance VeriSign certificate, obtain a CA certificate from VeriSign, receive it into your key database file, and mark it as trusted. If the LDAP server is using a self-signed **gskkyman** server certificate, the administrator of the LDAP server can supply you with a copy

of the server's certificate request file. Receive the certificate request file into your key database file and mark it as trusted.

Using the **db2pwwden** or **ldapexop** utilities without the **-Z** parameter or the **ldapdiff** utility without the **-sZ** or the **-cZ** parameters and calling the secure port on an LDAP server. In other words, a nonsecure call to a secure port is not supported. Also, a secure call to a nonsecure port is not supported.

SSL/TLS encrypts the key database file, therefore, either the key database password or a stash file must be specified on the **-P keyFilePW** parameter. If a stash file is specified, it must be specified in the form **file://** followed immediately (no blanks in between) by the file specification of the stash file. For more information about using the **gskkyman** utility to create a stash file, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*.

Using RACF key rings

Alternately, LDAP supports the use of a RACF key ring. For instructions on how to migrate a key database to RACF and how to use the RACDCERT command to protect the certificate and key ring, see [Certificate/Key management](#) in *z/OS Cryptographic Services System SSL Programming*.

The user ID under which the LDAP client runs must be authorized by RACF to use RACF key rings. To authorize the LDAP client using ring-specific profile checking, you can use the RACF commands in the following example (where *userid* is the user ID running the LDAP client utility):

```
RDEFINE RDATA LIB <ringowner>.<ringname>.LST UACC(NONE)
PERMIT <userid>.<ringname>.LST CLASS(RDATA LIB) ID(<userid>) ACCESS(READ)
```

Note: In the previous example, ACCESS(READ) should be specified if the server certificate is owned by *userid*. Otherwise, ACCESS(UPDATE) should be specified.

Remember to refresh RACF after doing the authorizations.

```
SETROPTS RACLIST(RDATA LIB) REFRESH
```

Or to authorize the LDAP client using global profile checking,

```
RDEFINE FACILITY IRR.DIGTCERT.LISTRING UACC(NONE)
PERMIT IRR.DIGTCERT.LISTRING CLASS(FACILITY) ID(<userid>) ACCESS(READ)
```

Note: In the previous example, ACCESS(READ) should be specified if the server certificate is owned by *userid*. Otherwise, ACCESS(UPDATE) should be specified.

Remember to refresh RACF after doing the authorizations.

```
SETROPTS RACLIST(FACILITY) REFRESH
```

Global profile checking applies to all key rings. Ring-specific profile checking applies to a specific key ring. Ring-specific checking has precedence over global profile checking. The method that is chosen must work with the methods of permitting and securing access to other key rings being used on your system. Because of the wide scope of coverage that global profile checking provides, ring-specific profile checking is typically the more appropriate method to use.

After the RACF key ring is set up and authorized, specify the RACF key ring name for the **-K keyFile**, **-cK keystore**, or **-sK keystore** options and do not specify the **-P keyFilePw**, **-cP keystorePw**, or **-sP keystorePw** options.

Using PKCS #11 tokens

The **db2pwwden** and **ldapexop** utilities support the use of PKCS #11 tokens. The **gskkyman** utility or the RACDCERT command can be used to create or modify PKCS #11 tokens. ICSF uses the CRYPTOZ SAF class to determine if the issuer of the **gskkyman** utility or the RACDCERT command is permitted to perform the operation against a z/OS PKCS #11 token.

- For more information about the **gskkyman** utility and migrating keys and certificates, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*.
- For more information about the RACDCERT command, see [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference*.

The user ID that runs the **db2pwwden** or **ldapexop** utility must be authorized by RACF to use the PKCS #11 token. To authorize the user ID, you can use the RACF commands in the following example (where *NAME* is the name of the PKCS #11 token and *userid* is the user ID running the utility).

```
SETROPTS CLASSACT(CRYPTOZ)
RDEFINE CRYPTOZ USER.NAME UACC(NONE)
RDEFINE CRYPTOZ SO.NAME UACC(NONE)
PERMIT USER.NAME CLASS(CRYPTOZ) ID(userid) ACCESS(READ)
PERMIT SO.NAME CLASS(CRYPTOZ) ID(userid) ACCESS(READ)
```

Remember to refresh RACF after doing the authorizations.

```
SETROPTS RACLIST(CRYPTOZ) REFRESH
```

Once the PKCS #11 token is set up and authorized, specify the PKCS #11 token for the **-K** *keyFile* option in the following manner: **-K *TOKEN*/NAME**. Also, do not specify the **-P** *keyFilePW* option when using a PKCS #11 token.

Using a Java keystore or RACF key ring for ldapdiff

Keys and certificates that are needed for using SSL with the **ldapdiff** utility must be stored in either a Java™ keystore file (.jks) or a RACF key ring. If your existing keys and certificates are in a System SSL key database file or a PKCS #11 token, you must migrate them to a keystore file or a RACF key ring. If they are already in a RACF key ring, you can use them as is or can migrate them to a keystore file. To migrate keys and certificates, you must first export them from their source location and then import them into their target location.

You can use the **gskkyman** utility to export from a key database file or from a PKCS #11 token. Use the RACDCERT command to export from a RACF key ring or PKCS #11 token.

You can then use the RACDCERT command to import into a RACF key ring or the **keytool** Java application to import into a Java keystore. Make sure to specify the **-storetype JCEKS** option if you are using **keytool**.

When the setup is complete, identify the Java keystore or RACF key ring using the appropriate **-sK** *keystore*, **-sN** *keystoreType*, **-cK** *keystore*, **-cN** *keystoreType*, **-sT** *truststore*, **-sT** *truststoreType*, **-cT** *truststore*, or **-cT** *truststoreType* options when running the **ldapdiff** utility.

If both **-sK** and **-cK** are specified, Java Runtime only uses **-sK** keystore to initialize the security context and ignores **-cK** keystore. In this case, make sure certificates in **-cK** keystore are also loaded to the **-sK** keystore. Similarly, make sure certificates in **-cT** truststore are also loaded to **-sT** truststore if both **-sT** and **-cT** are specified.

For more information about the **gskkyman** utility and migrating keys and certificates, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*. For more information about the RACDCERT command, see [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference*.

Server utilities

This section describes the **db2pwwden**, **ds21dif**, **ldif2ds**, **ldapdiff**, and **ldapexop** server utilities.

The db2pwwden utility

The **db2pwwden** utility is provided to encrypt or hash all unencrypted, AES encrypted, and DES encrypted user passwords in an already loaded TDBM, LDBM, or CDBM backend. The utility runs as a client operation while the server is active, and causes the server to encrypt or hash all the userPassword attribute values

that are unencrypted, AES encrypted, or DES encrypted with the pwEncryption method configured on the LDAP server. The utility must be run by an LDAP administrator with the appropriate authority or a user with the authority to update password values. See [“Administrative roles” on page 155](#) for more information about administrative role authority.

Format of the db2pwwden utility

db2pwwden [*options*]

Parameters of the db2pwwden utility

options

The following table shows the options that you can use for the **db2pwwden** utility.

Table 24. Options for the db2pwwden utility	
Option	Description
-?	Print this text.
-b <i>baseDN</i>	Use <i>baseDN</i> as the starting point for the update instead of the default. If -b is not specified, this utility examines the LDAP_BASEDN environment variable for a <i>baseDN</i> definition. If you are running in TSO, set the LDAP_BASEDN environment variable using Language Environment® runtime environment variable _CEE_ENVFILE. If you are running in the z/OS shell, export the LDAP_BASEDN environment variable.
-d <i>debugLevel</i>	Specify the level of debug messages to be created. The <i>debugLevel</i> is specified in the same fashion as the debug level for the LDAP server. LDAP debug levels lists the specific debug levels. The default is no debug messages.
-D <i>bindDN</i>	Use <i>bindDN</i> to bind to the LDAP directory. The <i>bindDN</i> option is a string-represented DN. The default is a NULL string. If the -S or -m option is equal to DIGEST-MD5 or CRAM-MD5, this option is the authorization DN, which is used for making access checks. This directive is optional when used in this manner.
-g <i>realmName</i>	Specify the <i>realmName</i> to use when doing a DIGEST-MD5 bind. This option is required when multiple realms are passed from an LDAP server to a client as part of a DIGEST-MD5 challenge; otherwise, it is optional.
-h <i>ldapHost</i>	Specify the hostname or IP address on which the LDAP server is running. The default is the local host.

Table 24. Options for the db2pwwden utility (continued)

Option	Description
-K <i>keyFile</i>	<p>Specify the name of the System SSL key database file, RACF key ring, or PKCS #11 token. If this option is not specified, this utility looks for the presence of the <code>SSL_key ring</code> environment variable with an associated name.</p> <p>If <i>keyFile</i> is specified as <code>*TOKEN*/NAME</code>, then System SSL uses the specified PKCS #11 token. Otherwise, System SSL uses a key database file or a RACF key ring. In this case, System SSL first assumes that <i>keyFile</i> is a key database file name and tries to locate the file. If <i>keyFile</i> is not a fully qualified z/OS UNIX System Services file name, the current directory is assumed to contain the key database file. The name cannot be a data set. If System SSL cannot locate the file, it then assumes that <i>keyFile</i> is a RACF key ring name.</p> <p>See “SSL/TLS information for LDAP utilities” on page 219 for information about System SSL key databases, RACF key rings, and PKCS #11 tokens.</p> <p>This option is ignored if -Z is not specified.</p>
-m <i>mechanism</i> or -S <i>mechanism</i>	<p>Specify the bind method to use. You can use either -m or -S to indicate the bind method.</p> <p>Specify GSSAPI to indicate that a Kerberos Version 5 bind is requested, EXTERNAL to indicate that a certificate (SASL external) bind is requested, CRAM-MD5 to indicate that a SASL Challenge Response Authentication Mechanism bind is requested, or DIGEST-MD5 to indicate that a SASL digest bind is requested.</p> <p>The GSSAPI method requires a protocol level of 3 and the user must have a valid Kerberos Ticket Granting Ticket in their credentials cache by using the Kerberos kinit command-line utility.</p> <p>The EXTERNAL method requires a protocol level of 3. You must also specify -Z, -K, and -P to use certificate bind. Unless you want to use the default certificate in the key database file, RACF key ring, or PKCS #11 token, use the -N option to specify the label of the certificate.</p> <p>The CRAM-MD5 method requires protocol level 3. The -D or option must be specified.</p> <p>The DIGEST-MD5 method requires protocol level 3. The -U> option must be specified. The -D option can optionally be used to specify the authorization DN.</p> <p>If -m or -S is specified, a simple bind is performed.</p>
-N <i>keyFileDN</i>	<p>Specify the label associated with the certificate in the key database file, RACF key ring, or PKCS #11 token.</p> <p>This option is ignored if -Z is not specified</p>
-pldapPort	Specify the TCP port where the LDAP server is listening. The default LDAP non-secure port is 389 and the default LDAP secure port is 636.
-P <i>keyFilePW</i>	<p>Specify either the key database file password or the file specification for a System SSL password stash file. When the stash file is used, it must be in the form <code>file://</code> followed immediately (no blanks) by the file system file specification (for example, <code>file:///etc/ldap/sslstashfile</code>). The stash file must be a file and cannot be a data set.</p> <p>This option is ignored if -Z is not specified.</p>

Table 24. Options for the db2pwwden utility (continued)	
Option	Description
-U <i>userName</i>	Specify the <i>userName</i> for CRAM-MD5 or DIGEST-MD5 binds. The <i>userName</i> is a short name (UID) that is used to perform bind authentication. This option is required if the -S or -m option is set to DIGEST-MD5.
-w <i>passwd</i>	Use <i>passwd</i> as the password for simple, CRAM-MD5, and DIGEST-MD5 authentication. The default is a NULL string.
-v	Use verbose mode, with many diagnostics written to standard output.
-x <i>sslFipsMode</i>	Specify FIPS mode for SSL/TLS protected connections. The supported FIPS modes are LEVEL1, LEVEL2, LEVEL3, and OFF. When FIPS mode is enabled, it is more restrictive regarding cryptographic algorithms, protocols, and key sizes that can be supported. If this option is not specified, the FIPS mode is set to OFF. This option is ignored if -Z is not specified.
-z	Use a secure connection to communicate with the LDAP server. Secure connections expect the communication to begin with the SSL/TLS handshake. The -K <i>keyFile</i> option or equivalent environment variable is required when the -Z option is specified. The -P <i>keyFilePW</i> option is required when the -Z option is specified and the key file specifies a file system key database file. Unless you want to use the default certificate in the key database file, RACF key ring, or PKCS #11 token, use the -N option to specify the label of the certificate.

All other command-line inputs result in a syntax error message and the correct syntax is displayed. If the same option is specified multiple times or if both -m and -S are specified, the last value specified is used.

The **db2pwwden** utility sends the **PasswordPolicy** control as a non-critical control when the user attempts to authenticate to the targeted LDAP server. If the bound user is subject to password policy on the LDAP server, the **db2pwwden** utility parses and displays the warning and error messages from the **PasswordPolicy** control response.

Examples of the db2pwwden utility

Following are examples using the db2pwwden utility:

- The following command:

```
db2pwwden -D "cn=admin" -w secret
```

encrypts or hashes all unencrypted, AES encrypted, or DES encrypted passwords in the TDBM, LDBM, or CDBM backend at the LDAP server on the local host. The base is defined in the LDAP_BASEDN environment variable. The encryption or hashing method used is the pwEncryption method configured on the LDAP server.

- The following command:

```
db2pwwden -h ushost -p 391 -D "cn=admin" -w secret -b "o=university, c=US"
```

encrypts or hashes all unencrypted, AES encrypted, or DES encrypted passwords starting at the base "o=university, c=US" in the TDBM or LDBM backend on host ushost at port 391. The encryption or hashing method used is the pwEncryption method configured on the LDAP server.

Diagnosis notes for the db2pwwden utility

Exit status is 0 if no errors occur. Errors result in a nonzero exit status and a diagnostic message being written to standard error.

The ds2ldif utility

The **ds2ldif** utility is used to unload entries from a directory that is stored in a TDBM, LDBM, or CDBM backend into a file in LDAP Data Interchange Format (LDIF). It is also used to obtain the LDAP server schema entry.

Restriction: **ds2ldif** cannot be used to unload a GDBM or SDBM backend.

There are two versions of the **ds2ldif** utility:

- **ds2ldif31** (runs in a 31-bit environment)
- **ds2ldif64** (runs in a 64-bit environment)

Both can be used to unload LDBM entries, TDBM entries, CDBM entries, or the LDAP server schema entry.

By default the **ds2ldif** utility starts a special LDAP server to perform the unload operation. Turn off the server so that the backends are available when the special LDAP server is started. This server instance cannot take requests or do other normal activity, and is terminated when the unload operation is finished. The utility can be used while the server is running if the **-r** option is specified. This option calls the unloadRequest extended operation, which does not create a new instance of the LDAP server. The unloadRequest extended operation can also be called through a client application. For more information about the unloadRequest extended operation, see [“unloadRequest” on page 689](#).

If you are using the **ds2ldif** utility in an interoperability environment, see [Appendix G, “Guidelines for interoperability between non-z/OS TDS and z/OS TDS,” on page 715](#) for more information.

Format of the ds2ldif utility

```
ds2ldif31 | ds2ldif64 -o outputFile [-d debugLevel] [-f confFile] [-g]
keyFile] [-r [-q filterDN]] [-j] [-k]
subtreeDN] | [-n beName] [-l]] [-t] [-s]
[-Z] [-?] [-w adminPW]
```

Parameters of the ds2ldif utility

The following table shows the options that you can use for the **ds2ldif** utility:

Option	Description
-?	Display the usage.
-d <i>debugLevel</i>	Specify the level of the debug messages to be created. The <i>debugLevel</i> is specified in the same fashion as the debug level for the LDAP server. LDAP debug levels lists the specific debug levels. The default is no debug messages.
-F <i>confFile</i>	Specify the name of the LDAP server configuration file to use. This configuration file only needs to contain information for the backend to be unloaded. The configuration data set specified by the CONFIG DD statement is used if the -F option is not specified. The <code>/etc/ldap/ds.conf</code> configuration file is used if the -F option is not specified and the CONFIG DD statement is not defined.

Option	Description
-g	Specify to unload entries in genealogical order. This unloads entries in each subtree together, doing a depth-first traversal of the directory. Specify this option when you are unloading many entries that you are loaded later, using the ldif2ds utility with the -g option, because this order of entries improves the capacity of ldif2ds to process large numbers of entries. Unloading in this order requires more processing and impacts unload performance.
-j	Indicate that the replicateOperationalAttributes control value is not written to the output LDIF file. The replicateOperationalAttributes control value has the modifyTimestamp, createTimestamp, creatorsName, and modifiersName attribute types and values for the entry base64 encoded.
-k <i>keyFile</i>	Specify the name of the file containing the LDAP server encryption keys. If running ds2ldif in batch, the data set specified by the LDAPKEYS DD statement is used if the -k option is not specified. The key file must be specified if any entries unloaded have userPassword, secretKey , replicaCredentials , ibm-replicaKeyPw , ibm-slapdAdminPw , or ibm-slapdMasterPw attribute values that are encrypted using the DES or AES algorithm and not using ICSF. These attribute values are decrypted and base64 encoded as the entry is written to the output LDIF file.
-l	Specify that entries under the cn=localhost suffix are unloaded from the LDBM or TDBM backend. When an entire LDBM or TDBM backend is unloaded, the entries under cn=localhost are not unloaded unless the -l option is specified. The -l option cannot be used when the -s option is specified.
-n <i>beName</i>	Specify the name of the LDBM, TDBM, or CDBM backend to unload. This is the name that is assigned to the backend on its database record in the LDAP server configuration file or the name that is automatically generated when the LDAP server is started. This can be used to indicate which LDBM, TDBM, or CDBM backend to process when there are multiple LDBM, TDBM, or CDBM backends in the configuration file. The -n option cannot be used when the -s option is specified.
-o <i>outputFile</i>	Specify the name of an output file to contain the unloaded directory entries. See “Specifying a value for filename” on page 85 for information about how to specify the file name.
-q <i>filterDN</i>	Specify a distinguished name (DN) of a replication filter entry that contains ibm-replicationFilterAttr attribute values. These values are filters that are used to skip entire entries or attributes within entries while unloading the directory. See “Partial replication” on page 519 for more information about replication filter entries. The targeted LDAP server must be running and the -r option must be specified when the -q option is specified. Also, the CDBM backend must be configured and useAdvancedReplication on specified in the CDBM backend section of the server configuration file to perform unload filtering.
-r	Perform an unloadRequest extended operation (1.3.18.0.2.12.62) to unload the subtree or backend. If the LDAP server that contains the backend that is to be unloaded is running, an unloadRequest extended operation can be sent to the LDAP server to unload the entries.
-s <i>subtreeDN</i>	Identify the DN of the top entry of the subtree whose entries are to be unloaded. This entry, plus all under it in the directory hierarchy, are written to the output file. The -s option must be used to unload the LDAP server schema entry, cn=schema. The -s option cannot be used when the -n option is specified.
-t	Specify that hashed userPassword and ibm-slapdAdminPw attribute values are unloaded with their encryption tag in clear text. See Using the -t (tagging) option for more information about this option.

Option	Description
-w <i>adminPW</i>	When using the unloadRequest extended operation, specify the password of the LDAP root administrator who is defined in the configuration file. Do not specify the -w option if the adminPW option is specified in the LDAP server configuration file. In this case, the value from the server configuration file is used to perform the LDAP bind before sending the unloadRequest extended operation to the LDAP server. If the adminPW configuration option is not present and the -w option is not specified or a ? is specified on the -w option, a prompt is displayed for the LDAP root administrator password.
-Z	When using the unloadRequest extended operation, use SSL to encrypt the communication between the ds2ldif utility and the LDAP server. By default, the ds2ldif utility attempts to use SSL to communicate with the LDAP server assuming that the LDAP server configuration file has the necessary SSL options (for example, sslKeyRingFile , sslKeyRingFilePW , sslCertificate , sslKeyRingStashFile , sslFipsState) specified along with a secure listen option (for example, <code>listen ldaps://</code>). If SSL cannot be used, the ds2ldif utility fails.

All other command-line inputs result in a syntax error message and the correct syntax is displayed. Also, specifying the same option multiple times with different values results in a syntax error.

Examples of the ds2ldif utility

1. This example starts the 31-bit version of **ds2ldif** to unload all the entries from the TDBM backend named `tdbm1` in the LDAP server configuration file `/etc/ldap/ds.conf`. The **replicateOperationalAttributes** control is not included in the unloaded entries. The two entries that are in the TDBM backend named `tdbm1` are written to data set `ADMIN3.LDIF.DATA`.

```
ds2ldif31 -j -o "'/ADMIN3.LDIF.DATA'" -n tdbm1 -f /etc/ldap/ds.conf
```

The `ADMIN3.LDIF.DATA` output data set contains the following:

```
version: 1

dn: o=tdbm
objectclass: organization
objectclass: top
o: tdbm
ibm-entryuuid: 3A67E000-2E5C-1876-99D0-402064040959
aclentry: cn=Anybody:normal:rsc:system:rsc
aclpropagate: TRUE
entryowner: CN=ADMIN
ownerpropagate: TRUE

dn: cn=entry1,o=tdbm
objectclass: newPilotPerson
objectclass: person
objectclass: top
cn: entry1
sn: 1
uid: entry1
userpassword:: c2VjcmV0
ibm-entryuuid: 0C3DE000-F85D-1884-94B3-402084027431
```

2. This example starts the 64-bit version of **ds2ldif** to unload all the data at and underneath the `o=ldbm subtreeDN` entry by performing an **unloadRequest** extended operation over SSL with an LDAP root administrator password of `secret`. By default, the **replicateOperationalAttributes** control is included in the unloaded entries. The entries are written to file `/ldbmdata/ldif.data` on the system where the LDAP server is running.

```
ds2ldif64 -o /ldbmdata/ldif.data -s o=ldbm -r -w secret -Z -f /etc/ldap/ds.conf
```

The /ldbmdata/ldif.data output file contains the following unloaded entries:

```
version: 1

dn: o=ldbm
control: 1.3.18.0.2.10.19 false:: MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWF
kbWluMDAKAQAwKwQPY3JlYXRlVGltZXN0YW1wMRgEFjIwMDgxMDI0MTY0MDUwLjYzMDg5NFowIAo
BADAbBA1tb2RpZmllcnNOYW1lMQoECGNuPWFkbWluMDAKAQAwKwQPBw9kaWZ5VGltZXN0YW1wMRg
EFjIwMDgxMDI0MTY0MDUwLjYzMDg5NFo=
o: ldbm
objectclass: organization
objectclass: top
ibm-entryuuid: 9A063000-FA92-1901-9FBA-402084027431
aclentry: cn=Anybody:normal:rsc:system:rsc
aclpropagate: TRUE
entryowner: CN=ADMIN
ownerpropagate: TRUE

dn: cn=replfilter,o=ldbm
control: 1.3.18.0.2.10.19 false:: MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWF
kbWluMDAKAQAwKwQPY3JlYXRlVGltZXN0YW1wMRgEFjIwMDkwMTE2MTYxMzI5LjA2NTg4NlowIAo
BADAbBA1tb2RpZmllcnNOYW1lMQoECGNuPWFkbWluMDAKAQAwKwQPBw9kaWZ5VGltZXN0YW1wMRg
EFjIwMDkwMTE2MTYxMzI5LjA2NTg4Nlo=
objectclass: ibm-replicationFilter
objectclass: top
cn: replfilter
ibm-replicationfilterattr: (objectclass=person):(cn,sn)
ibm-entryuuid: 1014C000-B229-1970-817D-402084027431

dn: ou=rochester,o=ldbm
control: 1.3.18.0.2.10.19 false:: MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWF
kbWluMDAKAQAwKwQPY3JlYXRlVGltZXN0YW1wMRgEFjIwMDkwMTE2MTYwODU5LjM5NjkwOVowIAo
BADAbBA1tb2RpZmllcnNOYW1lMQoECGNuPWFkbWluMDAKAQAwKwQPBw9kaWZ5VGltZXN0YW1wMRg
EFjIwMDkwMTE2MTYwODU5LjM5NjkwOVow=
objectclass: organizationalUnit
objectclass: top
ou: rochester
ibm-entryuuid: 60E5C000-B11B-1970-817D-402084027431

dn: cn=entry1,ou=rochester,o=ldbm
control: 1.3.18.0.2.10.19 false:: MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWF
kbWluMDAKAQAwKwQPY3JlYXRlVGltZXN0YW1wMRgEFjIwMDkwMTE2MTYwOTUxLjMxNjM3MVowIAo
BADAbBA1tb2RpZmllcnNOYW1lMQoECGNuPWFkbWluMDAKAQAwKwQPBw9kaWZ5VGltZXN0YW1wMRg
EFjIwMDkwMTE2MTYwOTUxLjMxNjM3MVo=
objectclass: newPilotPerson
objectclass: person
objectclass: top
cn: entry1
sn: entry1sn
userpassword:: c2VjcmV0
description: A very nice person
ibm-entryuuid: 4D3BE000-B14F-1970-817D-402084027431
```

- This example builds on the previous example, but it uses a replication filter entry to filter the unload data. The cn=replfilter, o=ldbm replication filter entry from “2” on page 227 has an ibm-replicationFilterAttr attribute value that only allows entries that have an objectclass value of person to be unloaded and only unloads the cn and sn attributes (if any) from these entries. See “Partial replication” on page 519 for more information about replication filtering.

```
ds2ldif31 -o /ldbmdata/filtered.ldif.data -s o=ldbm -r -w secret -q
cn=replfilter,o=ldbm
-f /etc/ldap/ds.conf
```

The /ldbmdata/filtered.ldif.data output file contains the following unloaded entry:

```
version: 1

dn: cn=entry1,ou=rochester,o=ldbm
control: 1.3.18.0.2.10.19 false:: MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWF
kbWluMDAKAQAwKwQPY3JlYXRlVGltZXN0YW1wMRgEFjIwMDkwMTE2MTYwOTUxLjMxNjM3MVowIAo
BADAbBA1tb2RpZmllcnNOYW1lMQoECGNuPWFkbWluMDAKAQAwKwQPBw9kaWZ5VGltZXN0YW1wMRg
EFjIwMDkwMTE2MTYwOTUxLjMxNjM3MVo=
objectclass: newPilotPerson
objectclass: person
objectclass: top
cn: entry1
```

```
sn: entry1sn
ibm-entryuuid: 4D3BE000-B14F-1970-817D-402084027431
```

- The `o=ldbm`, `cn=repfilter`, `o=ldbm` and `ou=rochester`, `o=ldbm` entries are not unloaded because they do not have an `objectclass` attribute value of **person**.
- The `cn=entry1`, `ou=rochester`, `o=ibm` entry is allowed to be unloaded because it has an `objectclass` attribute value of **person**. However, the `userpassword` and `description` attribute values are filtered out because they are not specified in the replication filter.
- The `objectclass` and `ibm-entryuuid` attribute values are always unloaded by the **ds2ldif** utility although they are not specified in the replication filter.

Using the `-t` (tagging) option:

When the `-t` option is used on the **ds2ldif** utility, the format of the unloaded `userPassword` or `ibm-slapdAdminPw` attribute depends on how the value is encrypted or hashed.

- If the value is hashed using crypt, MD5, SHA, SHA224, SHA256, SHA384, or SHA512 one-way hashing algorithms, then the tag is visible and the hashed `userPassword` or `ibm-slapdAdminPw` value is base64 encoded in the unloaded value. The format of the unloaded value is:

```
attrtype: {tag}base64encoded_and_hashedvalue
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. *tag* is crypt, MD5, SHA, SHA224, SHA256, SHA384, or SHA512. For example:

```
userpassword: {crypt}0fCik9fUqZnixuKkYQ==
userpassword: {MD5}34d121/hie8s
userpassword: {SHA}24309gf[jgt
userpassword: {SHA224}lcf7ypKsUI0v2mKlZKPQFPw7cskUDjy5nqa/Eg==
userpassword: {SHA256}K7gNU3sdo+OL0wNhqoVWhr3g6s1xYv72o1/pe/Unols=
userpassword: {SHA384}WKd1ukESvjAFrkQHznV9iP2nHUBJe7gCbsrFTU4//HIyzo3jq1rLMK4
5dg/ufFPt
userpassword: {SHA512}vSsar3708Jvp9Szi2NWZZ02Bqp1qRCFpbCTZPdBhnWgs5WtNZKncvCXd
hztmed2cmW192CF5bDufKRpayrW/isg==
```

- If the value is hashed using SSHA (Salted SHA), SSHA224, SSHA256, SSHA384, or SSHA512 hashing algorithms, then the tag is visible and the hashed `userPassword` or `ibm-slapdAdminPw` value and salt values are base64 encoded in the unloaded value. The format of the unloaded value is:

```
attrtype: {tag}base64encoded_hashed_and_salt_values
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. *tag* is SSHA, SSHA224, SSHA256, SSHA384, or SHA512. For example:

```
userpassword: {SSHA}yEmjV/P10snkDbFMpXARCPuZA0evrN4xquMjGW5bMKlhaAkb5Zt6VQ==
userpassword: {SSHA224}sEHZjTzABWiPMDSFmnuYDUUMzGF1C+X0cryro0otC3X3smmwNlAbs+
222PJRElE7GJUz4adtbpo=
userpassword: {SSHA256} qFzEm0vg2BtJL0cK6baEv6VrRJ4MI+wqQtvoknWjEA51AL3ePW2u0l
Ur6q+Ye/UYJG+e0yaAuHEehFN30kGJwA==
userpassword: {SSHA384}mbP0pQkuXYlDswEDq6JYWp2Y95jgysAX0wohTmbKP74tQvnrR19G5e
u46qth1j0Kfvm7HIItIuCzcdSRMTe80vynEsv+10eSfge60u3yrXs0cNeN/yw5yMp+FUX0HIg4f
userpassword: {SSHA512}rR/lS84oX0qz/GuxGsdTkaRwhdBXDVEP3Uj/WIRB+KB7zON8DX48gA
L1k1QCRnrLv0jvyBEB45Dmyj71AwT3M2T5PeagtoTIXbDs1XgVH7zDqAHosWJEI0ZnOviQFP3Cx6
1R30M0td5XEAJKC3RBTnhYk0Xmdqqwe6KkorUdaMQ=
```

- If the value is encrypted using a two-way encryption algorithm (DES or AES) or is not encrypted, then the unencrypted value is base64 encoded in the unloaded value and there is no tag. The format of the unloaded value is:

```
attrtype:: base64encoded_and_unencryptedvalue
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. For example:

```
userpassword:: kfa6903axs
```

This is also the format used when unloading `secretKey`, `replicaCredentials`, `ibm-replicaKeyPwd`, and `ibm-slapdMasterPwd` attribute values because these values can only be encrypted using two-way encryption algorithms.

Note:

1. The LDAP server loads and uses tagged `userPassword` or `ibm-slapdAdminPwd` values that are hashed in `crypt`, `SHA`, `SSHA` (Salted `SHA`), or `MD5` and were unloaded using the **ds2ldif** utility with the `-t` option. Also, these tagged values might be acceptable for other LDAP providers to load into their directory. If it is not directly loadable, this format is easily modifiable for loading by another provider into its LDAP directory.
2. The values returned by the **crypt** algorithm are portable only to other X/Open-conformant systems when the **pwCryptCompat** configuration option is set to **off**. When the **pwCryptCompat** configuration option is set to **off**, the `crypt()` algorithm uses ASCII, which is a subset of UTF-8, when generating the hashed **userPassword** or **ibm-slapdAdminPwd** attribute values. Therefore, you might want to set the **pwCryptCompat** configuration option to **off** when it is necessary to share **userPassword** or **ibm-slapdAdminPwd** attribute values hashed in `crypt()` between the z/OS LDAP server and other ASCII-based LDAP servers.

When the `-t` option is not used on the **ds2ldif** utility, the format of the unloaded password attributes depends upon how the `userPassword` or `ibm-slapdAdminPwd` value is encrypted or hashed.

1. If the value is hashed using `crypt`, `SHA`, or `MD5` one-way hashing algorithms, then the tag and the hashed `userPassword` or `ibm-slapdAdminPwd` values are base64 encoded in the unloaded value. The format of the unloaded value is:

```
attrtype:: base64encodedValue
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. *base64encodedValue* is a base64 encoding of *{tag}* hashedvalue.

where *tag* is `crypt`, `MD5`, or `SHA`. For example:

```
userpassword:: e2NyeXB0fdHwopPX1KmZ4sbipGE=
```

2. If the value is hashed using `SHA224`, `SHA256`, `SHA384`, or `SHA512` one-way hashing algorithms, then the tag is visible and the hashed `userPassword` or `ibm-slapdAdminPwd` value is base64 encoded in the unloaded value. The format of the unloaded value is:

```
attrtype: {tag}base64encoded_and_hashedvalue
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. *tag* is `SHA224`, `SSHA256`, `SSHA384`, or `SHA512`. For example:

```
userpassword: {SSHA224}sEHZjTzABWiPMDSFmnuYDUUMzGF1C+X0cryro0otC3X3smmwNlAbs+
222PJRE1E7GJUz4adtbpo=
userpassword: {SSHA256}qFzEm0vg2BtJL0cK6baEv6VrRJ4MI+wqQtvoknWjEA51AL3ePW2u01
Ur6q+Ye/UYJG+e0yaAuHEehFN30kGJwA==
userpassword: {SSHA384}mbP0pQkuXY1DswEDq6JYWP2Y95jgysAX0wohTmbKP74tQvnrR19G5e
u46qth1j0Kfvm7HIItIuCzcdSRMTe80vynEsv+10eSfge60u3yrXs0cNeN/yw5yMp+FUX0HIg4f
userpassword: {SSHA512}rR/lS84oX0qz/GuxGsdTkaRwhdBXDVEP3Uj/WIRB+KB7z0N8DX48gA
L1k1QCRnrLv0jvyBEB45Dmyj71AwT3M2T5PeagtoTixbDs1XgVH7zDqAHosWJEI0Zn0viQFP3Cx6
1R30M0td5XEAJkC3RBThYk0Xmdqqwe6KkorUdaMQ=
```

3. If the value is hashed using `SSHA` (Salted `SHA`), `SSHA224`, `SSHA256`, `SSHA384`, or `SSHA512` one-way hashing algorithms, then the tag is visible and the hashed `userPassword` or `ibm-slapdAdminPwd` value and salt values are base64 encoded in the unloaded value. The format of the unloaded value is:

```
attrtype: {tag}base64encoded_hashed_and_salt_values
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. *tag* is `SSHA`, `SSHA224`, `SSHA256`, `SSHA384`, or `SSHA512`. For example:

```
userpassword: {SSHA}yEmjV/P10snkDbFMpXARcpUzA0evrN4xquMjGW5bMK1haAkb5Zt6VQ==
userpassword: {SSHA224}sEHZjTzABWiPMDSFmnuYDUUMzGF1C+X0cryro0otC3X3smmwN1Abs+
222PJRE1E7GJUz4adtbpo=
userpassword: {SSHA256}qFzEm0vg2BtJL0cK6baEv6VrRJ4MI+wqQtvoknWjEA51AL3ePW2u01
Ur6q+Ye/UYJG+e0yaAuHEehFN30kGJwA==
userpassword: {SSHA384}mbP0pQkuXY1DswEDq6JYWp2Y95jgysAX0wohTmbKP74tQvnrR19G5e
u46qth1j0Kfvm7HI+IuCzcdSRMTe80vynEsv+10eSfge60u3yrXs0cNeN/yw5yMp+FUX0HIg4f
userpassword: {SSHA512}rR/lS84oX0qz/GuxGsdtKaRwhdBXDVEP3Uj/WIRB+KB7zON8DX48gA
L1k1QCRnrLv0jvyBEB45Dmyj71AwT3M2T5PeagtoTIXbDs1XgVH7zDqAHosWJEI0Zn0viQFP3Cx6
1R30M0td5XEAJKC3RBTnhYk0Xmdqqwe6KkorUdaMQ=
```

4. If the value is encrypted using a two-way encryption algorithm (DES or AES) or is not encrypted, then the unencrypted value is base64 encoded in the unloaded value and there is no tag present. The format of the unloaded value is:

```
attrtype:: base64encoded_and_unencryptedvalue
```

where *attrtype* is `userpassword` or `ibm-slapdadminpw`. For example:

```
userpassword:: e01ENXkfa6903axs
```

This is also the format used when unloading `secretKey`, `replicaCredentials`, `ibm-replicaKeyPwd`, and `ibm-slapdMasterPw` attribute values, because these values can only be encrypted using two-way encryption algorithms.

Using the unloadRequest extended operation

The **unloadRequest** extended operation is used to remotely unload directory data from a currently running z/OS LDAP server. The **unloadRequest** extended operation is required when attempting to unload data from an LDBM or CDBM backend that is already running with an active z/OS LDAP server. The **unloadRequest** extended operation is also required when using the `-q filterDN` option to filter entries as they are being unloaded from an LDBM, TDBM, or CDBM backend. The `-r` option can be used to force the **unloadRequest** extended operation to be sent to the z/OS LDAP server for any unload operation. If running **ds2ldif** from JCL, a DD card is not allowed to be specified on the `-o` option when using the **unloadRequest** extended operation.

The **ds2ldif** utility does the following when an **unloadRequest** extended operation is performed:

1. An LDAP root administrator simple bind is attempted using each secure `listen` option in the LDAP server configuration file until a successful secure connection is established with the LDAP server. The **sslKeyRingFile** option in the LDAP server configuration file indicates the key database file, RACF key ring, or PKCS #11 token that **ds2ldif** uses to communicate securely with the LDAP server. If the **sslKeyRingFile** option is a key database file, the **sslKeyRingFilePW** or **sslKeyRingPWStashFile** options in the LDAP server configuration file are used by **ds2ldif** to gain access to the key database file. The **sslCertificate** option in the LDAP server configuration file is used as the SSL certificate when **ds2ldif** establishes the secure connection with the LDAP server. The **adminDN** that is specified in the LDAP server configuration file is used as the bind DN. If there is an **adminPW** configuration option present, it is used as the password. If there is no **adminPW** configuration option, **ds2ldif** uses the value of the **ds2ldif** `-w` option or issues a prompt for the password if the `-w` option is not specified.

Note:

- a. The **ds2ldif** utility sends the **PasswordPolicy** control as a non-critical control when the LDAP root administrator in the configuration file (**adminDN** configuration option) attempts to authenticate to the LDAP server. If the LDAP root administrator's entry is subject to password policy on the targeted LDAP server, the **ds2ldif** utility parses and displays the warning and error messages from the **PasswordPolicy** control response.

- b. If you are running **ds2ldif** from TSO or batch, the password prompt does not execute. In these environments, you must either have an **adminPW** configuration option or specify the **-w** option.
 - c. The `getpass()` routine used to prompt for the password returns at most `PASS_MAX` number of characters, truncating any additional characters. For more information about the `getpass()` function, see [getpass\(\) — Read a string of characters without echo in z/OS XL C/C++ Runtime Library Reference](#). If the length of the root administrator (**adminDN**) password is greater than `PASS_MAX`, you must either have an **adminPW** configuration option or specify the **-w** option.
 - d. Ensure that the user ID running the **ds2ldif** utility has access to the key database file, RACF key ring, or PKCS #11 token that is specified on the **sslKeyRingFile** option.
2. If a secure connection is not established with the LDAP server or there are no secure `listen` options in the LDAP server configuration file, an LDAP root administrator simple bind is attempted using each nonsecure `listen` option until a successful nonsecure connection is established. If a connection is not established with the LDAP server, **ds2ldif** ends.
 - a. To perform the **unloadRequest** extended operation with the **ds2ldif** utility, the bound user is the LDAP root administrator (**adminDN**).
 - b. If the **-Z** option is specified, the **ds2ldif** utility communicates over a secure port if a connection is established. If a secure connection is not established, the **ds2ldif** utility fails.
 3. Entries are unloaded into an output file on the LDAP servers system. The name of the file is specified in the **ds2ldif -o** option.

If the **ds2ldif** utility unloads entries when using the **unloadRequest** extended operation, the output file is produced in the code page that is specified in the `LANG` environment variable of the LDAP server. Otherwise, the output file is produced in the code page that is specified in the `LANG` environment variable of the **ds2ldif** utility.
 4. An **unloadResponse** extended operation is sent back to the **ds2ldif** utility indicating how many entries are unloaded and whether the extended operation is successful.

Additional set up when unloading LDBM or CDBM directory data

If the **ds2ldif** utility is being used to unload LDBM or CDBM directory data and an **unloadRequest** extended operation is not being performed (the LDAP server is not running), the user ID that is running the **ds2ldif** utility must have read and execute access to the directory that is specified on the `databaseDirectory` configuration option of the LDBM or CDBM backend that is being unloaded and must also have read access to the LDBM or CDBM database and checkpoint files in that directory to successfully perform an unload. Also, the user ID must be in the owning GID group or be the owning UID for the directory and files in that directory to successfully perform an unload.

You can use the RACF command in the following example to define the user ID that runs the **ds2ldif** utility (substitute the values that you want for `DFLTGRP` and `UID`).

```
ADDUSER LDAPADMIN DFLTGRP(LDAPGRP) OMVS(UID(2))
PROGRAM('/bin/sh')
```

You can use the RACF `CONNECT` command to add an existing user to a group.

```
CONNECT LDAPADMIN GROUP(LDAPGRP)
```

See [“Requirements for a user ID that runs the LDAP server”](#) on page 46 for similar commands to create the user ID and group for the LDAP server. Note that the commands also use `LDAPGRP`.

If the **ds2ldif** utility is being used to unload directory data and an **unloadRequest** extended operation is not being performed (the LDAP server is not running), the user ID that is running the **ds2ldif** utility must have read and execute access to the directory specified by the `schemaPath` configuration option or its default value and it must also have read access to the `schema.db` file in the directory. Also, the user ID must be in the owning GID group or be the owning UID for the directory and `schema.db` file in that directory to successfully perform an unload.

Usage notes for the ds2ldif utility

1. The output file name option (-o) is a required option for the **ds2ldif** utility. See “Specifying a value for filename” on page 85 for information about specifying the output file name. If the output is to be written to a z/OS UNIX System Services file system, the file name must be fully qualified. If the output is to be written to a sequential or partitioned data set, the data set should be preallocated with a record format of variable blocked (VB), a record length of 1028, and a blocksize of 6144. The size of the output LDIF file is generally smaller than the space consumed in the database for both LDBM and TDBM, with the LDIF file often using less than half the space used in the database. However, unusual cases, such as a high amount of binary data or a high number of multi-valued attributes, can inflate the LDIF file size such that it might be slightly larger than the space used in the database. If you are unloading the entire backend, the size of the pertinent data can be estimated from the TDBM database by adding the SPACEF values (in kilobytes) of the DIR_ENTRY, DIR_LONGENTRY, and DIR_LONGATTR tables from a recent Db2 RUNSTATS report. For LDBM backends, the sum of the file sizes of all the LDBM-x.db files (where x is a number such as 1, 2, 3, and so on) provide a database size estimate. However, if the LDBM.ckpt file is large, this might include more data that has yet to be merged into the database files. In this case, you can either include the size of the LDBM.ckpt file in the sum or perform an LDBM commit to get a better estimate.
2. If the **ds2ldif** utility is invoked with the -s or the -n option and there is only one TDBM, LDBM, or CDBM backend in the LDAP server configuration file, all the directory entries (other than cn=localhost unless the -l option is specified) in that particular TDBM, LDBM, or CDBM backend are unloaded.
3. If a TDBM backend contains entries that have a suffix that is no longer configured in the TDBM section of the LDAP server configuration file, **ds2ldif** unloads those entries when it is invoked with the -n option. This is not true for an LDBM backend: only the entries that have a currently configured LDBM suffix are unloaded.
4. The **ds2ldif** utility only unloads owner and ACL information for entries that have a specific owner or ACL. Any entry data with an inherited owner or ACL does not have owner or ACL information unloaded.
5. The **ibm-entryuuid** attribute is included in each entry unloaded by the **ds2ldif** utility. The **ldapadd** utility can be used to add an entry containing an **ibm-entryuuid** attribute if the bound user is an LDAP root administrator and the server is running in maintenance mode or the -k option (**Server Administration** server control) is specified in the **ldapadd** utility. The **ldif2ds** utility supports loading entries containing the **ibm-entryuuid** attribute into a TDBM backend. If you do not need the **ibm-entryuuid** attribute in the loaded entry to have the same value as in the entry that was unloaded, then remove the attribute from each entry in the **ds2ldif** output file and a new **ibm-entryuuid** value is assigned when the entry is loaded using **ldapadd** or **ldif2ds**.
6. The **replicateOperationalAttributes** control is added to each unloaded entry when the -j option is not specified and the server compatibility level is 5 or greater. The **replicateOperationalAttributes** control value has the **modifyTimestamp**, **createTimestamp**, **creatorsName**, and **modifiersName** attribute types and values for the entry, base64 encoded. Both the **ldapadd** command and the **ldif2ds** utility support the specification of the **replicateOperationalAttributes** control in the input LDIF file. See the **replicateOperationalAttributes** control in “replicateOperationalAttributes” on page 663 for more information about the control. See the **serverCompatLevel** configuration option “serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125 for more information about the server compatibility level.
7. If there are password policy operational attribute values present in the entries that are being unloaded, they are included in the LDIF file created by the **ds2ldif** utility. The password policy operational attributes are **pwdChangedTime**, **pwdAccountLockedTime**, **pwdExpirationWarned**, **pwdFailureTime**, **pwdGraceUseTime**, **pwdHistory**, **pwdReset**, **ibm-pwdAccountLocked**, **ibm-pwdIndividualPolicyDN**, and **ibm-pwdGroupPolicyDN**.
8. If password policy is active in the LDAP server and there are plans to populate a new LDAP server with the same data, you might want the password policies in the cn=ibmpolicies suffix in the CDBM backend be unloaded along with the data you want in the LDBM or TDBM

backends. These unloaded password policy entries must be added to the new server under the `cn=ibmpolicies` suffix in case there are user or group entries that have **ibm-pwdgrouppolicydn** or **ibm-pwdindividualpolicydn** attribute values. These user or group entries cannot be added to the server with the **ldapadd** or **ldif2ds** utilities until all referenced password policy entries are added to the CDBM backend.

9. The LDAP Version 3 protocol has a related set of internet drafts that document the introduction of a version mechanism for use in creating LDIF files. The **ds2ldif** utility always creates "tagged" LDIF files. The LDIF tag consists of a single line at the top of the LDIF file:

```
version: 1
```

All characters that are contained in the version one LDIF file are portable characters that are represented in the local code page that is specified in the LANG environment variable of the **ds2ldif** utility. If the **unloadRequest** extended operation is used, the LDIF file is in the local code page that is specified in the LANG environment variable of the LDAP server. If you reload the data in the LDIF file, ensure the utility that loads the data expects the data in the same code page you used to create the LDIF file. Strings that contain nonportable characters (for example, textual values containing multi-byte UTF-8 characters) are base64-encoded.

10. To unload the LDAP server schema entry, specify:

```
-s cn=schema
```

The schema entry is unloaded in LDIF modify format. The current LDAP server schema entry is unloaded. No merging of TDBM schema into the LDAP server schema is performed when running **ds2ldif**.

11. If you want to unload the schema entry from a TDBM backend that is migrated from an Integrated Security Services LDAP server, specify the following:

```
-s cn=schema,suffixDN
```

where *suffixDN* is the DN of a suffix in the TDBM backend. The schema entry is unloaded in LDIF modify format. The current TDBM schema entry is unloaded. No merging of the LDAP server schema into the TDBM schema entry is performed when running **ds2ldif**.

12. When you edit the output file that is produced by **ds2ldif**, use an editor that does not delete blanks at the end of a line. If the output file contains a line that ends with blanks, using such an editor results in deleting the blanks, therefore, changing the value of the attribute. This is important when the line is continued, because the existing blanks no longer separate the last word in the line from the continuation on the next line. The maximum line length in a **ds2ldif** output file is 77; continued lines are always 77 long when the file is created by **ds2ldif**. The **oedit** editor is an example of an editor that deletes blanks and is not used.
13. The LDAP_DEBUG environment variable can also be used to set the debug level for **ds2ldif**. See [debugLevel](#) for more information about specifying the debug level.
14. If running **ds2ldif** in 64-bit mode, ensure that the user ID running the **ds2ldif** utility has a sufficient value specified for the MEMLIMIT and ASSIZEMAX values in the OMVS segment so that storage greater than 2 GB can be used. This enables the **ds2ldif** utility to work properly in 64-bit mode.
15. If you are using **ds2ldif** to unload many entries that you plan to later load using **ldif2ds**, specify the **-g** option on both **ds2ldif** and **ldif2ds**. This causes **ds2ldif** to unload the entries using a depth-first traversal of the directory: the root is unloaded, then each subtree directly under the root is traversed. This order results in improved **ldif2ds** load capacity, at the cost of some effect on **ds2ldif** performance. **ldapadd** performance does not benefit from the **-g** option for **ds2ldif**.

Diagnosis notes for the ds2ldif utility

Exit status is 0 if no errors occur. Errors result in a nonzero exit status and a diagnostic message being written to standard error.

The ldif2ds utility

Use the **ldif2ds** utility to load entries that are specified in LDAP Data Interchange Format (LDIF) into a TDBM directory that is stored in a relational database. Do not use it to load entries into a GDBM, LDBM, CDBM, or SDBM directory. The TDBM directory must exist. The **ldif2ds** utility is intended for loading many entries. The utility creates load records from the entries in the LDIF input files, then runs the Db2 Load Utility to load the records into the TDBM directory.

The **ldapadd** utility can also be used to add entries to a TDBM directory. See [“When to use the ldif2ds utility”](#) on page 240 for more information about when to use **ldif2ds** or **ldapadd**. For more information about **ldapadd**, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

The **ldif2ds** utility might be used to add entries to an empty directory or to a directory that already contains entries. The utility cannot be used to modify the LDAP server schema. The schema must already be appropriate for the entries that are being added.

There are two versions of the **ldif2ds** utility:

- **ldif2ds31** (runs in a 31-bit environment)
- **ldif2ds64** (runs in a 64-bit environment)

See [“Preparing to run ldif2ds”](#) on page 238 before using **ldif2ds**.

Format

```
ldif2ds | ldif2ds31 | ldif2ds64 { [ { [-c] [-g]
    [-p [-o outHlq] [-j] [-b creator] [-k keyFile]] }
    { [-i ldifFile[,ldifFile]...] [-e ldifListFile] }
    [-f confFile] [-q summaryFrequency] [-C maxCheckErrs] ]
    [ -l [-o outHlq] ] }
    [-d debugLevel] [-?]
```

Note: You can use **ldif2ds** instead of **ldif2ds31**

Parameters

The following table shows the options that you can use for the **ldif2ds** utility.

Option	Description
-?	Display the usage.
-b creatorDN	The DN to be associated as creator with each loaded entry that does not already include a creatorsname attribute. If -b is not specified, the value of the adminDN option in the LDAP server configuration file is used. If neither option is specified, ldif2ds fails. The same processing is also applied for the modifier for each loaded entry that does not already include a modifiersname attribute. This option is ignored if ldif2ds is not invoked for the prepare step.
-c	Check that the entries in the LDIF input file or files are complete and acceptable according to the LDAP server schema. The Db2 database is not modified during the check phase.
-C maxCheckErrs	Specify the maximum number of errors that are allowed in the check processing phase, such as syntax or schema errors. When this limit is reached, the utility terminates. The default value is 100 errors. Specify a value of 0 to indicate no limit.

Option	Description
-d <i>debugLevel</i>	Specify the level of the debug messages to be created. The <i>debugLevel</i> is specified in the same fashion as the debug level for the LDAP server. LDAP debug levels lists the specific debug levels. The default is no debug messages.
-e <i>ldifListFile</i>	Specify the name of a file that contains a list of LDIF input files to be used as input. This is equivalent to using the -i option to specify a list of LDIF files, but is more convenient for a large list. Each record in the list file must contain the name of one LDIF input file. Blank lines and lines beginning with a # (comment lines) are ignored. See the ldifFile option for more information about using a list of LDIF files. This option is ignored if ldif2ds is not invoked for the check or prepare step.
-f <i>confFile</i>	Specify the name of the LDAP server configuration file to use. This configuration file only needs to contain information for the TDBM backend into which the entries are to be loaded. The configuration data set specified by the CONFIG DD statement is used if the -f option is not specified. The /etc/ldap/ds.conf configuration file is used if the -f option is not specified and the CONFIG DD statement is not defined. This option is ignored if ldif2ds is not invoked for the check or prepare step. For information about how to specify the file name, see “ Specifying a value for filename ” on page 85.
-g	Specify that the entries to be loaded are in genealogical order in the input LDIF files. This is the order that results from doing a depth-first traversal of a directory. This order greatly reduces the storage usage of ldif2ds during the check and prepare steps, enabling more entries to be loaded at one time. Do not specify this option if the entries to load are not in genealogical order. This order is produced when entries are unloaded using ldif2ds with the -g option.
-i <i>ldifFile</i>	Specify the name of an LDIF file to use as input. If a list of file names is specified, each file in the list is processed in turn. If ldif2ds is invoked separately to run the check and prepare steps, make sure to specify the same set of LDIF files each time you run ldif2ds . See “ Specifying a value for filename ” on page 85 for information about how to specify the file name. For more information about the ldapmodify utility, see ldapmodify and ldapadd utilities in <i>z/OS IBM Tivoli Directory Server Client Programming for z/OS</i> . This option is ignored if ldif2ds is not invoked for the check or prepare step.
-j	Specify that Db2 logging is used when loading the directory entries. The load operation is faster if Db2 logging is not used but the Db2 database is placed into copy-pending state after the data has been loaded. You then must run either the Db2 COPY or REORG utility to reset the copy-pending state. Note: You can only specify this option during the prepare step, when the JCL for the load jobs is created. It is ignored if ldif2ds is not invoked for the prepare step.

Option	Description
-k <i>keyFile</i>	Specify the name of the file containing the LDAP server encryption keys. If running ldif2ds in batch, the data set specified by the LDAPKEYS DD statement is used if the -k option is not specified. The key file must be specified whether any entries loaded have userPassword, secretKey, ibm-replicaKeyPwd, ibm-slapdMasterPw, or replicaCredentials attribute values that are encrypted using the DES or AES algorithm and not using ICSF. These attribute values are encrypted as the entry is prepared for loading into the directory.
-l	Start the Db2 Load Utility to load the TDBM database.
-p	Prepare Db2 table load files and JCL from the entries in the LDIF input file or files. The load and JCL files are generated as data sets, whose high-level qualifier is specified with the -o option. The prepare step deletes the existing contents of the data sets before writing new contents to the data sets. The Db2 database is modified during the prepare phase as entry identifiers and attribute identifiers are assigned for the new directory entries. The check phase is always performed when the -p option is specified, even if the -c option is not specified.
-o <i>outHlq</i>	Specify the high-level qualifier of the data sets that contains the Db2 load and JCL output, the status information, and the system information. These data sets must be allocated before invoking ldif2ds . The value cannot be more than 22 characters long. See “Preparing to run ldif2ds” on page 238 for more information. This option is ignored if ldif2ds is not invoked for the prepare or load step.
-q <i>summaryFrequency</i>	Specify the number of LDIF entries the check or prepare step processes between issuing summary messages. The default value is 1000, resulting in issuing a summary message after every 1000 entries are checked or prepared. If you have many LDIF entries, increase this value to reduce the frequency of summary messages. Specify a value of 0 to suppress issuing any intermediate summary messages. A final summary message is always issued. This option is ignored if ldif2ds is not invoked for the check or prepare step.

All other command-line inputs result in a syntax error message and the correct syntax is displayed. Also, specifying the same option multiple times with different values results in a syntax error message. File names are case-sensitive unless the file name refers to a data set or DD statement. A data set is indicated by `// 'dsname'` while a DD statement is indicated by `//DD: ddname`.

Examples

Following is an example using the **ldif2ds** utility in 31-bit mode:

```
ldif2ds31 -cpl -i /data2/ldif.data -o admin3.prv -d ERROR
```

This **ldif2ds** utility invocation checks, prepares, and loads the LDIF data from `/data2/ldif.data`, uses the output data sets `ADMIN3.PR.V.BULKLOAD.INPUT.xxx` and `ADMIN3.PR.V.BULKLOAD.JCL`, and specifies a debug level of `ERROR`. By default, the server configuration file that is used is `/etc/ldap/ds.conf`. Also, the value of the `adminDN` option in the LDAP server configuration file is used as the default creator of each loaded entry, no Db2 logging is done when loading the entries, and a progress message is issued after every 1000 entries processed during the check and prepare steps.

Following is an example that uses the **ldif2ds** utility in 64-bit mode:

```
ldif2ds64 -cpl -i "'/'ADMIN3.LDIF.DATA'" -o admin3.prv -d ERROR
```

Preparing to run ldif2ds

Before invoking **ldif2ds**, you must:

- Allocate the output data sets used by **ldif2ds**.
- Create the SYSTEM file that is used by the prepare step of **ldif2ds**.
- Set up the user ID to run **ldif2ds** to ensure sufficient access to directories and files.

When you set up a user ID to run **ldif2ds**, the **ldif2ds** utility accesses the schema directory and file, and the CDBM backend directory and files. The user ID that runs **ldif2ds** must have the following attributes:

- The user ID must have read and execute access to the directory specified by the schemaPath Directory server configuration option or its default value and read access to the schema.db file in that directory.
- The user ID must be in the owning GID group or be the owning UID for the directory and schema.db file in that directory.
- The user ID must have read access to the CDBM backend directory as specified by the databaseDirectory server configuration option or its default value and the files within that directory.
- The user ID must be in the owning GID group or be the owning UID for the CDBM backend directory and files within that directory.

You can use the RACF commands in the following example to define the user ID that runs the **ldif2ds** utility (substitute appropriate values for DFLTGRP and UID).

```
ADDUSER LDAPADMIN DFLTGRP(LDAPGRP) OMVS(UID(2))
PROGRAM('/bin/sh')
```

You can use the RACF CONNECT command to add an existing user to a group.

```
CONNECT LDAPADMIN GROUP(LDAPGRP)
```

See “Requirements for a user ID that runs the LDAP server” on page 46 for similar commands to create the user ID and group for the LDAP server. Note that the commands also use LDAPGRP.

When you allocate data sets that are required by the **ldif2ds** utility, the various **ldif2ds** processing steps use six load data sets and a JCL data set. These data sets must be allocated before invoking **ldif2ds** and the high-level qualifiers in the data set names must be specified as the value of the **-o outHlq** option on the command. The **ldif2ds** utility writes the contents of these data sets, except for the SYSTEM member of the JCL data set which must be created before **ldif2ds** is run.

Load record data sets

The prepare step of **ldif2ds** writes the load data created from each LDIF entry into the load record data sets. Each data set contains the records for one database table and is used as input to the Db2 Load Utility when loading that table.

- Data set names:

```
outHlq.BULKLOAD.INPUT.DESC - DIR_DESC load data set
outHlq.BULKLOAD.INPUT.ENTRY - DIR_ENTRY load data set
outHlq.BULKLOAD.INPUT.LATTR - DIR_LONGATTR load data set
outHlq.BULKLOAD.INPUT.LENTRY - DIR_LONGENTRY load data set
outHlq.BULKLOAD.INPUT.REPLICA - DIR_REPLICA load data set
outHlq.BULKLOAD.INPUT.SEARCH - DIR_SEARCH load data set
```

- Data set format:

```
Sequential (non-PDS)
```

Record format = VB

- Data set record length and block size:

The record length depends on the page size of the corresponding table space. The actual record length might be reduced slightly by **ldif2ds** at run time.

For a 32 K page size in Db2, use LRECL=32756, BLKSIZE=32760.

This record length and block size can also be used for smaller page sizes. However, for smaller page sizes, a smaller LRECL and BLKSIZE can be used to reduce the required disk space. For example, on 3390 DASD, LRECL=27994, BLKSIZE=27998 enables two blocks for each track and, in general, more bytes for each track to be written. For the smaller page sizes, the LRECL and BLKSIZE must be at least pagesize + 6 and pagesize + 10, in that order.

- Data set size:

A rough estimate for the size (in bytes) of each data set is as follows:

- *outHLQ.BULKLOAD.INPUT.DESC*:

$20 * (\text{average depth}) * (\text{number of entries in the LDIF files})$

where average depth = (average number of levels in a DN) - (average number of levels in each DN's suffix) + 1

- *outHLQ.BULKLOAD.INPUT.ENTRY*, *outHLQ.BULKLOAD.INPUT.LATTR*, and *outHLQ.BULKLOAD.INPUT.LENTRY*:

The combined space that is required for these files is roughly
(number of bytes in the LDIF input files) * 3.0

If most directory entries are shorter than the DIR_ENTRY page size, and most attributes are shorter than the attrOverflowSize in the LDAP server configuration file, then most of the data is written in the *outHLQ.BULKLOAD.INPUT.ENTRY* data set. Otherwise, you might want to allocate each of these three data sets as this maximum size to ensure that you do not run out of space.

- *outHLQ.BULKLOAD.INPUT.REPLICA*:

(number of replicas defined in the LDIF input files) * 24

If there are no replica entries defined in the LDIF input files, use a minimum size to allocate the data set, such as one block.

- *outHLQ.BULKLOAD.INPUT.SEARCH*:

(number of bytes in the LDIF input files) * 2.5

JCL data set

The JCL data set is a PDS whose members contain system information, status information, and the JCL to run Db2 Load Utility for each database table that must be loaded. The prepare and load steps of **ldif2ds** use the status information. The prepare step writes the contents of the JCL members of the JCL data set, using the information in the system member. The system member of the JCL data set must be created by the user before **ldif2ds** is invoked to run the prepare step.

- Data set name:

outHLQ.BULKLOAD.JCL

- Members:

outHLQ.BULKLOAD.JCL(JDESC) - DIR_DESC load JCL

outHLQ.BULKLOAD.JCL(JENTR) - DIR_ENTRY load JCL

outHLQ.BULKLOAD.JCL(JLATT) - DIR_LONGATTR load JCL

outHLQ.BULKLOAD.JCL(JLENT) - DIR_LONGENTRY load JCL

outHLQ.BULKLOAD.JCL(JREPL) - DIR_REPLICA load JCL

outHLQ.BULKLOAD.JCL(JSRCH) - DIR_SEARCH load JCL

outHLQ.BULKLOAD.JCL(STATUS) - Status information

outHLQ.BULKLOAD.JCL(SYSTEM) - System information - see below

- Data set format:
 Partitioned (PDS)
 Record format = FB
 Record length = 80
- Data set size:
 200 K bytes

When you create the SYSTEM member, the contents of the SYSTEM member, *outHlq.BULKLOAD.JCL(SYSTEM)*, must be created before invoking the contents of the SYSTEM member, *outHlq.BULKLOAD.JCL(SYSTEM)*, must be created before invoking *ldif2ds* to run the prepare step, which uses the information in the SYSTEM member to create the JCL to start the Db2 Load Utility to load each of the database tables. to run the prepare step, which uses the information in the SYSTEM member to create the JCL to start the Db2 Load Utility to load each of the database tables.

- Format of SYSTEM records

```
HLQ db2hlq           High level qualifier for DB2 datasets
JOB CARD //jobname... Job card record for JCL
#Comment record      Ignored if first non-blank character is #
```

- The SYSTEM member must contain one or more JOBCARD records. The first JOBCARD record must contain the job name. The JOB statement might span multiple JOBCARD records and must follow the JCL continuation rules. The maximum length of each JCL record is 72 characters. JES control statements might also be included in the JOBCARD specification. For example:

```
JOB CARD //DB2TDBMn JOB (ACCOUNT),PGMR,CLASS=A,MSGCLASS=A,MSGLEVEL=1,
JOB CARD // NOTIFY= &SYSUID
JOB CARD /*JOBPARM SYSAFF=SYS1
```

The HLQ record is optional. The Db2 high-level qualifier defaults to DSN if the HLQ record is not specified. If specified, the maximum length of the HLQ value is 35.

Make sure that there are no sequence numbers at the end of each line of the SYSTEM member.

- To differentiate the load jobs in the 6 JCL members of the JCL PDS, the contents of the SYSTEM member, *outHlq.BULKLOAD.JCL(SYSTEM)*, must be created before invoking *ldif2ds* to run the prepare step, which uses the information in the SYSTEM member to create the JCL to start the Db2 Load Utility to load each of the database tables. replaces the last character of the job name with the digits 1 through 6, as follows:

Jobname ends in 1 - JCL for loading DIR_DESC table, in *outHlq.BULKLOAD.JCL(JDESC)*.
Jobname ends in 2 - JCL for loading DIR_ENTRY table, in *outHlq.BULKLOAD.JCL(JENTRY)*.
Jobname ends in 3 - JCL for loading DIR_LONGATTR table, in *outHlq.BULKLOAD.JCL(JLATT)*.
Jobname ends in 4 - JCL for loading DIR_LONGENTRY table, in *outHlq.BULKLOAD.JCL(JLENT)*.
Jobname ends in 6 - JCL for loading DIR_REPLICA table, in *outHlq.BULKLOAD.JCL(JREPL)*.
Jobname ends in 5 - JCL for loading DIR_SEARCH table, in *outHlq.BULKLOAD.JCL(JSRCH)*.

When to use the ldif2ds utility

Both the **ldif2ds** and **ldapadd** utilities can be used to load entries into a TDBM database. There are advantages and disadvantages to each of these. Following is a list of considerations that can help determine which method to use when loading entries.

Table 25. Considerations for using ldif2ds or ldapadd		
Considerations	ldif2ds	ldapadd
Speed of load	Faster	Slower, especially if the database is already large.

Table 25. Considerations for using ldif2ds or ldapadd (continued)

Considerations	ldif2ds	ldapadd
Operational attributes	Accepts input containing operational attributes such as <code>creatorsname</code> , <code>modifiersname</code> , <code>createtimestamp</code> , <code>modifytimestamp</code> , and <code>ibm-entryuuid</code> .	Input can contain these operational attributes however the <code>-k</code> option (Server Administration server control) must be specified to allow operational attributes to be added.
Complexity	High, takes time to learn. Typical usage requires multiple invocations, with review of JCL and preparation for recovery before load.	Low.
Set up	User must allocate data sets and create the SYSTEM information file before running ldif2ds .	No setup.
LDAP server downtime	LDAP server must be down during load step. Server can be up during check and prepare steps.	Server must be operational during adds.
Db2 logging	Logging is optional. Additional Db2 work is needed to make database fully usable after the load if logging is not performed.	Requires logging.
Recovery	Recovery from load failure is complex, involving knowledge of Db2 Utilities.	Simple recovery.
Invocation	Must be run from z/OS system containing the database, or any image in a Parallel Sysplex® running a Db2 subsystem which is a member of the Db2 data sharing group containing the database, using a user ID with Db2 privileges.	Can be run from any LDAP client with appropriate LDAP access.
Reusability	Prepared entries are saved so that they can be re to reload this system.	No saved output.
Replication	New entries are not replicated.	New entries can be replicated.

The **ldif2ds** utility usage is complex, but it is fast. The **ldapadd** utility usage is simpler, but it is slower.

For one-time additions of 100 K or more entries, or for frequent additions of 10K or more entries, use **ldif2ds**. For infrequent additions of less than 10K entries, use **ldapadd**. For additions of between 10K and 100K entries, use either **ldif2ds** or **ldapadd**.

ldif2ds performance considerations

The **ldif2ds** utility performance considerations are:

1. **ldif2ds** uses much storage when adding many entries. Make sure that you have sufficient memory available.
2. If the entries to load are in genealogical order, **ldif2ds** can take certain shortcuts to reduce the storage used during the check and prepare steps. This allows **ldif2ds** to process more entries at one time. Genealogical order is the order that results from doing a depth-first traversal of a directory: the root is visited, then each subtree directly under the root is traversed. Specify the `-g` option to indicate that the LDIF input is in this order. The `-g` option of the **ds2ldif** utility can be used to unload entries in genealogical order. Do not specify the `-g` option on **ldif2ds** if the input is not in genealogical order.
3. If the parent of an entry being added is in the TDBM database, then **ldif2ds** must also check the database to ensure that the entry itself does not exist. Therefore, to minimize the database checks, include the parents of the entries being added in the **ldif2ds** input whenever possible. For example,

do not use **ldapadd** to add a suffix and then use **ldif2ds** to add all the entries under the suffix. Instead, include the suffix in the **ldif2ds** input.

4. Do not specify the debug command-line option, -d. Usage of debug might affect performance even when there is little debug output. Only specify -d when an error occurs that you cannot fix.
5. By default, for better load performance **ldif2ds** sets the LOG NO option in the Db2 Load Utility JCL created during the prepare (-p) step. When the load (-l) step invokes the Db2 Load Utility, the Load Utility sets the copy pending restriction against the table space. The database can be read but cannot be updated until the restriction is removed, for example, by running the Db2 REORG or COPY utility. To avoid entering the copy pending state (for example, when the database already contains many entries), change LOG NO to LOG YES in the JCL. This is done by **ldif2ds** during the prepare step if the -j option is specified along with the -p option. It can also be performed manually in each of the *outhlq*.BULKLOAD.JCL members after the prepare step if the load step is run separately from the prepare step.

ldif2ds normal usage

The typical usage of **ldif2ds** is:

1. Perform the necessary setup for running **ldif2ds**, as described in [“Preparing to run ldif2ds” on page 238](#). This consists of:
 - Allocating data sets required by **ldif2ds**.
 - Creating the SYSTEM member in the *outhlq*.BULKLOAD.JCL data set.

Note that the same data sets can be used for loading different entries, but the contents of the data sets are overwritten each time.

2. Repeatedly invoke **ldif2ds** with only the prepare (-p) option until all problems in the LDIF input files have been resolved. The check step and the prepare step are performed. You can use the check option (-c) instead if you only want to check the entries at this time, then later invoke **ldif2ds** again with the -p option.
3. Run **ldif2ds** with the prepare (-p) option to prepare the load data.
4. Bring the LDAP server down.
5. Even if loading an empty database, make a full image copy of the table spaces for the DIR_DESC, DIR_ENTRY, DIR_LONGATTR, DIR_LONGENTRY, DIR_REPLICA, and the DIR_SEARCH tables. A full image copy is required to help recover from any potential Db2 Load Utility failures. It is performed after the **ldif2ds** invocation with the prepare (-p) option specified because the prepare (-p) option might update some database tables. Therefore, these updates must be captured for a successful recovery from a Db2 Load Utility failure. If the prepare (-p) and load (-l) options are specified together, the full image copy is performed before the **ldif2ds** invocation.
6. Review the JCL created by the prepare step in the JCL data set, *outhlq*.BULKLOAD.JCL. Ensure that the Db2 Load Utility data sets are large enough and that the Db2 Load Utility options, especially the LOG value, are acceptable. See note “5” on page 242 in the [“ldif2ds performance considerations” on page 241](#) section for more information about the LOG value.
7. Run **ldif2ds** once more, with the load (-l) option to load the data into the database, and six batch jobs are submitted to load the database.
8. Review the output from the load jobs when they end. If the loaded table spaces are in the copy pending state, see *Db2 Utility Guide and Reference in Db2 for z/OS in IBM Documentation* (www.ibm.com/docs/en/db2-for-zos) for instructions on removing that restriction on table spaces. This typically involves running a Db2 utility to create an image copy of the database or reorganize the database (or both).
9. Run the Db2 RUNSTATS utility to reset the statistics used by Db2 to access the database. See [Chapter 31, “Performance tuning,” on page 573](#) for detailed information about running the Db2 RUNSTATS utility.
10. Run the Db2 COPY utility to make a backup image copy of the database.

11. If running the **ldif2ds** utility in 64-bit mode, ensure that the user ID running the **ldif2ds** utility has a sufficient value specified for the MEMLIMIT and ASSIZEMAX values in the OMVS segment so that storage greater than 2 gigabytes can be used. This enables the **ldif2ds** utility to work properly in 64-bit mode.

ldif2ds recovery

The **ldif2ds** utility can determine whether the submission of the Db2 Load Utility jobs is successful, but it cannot determine if the Db2 Load Utility jobs themselves succeed. In fact, **ldif2ds** typically terminates before the jobs are finished. Therefore, the final **ldif2ds** success message displays even if one or more of the jobs eventually fails.

If a Db2 Load Utility job fails, stop all the Db2 Load Utility invocations that failed, using

```
-TERM UTIL(BULKx)
```

where x is the last number in the job name of the failing job. Then, there are two alternatives for recovery.

Recovery process 1

The first recovery alternative is not selective in nature and might result in unnecessary reloading of data. This alternative must be used for recovery when:

- The **ldif2ds** utility is run with the load (-l) option immediately after creating the TDBM database (that is, without first starting the server or running **ldif2ds** with the check (-c) or prepare (-p) options).
- Loading the DIR_ENTRY, DIR_LONGENTRY, or DIR_LONGATTR table fails and a full image copy of these tables does not exist.

Following is the first recovery alternative process:

1. If full image copies exist for all six table spaces, use the Db2 Recover Utility to recover all six table spaces from those full image copies. Otherwise, drop and re-create the DIR_DESC, DIR_ENTRY, DIR_LONGATTR, DIR_LONGENTRY, DIR_REPLICA, and DIR_SEARCH tables.
2. See *Db2 Utility Guide and Reference* in *Db2 for z/OS in IBM Documentation* (www.ibm.com/docs/en/db2-for-zos) for information about correcting the problems that were logged in the failing jobs.
3. Run **ldif2ds** with only the load (-l) option again.

Recovery process 2

The second recovery alternative requires less processing, but requires a greater understanding of the problem. It cannot be used for recovery when:

- The **ldif2ds** utility is invoked with the load (-l) option immediately after creating the TDBM database.
- Loading the DIR_ENTRY, DIR_LONGATTR, or DIR_LONGENTRY table fails and a full image copy of these tables does not exist.

Following is the second recovery alternative process:

- If the load jobs that failed involve only the DIR_DESC or DIR_SEARCH tables, follow these steps:
 1. If a full image copy exists for the failing table spaces, use the Db2 Recover Utility to recover these table spaces from those full image copies. Otherwise, drop and re-create the failing tables.
 2. For information about correcting problems that were logged in the failing jobs, see in *Db2 for z/OS in IBM Documentation* (www.ibm.com/docs/en/db2-for-zos).
 3. Manually resubmit the Db2 Load Utility jobs that failed.
- If the load jobs that failed involve the DIR_ENTRY, DIR_LONGATTR, or DIR_LONGENTRY tables and a full image copy exists (you must use the first recovery alternative if a full image copy does not exist), follow these steps:
 1. If a full image copy exists for the affected table spaces, use the Db2 Recover Utility to recover these table spaces from those full image copies. Otherwise, you must use the first alternative.

2. For information about correcting problems that are logged in the failing jobs, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](http://www.ibm.com/docs/en/db2-for-zos).
3. Manually resubmit the Db2 Load Utility jobs for all the affected tables.

Usage notes for the ldif2ds utility

1. All input files specified with the **-i** and **-e** options can be z/OS UNIX file system files or data sets. To use data sets with **ldif2ds**, you must use a VB record format. Further, separator lines between directory entries in the LDIF file must contain no characters.
2. The **ldif2ds** utility can be invoked to run the check (**-c**) and prepare (**-p**) steps while an LDAP server using the same TDBM database is active. The LDAP server must be down when the load (**-l**) step is run.
3. The LDAP_DEBUG environment variable can also be used to set the debug level for **ldif2ds**. See [debugLevel](#) for more information about specifying the debug level.
4. Run the Db2 RUNSTATS utility when the data is loaded so that Db2 queries are optimized. See Chapter 31, “Performance tuning,” on page 573 for detailed information about running the Db2 RUNSTATS utility.
5. No replication is performed for entries added by **ldif2ds**. Advanced and basic replication entries can be added using **ldif2ds**, but replication does not begin until the LDAP server is started.
6. Referral entries can be added by **ldif2ds**.
7. Only one TDBM database is loaded in an invocation of **ldif2ds**. All the LDIF entries in the LDIF input files and schema input file must contain DNs that belong to the same TDBM database. The parent of each LDIF entry must either be already in the database or must be a prior LDIF entry within these LDIF input files.
8. **ldif2ds** cannot be used to modify the LDAP server schema. The schema must already contain all the attributes and object classes used by the entries being added.
9. Do not specify the **ac1Source** and **ownerSource** attributes in an LDIF entry because they are ignored. These attributes are set only by the system.
10. By default, the **ldif2ds** utility check processing is terminated after 100 syntax errors or schema errors are detected. This value can be changed with the option, **-C**. A value of 0 indicates no limit. The **ldif2ds** utility prepare and load processing is terminated after the first error, and these processing phases have no adjustable error limit.
11. Because typical **ldif2ds** usage can involve multiple invocations to check, prepare, and load the entries, **ldif2ds** maintains a status file to keep information about the last successful step processed. The status file is *outHlq*.BULKLOAD.JCL(STATUS), where *outHlq* is the value of the **-o** option on the command. Any invocation of **ldif2ds** with the same value for **-o** is considered a continuation of processing of an earlier invocation.

The status file contains a STATUS record and a TIME record. When the prepare (**-p**) step is successful, the status is changed to STATUS P and the TIME record is set to the current time. The load step (**-l**) checks the STATUS record and exits if the status is not P. When the load step is successful, the status is changed to STATUS L and the TIME record is reset to the current time.
12. The prepare step uses the current LDAP server schema to create the load records for the entries to be added. Do not change the schema between the prepare step and the load step. This can result in loading entries that might not be valid for the new schema.
13. During the prepare (**-p**) step, the RDN of the new LDIF entry is checked to ensure that all the values specified in the RDN are also specified as attributes in the LDIF entry. Missing attributes are added to the entry before it is loaded into the directory. No messages are issued indicating this.
14. The **ldif2ds** utility encrypts or hashes clear text **userPassword**, **secretKey**, **ibm-replicaKeyPwd**, **ibm-slapdAdminPw**, **ibm-slapdMasterPw**, and **replicaCredentials** attribute values for new entries loaded into the TDBM backend with the **pwEncryption** and **secretEncryption** methods specified in the LDAP server configuration file. The **ldif2ds** utility loads the LDIF format of an encrypted or hashed value unloaded by the **ldif2ds** utility with or

without the `-t` option. When using the **ldif2ds** utility to load entries that have `userPassword` or `ibm-slapdAdminPw` attribute values hashed with `crypt`, the `pwCryptCompat` configuration option must be set in the same manner as when the values were originally hashed. The **ldif2ds** utility expects that textual data contained within the LDIF file is portable and of UTF-8 origin.

15. If you are maintaining multiple identical TDBM databases, you might want to run the prepare (`-p`) and load (`-l`) steps of **ldif2ds** against each TDBM database. Do not try to use the load data created by running the **ldif2ds** utility prepare step against one database to load entries on a different database. This can result in an unusable TDBM database.
16. Each loaded entry has a `creatorsname`, `modifiersname`, `createtimestamp`, `modifytimestamp`, and `ibm-entryuuid` attribute. The values for these attributes can be specified in the LDIF input for the entry. If not:
 - The `creatorsname` and `modifiersname` attributes are assigned the value of the `-b` command-line option if it is specified; otherwise, they are assigned the value of the `adminDN` option in the LDAP server configuration file.
 - The `createtimestamp` and `modifytimestamp` attributes are assigned a time set during utility initialization.
 - The `ibm-entryuuid` attribute is assigned a unique value generated by the utility.
17. When LDIF input contains a `replicateOperationalAttributes` control and the control has a `creatorsname`, `modifiersname`, `createtimestamp`, or `modifytimestamp` attribute value, that attribute value is assigned for the attribute in the entry being loaded. An attribute value assigned from the `replicateOperationalAttributes` control replaces any other assigned value for that attribute described in the previous usage note.
18. If there are user or group entries that have `ibm-pwdgrouppolicydn` or `ibm-pwdindividualpolicydn` attribute values specified, the password policy entries referenced in these values must exist in the CDBM backend under the `cn=ibmpolicies` suffix before using the check (`-c`) step of the **ldif2ds** utility. Before running **ldif2ds**, the server must be started with the CDBM backend configured and the server compatibility set to 6 and the necessary password policy entries must be added. When the password policy entries are added to the CDBM backend, shut down the server and then the **ldif2ds** utility can be run.
19. If any entry exists in the target TDBM, then error message GLD1829E is issued. Therefore, you should set an appropriate `-C` option value if the **ldif** file contains a significant number of entries.
20. **ldif2ds** checks whether an entry exists. It does not verify whether its attributes match what is in the **ldif** file and does not update existing entries attributes to match the **ldif** file.

Diagnosis notes for the ldif2ds utility

Exit status is 0 if no errors occur. Errors result in a nonzero exit status. A diagnostic message is written to standard error.

The ldapdiff utility

The **ldapdiff** utility compares two directory subtrees or two schemas on two different directory servers to determine whether their contents match. **ldapdiff** runs as a client operation when both servers are active and determines the differences between the servers. It can optionally attempt to synchronize one directory subtree to match the contents of the other.

Format of the ldapdiff utility

```
ldapdiff { [-S] [-b baseDn] } [-a] [-C countNumber] [-d debugLevel] [-F] [-j] [-L fileName]
          [-n] [-O] [-v] [-x]
          -sh host [-sp port] [-sD bindDn -sw bindPw]
                  [-sT trustStore -st trustStoreType [-sY trustStorePw]
                  [-sZ] [-sK keyStore -sN keyStoreType [-sP keyStorePw]]]
          -ch host [-cp port] [-cD bindDn -cw bindPw]
                  [-cT trustStore -ct trustStoreType [-cY trustStorePw]
```

```
[-cZ] [-cK keyStore -cN keyStoreType [-cP keyStorePwd]]]
```

Parameters for the ldapdiff utility

The following table shows the general options that you can use for the **ldapdiff** utility.

Table 26. General options for the ldapdiff utility	
Option	Description
-?	Display the usage.
-a	Specify that the Server Administration control is to be sent to the consumer server or written to the output LDIF file. This control enables a server that normally refuses updates, such as a quiesced or replica server, to allow updates. If the -F option is specified, the control is sent to the consumer server. If the -L option is specified, the control is written to the output LDIF file.
-b <i>baseDn</i>	Indicate the starting point for the subtree comparison. The ldapdiff utility requires either the -b or -S option, or both.
-C <i>countNumber</i>	Specify the maximum number of nonmatching subtree entries that can be found between the two LDAP servers. If the number of nonmatching subtree entries exceeds the specified number, the ldapdiff utility exits.
-d <i>debugLevel</i>	Specify the level of debug messages to be created. The default is no debug messages. Only the ALL level is supported by the ldapdiff utility, which creates a large amount of debug output.
-F	Specify that the content on the consumer replica server is modified to match the content of the supplier server. The -F option has no effect when doing schema comparisons as requested by the -S option.
-j	Indicate that the four operational attributes creatorsName, createTimeStamp, modifiersName, and modifyTimeStamp are to be ignored when comparing subtrees.
-L <i>fileName</i>	Specify the name of the output LDIF file to contain the differences between the supplier and consumer servers. The output LDIF file can be used to update the consumer server to eliminate the differences between the supplier and consumer. The name cannot be a data set.
-n	Specify that the Do Not Replicate control is to be sent to the consumer server or written to the output LDIF file. This control prevents the consumer server from sending replicated entries to the next tier of advanced replication servers. If the -F option is specified, the control is sent to the consumer server. If the -L option is specified, the control is written to the output LDIF file.
-O	Indicate that directory subtrees are compared by using checksum . This option can be used to quickly detect differences between servers without the need to retrieve all attribute types and values. DNs for nonmatching entries between the supplier and consumer servers are displayed, but not the nonmatching attributes. Both servers must support entry checksum. Otherwise, the ldapdiff utility does not start. The -O option overrides the -F, -j, and -L options.

Table 26. General options for the ldapdiff utility (continued)

Option	Description
-S	Specify that the schema is to be compared between the supplier and consumer servers. The ldapdiff utility requires either the -b or -S option, or both.
-v	Use verbose mode, with many diagnostics written to standard output.
-x	Specify that extra entries on the consumer server are to be ignored.

The following options apply to the supplier server and are denoted by an initial 's' in the option name:

Table 27. Server options for the ldapdiff supplier

Option	Description
-sD <i>bindDn</i>	Specify the DN to use to bind to the supplier server. This option should be a string-represented DN. The default is an empty string.
-sh <i>host</i>	Specify the hostname or IP address on which the supplier server is running. This option is required because there is no default.
-sK <i>keystore</i>	<p>Specify the file name of the Java keystore or RACF key ring that contains the client certificate. If the supplier server is configured to perform server authentication only, a client certificate is not required. If the supplier server is configured to perform client and server authentication, a client certificate might be required. The file name cannot be a data set.</p> <p>If you are specifying a RACF key ring, use the following formats. (IBM Semeru Runtime Certified Edition for z/OS, Version 11, supports only the first format, but ldapdiff also accepts the second format for compatibility considerations and converts it to the first format.)</p> <pre>safkeyringjce://userid/keyFile safkeyring://userid/keyFile</pre> <p>where <i>userid</i> is the RACF user ID that owns the RACF key ring and <i>keyFile</i> is the name of the RACF key ring. If the user ID running ldapdiff is the owner of the RACF key ring, then the following simplified formats might be used:</p> <pre>safkeyringjce:///keyFile safkeyring:///keyFile</pre> <p>where <i>keyFile</i> is the name of the RACF key ring.</p>
-sN <i>keystoreType</i>	<p>Specify the type of the keystore that is used by the -sK option. The supported keystore types are:</p> <ul style="list-style-type: none"> JCERACFKS (RACF key ring) JCEKS (Java keystore) <p>This is a required option if the -sK option is specified. This option cannot be specified by itself.</p>
-sp <i>port</i>	Specify the TCP port where the supplier server is listening. The default LDAP nonsecure port is 389 and the default LDAP secure port is 636.
-sP <i>keystorePwd</i>	<p>Specify the keystore password. This password is required to access the encrypted information in the keystore file, which might include one or more private keys.</p> <p>If the keystore specified by -sK is a RACF key ring, then this option should not be specified. This option is not allowed if the -sK option is not specified.</p>

Table 27. Server options for the ldapdiff supplier (continued)	
Option	Description
-st <i>truststoreType</i>	<p>Specify the type of the truststore used by the -sT option. The supported truststore types are:</p> <p>JCERACFKS (RACF key ring) JCEKS (Java keystore)</p> <p>This is a required option if the -sT option is specified. This option cannot be specified by itself.</p>
-sT <i>truststore</i>	<p>Specify the file name of the Java keystore or RACF keyring that contains the CA (certificate authority) certificate that signed the supplier server's certificate.</p> <p>The file name cannot be a data set.</p> <p>If you are specifying a RACF key ring, use the following formats. (IBM Semeru 11 supports only the first format, but ldapdiff also accepts the second format for compatibility considerations and converts it to the first format.)</p> <pre>safkeyringjce://userid/keyFile safkeyring://userid/keyFile</pre> <p>where <i>userid</i> is the RACF user ID that owns the RACF key ring and <i>keyFile</i> is the name of the RACF key ring. If you have ownership of the RACF key ring, then the following simplified formats might be used:</p> <pre>safkeyringjce:///keyFile safkeyring:///keyFile</pre> <p>where <i>keyFile</i> is the name of the RACF key ring.</p> <p>This option is required if you are using SSL. It enables secure connection even if the -sZ is not specified.</p>
-sw <i>bindPwd</i>	Specify the bind password for simple authentication. The default is an empty string.
-sY <i>truststorePwd</i>	<p>Specify the truststore password. This password is required to access the encrypted information in the truststore file, which might include one or more private keys. If the truststore specified by -sT is a RACF key ring, then this option should not be specified.</p> <p>This option is not allowed if the -sT option is not specified.</p>
-sZ	Use a secure connection to communicate with the supplier server. Secure connections expect the communication to begin with the SSL/TLS handshake.

The following options apply to the consumer server and are denoted by an initial 'c' in the option name:

Table 28. Options for the ldapdiff consumer server	
Option	Description
-cD <i>bindDn</i>	Specify the DN to use to bind to the consumer server. This option should be a string-represented DN. The default is an empty string.
-ch <i>host</i>	Specify the host on which the consumer server is running. This option is required because there is no default host.

Table 28. Options for the **ldapdiff** consumer server (continued)

Option	Description
-cK <i>keystore</i>	<p>Specify the file name of the Java keystore or RACF key ring that contains the client certificate. If the consumer server is configured to perform server authentication only, a client certificate is not required. If the consumer server is configured to perform client and server authentication, a client certificate might be required. The file name cannot be a data set.</p> <p>If you are specifying a RACF key ring, use the following formats. (IBM Semeru 11 supports only the first format, but ldapdiff also accepts the second format for compatibility considerations and converts it to the first format.)</p> <pre>safkeyringjce://userid/keyFile safkeyring://userid/keyFile</pre> <p>where <i>userid</i> is the RACF user ID that owns the RACF key ring and <i>keyFile</i> is the name of the RACF key ring. If you have ownership of the RACF key ring, then the following simplified formats might be used:</p> <pre>safkeyringjce:///keyFile safkeyring:///keyFile</pre> <p>where <i>keyFile</i> is the name of the RACF key ring.</p>
-cN <i>keystoreType</i>	<p>Specify the type of the keystore that is being used by the -cK option. The supported keystore types are:</p> <ul style="list-style-type: none"> JCERACFKS (RACF key ring) JCEKS (Java keystore) <p>This is a required option if the -cK option is specified. This option cannot be specified by itself.</p>
-cp <i>port</i>	Specify the TCP port where the consumer server is listening. The default LDAP nonsecure port is 389 and the default LDAP secure port is 636.
-cP <i>keystorePwd</i>	<p>Specify the keystore password. This password is required to access the encrypted information in the keystore file, which might include one or more private keys.</p> <p>If the keystore specified by -cK is a RACF key ring, then this option should not be specified. This option is not allowed if the -cK option is not specified.</p>
-cT <i>truststoreType</i>	<p>Specify the type of the truststore used by the -cT option. The supported truststore types are:</p> <ul style="list-style-type: none"> JCERACFKS (RACF key ring) JCEKS (Java keystore) <p>This is a required option if the -cT option is specified. This option cannot be specified by itself.</p>

Table 28. Options for the **ldapdiff** consumer server (continued)

Option	Description
-cT <i>truststore</i>	<p>Specify the file name of the Java keystore or RACF keyring that contains the CA (certificate authority) certificate that signed the consumer server's certificate.</p> <p>The file name cannot be a data set.</p> <p>If you are specifying a RACF key ring, use the following formats. (IBM Semeru Runtime Certified Edition for z/OS, Version 11 supports only the first format, but ldapdiff also accepts the second format for compatibility considerations and converts it to the first format.)</p> <pre>safkeyringjce://userid/keyFile safkeyring://userid/keyFile</pre> <p>where <i>userid</i> is the RACF user ID that owns the RACF key ring and <i>keyFile</i> is the name of the RACF key ring. If you have ownership of the RACF key ring, then the following simplified formats might be used:</p> <pre>safkeyringjce:///keyFile safkeyring:///keyFile</pre> <p>where <i>keyFile</i> is the name of the RACF key ring.</p> <p>This option is required if you are using SSL. This option enables the -cZ option.</p>
-cw <i>bindPwd</i>	Specify the bind password for simple authentication. The default is an empty string.
-cY <i>truststorePwd</i>	<p>Specify the truststore password. This password is required to access the encrypted information in the truststore file, which might include one or more private keys. If the truststore specified by -cT is a RACF key ring, then do not specify this option.</p> <p>This option is not allowed if the -cT option is not specified.</p>
-cZ	Use a secure connection to communicate with the consumer server. Secure connections expect the communication to begin with the SSL/TLS handshake.

All other command-line inputs result in a syntax error message and the correct syntax is displayed. Also, specifying the same option multiple times results in the last specified option being used.

Examples of the ldapdiff utility

Assume that two servers are set up, one as a supplier server on IP address 1.2.3.4 and other as a consumer server on IP address 1.2.3.5, and that the suffix o=sample is present on both servers. Assume the entries in the *supplier.ldif* file are in the supplier server and the entries in the *consumer.ldif* file are in the consumer server.

- Contents of the *supplier.ldif* file:

```
dn: cn=Entry1,o=sample
objectclass: inetOrgPerson
objectclass: organizationalPerson
objectclass: person
objectclass: top
objectclass: ePerson
sn: entry1
cn: Entry1

dn: cn=Entry2,o=sample
objectclass: inetOrgPerson
objectclass: organizationalPerson
objectclass: person
objectclass: top
```



```
objectclass: ePerson
sn: entry2
cn: Entry2
```

- Contents of the `consumer.ldif` file:

```
dn: cn=Entry2,o=sample
objectclass: inetOrgPerson
objectclass: organizationalPerson
objectclass: person
objectclass: top
objectclass: ePerson
sn: abcd
cn: Entry2

dn: cn=Entry3,o=sample
objectclass: inetOrgPerson
objectclass: organizationalPerson
objectclass: person
objectclass: top
objectclass: ePerson
sn: entry3
cn: Entry3
```

The following command runs the **ldapdiff** utility to modify the contents of the `o=sample` subtree on the consumer server (even if it is quiesced) to match the supplier server, binding to the supplier server on IP address `1.2.3.4` with a bind DN of `cn=admin` and a password of `supplier` and binding to the consumer server on IP address `1.2.3.5` with a bind DN of `cn=admin` and a password of `consumer`:

```
ldapdiff -b o=sample -sh 1.2.3.4 -sd cn=admin -sw supplier -ch 1.2.3.5 -cd cn=admin
-cw consumer -F -a
```

The resulting actions are:

1. The `cn=Entry1,o=sample` is added to the consumer server. This entry is already present on the supplier server but was not on the consumer server.
2. The `cn=Entry2,o=sample` is modified on the consumer server. The `sn` attribute value on the `cn=Entry2,o=sample` entry on the consumer server gets modified to match the value on the supplier server.
3. The `cn=Entry3,o=sample` is deleted from the consumer server. This entry does not exist on the supplier server, and is deleted from the consumer server so that the same set of entries are present on both the supplier and consumer servers.

Usage notes for the ldapdiff utility

1. The **ldapdiff** utility is a Java-based utility and requires IBM Semeru Runtime for z/OS, V11 or later, to be installed on the system.
2. The **ldapdiff** utility is used to bring a supplier and a consumer server in sync before advanced replication is started. The **ldapdiff** utility requires that the base DN, which is being compared, exist on at least one of the servers.
3. The **ldapdiff** utility is a diagnostic and corrective tool. Do not run it as part of routine maintenance. If out of sync replication-related errors are seen, an LDAP administrator with the appropriate administrative roles might decide to run the utility to correct the out of sync condition.
4. When the **ldapdiff** utility is run, do not make any updates to either of the targeted LDAP servers. If the **ldapdiffldapdiff** utility is run while updates are being made, it cannot be guaranteed that all discrepancies are accurately reported or fixed. An LDAP root, directory data, or replication administrator must manually quiesce or suspend all update activity to the two subtrees that are being compared on the two servers. The **ldapdiff** utility does not check at initialization time to determine whether the servers are quiesced or not. The replication context subtree can be quiesced by using the **Quiesce or unquiesce context extended** operation on the **ldapexop** utility. See [“The ldapexop utility”](#) on page 253 for information about the **Quiesce or unquiesce context extended** operation.
5. Use the fix option (`-F`) with caution because it automatically synchronizes all the entries from the supplier server to the consumer server starting from the baseDn. This synchronization can result

in unintentional results on the consumer server such as the deletion of replication topology entries, RACF users, groups, user-group connections, resource profiles, and other entries. Use the **-L** option first to write any differences between the supplier and consumer servers in LDIF file format. An LDAP administrator analyzes the output LDIF file to ensure that the updates are correct. If they are correct, the changes can be manually applied to the consumer server using the **ldapmodify** command or the **ldapdiff** utility can be rerun with the **fix** option (**-F**) specified.

If the **-F** option is specified, use the Server Administration server control option (**-a**) to enable the **ldapdiff** utility to write to a read-only replica. The **Server Administration** server control also allows **ldapdiff** to modify operational attributes such as **aclPropagate**, **aclSource**, **createTimeStamp**, **creatorsName**, **entryOwner**, **ibm-entryuuid**, **ibm-pwdGroupPolicyDN**, **modifiersName**, **modifyTimeStamp**, **ownerPropagate**, **ownerSource**, **pwdAccountLockedTime**, **pwdChangedTime**, **pwdExpirationWarned**, **pwdFailureTime**, **pwdGraceUseTime**, **pwdHistory**, **pwdReset**, **ibm-pwdAccountLocked**, and **ibm-pwdIndividualPolicyDN**.

6. The **ldapdiff** utility performs two passes to get the supplier and consumer servers back in sync.

In the first pass, the **ldapdiff** utility traverses the supplier server and does the following:

- Checks for any extra entries on the supplier server that are not on the consumer server. The extra entries are added to the consumer server if the **-F** option is specified.
- Compares the entries that exist on both the supplier and consumer servers. If there are mismatches, the consumer server entries are modified to match the supplier server entries if the **-F** option is specified.

In the second pass, the **ldapdiff** utility traverses the consumer server to check for any extra entries on the consumer server. The extra entries are deleted from the consumer server if the **-F** option is specified. The second pass can be skipped by specifying the **-x** option.

7. The supplier and consumer bind DN's (**-sD** and **-cD** options) must be able to read the attributes in the entries being compared. In addition, if the **fix** option (**-F**) is specified, the consumer bind DN must also be able to update attributes and add and delete entries.
8. The **ldapdiff** utility traverses each entry in the directory subtree on the supplier server and compares its contents with the corresponding entry on the consumer server. Because each entry must be retrieved, running the **ldapdiff** utility can take a long time and can generate lots of read requests to the supplier and consumer servers. Depending on how many differences are found and whether the **fix** option (**-F**) is specified, the **ldapdiff** utility can also generate an equal amount of update (for example add, delete, modify) requests to the consumer server. Use the **ldapdiff** utility once between servers, when replication is initially set up. For example, if your replication topology has two peer controllers and two replica servers, you might want to run the **ldapdiff** utility between peer 1 and peer 2. Then, if replication is suspended, run **ldapdiff** concurrently between peer 1 and replica 1 and between peer 2 and replica 2. If replica servers are out of sync with their controller servers, the **ldapdiff** utility can be run to identify and correct out of sync conditions.
9. The following password policy operational attributes in user entries are only compared if both the supplier and consumer servers are participating in password policy:
 - **pwdChangedTime**
 - **pwdReset**
 - **ibm-pwdAccountLocked**
 - **pwdExpirationWarned**
 - **pwdGraceUseTime**
 - **pwdFailureTime**
 - **pwdAccountLockedTime**
 - **pwdHistory**

Also, the following attributes for specifying individual and group policies in user and group entries are only compared if both the supplier and consumer servers are participating in password policy:

- `ibm-pwdIndividualPolicyDn`
 - `ibm-pwdGroupPolicyDn`
10. If the supplier and consumer servers are participating in password policy, the **ldapdiff** utility needs to be run to synchronize the password policy entries in the `cn=ibmpolicies` subtrees on both servers, and then run to synchronize the entries in the LDBM and TDBM backends. There can be situations where the **ldapdiff** utility must be run for the entries in LDBM and TDBM subtrees first, and then run for the password policies entries. For example, if the consumer server has a password policy that no longer exists on the supplier server, but entries on the consumer server still reference that password policy, the password policy cannot be deleted until all references to it are removed. In this case, running **ldapdiff** for the LDBM and TDBM entries first removes those references, and then the **ldapdiff** utility can be run to synchronize the password policy entries.
11. The **ldapdiff** utility displays a message after it finishes comparing every 100th entry.

Diagnosis notes for the ldapdiff utility

Exit status is 0 if no errors occur. Errors result in a nonzero exit status and a diagnostic message being written to standard error.

The ldapexop utility

The **ldapexop** utility provides an interface to the `ldap_extended_operation()` API. The utility runs as a client operation while the server is active. The **ldapexop** utility performs the following extended operations:

acctstatus

Account status extended operation.

cascrepl

Cascading control replication extended operation.

controlqueue

Control replication queue extended operation.

controlrepl

Control replication extended operation.

controlreplerr

Control replication error log extended operation.

effectpwdpolicy

Effective password policy extended operation.

geteffectiveacl

GetEffectiveACL extended operation.

getusertype

User type extended operation.

quiesce

Quiesce or unquiesce context extended operation.

repltopology

Replication topology extended operation.

Format of the ldapexop utility

```
ldapexop [-D> debugLevel] [-h host] [-p port] [-?] [-help] [-v]
  { [-m EXTERNAL -Z [-x sslFipsMode] [-K keyFile] [-P keyFilePwd]
    [-N certificateLabel]]
    [ [ { [-D> dn -w password] |
          [-m CRAM-MD5 -w password { [-D> dn] | [-U userName [-D> dn]] } ] |
          [-m DIGEST-MD5 -U userName -w password [-D> dn] [-G realmName]] |
          [-m GSSAPI]
        }
      ]
    [-Z [-x sslFipsMode] [-K keyFile] [-P keyFilePwd] [-N certificateLabel]]
```

```

    ]
} -op extendedOperation extOptions

```

Parameters for the ldapexop utility

The options for the **ldapexop** utility are divided into two categories:

1. General options that specify how to connect to the LDAP server are available. These options must be specified before the `-op` option. See [Table 29 on page 254](#) for an explanation about the general options.
2. Extended operation options identify the extended operation to be performed. These options are specified after the general options and must begin with the `-op` option. See [Extended operations options](#) for an explanation about these options.

Option names can normally be specified in a reduced manner with as few as one or two of the initial characters specified.

All other command-line inputs result in a syntax error message after the correct syntax is displayed. Except for the `-op` option, if the same option is specified multiple times, the last value that was specified is used. The `-op` option must be specified only once.

Table 29. ldapexop general options

Option	Description
<code>-?</code>	Display the usage.
<code>-d <i>debugLevel</i></code>	Specify the level of the debug messages to be created. The <i>debugLevel</i> is specified in the same fashion as the debug level for the LDAP server. LDAP debug levels lists the specific debug levels. The default is no debug messages.
<code>-D <i>dn</i></code>	Specify the DN to use to bind to the LDAP directory. This option is a string-represented DN. The default is a NULL string. If the <code>-m</code> option is equal to DIGEST-MD5 or CRAM-MD5, this option is the authorization DN, which is used for making access checks. This directive is optional when used in this manner.
<code>-G <i>realmName</i></code>	Specify the realm name to use when you are doing a DIGEST-MD5 bind. This option is required when multiple realms are passed from an LDAP server to a client as part of a DIGEST-MD5 challenge; otherwise, it is optional.
<code>-h <i>host</i></code>	Specify the hostname or IP address on which the LDAP server is running. The default is the local host.
<code>-help</code>	Display the usage.
<code>-K <i>keyFile</i></code>	Specify the name of the System SSL key database file, RACF key ring, or PKCS #11 token. If this option is not specified, this utility looks for the presence of the <code>SSL_KEYRING</code> environment variable with an associated name. If <i>keyFile</i> is specified as <code>*TOKEN*/NAME</code> , then System SSL uses the specified PKCS #11 token. Otherwise, System SSL uses a key database file or a RACF key ring. In this case, System SSL first assumes that <i>keyFile</i> is a key database file name and tries to locate the file. If <i>keyFile</i> is not a fully qualified z/OS UNIX System Services file name, the current directory is assumed to contain the key database file. The name cannot be a data set. If System SSL cannot locate the file, it then assumes that <i>keyFile</i> is a RACF key ring name. See “SSL/TLS information for LDAP utilities” on page 219 for information about System SSL key databases, RACF key rings, and PKCS #11 tokens. This option is ignored if <code>-Z</code> is not specified.

Table 29. ldapexop general options (continued)

Option	Description
-m <i>mechanism</i>	<p>Specify the bind method to use.</p> <p>Specify GSSAPI to indicate a Kerberos Version 5 bind is requested, EXTERNAL to indicate that a certificate (SASL external) bind is requested, CRAM-MD5 to indicate that a SASL Challenge Response Authentication Mechanism bind is requested, or DIGEST-MD5 to indicate a SASL digest bind is requested.</p> <p>The GSSAPI method requires a protocol level of 3 and the user must have a valid Kerberos Ticket Granting Ticket in their credentials cache by using the Kerberos kinit command-line utility.</p> <p>The EXTERNAL method requires a protocol level of 3. You must also specify -Z, -K, and -P to use certificate bind. Unless you want to use the default certificate in the key database file, RACF key ring, or PKCS #11 token, use the -N option to specify the label of the certificate.</p> <p>The CRAM-MD5 method requires protocol level 3. The -D or -U option must be specified.</p> <p>The DIGEST-MD5 method requires protocol level 3. The -U option must be specified. The -D option can optionally be used to specify the authorization DN.</p> <p>If -m is not specified, a simple bind is performed.</p>
-N <i>certificateLabel</i>	<p>Specify the label associated with the certificate in the key database file, RACF key ring, or PKCS #11 token.</p> <p>This option is ignored if -Z is not specified</p>
-p <i>port</i>	Specify the TCP port where the LDAP server is listening. The default LDAP nonsecure port is 389 and the default LDAP secure port is 636.
-PkeyFilePwd	<p>Specify either the key database file password or the file specification for a System SSL password stash file. When the stash file is used, it must be in the form <code>file://</code> followed immediately (no blanks) by the file system file specification (for example, <code>file:///etc/ldap/sslstashfile</code>). The stash file must be a file and cannot be a data set.</p> <p>This option is ignored if -Z is not specified.</p>
-U <i>userName</i>	<p>Specify the user name for CRAM-MD5 or DIGEST-MD5 binds. The <i>userName</i> is a short name (uid) that is used to perform bind authentication.</p> <p>This option is required if the -m option is set to DIGEST-MD5.</p>
-v	Use verbose mode, with many diagnostics written to standard output.
-x <i>sslFipsMode</i>	<p>Specify FIPS mode for SSL/TLS protected connections. The supported FIPS modes are LEVEL1, LEVEL2, LEVEL3, and OFF. When FIPS mode is enabled, it is more restrictive regarding cryptographic algorithms, protocols, and key sizes that can be supported. If this option is not specified, the FIPS mode is set to OFF.</p> <p>This option is ignored if -Z is not specified.</p>
-wpassword	<p>Specify the bind password for simple, CRAM-MD5, and DIGEST-MD5 authentication. The default is a NULL string.</p> <p>Specify ? to prompt for the password.</p>

Table 29. ldapexop general options (continued)

Option	Description
-Z	Use a secure connection to communicate with the LDAP server. Secure connections expect the communication to begin with the SSL/TLS handshake. The -K <i>keyFile</i> option or equivalent environment variable is required when the -Z option is specified. The -P <i>keyFilePwd</i> option is required when the -Z option is specified and the key file specifies a file system key database file. Unless you want to use the default certificate in the key database file, RACF key ring, or PKCS #11 token, use the -N option to specify the label of the certificate.

Extended operations options: The -op *extendedOperation* option identifies the extended operation to be performed. The *extOptions* indicate the required and optional options for the specific extended operation. Each of the extended operations supported by the **ldapexop** utility is documented in detail in [Appendix D, “Supported extended operations,”](#) on page 669. The supported extended operations and their options are:

acctstatus -d userDn

Perform the Account status extended operation. This extended operation returns the status of a user entry with a `userPassword` attribute value. The status that is returned is either opened, locked, or expired. See [“Account status extended operation example”](#) on page 386 for more information about the Account status extended operation.

-d userDn

Specifies the DN of the entry to be queried.

This example performs the Account status extended operation to query the status of the `cn=jon,o=acme,c=us` entry.

```
ldapexop -D adminDn -w adminPw -op acctstatus -d cn=jon,o=acme,c=us
```

casc repl -action { quiesce | unquiesce | replnow | wait } -rc contextDn [-timeout secs]

Perform the **Cascading control replication** extended operation. The requested action is applied to the specified server and also passed along to all replicas of the given context (subtree). If any of these are forwarding replicas or gateway servers, they pass the extended operation along to their replicas. The operation cascades over the entire advanced replication topology. See [“Cascading control replication”](#) on page 670 for more information about the **Cascading control replication** extended operation.

-action { quiesce | unquiesce | replnow | wait }

Specifies the **Cascading control replication** extended operation action to be performed.

quiesce

Halts further updates, except by replication. Client updates under the specified context are restricted to LDAP administrators, if using the Server Administration control (OID 1.3.18.0.2.10.15), and any replication master DN's with authority under this context.

unquiesce

Resumes normal operation, client updates are accepted.

replnow

Replicates all queued changes to all replica servers as soon as possible, regardless of schedule. This operation is propagated to the consumer server of each replication agreement without waiting for all queued updates to be applied.

wait

Replicates all queued changes to all replica servers as soon as possible, regardless of schedule. This operation is propagated to the consumer server of each replication agreement after all queued updates for that agreement are applied.

-rc contextDn

Specifies the DN of the advanced replication context (subtree).

-timeout secs

Specifies the number of seconds that the extended operation must successfully complete. If not present, or 0, the operation has an indefinite amount of time to complete.

This example performs the **Cascading control replication** extended operation to wait for all updates to be replicated to each consumer server in the `o=acme,c=us` replication context. If the extended operation does not successfully complete in 60 seconds, the operation ends with a return code of `LDAP_TIMEOUT`.

```
ldapexop -D adminDn -w adminPw -op cascrepl -action wait -rc "o=acme,c=us"
-timout 60
```

controlqueue -skip { all | changeId } -ra agreementDn

Perform the **Control replication queue** extended operation. This extended operation indicates which pending changes in the advanced replication queue are skipped and not replicated to the consumer server. See [“Control replication queue”](#) on page 677 for more information about the **Control replication queue** extended operation.

-skip {all | changeId}**all**

Deletes (skips) all changes currently queued for replication for the specified replication agreement DN.

changeId

Deletes (skips) the change queued for replication with the change ID matching the specified number. The number must be in the range 1 - 4294967295. Change IDs can be determined by searching the *agreementDn* entry for the `ibm-replicationPendingChanges` operational attribute. Only the next change to be replicated can be skipped in this manner.

-ra agreementDn

Specifies the DN of the advanced replication agreement.

This example performs the **Control replication queue** extended operation to delete (skip) all pending updates in the advanced replication queue for the replication agreement, `cn=server3,ibm-replicaSubentry=master1-id,ibm-replicaGroup=default,o=acme,c=us`. This extended operation prevents all changes in the replication queue from being replicated to all consumer servers.

```
ldapexop -D adminDn -w adminPw -op controlqueue -skip all
-ra "cn=server3,ibm-replicaSubentry=master1-id,ibm-
replicaGroup=default,o=acme,c=us"
```

controlrepl -action { suspend | resume | replnow } { -rc contextDn | -ra agreementDn }

Perform the **Control replication** extended operation. This extended operation indicates whether to suspend, resume, or immediately replicate entries in the advanced replication context (subtree) or agreement. See [“Control replication”](#) on page 674 for more information about the **Control replication** extended operation.

-action { suspend | resume | replnow }

Specifies the **Control replication** extended operation action to be performed.

suspend

Suspends advanced replication for the replication agreement or context (subtree). Any updates under the replication agreement or context are queued until the **Control replication** extended operation is performed to resume updates to consumer servers.

resume

Resumes advanced replication for the replication agreement or context (subtree).

replnow

Replicates immediately any outstanding updates for the replication agreement or context (subtree), regardless of schedule. **replnow** has no effect on a suspended replication agreement or context.

-rc contextDn | -ra agreementDn

Specifies the DN of the advanced replication context (subtree) or agreement the action is to be performed against. To perform the action against all agreements under a replication context, use **-rc contextDn** with the DN of the replication context. Alternatively, to perform this action against a single agreement, use **-ra agreementDn** with the DN of the replication agreement. A *contextDn* and an *agreementDn* cannot both be specified.

This example performs the **Control replication** extended operation to suspend advanced replication on the replication agreement, cn=server3,ibm-replicaSubentry=master1-id,ibm-replicaGroup=default,o=acme,c=us.

```
ldapexop -D adminDn -w adminPw -op controlrepl -action suspend
-ra "cn=server3,ibm-replicaSubentry=master1-id,ibm-
replicaGroup=default,o=acme,c=us"
```

controlreplerr -ra agreementDn { [-delete { failureId | all }] | [-retry { failureId | all }] | [-show failureId] }

Perform the **Control replication error log** extended operation. This extended operation indicates whether to delete, retry, or show a failed advanced replication update. Failing operations can be determined by searching the *agreementDn* entry for the *ibm-replicationFailedChanges* operational attribute which contains the failing change ID. See [“Control replication error log” on page 675](#) for more information about the **Control replication error log** extended operation.

-ra agreementDn

Specifies the DN of the advanced replication agreement.

-delete { failureId | all }

Removes one or all failed replication updates.

failureId

Deletes only the failed update specified by the *failureId* for this agreement. The *failureId* must be in the range 1 - 4294967295.

all

Deletes all the failed updates for this agreement.

-retry { failureId | all }

Reprocesses one or all failed replication updates.

failureId

Tries again only the failed update specified by the *failureId* for this agreement. The *failureId* must be in the range 1 - 4294967295.

all

Tries again all the failed updates for this agreement.

-show failureId

Shows the failed update specified by the *failureId* for this agreement. The *failureId* must be in the range 1 - 4294967295.

This example performs the **Control replication error log** extended operation to remove all failures from the replication error log for the replication agreement, cn=server3,ibm-replicaSubentry=master1-id,ibm-replicaGroup=default,o=acme,c=us.

```
ldapexop -D adminDn -w adminPw -op controlreplerr -delete all
-ra "cn=server3,ibm-replicaSubentry=master1-id,ibm-
replicaGroup=default,o=acme,c=us"
```

effectpwdpolicy -d entryDn

Perform the **Effective password policy** extended operation. This extended operation returns the effective password policy entries and the attribute values of the effective password policy that the specified entry is subject to. See [“Effective password policy” on page 678](#) for more information about the **Effective password policy** extended operation.

-d entryDn

Specifies the DN of the entry to be queried to obtain its effective password policy.

This example performs the **Effective password policy** extended operation to query the effective password policy of the `cn=jon,o=acme,c=us` entry.

```
ldapexop -D adminDn -w adminPw -op effectpwdpolicy -d cn=jon,o=acme,c=us
```

geteffectiveacl

Perform the GetEffectiveACL extended operation. This extended operation performs a search using the base DN, scope, and search filter to retrieve a list of entries. For each entry in the list, the extended operation then uses the optional bind and entry access information to determine the effective access control and returns the following:

- The entry DN to which access was requested.
- The subject and all of its alternate DNs and group DNs for which access was calculated for.
- The source attribute values (`aclEntry`, `aclPropagate`, `aclSource`, `entryOwner`, `ownerPropagate`, and `ownerSource`) in effect for the entry.
- The applicable attribute values (`aclEntry` and `entryOwner`) used to form the effective permissions.
- The calculated effective access class permissions.
- The calculated effective attribute permissions.

Note: Administrator permissions can be restricted by ACL filters that match an LDAP administrator DN. As a result, the calculated effective permissions of an LDAP administrator DN can affect the results returned from the extended operation.

```
geteffectiveacl -filt searchFilter [-b baseDN]
[-s {base | one | sub}] [-a {never | always | search | find}]
[-z sizeLimit] [-l timeLimit]
[-m {SIMPLE | CRAM-MD5 | DIGEST-MD5 | GSSAPI | EXTERNAL}]
[-dn DN] [-U racfUserID] [-r principalRealm]
[-ip bindIP] [-time accessTime] [-day accessDay] [-en]
```

Referral entries are not returned from the search operation. Therefore, access to referral entries is not calculated.

-filt[er] searchFilter

An IETF RFC 2254 (tools.ietf.org/html/rfc2254) compliant LDAP search filter that determines the entries to calculate effective permissions for. The *searchFilter* is required.

-b[ase] baseDN

The base DN used as a starting point for calculating effective permissions. If unspecified, *baseDN* is set to the empty string "", representing a null-based subtree starting point.

-s[cope] scope

The scope and *baseDN* determine the directory entries to which DN's permissions are calculated for, starting with *baseDN*. The scope must be *base*, *one*, or *sub*. Scope is only required if *baseDN* is unspecified. Otherwise, the default is *sub*.

-a deref

Specifies how alias dereferencing is done during the search operation. *deref* must be one of *never*, *always*, *search*, or *find* to specify that aliases are never dereferenced, always dereferenced, dereferenced when searching, or dereferenced only when locating the base object for the search. The default is *never*.

-z sizeLimit

Indicates the maximum number of entries to calculate effective permissions. A value of 0 indicates that there is no limit. The LDAP server can also provide a size limit on the number of entries returned in the *sizeLimit* configuration option. See "[sizeLimit num-limit](#)" on page 128 for more information about the LDAP server size limit. If this option is not specified or is set to 0, the maximum number of entries returned is limited only by the LDAP server limit.

-l *timeLimit*

Indicates the maximum wait time (in seconds) for the search. A value of 0 indicates that there is no time limit on the search request. The LDAP server can also provide a limit on the search time in the **timeLimit** configuration option. See “[timeLimit num-seconds](#)” on page 134 for more information about the LDAP server time limit. If this option is not specified or is set to 0, the maximum number of seconds is limited only by the LDAP server limit.

-m[*mechanism*] {SIMPLE | EXTERNAL | CRAM-MD5 | DIGEST-MD5 | GSSAPI}

The string representation of the mechanism the DN used to bind to the LDAP server. This is used to match the `ibm-filterBindMechanism` attribute in any ACL filters. The default value is SIMPLE.

-dn *DN*

Indicates the string representation of the DN to calculate effective permissions for. This is the bind DN for SIMPLE, CRAM-MD5, or DIGEST-MD5 bind, and the subject DN for EXTERNAL bind. If SIMPLE bind is specified and this option is unspecified, the effective permissions are calculated for an anonymous bind. If CRAM-MD5, DIGEST-MD5, or EXTERNAL is used, this option is required. If GSSAPI bind is used, this option is ignored.

-u[*serid*] *racfUserID*

The string representation for the RACF user ID associated with the subject DN in the SSL certificate. This value is optional when EXTERNAL is specified. For all other bind mechanisms, this option is ignored.

-r[*ealm*] *principalRealm*

The SASL GSS API Kerberos bind source principal that is obtained from the GSS API client credentials, specified as *principal@REALM*. This value is required when GSSAPI is specified. For all other bind mechanisms, this option is ignored.

-ip *bindIP*

The string representation of the IPv4 or IPv6 address of the client used to connect to the LDAP server. If this value is unspecified, it defaults to the unspecified IPv4 address, 0.0.0.0.

-t *time* *accessTimeOfDay*

The string representation of the time of day the directory entry is accessed. The format is *hh:mm*, where *hh* ranges from 00 to 23, and *mm* ranges from 00 to 59. If this value is unspecified, it defaults to the server's current time of day.

-day *accessDayOfWeek*

The string representation of the day of week the directory entry is accessed. Valid values range from 0 to 6, where: Sunday = 0, Monday = 1, Tuesday = 2, Wednesday = 3, Thursday = 4, Friday = 5, Saturday = 6. If this value is unspecified, it defaults to the current day of week of the server.

-en[*cryption*]

When specified, it assumes the bind DN uses a secure LDAP connection (SSL). Otherwise, it assumes that the bind DN does not use a secure LDAP connection (SSL) with a non-clear cipher specification.

This example performs the **GetEffectiveACL** extended operation for each entry returned on the subtree search of the `dc=yourcompany, dc=com` subtree. The requested subtree search uses `dc=yourcompany, dc=com` as the *baseDN*, with a filter of “`objectclass=*`”, a search size limit of 100, a search time limit of 10 seconds, and no alias dereferencing. Based on these returned search entries, the **GetEffectiveACL** extended operation calculates the effective ACLs for user `cn=Joe Shmoe, ou=users, dc=yourcompany, dc=com` when a simple bind is done from IP address 129.176.132.92 at 18:30 on a Saturday over a secure SSL connection. See “[Querying effective permissions](#)” on page 441 for the output of this example.

```
ldapexop -D adminDn -w adminPw -op geteffectiveacl -filter "objectclass=*"
-base "dc=yourcompany,dc=com" -s sub -a never -z 100 -l 10
-dn "cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com" -ip 129.176.132.92
-time 18:30 -day 6 -mech SIMPLE -encrypt
```

getusertype

Perform the **User type** extended operation. This extended operation provides the authenticated user with their user type and administrative roles. See [“User type” on page 691](#) for more information about the **User Type** extended operation.

This example performs the **User type** extended operation to determine the user type and roles for user `cn=jon,o=ibm,c=us`:

```
ldapexop -D cn=jon,o=ibm,c=us -w secret -op getusertype
```

quiesce -rc contextDn [-end]

Perform the **Quiesce or unquiesce context** extended operation. When an advanced replication context is quiesced, update operations are only accepted from certain users. See [“Quiesce or unquiesce context” on page 684](#) for more information about the **Quiesce or unquiesce context** extended operation.

-rc contextDN

Specifies the DN of the advanced replication context (subtree) to be quiesced or unquiesced.

-end

Unquiesces the advanced replication context (subtree). If not specified, the default is to quiesce the replication context.

This example performs the **Quiesce or unquiesce context** extended operation to quiesce the replication context `o=acme,c=us`. After this extended operation is performed, updates to entries within the replication context are only allowed from certain users.

```
ldapexop -D adminDn -w adminPw -op quiesce -rc "o=acme,c=us"
```

repltopology -rc contextDn [-timeout secs] [-ra agreementDn]

Perform the **Replication topology** extended operation. This extended operation synchronizes all replication topology-related entries under the specified context DN. See [“Replication topology” on page 686](#) for more information about the **Replication topology** extended operation.

-rc contextDN

Specifies the DN of the advanced replication context (subtree) on the supplier server for which advanced replication topology related entries are synchronized. The extended operation is cascaded through all forwarding and gateway servers.

-timeout secs

Specifies the number of seconds that the extended operation must successfully complete. If not present, or 0, the operation has an indefinite amount of time to complete.

-ra agreementDn

Specifies the DN of the advanced replication agreement and allows the operation to be restricted to only one server and its consumer.

This example performs the **Replication topology** extended operation to synchronize replication topology entries within the `o=acme,c=us` replication context with the consumer that is defined in the replication agreement `cn=server3,ibm-replicaSubentry=master1-id,ibm-replicaGroup=default,o=acme,c=us`. This extended operation does not cascade. It only modifies the consumer that is defined in the replication agreement before it returns.

```
ldapexop -D adminDn -w adminPw -op repltopology -rc "o=acme,c=us"
-ra "cn=server3,ibm-replicaSubentry=master1-id,ibm-replicaGroup=default,o=acme,c=us"
```

Usage notes for the ldapexop utility

1. You must be bound as an LDAP administrator with the appropriate authority to successfully perform all extended operations (other than the **User type** extended operation) against the z/OS LDAP server. See [Table 15 on page 163](#) for information about which extended operations are allowed to be performed by administrative group members.

2. The **ldapexop** utility sends the PasswordPolicy control as a noncritical control when the user attempts to authenticate to the targeted LDAP server. If the bound user is subject to password policy on the LDAP server, the **ldapexop** utility parses and displays the warning and error messages from the PasswordPolicy control response.
3. The LDAP_DEBUG environment variable can be used to set the debug level. For more information about specifying the debug level by using keywords, decimal, hexadecimal, and plus and minus syntax, see [Table 17 on page 169](#) for a list of specific debug levels.
4. You can specify an LDAP URL for host on the -h option. For more information, see [ldap_init\(\)](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.
5. The password prompt (-w ?) is not supported when it is run from TSO or batch. In these environments, the password value must be specified on the -w option.

The `getpass()` routine used to prompt for the password returns at most PASS_MAX number of characters, truncating any additional characters. For more information about `getpass()`, see [getpass\(\) — Read a string of characters without echo in z/OS XL C/C++ Runtime Library Reference](#). If the length of the specified password is greater than PASS_MAX, the password value must be specified on the -w option.

Diagnosis notes for the ldapexop utility

Exit status is 0 if no errors occur. Errors result in a nonzero exit status and a diagnostic message being written to standard error.

See [Appendix D, “Supported extended operations,” on page 669](#) for additional diagnostic information about each of the extended operations.

Chapter 13. Globalization support

This topic contains information about translated messages and UTF-8 support.

Translated messages

The LANG and NLSPATH environment variables are set for the z/OS LDAP server and utility programs in the LDAP environment variables file. The default name and location for this file is:

```
/etc/ldap/ds.envvars
```

A sample ds.envvars file is shipped in /usr/lpp/ldap/etc. You can copy this file to /etc/ldap and modify its contents. Following is part of the sample file:

```
NLSPATH=/usr/lib/nls/msg/%L/%N
LANG=En_US.IBM-1047
```

There are no default values for these variables. Messages are also available in Japanese. The LANG variable should be set to LANG=Ja_JP or Ja_JP.IBM-939. These variables should also be set either in the environment variable file of the user or by exporting the variables in the shell for the user ID that runs the LDAP directory utilities.

There are symbolic links to the English language message catalogs in the following locations:

- /usr/lib/nls/msg/C
- /usr/lib/nls/msg/En_US
- /usr/lib/nls/msg/En_US.IBM-1047

It is possible to run with either LANG=En_US, LANG=C, or LANG=En_US.IBM-1047 and access the English language LDAP message catalogs.

There are also symbolic links to the following Japanese language message catalogs:

- /usr/lib/nls/msg/Ja_JP
- /usr/lib/nls/msg/Ja_JP.IBM-939

UTF-8 support

UTF stands for "UCS (Unicode) Transformation Format". The UTF-8 encoding can be used to represent any Unicode character. Depending on a Unicode character's numeric value, the corresponding UTF-8 character is a 1, 2, or 3 byte sequence. Table 30 on page 263 shows the mapping between Unicode and UTF-8. See RFC 2279 (tools.ietf.org/html/rfc2279) and RFC 2253 (tools.ietf.org/html/rfc2253) for more information about UTF-8.

Table 30. Mapping between Unicode and UTF-8	
Unicode range (hexadecimal)	UTF-8 octet sequence (binary)
0000-007F	0xxxxxxx
0080-07FF	110xxxxx 10xxxxxx
0800-FFFF	1110xxxx 10xxxxxx 10xxxxxx

The LDAP Version 3 protocol specifies that all data exchanged between LDAP clients and servers be UTF-8. The LDAP server supports UTF-8 data exchange as part of its Version 3 protocol support.

Note: For UTF-8 data stored in a LDAP server's TDBM and GDBM (when Db2-based) backends, collation for single-byte UTF-8 characters is relative to the server's locale. For multi-byte UTF-8 characters, collation is relative to the numeric value of the equivalent Unicode character.

Part 2. Use

Chapter 14. Data model

The LDAP data model is closely aligned with the X.500 data model. In this model, a directory service provides a hierarchically organized set of entries. Each of these entries is represented by an object class. The object class of the entry determines the set of attributes that are required to be present in the entry and the set of attributes that can optionally appear in the entry. An attribute is represented by an attribute type and one or more attribute values. In addition to the attribute type and values, each attribute has an associated syntax, which describes the format of the attribute values. Examples of attribute syntaxes for LDAP directory include directory string and binary.

To summarize, the directory is made up of entries. Each entry contains a set of attributes. These attributes can be single or multi-valued (have one or more values associated with them). The object class of an entry determines the set of attributes that must exist and the set of attributes that may exist in the entry.

Every entry in the directory has a distinguished name (DN). The DN is the name that uniquely identifies an entry in the directory. A DN is made up of attribute=value pairs, separated by commas. For example:

```
cn=Ben Gray,ou=editing,o=New York Times,c=US
cn=Lucille White,ou=editing,o=New York Times,c=US
cn=Tom Brown,ou=reporting,o=New York Times,c=US
```

The order of the component attribute=value pairs is important. The DN contains one component for each level of the directory hierarchy. LDAP directory DNs begin with the most specific attribute (typically some sort of name), and continue with progressively broader attributes, often ending with a country attribute.

Relative distinguished names

Each component of a DN is referred to as a relative distinguished name (RDN). It identifies an entry distinctly from any other entries which have the same parent. In the example shown in Chapter 14, “Data model,” on page 267, the RDN `cn=Ben Gray` separates the first entry from the second entry, (with RDN `cn=Lucille White`). The attribute=value pair or pairs that make up the RDN for an entry must also be present as an attribute=value pair or pairs in the entry. This is not true of the other components of the DN. The TDBM, LDBM, and CDBM backends add the attribute=value pairs in the RDN to the entry if they are not already present.

RDNs can contain multiple attribute=value pairs. So-called multivalued RDNs use two or more attribute=value pairs from the directory entry to define the name of the entry relative to its parent. An example where this would be useful would be where a directory hierarchy of users was being defined for a large university. This hierarchy would be segmented by campus. A problem is encountered, however, when it is discovered that there is more than one John Smith at the downtown campus. The RDN cannot simply be the name of the user. What can be done, however, is to add a unique value to the RDN, therefore, ensuring its uniqueness across the campus. Typically universities hand out serial numbers to their students. Coupling the student number with the person's name is one method of solving the problem of having a unique RDN under a parent in the directory hierarchy. The entry's RDN might look like:

```
cn=John Smith+studentNumber=123456.
```

The plus sign (+) is used to delimit separate attribute=value pairs within an RDN. The entry's DN might look like:

```
cn=John Smith+studentNumber=123456, ou=downtown, o=Big University, c=US
```

Any attribute can be used to make up an RDN except:

- Attributes with binary syntax.

Restriction: Because the `userPassword` attribute is binary, it cannot appear in an RDN.

- Attributes that are marked NO-USER-MODIFICATION in the schema, because these attributes cannot be added to an entry by a user.
- The `aclEntry`, `aclPropagate`, `entryOwner`, and `ownerPropagate` attributes.

Distinguished name syntax

The Distinguished Name (DN) syntax supported by this server is based on RFC 2253 (tools.ietf.org/html/rfc2253). A semicolon (;) character may be used to separate RDNs in a distinguished name, although the comma (,) character is the typical notation. A plus sign (+) is used to separate attribute=value pairs in an RDN.

White space (blank) characters may be present on either side of the comma or semicolon. The white space characters are ignored, and the semicolon replaced with a comma.

In addition, space characters may be present between an attribute=value pair and a plus sign (+), between an attribute type and an equal sign (=), and between an equal sign (=) and an attribute value. These space characters are ignored when parsing.

A value may be surrounded by quotation marks, which are not part of the value. Inside the quoted value, the following characters can occur without any escaping:

- A space or number sign (#) character occurring at the beginning of the string
- A space character occurring at the end of the string
- One of the characters
 - apostrophe (')
 - equal sign (=)
 - plus sign (+)
 - backslash (\)
 - less than sign (<)
 - greater than sign (>)
 - semicolon (;)

Alternatively, a single character to be escaped may be prefixed by a backslash (\). This method may be used to escape any of those characters, plus the quotation mark. Number signs (#) and space characters that do not occur at the beginning of a string can also be escaped, but this is not required.

This notation is convenient for common forms of name. This section gives a few examples of distinguished names written using this notation. First is a name containing three components:

```
OU=Sales+CN=J. Smith,O=Widget Inc.,C=US
```

This example shows a method of escaping a comma in an organization name:

```
CN=R. Smith,O=Big Company\, Inc.,C=US
```

Domain component naming

Domain component naming as specified in RFC 2247 (tools.ietf.org/html/rfc2247) is also supported in the LDAP server. For example, the domain name `ibm.com` could be specified as an entry in the LDAP server with the following distinguished name:

```
dc=ibm,dc=com
```

RACF-style distinguished names

If you are using SDBM (the RACF database backend of the LDAP server), the format of the DN's is restricted in order to match the schema of the underlying RACF data.

A RACF-style DN for a user or group contains two required attributes plus a suffix:

racfid

Specifies the user ID or group ID.

profiletype

Specifies user or group.

suffix

Specifies the SDBM suffix.

A RACF-style DN for a user's connection to a group contains three required attributes plus a suffix:

racfuserid+racfgroupid

Specifies the user and the group.

profiletype

Specifies connect.

suffix

Specifies the SDBM suffix.

A RACF-style DN for a general resource profile contains two required attributes plus a suffix:

profilename

Specifies the name of the resource profile. The case of the name is important if the class containing the resource profile supports mixed case names.

profiletype

The name of the class containing the resource profile.

suffix

Specifies the SDBM suffix.

The suffix for SDBM may contain additional attributes. For example, if the suffix has been specified as:

```
suffix cn=myRACF,c=US
```

in the LDAP configuration file, any RACF-style DN would end with:

```
cn=myRACF,c=US
```

Following is DN format and a sample DN for a user:

```
racfid=userid,profiletype=user,suffix
```

```
racfid=ID1,profiletype=user,cn=myRACF,c=US
```

Following is the DN format and a sample DN for a connection:

```
racfuserid=userid+racfgroupid=groupid,profiletype=connect,suffix
```

```
racfuserid=ID1+racfgroupid=GRP1,profiletype=connect,cn=myRACF,c=US
```

Following is the DN format and a sample DN for a resource profile:

```
profilename=resourcename,profiletype=classname,suffix
```

```
profilename=ABC.KEN,profiletype=FACILITY,cn=myRACF,c=US
```

Chapter 15. LDAP directory schema

The LDAP Version 3 (V3) protocol, as defined in [RFC 2252 \(tools.ietf.org/html/rfc2252\)](https://tools.ietf.org/html/rfc2252) and [RFC 2256 \(tools.ietf.org/html/rfc2256\)](https://tools.ietf.org/html/rfc2256), describes schema publication and update. Schema publication enables you to query the active directory schema through the use of the LDAP search function. Schema update is the ability to change the schema while the directory server is running.

Note:

- The z/OS LDAP server implements both schema publication and update. The schema is stored as an entry in the database and search (publication) and modify (update) operations might be performed on this entry. The distinguished name of the schema entry is `cn=schema`.

The **schemaPath** option in the LDAP server configuration file defines the location where the LDAP server saves the schema entry. The default is `/var/ldap/schema`. This directory is backed up as part of the normal system backup procedure since the loss of the schema directory invalidates all existing directory entries. If there are multiple LDAP servers running in single-server on the system, a unique schema directory must be specified in the **schemaPath** configuration option for each LDAP server. If there are multiple LDAP servers running in multi-server mode in the same sysplex group on the system, the schema directory specified in the **schemaPath** configuration option must be the same in each LDAP server's configuration file and must exist within a shared z/OS UNIX System Services file system. See [“Configuring the operational mode” on page 145](#) for more information.

- When the z/OS LDAP server is first started, the server supplies an initial schema. This initial schema is sufficient for usage of the SDBM (without RACF custom fields), CDBM (with configuration-related entries), and GDBM backends, but must be updated for usage of LDBM, TDBM, SDBM with RACF custom fields, and CDBM with user-defined entries. The initial schema elements cannot be deleted and can only be modified in limited ways. See [Appendix A, “Initial LDAP server schema,” on page 603](#) for the contents of the initial schema.
- Access to the schema entry is controlled by an access control list (ACL), even if the LDAP server is in maintenance mode. All requests to access the schema entry, except those from an LDAP root or schema administrator, are subject to ACL checking. In particular for a basic replication replica server, requests from the **masterServerDN** or **peerServerDN** are subject to access control. The default ACL allows all users to display the schema, but only an LDAP root or schema administrator can update the schema. This ACL can be modified. See [Chapter 24, “Using access control,” on page 425](#) for more information.

Setting up the schema for LDBM, TDBM, and CDBM

The LDAP server is shipped with two predefined schema files representing schema definitions that the user might want to load into the LDAP server schema when using LDBM, TDBM, or CDBM. These files are `schema.user.ldif` and `schema.IBM.ldif` and are in the `/usr/lpp/ldap/etc` directory. These files contain schema definitions that are based on industry and product defined schemas. As such, they should not be modified since existing products and applications use the schema elements as defined.

If you are creating a new z/OS IBM TDS, determine which of these schema files, if any, could be used to represent the data to be stored in the LDBM, TDBM, or CDBM directory, or locate or create other schema files to use. The schema definitions in `schema.user.ldif` are required to be loaded before loading the `schema.IBM.ldif`. If additional schema definitions are required from other products or customized applications, load them after `schema.user.ldif` and `schema.IBM.ldif` files are loaded.

Use the **ldapmodify** utility to load the schema or change the existing `cn=schema` entry on the server. For example, the **ldapmodify** utility commands used to load the `schema.user.ldif` and `schema.IBM.ldif` schema files would be:

```
ldapmodify -h ldaphost -p ldapport -D adminDN -w passwd -f /usr/lpp/ldap/etc/schema.user.ldif
```

```
ldapmodify -h ldaphost -p ldapport -D adminDN -w passwd -f /usr/lpp/ldap/etc/schema.IBM.ldif
```

For more information about **ldapmodify**, see [ldapmodify](#) and [ldapadd](#) utilities in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

Note:

1. Check that `schemaReplaceByValue off` is not specified in the global section of the LDAP server configuration file, or send the `IBMSchemaReplaceByValueControl` control with a value of `TRUE` on the modify request. This control can be sent by specifying the `-u` option on the **ldapmodify** utility. See “[schemaReplaceByValue {on | off}](#)” on page 123 for more information about the `schemaReplaceByValue` configuration option and “[IBMSchemaReplaceByValueControl](#)” on page 656 for more information about the `IBMSchemaReplaceByValueControl` control.
2. When the LDAP schema is modified using the `schema.user.ldif` and `schema.IBM.ldif` files, each attribute and object class definition in the file replaces the existing definition in the schema. Any changes previously made in the schema to these attributes and object classes must be made again. This includes any changes that are allowed to attributes and object classes in the initial LDAP schema.

If you are migrating an existing z/OS IBM TDS from an earlier release, the schema definitions that are supplied in `schema.user.ldif` or `schema.IBM.ldif` do not need to be reapplied. If the initial schema has changed from the previous release, the LDAP server automatically updates the schema with any new attribute types and object classes that have been added.

Schema introduction

Entries in the directory are made up of attributes that consist of an attribute type and one or more attribute values. These are referred to as *attribute=value* pairs. Every entry contains one or more *objectclass=value* pairs that identify what type of information the entry contains. The object classes that are associated with the entry determine the set of attributes that must or might be present in the entry.

The z/OS LDAP server has a single schema for the entire server. This schema is stored as an entry whose distinguished name is `cn=schema`. Following is a portion of the schema entry.

```
cn=SCHEMA
subtreespecification=NULL
objectclass=TOP
objectclass=SUBSCHEMA
objectclass=SUBENTRY
objectclass=IBMSUBSCHEMA
...
attributetypes= ( 2.5.4.3 NAME ( 'cn' 'commonName' ) SUP name )
...
ibmattributetypes = ( 2.5.4.3 ACCESS-CLASS normal )
...
objectclasses = ( 2.5.6.0 NAME 'top' ABSTRACT MUST objectclass )
...
ldapsyntaxes = ( 1.3.6.1.4.1.1466.115.121.1.15 DESC 'directory string' )
...
matchingrules = ( 2.5.13.5 NAME 'caseExactMatch' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 )
...
```

Figure 8. Sample schema entry

The `objectClass` values that are specified for the schema entry are `top`, `subEntry`, `subSchema`, and `ibmSubschema`. This set of object classes result in the `objectClass`, `cn`, and `subtreeSpecification` attributes being required for a schema entry and the `attributeTypes`, `objectClasses`, `ldapSyntaxes`, `matchingRules`, and `IBMAttributeTypes` attributes being allowed in a schema entry.

Note: The `ditContentRules`, `ditStructureRules`, `nameforms`, and `matchingRuleUse` attributes are allowed in a schema entry, but usage of these directives is not implemented by the z/OS LDAP server.

Every entry in the directory including the schema entry contains the **subschemaSubentry** attribute. The value that is shown for this attribute is the DN of the schema entry, cn=schema. Therefore, a search operation requesting the **subschemasubentry** for an entry always returns:

```
subschemasubentry=cn=schema
```

Attribute types, object classes, LDAP syntaxes, and matching rules have assigned unique numeric object identifiers. These numeric object identifiers are in dotted decimal format, for example, 2.5.6.6. Attribute types, object classes, and matching rules are also identified by a textual name, for example, person or names. The numeric object identifier and the textual names might be used interchangeably when an attribute type or object class definition specifies an object identifier. Most schema definitions use the textual name as the object identifier for these definitions.

Note: Nonnumeric object identifiers, for example myattr-oid, can be used instead of numeric object identifiers.

The attributes that comprise a directory schema include attribute types, IBM attribute types, object classes, LDAP syntaxes, and matching rules. There is a fixed set of LDAP syntaxes and matching rules supported by the z/OS LDAP server. These are listed in [Table 34 on page 282](#), [Table 35 on page 284](#), and [Table 36 on page 285](#). Each of the schema attributes are described.

• Attribute types

Attribute types define the characteristics of the data values stored in the directory. Each attribute type that is defined in a schema must contain a unique numeric object identifier and optionally contain a textual name, zero or more alias names, and a description of the attribute type. The characteristics defined for each attribute type include the syntax, number of values, and matching rules.

The SYNTAX defines the format of the data stored for the attribute type. The server checks the attribute values that are to be added to the directory by comparing the values against the set of allowed characters based on the syntax. For example, if the syntax of an attribute type is Boolean (where the acceptable values are TRUE or FALSE) and the attribute value that is specified is yes, the update fails. The syntaxes that are supported by the z/OS LDAP server are shown in [Table 34 on page 282](#) and [Table 35 on page 284](#).

Matching rules might be specified for EQUALITY, ORDERING, and SUBSTR (substring matching). The matching rule determines how comparisons between values are done. The EQUALITY matching rule determines if two values are equal. Examples of EQUALITY matching rules are caseIgnoreMatch, caseExactMatch, and telephoneNumberMatch. The ORDERING matching rule determines how two values are ordered (greaterThanOrEqual, lessThanOrEqual). Examples of ORDERING matching rules are caseIgnoreOrderingMatch and generalizedTimeOrderingMatch. The SUBSTR matching rule determines whether the presented value is a substring of an attribute value from the directory. Examples of SUBSTR matching rules are caseIgnoreSubstringsMatch and telephoneNumberSubstringsMatch.

If EQUALITY, ORDERING, or SUBSTR matching rules are not specified in the definition of an attribute type or through the inheritance hierarchy, the z/OS LDAP server performs evaluations to the best of its ability, but the results might not be as expected. The z/OS LDAP server uses the matching rules shown in the following table based on attribute type syntax to evaluate EQUALITY, ORDERING, and SUBSTR if those matching rules are not specified.

Table 31. Syntax and default EQUALITY, ORDERING, and SUBSTR matching rules			
Syntax	EQUALITY	ORDERING	SUBSTR
LDAP syntaxes and matching rules marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.			
Attribute Type Description	objectIdentifierFirstComponentMatch	-	-
Binary	-	-	-
Bit String*	bitStringMatch*	-	-
Boolean	booleanMatch	-	-
Certificate*	certificateMatch*	-	-

Table 31. Syntax and default EQUALITY, ORDERING, and SUBSTR matching rules (continued)			
Syntax	EQUALITY	ORDERING	SUBSTR
LDAP syntaxes and matching rules marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.			
Certificate List*	-	-	-
Certificate Pair*	-	-	-
Country String*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Delivery Method*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Directory String	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Distinguished Name	distinguishedNameMatch	distinguishedNameOrderingMatch	-
DIT Content Rule Description	objectIdentifierFirstComponentMatch	-	-
DIT Structure Rule Description	integerFirstComponentMatch	-	-
Enhanced Guide*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Facsimile Telephone Number*	telephoneNumberMatch	-	telephoneNumberSubstringsMatch
Fax*	-	-	-
Generalized Time	generalizedTimeMatch	generalizedTimeOrderingMatch	-
Guide*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
IA5 String	caseIgnoreIA5Match	caseIgnoreOrderingMatch	caseIgnoreIA5SubstringsMatch*
IBM Attribute Type Description	objectIdentifierFirstComponentMatch	-	-
IBM Entry UUID	IBM-EntryUUIDMatch	-	-
Integer	integerMatch	integerOrderingMatch*	-
JPEG*	-	-	-
LDAP Syntax Description	objectIdentifierFirstComponentMatch	-	-
Matching Rule Description	objectIdentifierFirstComponentMatch	-	-
Matching Rule Use Description	objectIdentifierFirstComponentMatch	-	-
MHS OR Address*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Name And Optional UID*	uniqueMemberMatch*	distinguishedNameOrderingMatch	-
Name Form Description	objectIdentifierFirstComponentMatch	-	-
Numeric String*	numericStringMatch*	numericStringOrderingMatch*	numericStringSubstringsMatch*
Object Class Description	objectIdentifierFirstComponentMatch	-	-
Object Identifier	objectIdentifierMatch	-	-
Octet String	octetStringMatch	octetStringOrderingMatch*	-
Other Mailbox*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Postal Address*	caseIgnoreListMatch*	caseIgnoreOrderingMatch	caseIgnoreListSubstringsMatch*
Presentation Address*	presentationAddressMatch*	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Printable String*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Protocol Information*	protocolInformationMatch*	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Substring Assertion	-	-	-
Supported Algorithm*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Telephone Number	telephoneNumberMatch	-	telephoneNumberSubstringsMatch
Teletex Terminal Identifier*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Telex Number*	telephoneNumberMatch	-	telephoneNumberSubstringsMatch

Table 31. Syntax and default EQUALITY, ORDERING, and SUBSTR matching rules (continued)			
Syntax	EQUALITY	ORDERING	SUBSTR
LDAP syntaxes and matching rules marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.			
UTC Time	utcTimeMatch	generalizedTimeOrderingMatch	-

The z/OS LDAP server also verifies that the matching rules specified for EQUALITY, ORDERING, and SUBSTR are consistent with the specified SYNTAX. Table 32 on page 275 shows acceptable values EQUALITY, ORDERING, and SUBSTR.

Table 32. Syntax and acceptable matching rules (EQUALITY, ORDERING, and SUBSTR)			
Syntax	EQUALITY	ORDERING	SUBSTR
LDAP syntaxes and matching rules that are marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.			
Attribute Type Description	objectIdentifierFirstComponentMatch	-	-
Binary	-	-	-
Bit String*	bitStringMatch*	-	-
Boolean	booleanMatch caseIgnoreMatch caseExactMatch	-	-
Certificate*	certificateMatch* certificateExactMatch*	-	-
Certificate List*	-	-	-
Certificate Pair*	-	-	-
Country String*	caseIgnoreMatch	caseIgnoreOrderingMatch	caseIgnoreSubstringsMatch
Delivery Method*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Directory String	caseIgnoreMatch caseExactMatch	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseExactSubstringsMatch
Distinguished Name	distinguishedNameMatch uniqueMemberMatch*	distinguishedNameOrdering Match	-
DIT Content Rule Description	objectIdentifierFirstComponentMatch	-	-
DIT Structure Rule Description	integerFirstComponentMatch	-	-
Enhanced Guide*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Facsimile Telephone Number*	telephoneNumberMatch	-	telephoneNumberSubstringsMatch
Fax*	-	-	-
Generalized Time	generalizedTimeMatch	generalizedTimeOrdering Match	-

Table 32. Syntax and acceptable matching rules (EQUALITY, ORDERING, and SUBSTR) (continued)

Syntax	EQUALITY	ORDERING	SUBSTR
LDAP syntaxes and matching rules that are marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.			
Guide*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
IA5 String	caseIgnoreMatch caseIgnoreIA5Match caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseExactSubstringsMatch
IBM Attribute Type Description	objectIdentifierFirstComponentMatch	-	-
IBM Entry UUID	IBM-EntryUUIDMatch	-	-
Integer	integerMatch integerFirstComponentMatch	integerOrderingMatch*	-
JPEG*	-	-	-
LDAP Syntax Description	objectIdentifierFirstComponentMatch	-	-
Matching Rule Description	objectIdentifierFirstComponentMatch	-	-
Matching Rule Use Description	objectIdentifierFirstComponentMatch	-	-
MHS OR Address*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Name And Optional UID*	distinguishedNameMatch uniqueMemberMatch*	distinguishedNameOrderingMatch	-
Name Form Description	objectIdentifierFirstComponentMatch	-	-
Numeric String*	numericStringMatch*	numericStringOrderingMatch*	numericStringSubstringsMatch*
Object Class Description	objectIdentifierFirstComponentMatch	-	-
Object Identifier	objectIdentifierMatch objectIdentifierFirstComponentMatch	-	-
Octet String	octetStringMatch	octetStringOrderingMatch*	-
Other Mailbox*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Postal Address*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch

Table 32. Syntax and acceptable matching rules (EQUALITY, ORDERING, and SUBSTR) (continued)			
Syntax	EQUALITY	ORDERING	SUBSTR
LDAP syntaxes and matching rules that are marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.			
Presentation Address*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Printable String*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Protocol Information*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Substring Assertion	-	-	-
Supported Algorithm*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Telephone Number	telephoneNumberMatch	-	telephoneNumberSubstringsMatch
Teletex Terminal Identifier*	caseIgnoreMatch caseIgnoreIA5Match caseIgnoreListMatch* presentationAddressMatch* protocolInformationMatch* caseExactMatch caseExactIA5Match	caseIgnoreOrderingMatch caseExactOrderingMatch	caseIgnoreSubstringsMatch caseIgnoreIA5SubstringsMatch* caseIgnoreListSubstringsMatch* caseExactSubstringsMatch
Telex Number*	telephoneNumberMatch	-	telephoneNumberSubstringsMatch
UTC Time	utcTimeMatch generalizedTimeMatch	generalizedTimeOrderingMatch	-

The syntax or matching rule values might be inherited by specifying a superior attribute type. This is done by specifying the keyword SUP, followed by the object identifier of the superior attribute type. This is known as an attribute type hierarchy and referred to as inheritance. A superior hierarchy might be created with multiple levels of inheritance. In the following partial example, ePersonName and personName would inherit their SYNTAX from name.

```
ePersonName SUP personName
personName SUP name
name SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
```

When the SYNTAX, EQUALITY, ORDERING, or SUBSTR values are not specified for an attribute type, the attribute type hierarchy are used to determine these values. The SYNTAX must be specified on the attribute type or through inheritance.

The number of values that might be stored in each entry for an attribute type is limited to one value if the keyword SINGLE-VALUE is specified. Otherwise, any number of attribute values might exist in the entry.

The OBSOLETE keyword indicates that the attribute type cannot be used to add data to existing entries or to store data in new entries. Modifications to entries that contain data values of an attribute type which has been made obsolete fails unless all data values for all obsolete attribute types are removed during the modification. Searches specifying the obsolete attribute type returns the entries containing the attribute type. If an obsolete attribute type is referred to in a superior hierarchy, the inherited values continue to be resolved.

Example 1:

```
attributeTypes: ( 1.2.3.4 NAME 'obsattr1' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
OBSOLETE )
attributeTypes: ( 5.6.7.8 NAME 'validattr1' SUP obsattr1 )
```

would be the same as

```
attributeTypes: ( 5.6.7.8 NAME 'validattr' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 )
```

Example 2:

```
attributeTypes: ( 10.20.30.40 NAME 'obsattr2' SUP obsattr3 )
attributeTypes: ( 50.60.70.80 NAME 'obsattr3'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 )
attributeTypes: ( 90.100.110.120 NAME 'validattr2' SUP obsattr2 )
```

would be the same as

```
attributeTypes: ( 90.100.110.120 NAME 'validattr2'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 )
```

The USAGE keyword's valid values are userApplications or one of three operational values (directoryOperation, distributedOperation, or dSAOperation). An attribute type that has an operational USAGE value, is called an operational attribute while all other attribute types are also known as non-operational attribute types. Operational attributes are treated differently than non-operational attributes. In particular, the value of an operational attribute type in an entry is only returned by a search operation if the attribute type is specified in the list of attributes to be returned. If a plus sign, +, is specified in the list of attributes to be returned, then all operational attributes other than **ibm-allMembers**, **ibm-allGroups**, **ibm-entryChecksum**, **ibm-entryChecksumOp**, and **hasSubordinates** are returned on the search response, if the user is authorized to read those operational attributes. Also, operational attribute types do not have to belong to an object class. The default for **USAGE** is userApplications. By default, non-operational attribute types are returned on a search response if the user is authorized to read those attributes. If an asterisk, '*', is specified in the list of attributes to be returned, then all non-operational attributes are returned. Specifying both '*' and '+' returns non-operational and operational attribute types that the user is authorized to read.

The z/OS LDAP server restricts users from modifying data values specified for an attribute type when NO-USER-MODIFICATION is specified on the definition of the attribute type. In general, NO-USER-MODIFICATION should only be specified for attribute types that are set by the server because they cannot be assigned a value by the user. Attribute types that are NO-USER-MODIFICATION can be modified during replication processing and when the LDAP server is in maintenance mode. See [“Basic replication maintenance mode” on page 463](#) and [“Advanced replication maintenance mode” on page 518](#) for more information.

Note: The LDAP V3 protocol also defines a COLLECTIVE keyword for attribute types. The LDAP server does not support this keyword. All attribute types are assumed to be not COLLECTIVE.

- **IBM attribute types**

Additional information required by IBM LDAP servers for each attribute type defined in the schema is specified using the IBMAttributeTypes schema attribute. The IBMAttributeTypes schema

attribute is an extension of the `attributeTypes` schema attribute. If the `attributeTypes` value is not defined, then the corresponding `IBMAAttributeTypes` value cannot be defined. For the z/OS LDAP server, the additional information defined using this attribute is the `ACCESS-CLASS` and the `RACFFIELD` of the associated attribute type.

`ACCESS-CLASS` specifies the level of access users have to data values of this attribute type. The levels that might be specified for user-defined attribute types are `normal`, `sensitive`, and `critical`. The system and restricted keywords are for LDAP server use and are specified for some of the attribute types controlled by the server. See [“Attribute access classes” on page 428](#) for the definition of access classes.

RACFFIELD specifies the information needed to associate this attribute type with a RACF custom field. The presence of `RACFFIELD` indicates that this attribute type is used to represent a RACF custom field in a user or group profile.

Note: Other LDAP servers from IBM use the `DBNAME` and `LENGTH` characteristics to specify additional information for their implementations. These might be specified in the schema but are not used by the z/OS LDAP server.

- **Object classes**

Object classes define the characteristics of individual directory entries. The object classes listed in a directory entry determine the set of required and optional attributes for the entry. Each object class defined in a schema must contain a unique numeric object identifier and optionally contain a textual name, zero or more alias names, a description of the object class, and lists of required (`MUST`) or optional (`MAY`) attribute types.

Required and optional attribute types for an object class might be inherited by specifying one or more superior object classes in an object class definition. This is done by specifying the keyword `SUP` followed by the object identifiers of the superior object classes. This is known as an object class hierarchy and referred to as multiple inheritance. A superior hierarchy might be created with multiple levels of inheritance.


Each object class is defined as one of three types: `STRUCTURAL`, `ABSTRACT`, or `AUXILIARY`. The type can be specified when the object class is defined. If the type is not specified, it defaults to `STRUCTURAL`.

The structural object class defines the characteristics of a directory entry. Each entry must specify exactly one base structural object class. A base structural object class is defined as the most subordinate object class in an object class hierarchy. **The structural object class of an entry cannot be changed.** Once an entry is defined in the directory, it must be deleted and re-created to change the structural object class.

Abstract and auxiliary object classes are used to provide common characteristics to entries with different structural object classes. Abstract object classes are used to derive additional object classes. Abstract object classes must be referred to in a structural or auxiliary superior hierarchy. Auxiliary object classes are used to extend the set of required or optional attribute types of an entry.

When using the keyword **SUP** to create an object class hierarchy, an auxiliary class should only specify superior object classes that are either auxiliary or abstract object classes. Similarly, a structural object class should only specify superior object classes that are either structural or abstract object classes. If these rules are not followed, the z/OS LDAP server might not be able to determine the base structural object class of the entry, resulting in the rejection of the entry.

An example of the relationship between structural, abstract, and auxiliary object classes is the schema entry shown in the following figure. The schema entry specifies `top`, `subEntry`, `subSchema`, and `ibmSubschema` as object classes. The object classes form the following hierarchy:

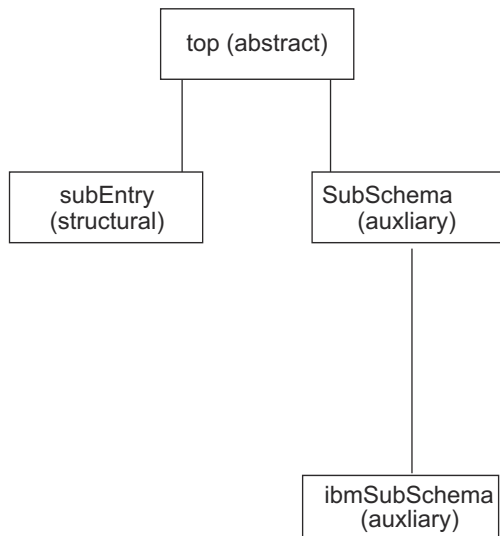

In this example, the subEntry object class is the base structural object class.

The OBSOLETE keyword indicates that the object class cannot be used to define entries in the directory. When an object class is made obsolete, new entries specifying the obsoleted object class cannot be added to the directory and existing entries cannot be modified unless the obsolete object class is removed from the entries' object class list. When the obsolete object class is removed from the entry, any attributes in the entry that are associated only with that object class must also be removed. These changes must be made through the same modify operation. If an obsolete object class is specified in a superior hierarchy for a new entry, then attempts to add the entry to the LDAP directory fails.

- **LDAP syntaxes**

Each attribute type definition includes the LDAP syntax which applies to the values for the attribute. The LDAP syntax defines the set of characters which are allowed when entering data into the directory.

The z/OS LDAP server is shipped with predefined supported syntaxes. See [Table 34 on page 282](#) and [Table 35 on page 284](#) for the list of syntaxes supported by the z/OS LDAP server. The set of syntaxes cannot be changed, added to, or deleted by users. Some syntaxes are only supported when the LDAP server is running at server compatibility level 6 or higher. See [“LDAP schema attributes” on page 282](#) for more information.

- **Matching rules**

Matching rules allow entries to be selected from the database based on the evaluation of the matching rule assertion. Matching rule assertions are propositions which might evaluate to true, false, or undefined concerning the presence of the attribute value or values in an entry.

The z/OS LDAP server is shipped with predefined supported matching rules. See [Table 36 on page 285](#) for the list of matching rules supported by the z/OS LDAP server. The set of matching rules cannot be changed, added to, obsoleted, or deleted by users. Some matching rules are only supported when the LDAP server is running at server compatibility level 6 or higher. See [“LDAP schema attributes” on page 282](#) for more information.

Schema attribute syntax

The attributes which are used in the schema entry use specific character representations in their values. These character representations are described in [Table 33 on page 281](#). The terms shown in this table are used in the schema attribute definitions in the next section.

Table 33. Character representations	
Term	Definition
<i>noidlen</i>	<p>Represented as:</p> <p><i>numericoid</i>{<i>length</i>}</p> <p>where <i>length</i> is a numeric string representing the maximum length of values of this attribute type.</p> <p>Example:</p> <p>1.3.6.1.4.1.1466.115.121.1.7{5}</p> <p>Implementation note: The z/OS LDAP server allows values to be any length, regardless of the specification of a length in the attribute type definition. User installations that want to limit the length of values must handle this during data input.</p>
<i>numericoid</i>	<p>A dotted decimal string.</p> <p>Example:</p> <p>2.5.13.72</p> <p>Note: A non-numeric object identifier, for example <code>myattr-oid</code>, can be used instead of a numeric object identifier.</p>
<i>oid</i>	<p>A single object identifier. This might be specified either as a name or as a numeric object identifier.</p> <p>Examples:</p> <pre>name 2.5.4.41</pre>
<i>oidlist</i>	<p>A list of object identifiers specified as names or numeric object identifiers separated by dollar signs (\$) within parentheses.</p> <p>Example:</p> <pre>(cn \$ sn \$ postaladdress \$ 2.5.4.6)</pre>
<i>oids</i>	Either an <i>oid</i> or <i>oidlist</i> .
<i>qdescrs</i>	<p>A quoted description shown as '<i>descr</i>' for one and as ('<i>descr</i>' '<i>descr</i>') for more than one. The description (<i>descr</i>) must have an alphabetic character as the first character, followed by any combination of alphabetic or numeric characters, the dash character (-), or the semicolon character (;). Each value must be in single quotation marks ('').</p> <p>If there is more than one value, they must be enclosed in parentheses.</p> <p>Examples:</p> <pre>'x121address' ('cn' 'commonName') 'userCertificate;binary'</pre> <p>Note: Although the LDAP V3 protocol does not support an underscore character (<code>_</code>) as a valid character in a <i>descr</i>, the z/OS LDAP server allows the use of an underscore character to facilitate data migration. This use should be minimized whenever possible and might not be supported by other servers.</p>

Table 33. Character representations (continued)	
Term	Definition
<i>qdstring</i>	<p>A quoted descriptive string shown as '<i>dstring</i>'. The descriptive string (<i>dstring</i>) is composed of one or more UTF-8 characters.</p> <p>Example:</p> <pre>'This is an example of a quoted descriptive string.'</pre>

LDAP schema attributes

The five attributes are used to define an LDAP schema. For these schema attributes, the *numericoid* must be the first item in the definition. All other keywords and values might be in any order.

Note: Some syntaxes and matching rules are only supported when the LDAP server is running at server compatibility level 6 or later. These syntaxes and matching rules are indicated by a * in the following tables. See “[serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}](#)” on page 125 for more information about setting the server compatibility level. When the server compatibility level is less than 6, these syntaxes and matching rules are not displayed as part of the schema, attributes that use these syntaxes or matching rules cannot be created, and the LDAP server does not start if any attributes that use these syntaxes or matching rules are already in the schema. Existing attributes using these syntaxes or matching rules must be deleted or modified to not use them while the server compatibility level is 6 or later before the server can be restarted with a compatibility level less than 6.

LDAP syntaxes

The set of syntaxes which are supported by the z/OS LDAP server cannot be modified, added to, or deleted by users. The descriptive material included here is for information only.

The format of the LDAP syntaxes attribute in a dynamic schema is:

```
ldapSyntaxes: ( numericoid [DESC qdstring] )
```

numericoid

The unique, assigned numeric object identifier.

DESC *qdstring*

Text description of the LDAP syntax

Note: LDAP syntaxes do not have a textual name. They are identified only by the numeric object identifier.

Following is an example of the definition of an LDAP syntax:

```
ldapSyntaxes: ( 1.3.6.1.4.1.1466.115.121.1.7 DESC 'Boolean' )
```

The LDAP syntaxes supported by the z/OS LDAP server fall into two categories. The first set, as shown in [Table 34 on page 282](#), would be used when defining attribute types that are used for directory data.

Table 34. Supported LDAP syntaxes - general use		
Numeric object identifier	Description	Valid values
LDAP syntaxes marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.		
1.3.6.1.4.1.1466.115.121.1.5	Binary	Binary data
1.3.6.1.4.1.1466.115.121.1.6	Bit String*	Bit data format (for example '0110'B)
1.3.6.1.4.1.1466.115.121.1.7	Boolean	TRUE, FALSE
1.3.6.1.4.1.1466.115.121.1.8	Certificate*	Binary data (no format checking)

Table 34. Supported LDAP syntaxes - general use (continued)		
Numeric object identifier	Description	Valid values
LDAP syntaxes marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.		
1.3.6.1.4.1.1466.115.121.1.9	Certificate List*	Binary data (no format checking)
1.3.6.1.4.1.1466.115.121.1.10	Certificate Pair*	Binary data (no format checking)
1.3.6.1.4.1.1466.115.121.1.11	Country String*	2 printable characters (alphabetic, digits, ' , (,) , + , , , - , . , / , : , ? , space)
1.3.6.1.4.1.1466.115.121.1.12	Distinguished Name	Sequence of attribute type and value pairs
1.3.6.1.4.1.1466.115.121.1.14	Delivery Method*	UTF-8 characters
1.3.6.1.4.1.1466.115.121.1.15	Directory String	UTF-8 characters
1.3.6.1.4.1.1466.115.121.1.21	Enhanced Guide*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.22	Facsimile Telephone Number*	Printable string (alphabetic, digits, ' , (,) , + , , , - , . , / , : , ? , space) and \$ (no format checking)
1.3.6.1.4.1.1466.115.121.1.23	Fax*	Binary data (no format checking)
1.3.6.1.4.1.1466.115.121.1.27	Integer	yyyyymmddhhmmss.ffffff (local time) yyyyymmddhhmmss.ffffffZ (Coordinated Universal Time) yyyyymmddhhmmss.ffffff-hhmm (Time zone west) yyyyymmddhhmmss.ffffff+hhmm (Time zone east) The seconds (ss) and microseconds (ffffff) can be omitted and defaults to 0.
1.3.6.1.4.1.1466.115.121.1.25	Guide*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.26	IA5 String	IA5 characters (commonly known as 7-bit ASCII)
1.3.6.1.4.1.1466.115.121.1.27	Integer	+/- 62 digit integer
1.3.6.1.4.1.1466.115.121.1.28	JPEG*	Binary data (no format checking)
1.3.6.1.4.1.1466.115.121.1.33	MHS OR Address*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.34	Name And Optional UID*	Sequence of attribute type and value pairs
1.3.6.1.4.1.1466.115.121.1.36	Numeric String*	List of space-separated numbers
1.3.6.1.4.1.1466.115.121.1.38	Object Identifier	Name or numeric object identifier
1.3.6.1.4.1.1466.115.121.1.39	Other Mailbox*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.40	Octet String	Octet data
1.3.6.1.4.1.1466.115.121.1.41	Postal Address*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.42	Protocol Information*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.43	Presentation Address*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.44	Printable String*	Printable string (alphabetic, digits, ' , (,) , + , , , - , . , / , : , ? , space)

Table 34. Supported LDAP syntaxes - general use (continued)		
Numeric object identifier	Description	Valid values
LDAP syntaxes marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.		
1.3.6.1.4.1.1466.115.121.1.49	Supported Algorithm*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.50	Telephone Number	Printable string (alphabetic, digits, ' (, + , , -, . , / , :, ? , and space) and "
1.3.6.1.4.1.1466.115.121.1.51	Teletex Terminal Identifier*	UTF-8 characters (no format checking)
1.3.6.1.4.1.1466.115.121.1.52	Telex Number*	Printable string (alphabetic, digits, ' (, + , , -, . , / , :, ? , space) and \$ (no format checking)
1.3.6.1.4.1.1466.115.121.1.53	UTC Time	Like Generalized Time but with a two-digit year specification (yy)

Values defined using the binary and octet string syntaxes are transferred in binary and do not consist of UTF-8 characters. For syntaxes that have valid values of UTF-8 characters or IA5 characters, as shown in Table 34 on page 282, a value can include embedded hexadecimal 00's.

The second set of syntaxes defined by the z/OS LDAP server are used in the definition of the LDAP schema. These would not typically be used in user schema attribute type definitions. They are listed here for reference.

Table 35. Supported LDAP syntaxes - server use	
Numeric object identifier	Description
1.3.6.1.4.1.1466.115.121.1.3	Attribute Type Description
1.3.6.1.4.1.1466.115.121.1.16	DIT Content Rule Description
1.3.6.1.4.1.1466.115.121.1.17	DIT Structure Rule Description
1.3.6.1.4.1.1466.115.121.1.30	Matching Rule Description
1.3.6.1.4.1.1466.115.121.1.31	Matching Rule Use Description
1.3.6.1.4.1.1466.115.121.1.35	Name Form Description
1.3.6.1.4.1.1466.115.121.1.37	Object Class Description
1.3.6.1.4.1.1466.115.121.1.54	LDAP Syntax Description
1.3.6.1.4.1.1466.115.121.1.58	Substring Assertion
1.3.18.0.2.8.1	IBM Attribute Type Description
1.3.18.0.2.8.3	IBM Entry UUID Description

Matching rules

The set of matching rules which are supported by the z/OS LDAP server cannot be modified, added to, obsoleted, or deleted by users. The descriptive material included here is for information only.

The format of the matching rules attribute in a dynamic schema is:

```
matchingRules: ( numericoid [NAME qdescrs] [DESC qdstring] [OBSOLETE] SYNTAX
numericoid )
```

numericoid

The unique, assigned numeric object identifier.

NAME *qdescrs*

The name by which this matching rule is known.

DESC *qdstring*

Text description of the matching rule.

OBSOLETE

Indicates that the matching rule is obsolete.

SYNTAX *numericoid*

Specifies the numeric object identifier of the syntax for this matching rule.

Following is an example of the definition of a matching rule:

```
matchingRules: ( 2.5.13.5 NAME 'caseExactMatch' SYNTAX
1.3.6.1.4.1.1466.115.121.1.15 )
```

The matching rules supported by the z/OS LDAP server are a fixed set as listed in the following table.

Table 36. Supported matching rules		
Name	Numeric object identifier	Assertion syntax
Matching rules marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.		
bitStringMatch*	2.5.13.16	Bit String. Must have same length and bits set.
booleanMatch	2.5.13.13	Boolean. Both values are either TRUE or FALSE. Case is ignored.
caseExactIA5Match	1.3.6.1.4.1.1466.109.14.1	IA5 String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case must be the same.
caseExactMatch	2.5.13.5	Directory String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case must be the same.
caseExactOrderingMatch	2.5.13.6	Directory String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case must be the same. Collating sequence is based on the UTF-8 representation.
caseExactSubstringsMatch	2.5.13.7	Directory String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case must be the same.
caseIgnoreIA5Match	1.3.6.1.4.1.1466.109.14.2	IA5 String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
caseIgnoreIA5SubstringsMatch*	1.3.6.1.4.1.1466.109.14.3	IA5 String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
caseIgnoreListMatch*	2.5.13.11	Postal Address. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.

Table 36. Supported matching rules (continued)		
Name	Numeric object identifier	Assertion syntax
Matching rules marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.		
caseIgnoreListSubstringsMatch*	2.5.13.12	Postal Address. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
caseIgnoreMatch	2.5.13.2	Directory String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
caseIgnoreOrderingMatch	2.5.13.3	Directory String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored. Collating sequence is based on the UTF-8 representation.
caseIgnoreSubstringsMatch	2.5.13.4	Directory String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
certificateExactMatch*	2.5.13.34	Certificate. Exact match of entire value.
certificateMatch*	2.5.13.35	Certificate. Exact match of entire value.
distinguishedNameMatch	2.5.13.1	Distinguished Name. Each name must have the same number of RDN components and each attribute within each RDN must match using the EQUALITY rule for that attribute type.
distinguishedNameOrderingMatch	1.3.18.0.2.4.405	Distinguished Name. The normalized string representation of each name is compared. The collating sequence is based on the UTF-8 representation.
generalizedTimeMatch	2.5.13.27	Generalized Time. The value is normalized as yyyyymmddhhmmss.ffffffZ.
generalizedTimeOrderingMatch	2.5.13.28	Generalized Time. The value is normalized as yyyyymmddhhmmss.ffffffZ.
IBM-EntryUUIDMatch	1.3.18.0.2.22.2	IBM Entry UUID. Hyphens are removed and a not case-sensitive string comparison is performed.
integerFirstComponentMatch	2.5.13.29	Integer.
integerMatch	2.5.13.14	Integer.
integerOrderingMatch*	2.5.13.15	Integer.
numericStringMatch*	2.5.13.8	Numeric String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank.

Table 36. Supported matching rules (continued)		
Name	Numeric object identifier	Assertion syntax
Matching rules marked with a * are only supported when the LDAP server is running at server compatibility level 6 or higher.		
numericStringOrderingMatch*	2.5.13.9	Numeric String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Perform string order processing. Collating sequence is based on the UTF-8 representation.
numericStringSubstringsMatch*	2.5.13.10	Numeric String. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank.
objectIdentifierMatch	2.5.13.0	Object Identifier. The value is normalized as an attribute descriptor.
objectIdentifierFirstComponentMatch	2.5.13.30	Object Identifier. The value is normalized as an attribute descriptor.
octetStringMatch	2.5.13.17	Octet String. Both values must contain the same number of octets and each octet must have the same value.
octetStringOrderingMatch*	2.5.13.18	Octet String. Perform string order processing. Collating sequence is based on the UTF-8 representation.
presentationAddressMatch*	2.5.13.22	Presentation Address. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
protocolInformationMatch*	2.5.13.24	Protocol Information. Leading and trailing whitespace is ignored. Embedded whitespace is replaced by a single blank. Case is ignored.
telephoneNumberMatch	2.5.13.20	Telephone Number
telephoneNumberSubstringsMatch	2.5.13.21	Telephone Number. The value is normalized using the telephoneNumberMatch rule.
uniqueMemberMatch*	2.5.13.23	Name And Optional UID. Each name must have the same number of RDN components and each attribute within each RDN must match using the EQUALITY rule for that attribute type. The optional UID is considered part of the rightmost RDN.
utcTimeMatch	2.5.13.25	UTC Time. The value is normalized as <code>yyymmddhhmmss.ffffffZ</code> .

Notes on matching rules:

1. An undefined attribute type within a distinguished name uses the directory string matching rules.
2. The **aclEntry** and **entryOwner** attribute types use the distinguished name matching rules for **access-id**, **group**, and **role** scopes of protection. The assertion value is just the DN portion of the attribute value. The matching rules used by **aclEntry** and **entryOwner** attribute types for the **aclFilter** and **ownerFilter** scopes of protection are dependent on the filter attributes specified within the corresponding access control filter.

3. Attribute types with a binary transfer syntax cannot be used in a search filter but can be used in a compare operation.
4. The **ibm-allGroups** and **ibm-allMembers** attribute types cannot be used in a search filter. These are read-only operational attributes and results in a FALSE match status when used in a search filter.
5. The TDBM, LDBM, and CDBM backends ignore the ORDERING and SUBSTR matching rules and always uses the EQUALITY matching rule when processing a search filter.

Attribute types

The format of the attribute types attribute in a dynamic schema is as follows.

```
attributeTypes: ( numericoid [NAME qdescrs] [DESC qdstring] [OBSOLETE] [SUP oid]
[EQUALITY oid] [ORDERING oid] [SUBSTR oid] [SYNTAX noidlen] [SINGLE-VALUE]
[NO-USER-MODIFICATION] [USAGE attributeUsage] )
```

numericoid

The unique, assigned numeric object identifier.

NAME *qdescrs*

The name and alias names by which this attribute type is known. This is also known as the *object identifier*. The first name in the list is used as the base name and the other names are referred to as *alias names*. It is suggested that the shortest name be listed first. If a name is not specified, the numeric object identifier is used to refer to the attribute type.

DESC *qdstring*

Text description of the attribute type.

OBSOLETE

Indicates that the attribute type is obsolete.

SUP *oid*

Specifies the superior attribute type. When a superior attribute type is defined, the EQUALITY, ORDERING, SUBSTR, and SYNTAX values might be inherited from the superior attribute type. The referenced superior attribute type must also be defined in the schema. When the SYNTAX, EQUALITY, ORDERING, or SUBSTR values are not specified for an attribute type, the attribute type hierarchy is used to determine these values. The SYNTAX must be specified on the attribute type or through inheritance.

EQUALITY *oid*

Specifies the object identifier of the matching rule which is used to determine the equality of values.

ORDERING *oid*

Specifies the object identifier of the matching rule which is used to determine the order of values.

SUBSTR *oid*

Specifies the object identifier of the matching rule which is used to determine substring matches of values.

SYNTAX *noidlen*

The syntax defines the format of the data stored for this attribute type. It is specified using the numeric object identifier of the LDAP syntax and, optionally, the maximum length of data stored for this attribute type.

Implementation note: The z/OS LDAP server allows values to be any length, regardless of the specification of a length in the attribute type definition. User installations that want to manage the lengths of values must handle this when values are put into the directory.

SINGLE-VALUE

Limits entries to only one value for this attribute type.

NO-USER-MODIFICATION

When specified, users might not modify values of this attribute type.

USAGE *attributeUsage*

Specify userApplications for *attributeUsage*. If USAGE is not specified, the default is userApplications.

The `directoryOperation`, `distributedOperation`, and `DSAOperation` keywords are used to create operational attributes. Operational attributes are treated differently than non-operational attributes. In particular, the value of an operational attribute type in an entry is only returned by a search operation if the attribute type is specified in the list of attributes to be returned. If a plus sign (+) is specified in the list of attributes to be returned, then all operational attributes other than `ibm-allMembers`, `ibm-allGroups`, `ibm-entryChecksum`, `ibm-entryChecksumOP`, and `hasSubordinates` are returned on the search response, if the user is authorized to read those operational attributes. Also, operational attribute types do not have to belong to an object class.

Following are examples of the definition of attribute types:

```
attributeTypes: ( 2.5.4.6 NAME 'c' SUP name SINGLE-VALUE )
attributeTypes: ( 2.5.4.41 NAME 'name' EQUALITY caseIgnoreMatch SUBSTR
  caseIgnoreSubstringsMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15{32768} )
```

IBM attribute types

The format of the IBM attribute types attribute in a dynamic schema is:

```
IBMAttributeTypes: ( numericoid [ACCESS-CLASS IBMAccessClass] [RACFFIELD qdescrs] )
```

numericoid

The unique, assigned numeric object identifier of the associated attribute type.

ACCESS-CLASS *ibmAccessClass*

The level of sensitivity of the data values for this attribute type. The acceptable values are `normal`, `sensitive`, and `critical`. See [“Attribute access classes” on page 428](#) for the definition of these values. The default attribute access class for an attribute is `normal`.

RACFFIELD *qdescrs*

The information needed to associate this attribute with a RACF custom field in a user or group profile.

The format of *qdescrs* is either a value in single quotation marks:

```
RACFFIELD 'racfFieldName'
```

or two values in parentheses, each in single quotation marks and separated by a blank:

```
RACFFIELD ('racfFieldName' 'racfFieldType') 
```

racfFieldName format must be:

```
USER-CSDATA-name
```

or

```
GROUP-CSDATA-name
```

where *name* is the name of the associated RACF custom field, which is 1 - 8 characters and consists of letters (A-Z), numbers (0-9), and special characters (@, #, and \$).

racfFieldType is the type of custom field. The acceptable values are `char`, `flag`, `hex`, `num`, and `char`. This value defaults to `char` if the *racfFieldType* is not specified.

Note: When specifying **RACFFIELD**:

1. The syntax of the attribute type must be IA5 String (1.3.6.1.4.1.1466.115.121.1.26).
2. The same *racfFieldName* value cannot be specified in more than one `IBMAttributeTypes` schema definition.
3. The *racfFieldType* value can affect the processing of the attribute values.
4. See [“Associating LDAP attributes to RACF custom fields” on page 330](#) for more information about the LDAP server support for RACF custom fields.

The IBMAttributeTypes schema element is an extension of the attributeTypes schema element. If the attributeTypes value is not defined, then the corresponding IBMAttributeTypes value cannot be defined.

Some schema elements are shipped with ACCESS-CLASS set to restricted or system. These values are used by the LDAP server. Other IBM LDAP servers might also specify DBNAME, LENGTH, and other keywords and values. These keywords are not used by the z/OS LDAP server and do not need to be specified when creating schemas. If they are specified in a schema that is used by the z/OS LDAP server, they are ignored.

Following is an example of the definition of an IBM attribute type:

```
IBMAttributeTypes: (2.5.4.6 ACCESS-CLASS normal)
```

Object classes

The format of the object classes attribute in a dynamic schema is:

```
objectClasses: ( numericoid [NAME qdescrs] [DESC qdstring]  
[OBSOLETE] [SUP oids] [ABSTRACT|STRUCTURAL|AUXILIARY] [MUST oids] [MAY oids] )
```

numericoid

The unique, assigned numeric object identifier.

NAME *qdescrs*

The name and alias names by which this object class is known. This is also known as the object identifier. The first name in the list is used as the base name. If name is not specified, the numeric object identifier is used to refer to the object class.

DESC *qdstring*

Text description of the object class.

OBSOLETE

Indicates that the object class is obsolete.

SUP *oids*

List of one or more superior object classes. When a superior object class is defined, entries specifying the object class must adhere to the superset of MUST and MAY values. The supersets of MUST and MAY values include all MUST and MAY values specified in the object class definition and all MUST and MAY values specified in the object class's superior hierarchy. When an attribute type is specified as a MUST in an object class in the hierarchy and a MAY in another object class in the hierarchy, the attribute type is treated as a MUST. Referenced superior object classes must be defined in the schema.

ABSTRACT | STRUCTURAL | AUXILIARY

Indicates the type of object class. STRUCTURAL is the default.

MUST *oids*

List of one or more mandatory attribute types. Attribute types which are mandatory must be specified when adding or modifying a directory entry.

MAY *oids*

List of one or more optional attribute types. Attribute types which are optional might be specified when adding or modifying a directory entry.

The extensibleObject object class is an AUXILIARY object class which allows an entry to optionally hold any attribute type. The extensibleObject object class is supported by the z/OS LDAP server. This allows any attribute type that is known by the schema to be specified in an entry which includes extensibleObject in its list of object classes.

The top object class is an abstract object class used as a superclass of all structural object classes. For each structural object class, top must appear in the **SUP** list of this object class or of an object class in the superior hierarchy of this object class.

Following is an example of the definition of an object class:

```
objectClasses: ( 2.5.6.0 NAME 'top' ABSTRACT MUST objectclass )
objectClasses: ( 2.5.6.6 NAME 'person' SUP top STRUCTURAL MUST ( cn $ sn )
MAY ( userpassword $ telephoneNumber $ seealso $ description ) )
objectClasses: ( 5.6.7.8 NAME 'company' SUP top MUST ( department $ telephoneNumber ) MAY ( postalAddress $ street ) )
objectClasses: ( 1.2.3.4 NAME 'companyPerson' SUP ( company $ person ) )
```

Defining new schema elements

You can define new schema elements for use by applications that you develop to use the directory. You can add new object classes and attribute types to the schema. To define a new object class or attribute type, create an LDIF file containing the new schema information, and perform an LDAP modify operation on the schema entry. Object classes and attribute types must be defined using the formats described in the previous section, and must include unique numeric object identifiers and names. Ensuring that the numeric object identifier and names are unique is essential to the correct operation of the directory when using your newly defined schema elements.

Numeric object identifiers (OIDs) are strings of numbers, separated by periods. OID "ranges" or "arcs" are allocated by naming authorities. If you are going to define new schema elements, you should obtain an "OID arc" from a naming authority. One such location to get an "OID arc" assigned is managed by [Internet Assigned Numbers Authority \(IANA\) \(www.iana.org\)](http://www.iana.org). Search the site for "Private Enterprise Number" to apply for a Private Enterprise number.

Once you have obtained an "OID arc" you can begin assigning OIDs to object classes and attribute types that you define.

For the example below, assume that OID arc 1.3.18.0.2.1000.100 is assigned. (Do not use this OID arc for defining your own schema elements. This arc is assigned to IBM for its use.) The following example adds a new object class that refers to two new attribute types. As you can see, the object class and attribute types can be added to the schema using a single LDAP modify operation. The changes to the schema are represented in LDIF mode input below:

```
dn: cn=schema
changetype: modify
add: attributetypes
attributetypes: ( 1.3.18.0.2.1000.100.4.1 NAME 'YourCompanyDeptNo'
DESC 'A users department number.'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 EQUALITY caseIgnoreMatch
USAGE userApplications
)
ibmattributetypes: ( 1.3.18.0.2.1000.100.4.1 ACCESS-CLASS normal )
attributetypes: ( 1.3.18.0.2.1000.100.4.2 NAME 'YourCompanyEmployeeID'
DESC 'A user employee ID.'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 EQUALITY caseIgnoreMatch
USAGE userApplications
)
ibmattributetypes: ( 1.3.18.0.2.1000.100.4.2 ACCESS-CLASS sensitive )
-
add: objectclasses
objectclasses: ( 1.3.18.0.2.1000.100.6.1 NAME 'YourCompanyPerson'
DESC 'Attached to inetOrgPerson to add more attributes.'
SUP top
AUXILIARY
MAY ( YourCompanyDeptNo $ YourCompanyEmployeeID )
)
-
```

This short description has described how to update the schema with new schema elements. Defining new schema elements is a complex undertaking and requires a thorough understanding of schema.

Updating the schema



Attention: Updating the schema, if not done properly, can result in being unable to access data. Read this section thoroughly to avoid this situation.

When the z/OS LDAP server is first started, the server supplies an initial schema. This initial schema is sufficient for usage of the SDBM (without RACF custom fields), CDBM (with configuration related entries),

and GDBM backends, but must be updated for usage of LDBM, TDBM, SDBM with RACF custom fields, and CDBM with user-defined entries. The schema files shipped with the LDAP server, **schema.user.ldif** and **schema.IBM.ldif**, might be sufficient for your usage of LDBM, CDBM, or TDBM. See [“Setting up the schema for LDBM, TDBM, and CDBM” on page 271](#) for more information about adding these files to the schema. If they are not sufficient, you can change the schema as needed. The schema entry is required and cannot be deleted. When in a sysplex, changes to the schema made at one LDAP server are broadcast to all the LDAP servers in the group. When deleting an attribute type or object class definition, you must provide just the object identifier enclosed in parentheses. Any additional fields that are specified are checked for appropriate syntax but are not used.

The operations supported include adding, modifying, or deleting any object class, attribute type, or IBM attribute type that is not part of the initial schema definition required by the LDAP server. Changes to the initial schema are restricted. See [“Changing the initial schema” on page 293](#) for more information. The modifications (additions, changes, and deletions) specified by the LDAP modify function are applied to the schema entry. The resulting schema entry becomes the active schema and is used by all backends to verify that directory changes adhere to it.

Updates to the schema must be performed such that the schema fully resolves. This includes:

- All attribute types referred to in object classes must exist in the schema.
- All superior attribute types or object classes must exist.
- Only the syntaxes and matching rules supported by the schema might be specified in attribute type definitions.
- All attribute types referred to in IBM attribute type definitions must also be defined as attribute types.
- All structural object classes must include the **top** object class in their object class hierarchy.

Modifications to the schema are rejected if they would possibly make existing entries no longer valid. If there is an entry in a TDBM, CDBM, or LDBM backend that is using an attribute or object class:

- The attribute or object class cannot be deleted. Instead, "delete" the schema element by modifying it to mark it as OBSOLETE rather than deleting its definition from the schema entry. Therefore, no new entries can be created using the schema element and the existing entries which do use the schema element are still accessible. An existing entry that uses the OBSOLETE schema element must be modified to use only non-OBSOLETE schema elements during the next modification of the entry in order for the modification to succeed.
- The attribute or object class cannot be modified in a way that could affect the data in the entry. For example, the syntax of an attribute cannot be changed when that attribute is in use. You must modify the entries first so they do not use the object class or attribute, then change the schema.

The following fields in an attribute type definition are the only fields that can be modified if the attribute type is in use by an entry:

DESC
OBSOLETE
SINGLE-VALUE (can be removed but not added)
NO-USER-MODIFICATION
USAGE

The following fields in an IBM attribute type definition can be modified:

ACCESS-CLASS
RACFFIELD

The following fields in an object class definition can be modified when the object class is in use by an entry:

DESC
OBSOLETE
MUST (can only move an attribute to MAY)
MAY (can only add an attribute)

Changing the initial schema

The initial schema contains the **ldapSyntaxes**, **matchingRules**, **attributeTypes**, **IBMAttributeTypes**, and **objectClasses** needed by the LDAP server. See [Appendix A, “Initial LDAP server schema,”](#) on page 603 for the contents of the initial schema.

The syntaxes, matching rules, attribute types, and IBM attribute types in the initial schema cannot be deleted or modified. The object classes in the initial schema cannot be deleted or modified, with the following exceptions:

1. **groupOfNames**
2. **groupOfUniqueNames**

These object classes allow the following fields to be modified:

DESC

MUST

MAY

The **MUST** and **MAY** lists can be modified in any way if no directory entries are using this object class. If there is a directory entry using this object class, the only **MUST** and **MAY** changes allowed are to move an attribute from the **MUST** list to the **MAY** list and to add an attribute to the **MAY** list.

Any part of a schema modification that attempts to add LDAP syntaxes or matching rules to the schema or to modify the initial schema except as previously described is ignored, with no message issued to indicate this. The rest of the schema modification is performed and the result of those changes is returned to the client.

Replacing individual schema values

It is often necessary to apply an updated schema file to an existing schema. Optimally, this would replace changed values in the existing schema with their updated values from the file and add new values from the file to the existing schema, leaving all other values in the existing schema unchanged. However, this is not the way the RFC 2251 (tools.ietf.org/html/rfc2251) definition for such a modify with replace operation works: the RFC requires that ALL the existing values in the schema be replaced by the values specified in the schema file. Therefore, the schema file must contain all the unchanged values from the schema in addition to the updated and new values so that no unchanged existing values are lost.

To address this problem, the LDAP server supports two different behaviors when using a modify with replace operation on the schema entry:

1. Standard RFC behavior, in which all the existing values for an attribute are replaced by the ones specified in the modify operation. In order for the modification to succeed, the replacement values must include definitions for all schema definitions that are in use by existing directory entries and the replacement values must conform to the rules described above about what fields can be modified in an active schema entry.
2. Schema-replace-by-value behavior, in which each replace value in the modify operation either replaces the existing value (if one exists) in the schema or is added to the schema (if an existing value does not exist). All other values in the schema remain as they are. A replace value replaces a schema value if the schema value and replace value have the same numeric object identifier (NOID). Otherwise, the replace value is considered a new value and is added to the existing values in the schema.

In all cases, the values of the attribute that are in the initial LDAP server schema cannot be deleted and can only be modified in limited ways as described in [“Changing the initial schema”](#) on page 293.

The behavior used by the LDAP server is selected in one of two ways:

1. Specify the **schemaReplaceByValue** option in the global section of the LDAP server configuration file to set the behavior for all modify with replace operations of the schema. Specifying **on** activates the schema-replace-by-value behavior; **off** activates the standard RFC behavior. See [Chapter 8, “Customizing the LDAP server configuration,”](#) on page 83 for more information.

2. Specify the **IBMSchemaReplaceByValueControl** control on the modify with replace operation to set the behavior for just that specific modify operation, overriding the **schemaReplaceByValue** configuration option. Specifying **TRUE** in the control activates the schema-replace-by-value behavior; **FALSE** activates the standard RFC behavior. See [Appendix C, “Supported server controls,”](#) on page 653 for more information.

If neither the **schemaReplaceByValue** configuration option or the **IBMSchemaReplaceByValueControl** control is specified, the default behavior is schema-replace-by-value.

Example: assume that the objectclasses attribute for cn=schema contains the following values:

```
objectclasses: ( 1.130.255 NAME 'oldObjectclass1' DESC 'old description 1' ... )
objectclasses: ( 1.130.256 NAME 'oldObjectclass2' DESC 'old description 2' ... )
objectclasses: ( 1.130.257 NAME 'oldObjectclass3' DESC 'old description 3' ... )
```

This is to replace 'oldObjectclass1' and add a value for 'newObjectclass4'.

This is the update file for the modify operation:

```
dn: cn=schema
changetype: modify
replace: objectclasses
objectclasses: ( 1.130.255 NAME 'newObjectClass1' DESC 'new description 1' ... )
objectclasses: ( 1.3.5.9 NAME 'newObjectClass4' DESC 'description 4' ... )
```

After the modify operation with schema-replace-by-value behavior, the objectclasses attribute in the schema would have the following values:

```
objectclasses: ( 1.130.255 NAME 'newObjectClass1' DESC 'new description 1' ... )
objectclasses: ( 1.130.256 NAME 'oldObjectclass2' DESC 'old description 2' ... )
objectclasses: ( 1.130.257 NAME 'oldObjectclass3' DESC 'old description 3' ... )
objectclasses: ( 1.3.5.9 NAME 'newObjectClass4' DESC 'description 4' ... )
```

If the modify operation with traditional RFC behavior is performed instead, the objectclasses attribute in the schema would end up with the following values:

```
objectclasses: ( 1.130.255 NAME 'newObjectClass1' DESC 'new description 1' ... )
objectclasses: ( 1.3.5.9 NAME 'newObjectClass4' DESC 'description 4' ... )
```

IBM attribute types are extensions to the attribute type definition. The IBM attribute type is deleted when the corresponding attribute type is deleted. IBM attribute types are always replaced by value even when **schemaReplaceByValue** off is specified in the LDAP server configuration file. This ensures that access class protection is not inadvertently removed from an existing attribute type.

Updating a numeric object identifier (NOID)

It might become necessary to update the numeric object identifier (NOID) of an attribute type or object class in the schema. This NOID change can be accomplished by a special modify operation. The modify operation must consist only of a value to delete followed by a value to add. The value to delete must specify the current NOID of the attribute type or object class whose NOID is to be changed; the value to add must specify the new NOID for the attribute type or object class, along with all the other parts of the attribute type or object class definition. For an attribute type, the **NAME**, **SUP**, **EQUALITY**, **ORDERING**, **SUBSTR**, and **SYNTAX** must be identical in the existing definition and the value to add. **SINGLE-VALUE** can be removed but not added. For an object class, **NAME**, **SUP**, **MUST**, **MAY**, and type (**ABSTRACT**, **STRUCTURAL**, or **AUXILIARY**) must be identical in the existing definition and the value to add. The entire attribute type or object class definition is replaced by the contents of the add. Note the object identifier assigned to an attribute type or object class cannot be changed if there are any directory entries using the attribute type or object class. Also, the object identifier of an attribute type or object class in the initial LDAP schema cannot be changed.

As an example for changing the NOID of the xyz attribute type from 1.3.5.7 to 2.4.6.8, the update file for the modify operation is as follows:

```
cn=schema
-attributetypes=( 1.3.5.7 NAME 'xyz' DESC 'xyz attribute added for application abc' \
```

```
SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications )
+attributetypes=( 2.4.6.8 NAME 'xyz' DESC 'xyz attribute added for application abc' \
SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications )
```

Changing a NOID should not need to be done as part of normal LDAP server operations. It is intended to be used as an error recovery device for when an incorrect NOID has been added to the schema.

Analyzing schema errors

Following is some information about the possible cause of some schema errors that might be encountered when updating schema:

- For enhanced readability, *type:value* pairs in LDIF files might be split across multiple lines. The indicator to LDIF that the subsequent lines are continuations is that the first character on the subsequent line is a space. This character is ignored by parsers and it is assumed that the next character immediately follows the previous line. Therefore, if a space is needed between the last value on one line and the first value on the subsequent line, a second space must exist on the subsequent LDIF line. Various reason codes related to unrecognized values might be issued.
- Only limited changes are allowed to the initial schema, as described in “Changing the initial schema” on page 293. All other changes to the initial schema are ignored by the LDAP server with no error returned.
- The IBM attribute type schema attribute is an extension to the associated attribute type in the schema. If the schema update contains an IBM attribute type value for which an attribute type value is not defined, the schema update fails. For example,

```
IBMAttributeTypes: ( 1.2.3.4 ACCESS-CLASS normal )
```

cannot be specified unless

```
attributeTypes: ( 1.2.3.4 NAME 'sample' ... )
```

is also defined.

- While the UTC Time syntax is supported, usage of the Generalized Time syntax is preferred. For UTC Time syntax, year values between 70 and 99 assume 1970 to 1999 and values between 00 and 69 assume 2000 to 2069.
- When searching attribute type values of Coordinated Universal Time syntax, use Coordinated Universal Time syntax in the search filter rather than local time. All time values are stored in the data store as Coordinated Universal Time times.

Retrieving the schema

The following sections describe how you can display the schema entry and also find the subschemaSubentry DN.

Displaying the schema entry

The following command shows how to search for the schema entry. Note the scope must be base in the search request to display the schema.

```
ldapsearch -h ldaphost -p ldapport -s base -b "cn=schema" "objectclass=subschema"
```

Immediately after the server is started for the first time, this command produces the results shown in Appendix A, “Initial LDAP server schema,” on page 603. After the schema is updated by an LDAP root or schema administrator, the search results show the full schema as the union of the initial schema and the added schema elements.

The search results contain these attributes:

```
cn=SCHEMA
cn=schema
subtreespecification=NULL
```

```

objectclass=TOP
objectclass=SUBSCHEMA
objectclass=SUBENTRY
objectclass=IBMSUBSCHEMA
...
attributetypes = ( 2.5.4.3 NAME ( 'cn' 'commonName' ) SUP name )
...
ibmattributetypes = ( 2.5.4.3 ACCESS-CLASS normal )
...
objectclasses = ( 2.5.6.0 NAME 'top' ABSTRACT MUST objectclass )
...
ldapsyntaxes = ( 1.3.6.1.4.1.1466.115.121.1.15 DESC 'directory string' )
...
matchingrules = ( 2.5.13.5 NAME 'caseExactMatch' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 )
...

```

Finding the subschemaSubentry DN

The subschemaSubentry attribute in each directory entry contains the DN of the LDAP server schema entry. To find the value of the subschemaSubentry attribute, specify subschemaSubentry as an attribute to be returned on an LDAP search of the entry.

```

ldapsearch -h ldaphost -p ldapport -s base -b "o=Acme Company, c=UK" "objectclass=*"
    subschemasubentry

o=Acme Company, c=UK
subschemasubentry=cn=schema

```

Chapter 16. Modify DN operations

The Modify DN Operation allows a client to change the leftmost (least significant) component of the name of an entry in the directory, or to move a subtree of entries to a new location in the directory. This topic explains the function of the Modify DN operation and the options supported to influence the scope and duration of the operation. In addition, it instructs on the techniques necessary to achieve certain forms of directory renames and movement, and it advises on issues which might result in unintentional or unwanted results.

In LDAP, modify DN operations are only supported in the TDBM (Db2-based), LDBM (file-based), and CDBM (file-based) backends.

Modify DN operation syntax

The z/OS implementation of the Modify DN operation supports all required and optional parameters that are described for the operation in [RFC 2251 \(tools.ietf.org/html/rfc2251\)](https://tools.ietf.org/html/rfc2251). Specifically, these parameters are required:

- **entryDN:** This is the Distinguished Name (DN) of the entry whose name is changed. This entry might not have subordinate entries. This parameter might not be a zero-length string.
- **newRdn:** The Relative Distinguished Name (RDN) that forms the leftmost component of the new name of the entry. This parameter might not be a zero-length string. If the intent of the Modify DN operation is to move the target entry to a new superior without changing its RDN, the old RDN value must be supplied in the **newRdn** parameter. The attributes and values in the **newRdn** parameter are added to the entry if they are not already present in the entry.
- **deleteoldrdn:** A boolean parameter that controls whether the old RDN attribute values are to be retained attributes of the entry or whether they are deleted from the entry.

The following parameter to the Modify DN operation is optional:

- **newSuperior:** The Distinguished Name (DN) of the entry that becomes the immediate superior of the renamed entry (identified by the **entryDN** parameter). If this parameter is present, it might consist of a zero-length string or a non-zero-length string. See “Modify DN operations related to suffix DNs” on page 307 for more information about the use of a zero-length string for this parameter. A zero-length string value for this parameter (“”) signifies that the new superior entry is the root DN.

This operation also supports optional values, or controls, to influence the behavior of the operation. Two controls are supported (see [Appendix C, “Supported server controls,”](#) on page 653):

- **IBMModifyDNTimeLimitControl:** This control causes the Modify DN operation to be abandoned if its duration exceeds the time limit that is represented by the control value that is expressed in seconds. No changes are made if the operation is abandoned. This control is accepted even if it is set by the admin DN for the server. When this control is present, it does not propagate to the replica servers. (See “Modify DN operations and replication” on page 314 for more information about replication of Modify DN operations.)
- **IBMModifyDNRealignDNAttributesControl:** This control causes the server to search for all attributes whose attribute type is based on a DN syntax (designated by OID 1.3.6.1.4.1.1466.115.121.1.12) and whose values match any of the old DN values being renamed as part of the Modify DN operation, and to modify the old DN values to reflect the corresponding renamed DN attribute values. This includes modifications to two other attribute types that construct DN-type attribute values (those whose attribute syntax is not distinguished name but, which might be used to store DN values). They are **aclEntry** and ownership **entryOwner** attributes. Updates to constructed DN types are limited to these two attributes that are defined by the LDAP Server. No changes are made to any user constructed types.

This control is an all-or-none operation in which the server attempts to realign all appropriately matched DN attribute values in the LDBM, TDBM, or CDBM backend. Users cannot limit the scope of values that should be realigned. If a failure arises during the realignment operation, it realigns none

of the values, and the Modify DN operation fails. No changes are made if the operation is abandoned. Note that even if the control is designated as non-critical, the server still tries to accept the intent of the control and if this attempt fails, the entire Modify DN operation fails.

When **IBMModifyDNRealignDNAttributesControl** is present on a request to a master server on which replication of Modify DN operations is enabled, it is propagated to the replica servers. (See “[Modify DN operations and replication](#)” on page 314 for more information about replication of Modify DN operations.)

A few simple examples of the use of the Modify DN operation follow. Each request is expressed in the format of the ModifyDNRequest defined in RFC 2251 (tools.ietf.org/html/rfc2251) and in the corresponding invocation command for the z/OS client utility program **ldapmodrdn**. For more information about the **ldapmodrdn** utility, see [ldapmodrdn utility](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

Example 1:

Simple Modify DN of leaf node

```
ModifyDNRequest ::= {
entry          cn=Kevin Heard, o=Athletics, o=Human Resources, o=Deltawing, c=AU
newrdn         cn=Kevin T. Heard
deleteoldrdn   TRUE
}
```

```
ldapmodrdn -h ldaphost -p ldapport -D binddn -w passwd -r "cn=Kevin Heard,
o=Athletics, o=Human Resources, o=Deltawing, c=AU" "cn=Kevin T. Heard"
```

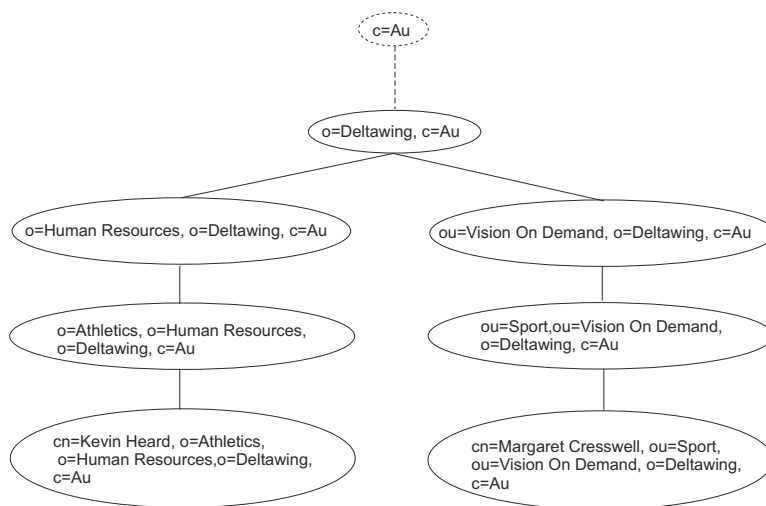


Figure 9. Before Modify DN operation

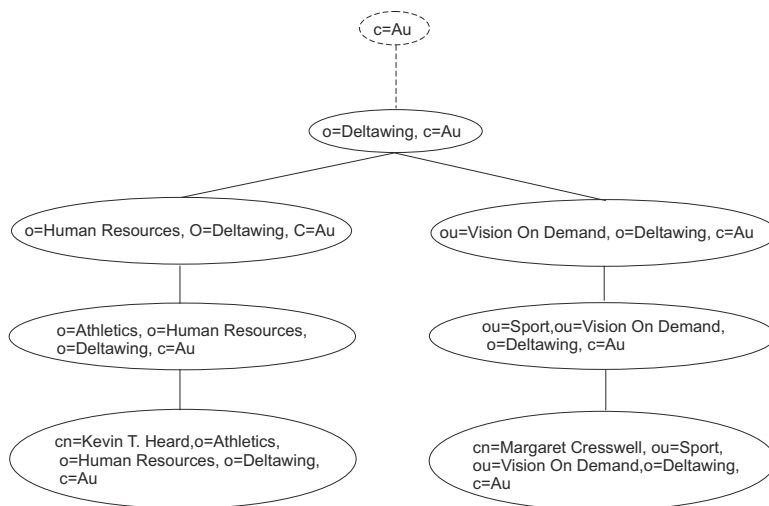


Figure 10. After Modify DN operation

Note: The `-r` parameter specifies that the old RDN attribute value (`cn=Kevin Heard`) is deleted from the target entry after this operation.

Example 2

Simple Modify DN of non-leaf node

```
ModifyDNRequest ::= {
  entry          o=Athletics, o=Human Resources, o=Deltawing, c=AU
  newrdn         ou=College Athletics Dept.,
  deleteoldrdn   FALSE
}
```

```
ldapmodrdn -h ldaphost -p ldapport -D binddn -w passwd "o=Athletics,
o=Human Resources, o=Deltawing, c=AU" "ou=College Athletics Dept."
```

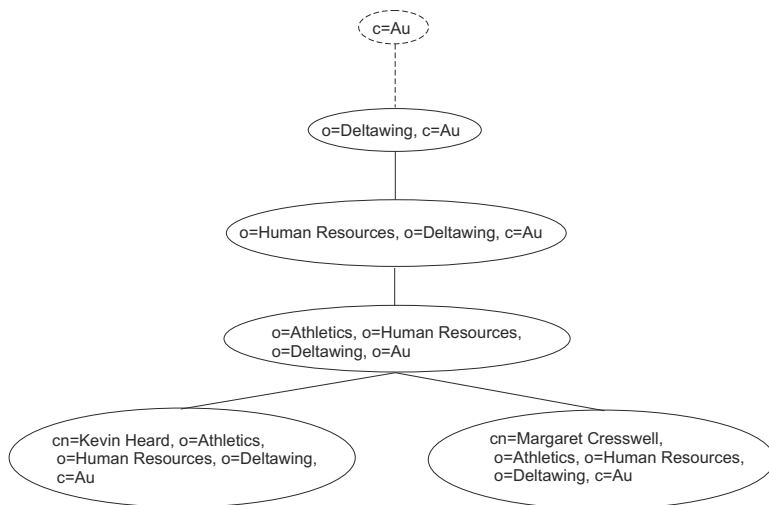


Figure 11. Before Modify DN operation

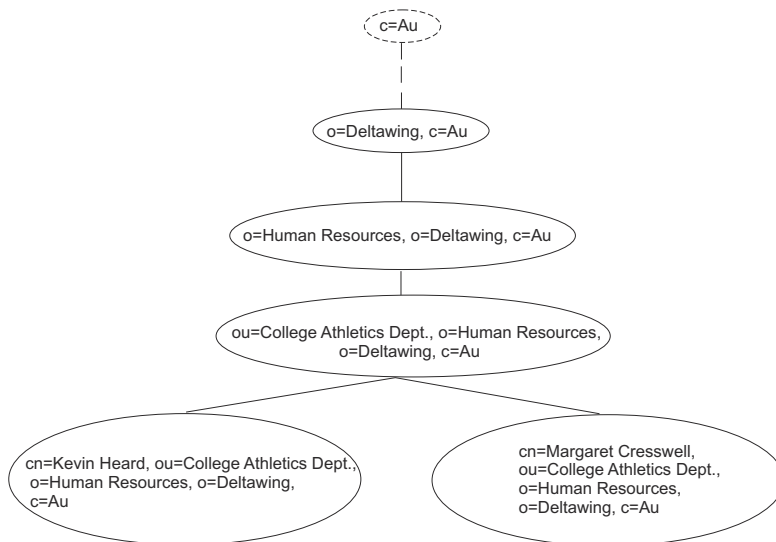


Figure 12. After Modify DN operation

Note: The absence of the **-r** parameter specifies that the old RDN attribute value (o=Athletics) is preserved in the target entry after this operation.

Example 3

Modify DN of non-leaf node with relocation (*newSuperior*)

```

ModifyDNRequest ::= {
entry          o=Athletics, o=Human Resources, o=Deltawing, c=AU
newrdn         o=Adult Athletics
deleteoldrdn   FALSE,
newSuperior    ou=Sport, ou=Vision On Demand, o=Deltawing, o=AU
}
  
```

```

ldapmodrdn -h ldaphost -p ldapport -D binddn -w passwd -s "ou=Sport, ou=Vision On Demand, o=Deltawing, c=AU" "o=Athletics,o=Human Resources, o=Deltawing, c=AU" "o=Adult Athletics"
  
```

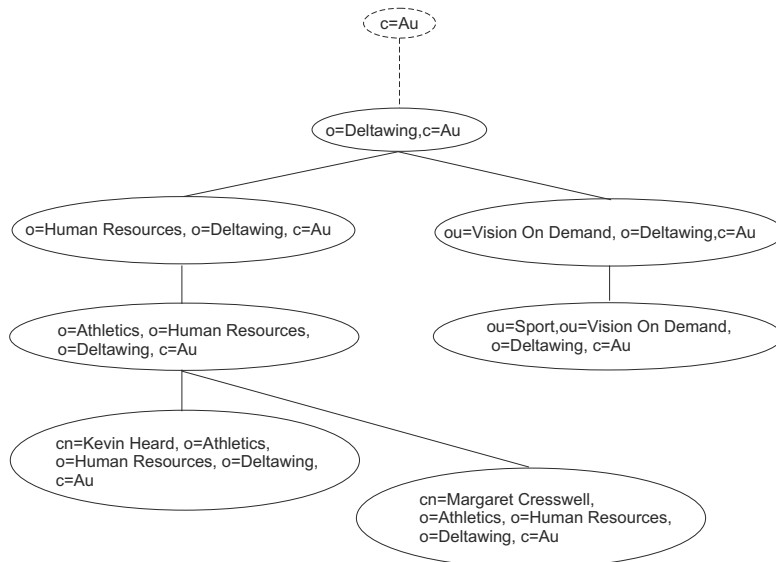


Figure 13. Before Modify DN operation

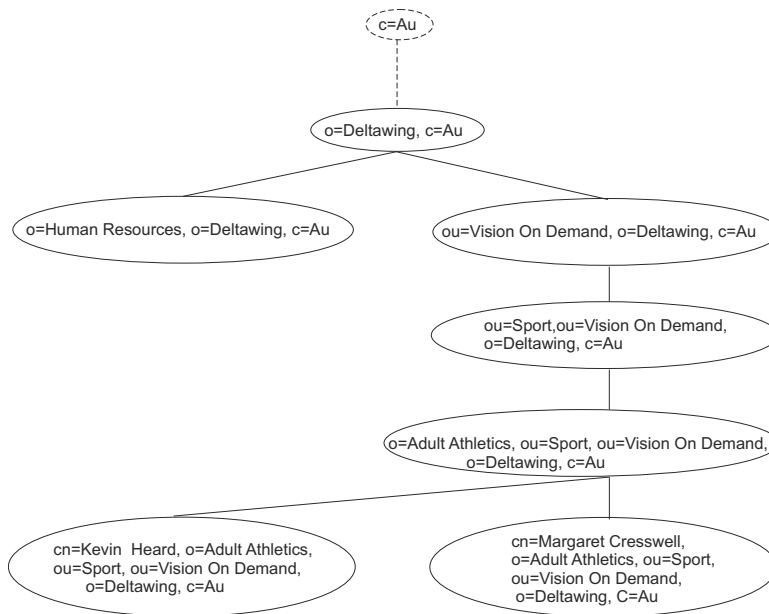


Figure 14. After Modify DN operation

Note: The absence of the `-r` parameter specifies that the old RDN attribute value (`o=Athletics`) is preserved in the target entry after this operation. The target entry and descendants in its subtree are relocated in the directory hierarchy.

Considerations in the use of Modify DN operations

As this operation has the potential to significantly change directory data and how it can be accessed, it is important that the user fully comprehend the data before using the Modify DN operation. Specifically, the user must know that:

- The ability of this operation to move directory subtrees has the potential for affecting many entries in the directory in a single operation.
- Certain options might result in modification of additional directory entries which are outside the scope of the directory subtrees being moved. This topic explains and gives examples of how that can occur.
- Because the changes performed to the directory as a result of the operation are committed as a single transaction (or reversed if an error occurs), it might result in a long-running transaction, which might reduce concurrency of other LDAP operations targeted for the same directory entries. See [“Concurrency considerations between Modify DN operations and other LDAP operations”](#) on page 303 for more information.
- The scope of the changes might result in unanticipated effects in the directory and might affect user access to these entries. See [“Access control changes”](#) on page 305 for more information.
- There are limitations to which directory entries are eligible for the Modify DN operation. See [“Eligibility of entries for rename”](#) on page 302 for more information.
- In case the directory needs to be returned to a state before a Modify DN operation, the directory should be backed up. Use the **ds2ldif** utility program or, for a TDBM backend, use the Db2 utilities to generate a Db2 image copy of the underlying table spaces. See Chapter 12, “Running and using the LDAP server utilities,” on page 217 for more information about the **ds2ldif** utility program. For more information about the Db2 image copy, see in [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](#).
- There are considerations if the data to be modified by this operation is being replicated. See [“Modify DN operations and replication”](#) on page 314 for more information.

Eligibility of entries for rename

Entries in the directory which are targeted to be renamed in a single Modify DN operation are subject to these constraints:

1. All entries to be renamed must be in the same TDBM, LDBM, or CDBM backend targeted by the Modify DN operation. The Modify DN operation with `newSuperior` option moves subtree entries within the same TDBM, LDBM, or CDBM backend, and does not permit movement of subtree entries from one backend to another. The entry to be renamed must exist in the backend, and the new DN for the entry must not exist in the backend.
2. Referral entries might be renamed as part of a Modify DN operation. If a referral entry is renamed as part of a Modify DN operation, its corresponding entry in the referral server must be manually updated to reflect the name changes; no automatic updates are propagated to those backends from the target backend. Referrals which exist in other directory servers that refer to any of the entries whose DNs were modified in the local directory by a Modify DN operation must be manually updated to reflect the changes; no automatic updates are propagated to those servers from the local one.
3. The LDAP server schema entry cannot be renamed.
4. Entries renamed by a Modify DN operation must conform to the LDAP server schema. As such, the RDN attribute type must be consistent with the schema rules for the object classes of the entry: a Modify DN operation fails if the attribute type of `newRdn` is not in the **MUST** or **MAY** list for the entry's object classes.
5. If a new superior entry is specified, it must be in the same backend as the entry to be renamed but may be under a different suffix managed by that backend. If the **IBMModifyDNRealignDNAttributesControl** is specified, only entries within the same backend as the renamed entry are processed.
6. When **IBMModifyDNRealignDNAttributesControl** is present on a Modify DN request, the operation looks for occurrences of each renamed DN (this can be multiple DNs if renaming a subtree) in certain attributes within all the entries in the backend and replaces each renamed DN with its new DN. The affected attributes are:
 - a. Any attribute whose syntax is DN syntax (OID 1.3.6.1.4.1.1466.115.121.1.12).
 - b. The **aclEntry** and **entryOwner** attributes (these contain DNs in a structured format).
7. If `newRdn` is specified on a Modify DN operation, each attribute in the `newRdn` value is added to the entry when it is moved. If a `newRdn` attribute already has a different value in the entry and the attribute is defined as **SINGLE-VALUE** in the schema, the Modify DN operation fails. For example, suppose an entry with DN of `dept=AAA,ou=mydivision,o=MyCompany,c=us` is to be renamed with the `newRdn` `sector=northeast` and that the entry already contains the **SINGLE-VALUE** attribute **sector** with a value of `northwest`. This rename fails because it attempts to add a second value (`northeast`) to the `sector` attribute.

If the `newRdn` attribute is contained in the current RDN, then the `deleteoldrdn` parameter can be added to the Modify DN operation to allow it to succeed. In this case, the current attribute value is removed so that the attribute only contains the one value from `newRdn` in the renamed entry. For example, suppose an entry with DN of `sector=northwest,ou=mydivision,o=MyCompany,c=us` is to be renamed with the `newRdn` `sector=northeast` and `deleteoldrdn` is specified on the Modify DN operation. This rename succeeds because `northwest` is replaced by `northeast` as the single value of the `sector` attribute in the renamed entry.

8. Entries might be renamed only if all access control requirements are satisfied for the bound user, as determined by the effective ACL and ownership permissions for those entries and attributes. See [“Access control and ownership” on page 303](#) for detailed explanation and examples of this effect.
9. Alias entries (entries containing the **aliasedObjectName** attribute and either the **alias** or **aliasObject** object class) can be renamed as part of a modify DN operation if this does not result in an **aliasedObjectName** value that is a DN equal to the DN of the renamed alias entry.

10. When advanced replication is configured, a Modify DN operation from one replication context to a different replication context is not supported. The Modify DN operation must occur within the same replication context.
11. The global password policy entry, `cn=pwdpolicy,cn=ibmpolicies`, cannot be renamed. If a user or group entry has a reference to a password policy entry in an **ibm-pwdIndividualPolicyDN** or **ibm-pwdGroupPolicyDN** attribute value, the individual or group password policy entry cannot be renamed or deleted until the association is removed from all user or group entries.

Concurrency considerations between Modify DN operations and other LDAP operations

The ability of the Modify DN operation to rename non-leaf nodes in the directory (which causes all entries which are hierarchical subordinates of the target entry to be renamed) and the ability to move directory subtrees have the potential for affecting many entries in the directory in a single operation. Use of `IBMModifyDNRealignDNAttributesControl` with this operation might further result in modification of additional directory entries which are outside the scope of the directory subtrees being renamed or moved.

Changes to all entries affected by the operation are committed at the same time. While modified entries are awaiting the transaction commit point, database locks are held which prevent other concurrent operations from sharing and modifying the data. If many entries undergo modification with this operation, it might result in a long-running transaction which has potential for reducing concurrency of other operations targeted for the same directory entries.

Although the LDAP server can process concurrent LDAP operations targeted at a given TDBM, LDBM, or CDBM backend while the Modify DN operation is in progress, the extent to which such concurrency is possible depends on what data in the directory might be needed and locked by the competing operations. In addition, if the number of entries being affected by the TDBM Modify DN operation is large or if the database is small, the underlying Db2 locking mechanism might escalate locking levels, which would result in more entries being excluded from use by other concurrent operations than just those which are modified by the Modify DN operation. It might be advisable to submit such a request during a low-activity period when demand for the same resources by multiple concurrent operations is relatively low.

For example, the Modify DN operation that is shown at [“Modify DN operation syntax” on page 297](#) would potentially be susceptible to lock contention when:

- There are concurrent update operations under the new parent `"ou=Sport, ou=Vision On Demand, o=Deltawing, c=AU"`
- or there are concurrent update operations under the old parent `"o=Human Resources, o=Deltawing, c=AU"`
- or Db2 locking chooses an access path that results in lock escalation for entries under `"o=Deltawing, c=AU"`

For more information about Db2 lock escalation, see [Db2 for z/OS in IBM Documentation \(www.ibm.com/docs/en/db2-for-zos\)](http://www.ibm.com/docs/en/db2-for-zos).

Access control and ownership

For all entries being renamed, the caller must have **w(rite)** permissions for the attribute values that must change in all affected entries. In addition, if the `newSuperior` parameter is present on the Modify DN request, the caller must have permissions of `object:a` on the `newSuperior` entry and `object:d` on the target entry at the top of the subtree of entries being moved. If the caller lacks one or more of these permissions, the operation is denied. No access control checking is done against any of the target entry's subordinates even though their DN is changed. Note that if the caller is an effective owner of any of the entries being renamed, the permissions are automatically satisfied for those entries.

In addition, if the `IBMModifyDNRealignDNAttributesControl` accompanies a Modify DN request, then the bound DN must have **w(rite)** permission to all of the attributes that are changed as a result of realignment of the DN values.

Example:

Assume that our sample directory contains the following entry, which is the target of a Modify DN operation, and that contains explicit ACL information:

```
dn: o=Athletics, o=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU
aclEntry: access-id: cn=Mark Crawford, ou=Human Resources, ou=Delta Home Media Ltd.,
o=Deltawing, c=AU:normal:rswc:sensitive:rsc:object:d
(other attributes not shown)
```

The directory also contains an entry with DN `ou=Production, ou=Vision On Demand, o=Deltawing, c=AU`, which is the new Superior of the Modify DN operation. This entry inherits the following ACL information (propagated from a superior entry):

```
aclEntry: access-id: dn: cn=Mark Crawford, ou=Human Resources, ou=Delta Home Media
Ltd., o=Deltawing, c=AU:normal:rswc:sensitive:rsc:object:a
```

In addition, there are several entries containing attributes of DN syntax. For this example, assume that these attribute types and their respective attribute access classes are as follows:

attribute: reportingOrganization

access-class: sensitive

attribute: workingOrganization

access-class: normal

The LDIF format representation of the entries containing `reportingOrganization` or `workingOrganization` attributes are:

```
dn: cn=Lisa Fare, ou=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU
cn: Lisa Fare
objectclass: organizationalPerson
objectclass: person
objectclass: TOP
aclEntry: access-id: cn=Mark Crawford, ou=Human Resources, ou=Delta Home
Media Ltd., o=Deltawing, c=AU:normal:rsc:sensitive:rs
sn: Fare
title: Occupational Health and Safety Administrator
telephonenumber: (07) 635 1432
manager: cn=John Gardner, ou=Human Resources Group, ou=Deltawing InfoSystems,
o=Deltawing, c=AU
secretary: cn=Ian Campbell, o=Deltawing, c=AU
reportingOrganization: o=Athletics, o=Human Resources, ou=Delta Home Media Ltd.,
o=Deltawing, c=AU

dn: cn=Laurie Wood, ou=Human Resources Group, ou=Deltawing Automotive Ltd., o=Deltawing, c=AU
cn: Laurie Wood
objectclass: organizationalPerson
objectclass: person
objectclass: TOP
aclEntry: access-id: cn=Mark Crawford, ou=Human Resources, ou=Delta Home
Media Ltd., o=Deltawing, c=AU:normal:rswc:sensitive:rsw
sn: Wood
telephonenumber: (03) 9335 2114
title: Pay Officer
workingOrganization: o=Athletics, o=Human Resources, ou=Delta Home Media Ltd.,
o=Deltawing, c=AU
```

Relocating an entry

User "cn=Mark Crawford, ou=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU" submits the following Modify DN operation request to the server to relocate the target entry:

```
ldapmoddn -h ldaphost -p ldapport -D "cn=Mark Crawford, ou=Human Resources, ou=Delta Home
Media Ltd., o=Deltawing, c=AU" -w passwd -s "ou=Production, ou=Vision On Demand,
o=Deltawing, c=AU" "o=Athletics, o=Human Resources, ou=Delta Home Media Ltd., o=Deltawing,
c=AU" "o=Athletics Division"
```

The `-s` parameter specifying `newSuperior` is present on this operation request, so in addition to the access permissions needed for all Modify DN operations (**w** on affected attributes), the user also needs **object:d** on the target entry and **object:a** on the `newSuperior` entry. The bound user is in the **aclEntry** for the target entry and in the **aclEntry** for the `newSuperior` entry, and has all required access permissions (can write attributes and delete the target entry, and can add objects under the `newSuperior` entry), so the operation is permitted.

Relocating an entry with DN realignment requested

If the same user submits a Modify DN operation request to the server to relocate the same target entry under the same `newSuperior` entry, but with the addition of the control requesting realignment of DN attribute values (`-a` parameter):

```
ldapmoddn -h ldaphost -p ldappart -D "cn=Mark Crawford, ou=Human Resources,
ou=Delta Home Media Ltd., o=Deltawing,c=AU" -w passwd -a -s "ou=Production, ou=Vision On
Demand,
o=Deltawing, c=AU" "o=Athletics, o=Human Resources, ou=Delta Home Media Ltd., o=Deltawing,
c=AU"
"o=Athletics Division"
```

In addition to the permissions required on the previous example, this operation requires additional permissions to be checked on entries containing values which qualify for realignment. The DN being modified ("o=Athletics, o=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU") is found in DN-syntax attributes of two entries: The entry with DN "cn=Laurie Wood, ou=Human Resources Group, ou=Deltawing Automotive Ltd., o=Deltawing, c=AU" contains this value in the **workingOrganization** attribute, and the entry with DN "cn=Lisa Fare, ou=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU" contains this value in the **reportingOrganization** attribute.

The bound user is in the **aclEntry** for "cn=Laurie Wood, ou=Human Resources Group, ou=Deltawing Automotive Ltd., o=Deltawing, c=AU". The **workingOrganization** attribute is in the access-class of normal, and the bound user is granted **w** access to this class of attributes, so the realignment of the DN value would be permitted in this entry.

The bound user is also in the **aclEntry** for "cn=Lisa Fare, ou=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU". The **reportingOrganization** attribute is in the access-class of sensitive, and the bound user is granted only **rs** permissions on **sensitive** attributes in the entry, so the realignment of this value would be denied. Even though the bound user had adequate permissions to perform the relocation of the target entry and had adequate permissions to perform realignment of the DN value in one of the two entries containing a matching DN, the operation would fail because the bound user does not have the necessary permissions on everything that is needed to complete the operation.

Access control changes

If a Modify DN operation is accompanied by the `newSuperior` parameter, changes in effective ACLs and in effective ownership of the relocated entries may result. Regardless of the effective ACLs which applied to the moved subtree in its old location, the moved subtree inherits any propagating ACLs applying to the `newSuperior` entry. As a consequence, entries to which a user had access before the request might no longer be accessible by that user, and entries to which access was denied for a given user before the request is accessible by that user.

Explicit ACLs in the entry or subtree override propagating ACLs. All explicit ACLs which were in the moved subtree at its original location move along with the entries.

When renaming a DN, it is possible that ACLs and entryOwners containing the renamed DN are modified. Therefore, before such a move or rename, users should carefully consider how ownership and accessibility to entries protected by these attributes might change after the move, and what ACL and ownership changes might be wanted, if any.

The following is an example of how a Modify DN operation might affect access controls:

```

ModifyDNRequest ::= {
entry          o=Athletics, o=Human Resources, o=Deltawing, c=AU
newrldn        o=Adult Athletics
deleteoldrldn  FALSE,
newSuperior    ou=Sport, ou=Vision On Demand, o=Deltawing,c=AU
}

```

```

ldapmodrldn -h ldaphost -p ldapport -D binddn -w passwd -s "ou=Sport,
ou=Vision On Demand, o=Deltawing, c=AU" "o=Athletics,o=Human Resources,
o=Deltawing, c=AU" "o=Adult Athletics"

```

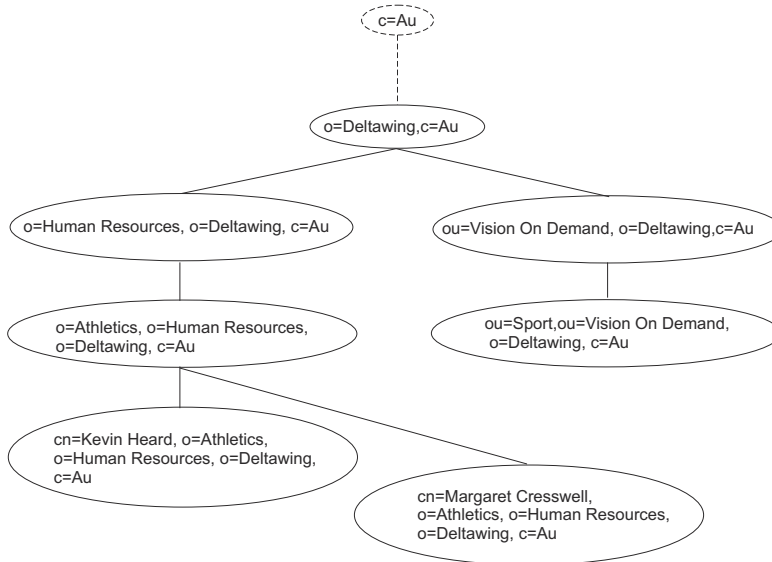


Figure 15. Before Modify DN operation

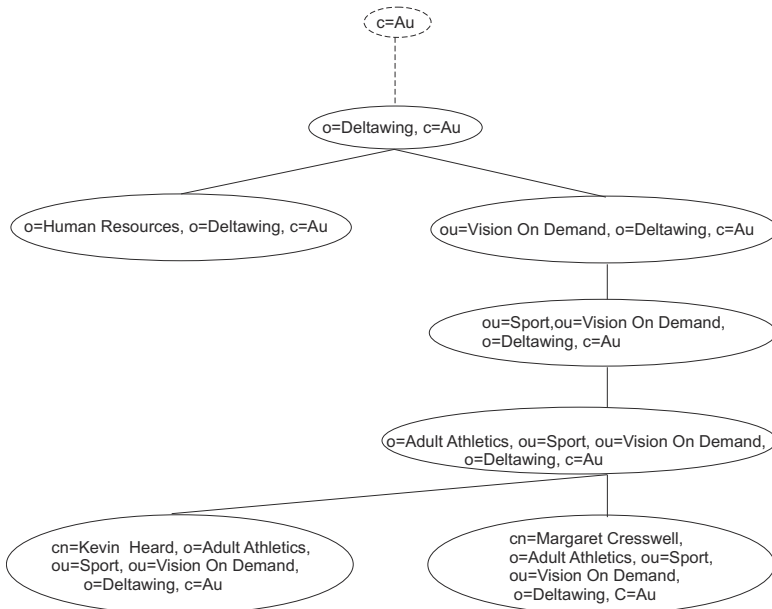


Figure 16. After Modify DN operation

Assume that the entry with DN o=Human Resources, o=Deltawing, c=AU has an explicit propagating ACL containing the following **aclEntry**:

```

aclEntry: access-id: cn=Mark Edmondson, ou=Vision On Demand, ou=Delta Home Media Ltd.,
o=Deltawing, c=au:normal:rwcs:sensitive:rwcs:critical:rows:object:d

```


Also, assume that the entry with DN `ou=Sport, ou=Vision On Demand, o=Deltawing, c=AU` has an explicit propagating ACL containing the following **aclEntry**:

```
aclEntry: access-id: cn=Mark Edmondson, ou=Vision On Demand, ou=Delta Home Media Ltd.,  
o=Deltawing,c=au:normal:rws:sensitive:r:critical:r:object:a
```

If the user bound as DN `cn=Mark Edmondson, ou=Vision On Demand, ou=Delta Home Media Ltd., o=Deltawing, c=AU` performs the example Modify DN operation, there are at least two consequences that should be noted:

- While this DN previously had **rwcs** permissions on sensitive attributes in the entry `o=Athletics, o=Human Resources, o=Deltawing, c=AU` and **rws** permissions on critical attributes in the same entry, this DN has only **r** access on both sensitive and critical attributes in the entry after the relocation. It might be expected that a given DN has the same accessibility to specific entries and data in the directory after a Modify DN operation as it had to those entries and data before the operation, but this example demonstrates that such an expectation is not valid.
- If, after completion of the Modify DN operation, the bound user decides that they want to return the moved entry (and its subordinates) back to their original location in the directory hierarchy, this is not possible with the access controls currently in place. The bound DN has only **object:d** permission on the old superior node (`"o=Human Resources, o=Deltawing, c=AU"`) where **object:a** is needed to affect the move of an entry or subtree under the superior node, and the bound DN has only **object:a** permission on the moved entry (`"o=Adult Athletics, ou=Sport, ou=Vision On Demand, o=Deltawing, c=AU"`) where **object:d** is needed to move the entry. Therefore, while it might be expected that a given DN can reverse a Modify DN operation under all circumstances, this example demonstrates that such an expectation is not valid.

Ownership changes

When the new `Superior` parameter accompanies the Modify DN request, any entries in a relocated subtree which had explicit owners before the relocation preserves that explicit ownership after the relocation is performed. Any entries in the relocated subtree which inherited ownership before relocation continues to inherit ownership following relocation. If the owning entry before relocation was a node superior to the relocated entry, the owning entry is the new superior entry. If the owning entry was an entry within the relocated subtree, the owning entry is preserved following the relocation.

Any entries in the relocated subtree which propagated ownership to subordinates before relocation continue to propagate ownership to subordinates after the relocation.

See the example in [“Access control changes” on page 305](#).

Assume that the entry with DN `o=Human Resources, o=Deltawing, c=AU` has an explicit propagating owner of `cn=Mark Crawford, ou=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU`.

Also, assume that the entry with DN `ou=Sport, ou=Vision On Demand, o=Deltawing, c=AU` has an explicit propagating owner of `cn=Neville McAuliffe, ou=Human Resources Group, ou=Deltawing Infosystems, o=Deltawing, c=AU`.

Before the Modify DN operation, the effective owner of the renamed entry is `cn=Mark Crawford, ou=Human Resources, ou=Delta Home Media Ltd., o=Deltawing, c=AU`; after completion of the operation, the effective owner of the renamed entry is now `cn=Neville McAuliffe, ou=Human Resources Group, ou=Deltawing Infosystems, o=Deltawing, c=AU`. Therefore, the act of relocating an entry might change the effective owner of that entry and of its subordinates.

Modify DN operations related to suffix DNs

The Modify DN operation might be used to modify the DNs of any entries in a TDBM or LDBM backend. In addition to renaming leaf entries (directory entries with no subordinate entries) and mid-hierarchy entries (directory entries which have both superior entries and subordinate entries), suffix entries might

also be renamed. Suffix entries might be renamed to become non-suffix entries and suffix entries might be renamed such that they continue to be suffix entries. In addition, non-suffix entries might be renamed to become suffix entries. This section provides example scenarios for rename operations which involve suffix entries. It summarizes constraints which are adopted for the LDAP directory implementation which are not defined in the protocol behavior prescribed by [RFC 2251 \(tools.ietf.org/html/rfc2251\)](https://tools.ietf.org/html/rfc2251) for the Modify DN operation. Examples are provided on how various renaming scenarios might be accomplished, and factors to be considered when performing these operations are mentioned.

Note: Do not rename the `cn=ibmpolicies` and `cn=configuration` CDBM suffix entries. Renaming these suffixes can cause configuration related problems. The global password policy entry, `cn=pwdpolicy`, `cn=ibmpolicies`, cannot be renamed. If a user or group entry has a reference to a password policy entry in an **ibm-pwdIndividualPolicyDN** or **ibm-pwdGroupPolicyDN** attribute value, the individual or group password policy entry cannot be renamed or deleted until the association is removed from all user or group entries.

Scenario constraints

Several constraints apply which are not defined by [RFC 2251 \(tools.ietf.org/html/rfc2251\)](https://tools.ietf.org/html/rfc2251) in the description of the protocol behavior:

1. If an entry being renamed becomes (or remains) a suffix, the new DN must be designated in the server's configuration file as a suffix for the backend, otherwise the operation is not permitted.
2. The `newRdn` parameter of the Modify DN request must contain a non-null value, otherwise the operation request is treated as an error.
3. If the `newSuperior` parameter is present, it might contain a zero-length string signifying that the new entry does not have a superior entry, therefore is a suffix entry.

In the directory hierarchy diagrams which follow, a circle outlined with a dashed line represents a component of a suffix DN. Circles containing gray fill represent DN's for which an entry exists in the directory.

Example scenarios

The following are example scenarios:

1. Rename a suffix RDN with no accompanying *newSuperior*, and the new DN remains a suffix after the rename is completed.

For example:

Suffixes defined in the server configuration file:

suffix: `ou=End_GPL, o=MyCompany, c=US`

suffix: `ou=Endicott, o=MyCompany, c=US`

Rename operation is to rename suffix entry

`ou=End_GPL, o=MyCompany, c=US`

to suffix entry

`ou=Endicott, o=MyCompany, c=US`

The following figure shows an example of this operation:

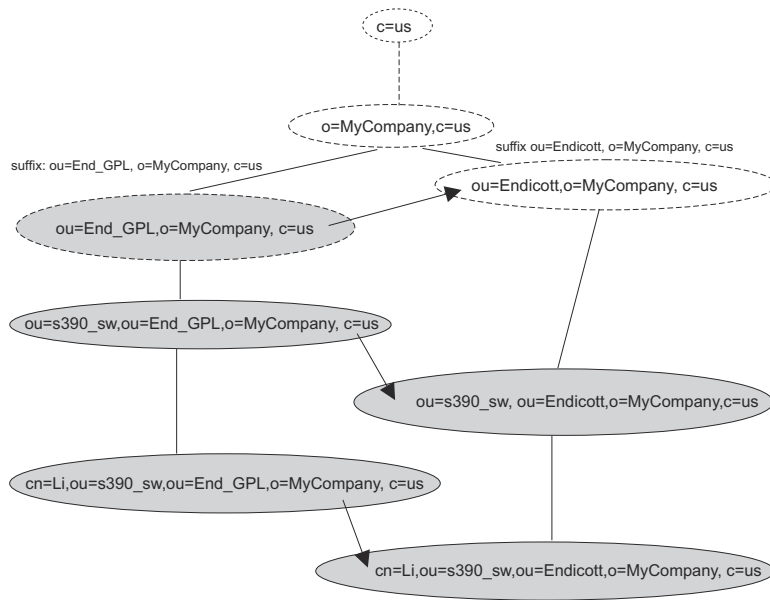


Figure 17. Suffix rename with no new superior

The new DN must be already designated as a suffix for this backend, otherwise this operation fails.

The operation is performed the same as a rename of any other RDN in the directory

- a. Send Modify DN operation request with
 - target=ou=End_GPL, o=MyCompany, c=US
 - newRdn=ou=Endicott

This results in renaming ou=End_GPL, o=MyCompany, c=US to ou=Endicott, o=MyCompany, c=US and in renaming subordinate entries accordingly.

2. Rename of suffix DN with an accompanying *newSuperior*, and the new DN remains a suffix after the rename is completed. For example:

Suffix defined in the server configuration file:

suffix: ou=Endicott, o=MyCompany, c=us

Rename operation is to rename suffix entry

ou=Endicott, o=MyCompany, c=us

to suffix entry

o=MyCompany, c=us

The following figure shows an example of this operation:

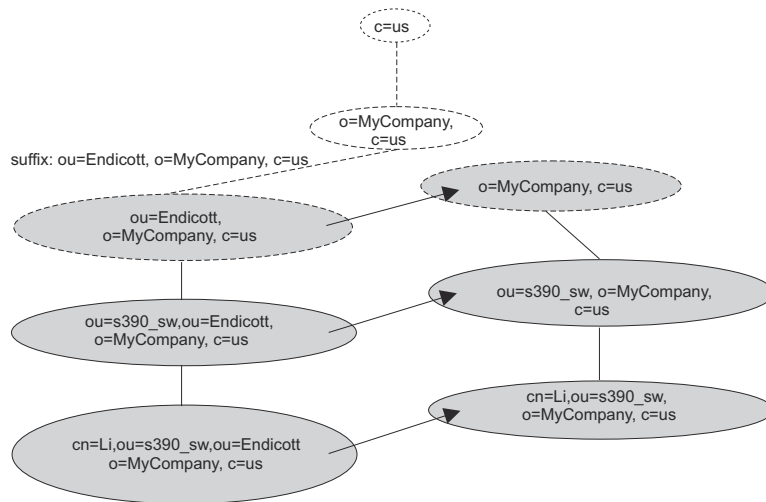


Figure 18. Suffix rename with new superior

This scenario, which involves renaming an existing suffix to an overlapping new suffix, must be performed in several steps, since the product does not permit designation in the server configuration file of overlapping suffixes. The definition of overlapping suffixes is when two suffixes with differing numbers of naming components are equal to the extent of the shorter of the two suffixes. For example, `ou=Endicott, o=MyCompany, c=US` and `o=MyCompany, c=US` are considered to be overlapping suffixes, while `ou=Endicott, o=MyCompany, c=US` and `ou=Raleigh, o=MyCompany, c=US` are not considered to be overlapping suffixes.

This rename can be accomplished by having a temporary suffix pre-defined for the backend (for example, `o=OurTemporarySuffix`), renaming the target entry to become the temporary suffix, stopping the server and deleting the suffix `ou=Endicott, o=MyCompany, c=us` and adding the suffix `o=MyCompany, c=us`, and restarting the server. The temporary suffix would later be deleted from the list of suffixes for the backend.

- a. Send a Modify DN operation request with
 - target= `ou=Endicott, o=MyCompany, c=us`
 - newRdn= `o=OurTemporarySuffix`
 - newSuperior= "" (present in request with zero-length string)

This results in renaming `ou=Endicott, o=MyCompany, c=us` to `o=OurTemporarySuffix`. Note that the server treats `newRdn` as an error if it contains a zero-length string, but zero-length strings are permitted in the `newSuperior` argument to signify that the superior entry is the root DN.

- b. Stop server, remove suffix `ou=Endicott, o=MyCompany, c=us` from the server configuration file, add suffix `o=MyCompany, c=us`, and restart server.

This results in adding the target suffix that you want without a resulting conflict from overlapping suffixes.

- c. Send a Modify DN operation request with
 - target= `o=OurTemporarySuffix`
 - newRdn= `o=MyCompany`
 - newSuperior= `c=us`

This step results in renaming the temporary suffix `o=OurTemporarySuffix` to the requested suffix `o=MyCompany, c=us`, accomplishing the rename from `ou=Endicott, o=MyCompany, c=us` to `o=MyCompany, c=us`. In the process, subordinate entries would be renamed accordingly.

3. This example shows the renaming of a suffix to another overlapping suffix higher in the directory hierarchy. A similar scenario could also be performed involving the rename of a suffix to another overlapping suffix, where the new name is a suffix lower in the directory hierarchy. For example:

Suffix defined in the server configuration file suffix:

```
ou=Endicott, o=MyCompany, c=us
```

Rename operation is to rename suffix entry:

```
ou=Endicott, o=MyCompany, c=us
```

to suffix entry:

```
div=S390, ou=Endicott, o=MyCompany, c=us
```

The following figure shows an example of this operation:

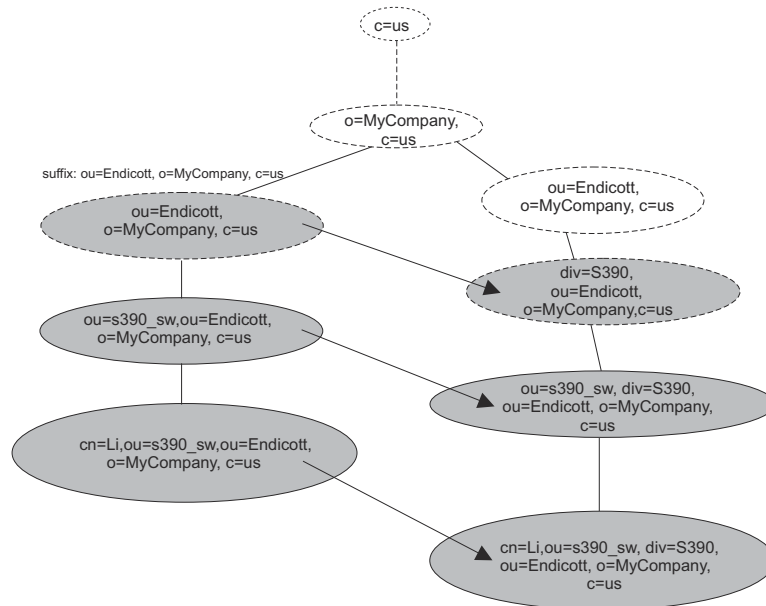


Figure 19. Overlapping suffix rename A

This rename can be accomplished by having a temporary suffix pre-defined for this backend in the server configuration file (for example, `o=OurTemporarySuffix`), renaming the target entry to become the temporary suffix, stopping the server and deleting the suffix `ou=Endicott, o=MyCompany, c=us` and adding the suffix `div=S390, ou=Endicott, o=MyCompany, c=us`, and restarting the server. The temporary suffix would later be deleted from the list of suffixes for the backend. This scenario would be done as follows:

- Send a Modify DN operation request with
target= `ou=Endicott, o=MyCompany, c=us`
newRdn= `o=OurTemporarySuffix`
newSuperior= "" (present in request with zero-length string)
- Stop server, remove suffix `ou=Endicott, o=MyCompany, c=us`, add suffix `div=S390, ou=Endicott, o=MyCompany, c=us`, and restart server.
- Send a Modify DN operation request with
target= `o=OurTemporarySuffix`
newRdn= `div=S390`
newSuperior= `ou=Endicott, o=MyCompany, c=us`

If basic replication is configured, it should be noted that if these operational scenarios are to be replicated from a master server to one or more replica servers, there is a procedure this must be followed to permit this. Advanced replication does not support a Modify DN operation from one replication context to another replication context. Therefore, the following procedure only works with basic replication.

- Stop the replica server, add the temporary suffix (`o=OurTemporarySuffix` in our examples), restart the replica server.

- b. On the master server, perform the previous Steps “3.a” on page 311 and “3.b” on page 311 from the examples above. This results in the intermediate rename to be performed on the master server and the results to be propagated to the replica server.
 - c. Stop the replica server, delete the original suffix (ou=Endicott, o=MyCompany, c=us in both examples above), add the new suffix (o=MyCompany, c=us in the first example above, div=S390, ou=Endicott, o=MyCompany, c=us in the second example above), and restart the replica server.
 - d. On the master server, perform the previous Step “3.c” on page 311 from the examples above. This results in the rename of entries to the final destination on the master server and in the results being propagated to the replica server.
4. Rename of suffix DN (some component other than RDN), and the new DN remains a suffix after the rename is completed. For example:

Suffixes defined in the server configuration file:

suffix: ou=Endicott, o=MyCompany, c=us

suffix: ou=Endicott, o=MyCompany_ny, c=us

Rename operation is to rename suffix entry:

ou=Endicott, o=MyCompany, c=us

to suffix entry ou=Endicott, o=MyCompany_ny, c=us

The following figure shows an example of this operation:

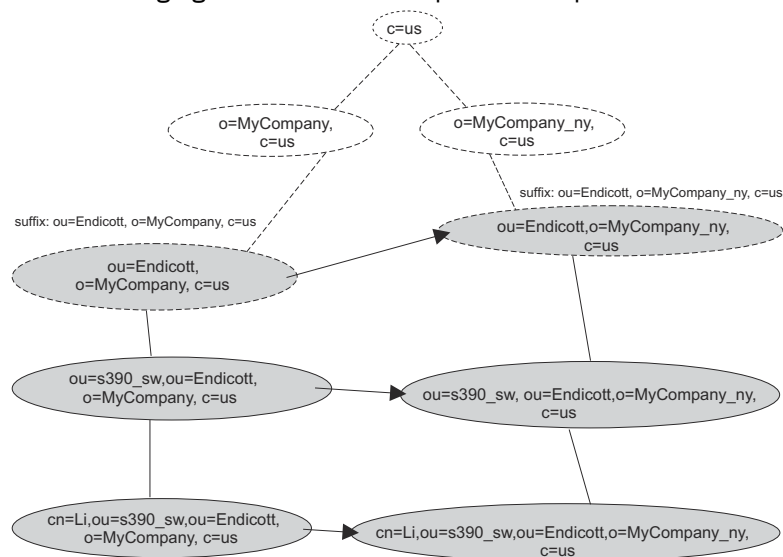


Figure 20. Overlapping suffix rename B

The new DN must be already designated as a suffix for this backend, otherwise this operation fails. The operation is performed the same as a rename of any other DN in the directory. The product permits the rename to occur in one step, even if an entry for *newSuperior* does not already exist, since the newly named entry becomes a suffix entry.

- a. Send a Modify DN operation request with
 - target= ou=Endicott, o=MyCompany, c=us
 - newRdn= ou=Endicott
 - newSuperior= o=MyCompany_ny, c=us

This results in renaming the DN from ou=Endicott, o=MyCompany, c=us to u=Endicott, o=MyCompany_ny, c=us and in renaming subordinate entries accordingly.

5. Rename of suffix DN (including some component other than RDN), with an accompanying *newSuperior*, but the new DN is no longer a suffix. For example:

Suffixes defined in the server configuration file:

suffix: ou=End, o=MyCompany, c=us

suffix: ou=End, ou=MyCompany_na, o=MyCompany, c=us

Rename operation is to rename suffix entry ou=End, o=MyCompany, c=us

to non-suffix entry ou=GPL, ou=End, ou=MyCompany_na, o=MyCompany, c=us

The following figure shows an example of this operation:

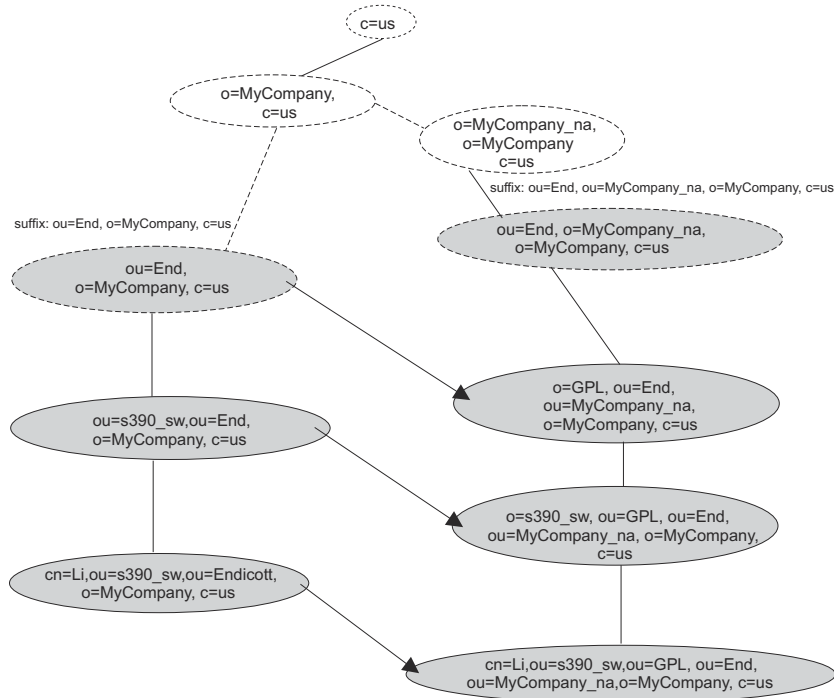


Figure 21. Suffix rename to non-suffix entry

The *newSuperior* entry must already exist before this operation is permitted.

- a. Send a Modify DN operation request with
target= ou=End, o=MyCompany, c=us
newRdn= ou=GPL
newSuperior= ou=End, ou=MyCompany_na, o=MyCompany, c=us

This results in renaming ou=End, o=MyCompany, c=us to ou=GPL, ou=End, ou=MyCompany_na, o=MyCompany, c=us and in renaming subordinate entries accordingly.

6. Rename of a non-suffix DN (including some component other than RDN), with an accompanying *newSuperior*, and the new DN is now a suffix. For example:

Suffixes defined in the server configuration file:

suffix: ou=End, o=MyCompany, c=us

suffix: o=Lotus, c=us

Rename operation is to rename non-suffix

div=Lotus, ou=End, o=MyCompany, c=us

to suffix o=Lotus, c=us

The following figure shows an example of this operation:

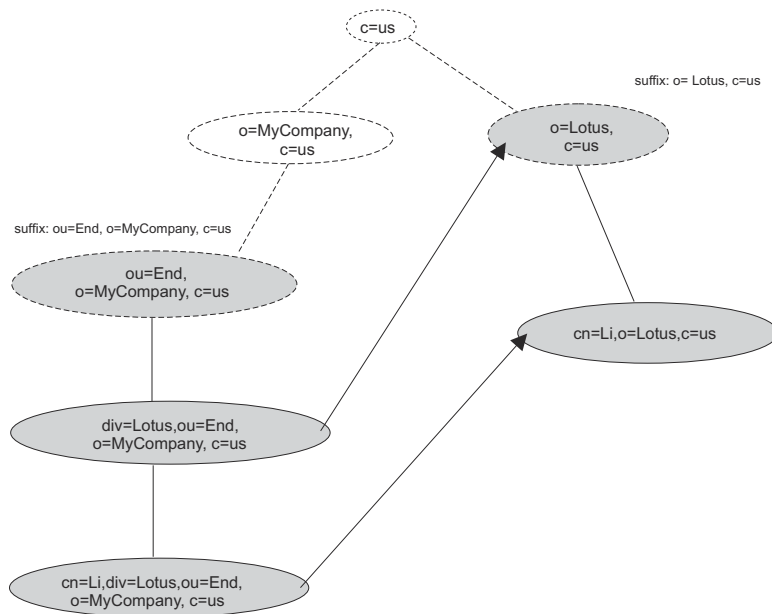


Figure 22. Rename non-suffix entry to suffix entry

The new DN must be already designated as a suffix for this backend, otherwise this operation fails.

- a. Send a Modify DN operation request with
 - target= div=Lotus, ou=Endicott, o=MyCompany, c=us
 - newRdn= o=Lotus
 - newSuperior= c=us

This step results in renaming div=Lotus, ou=Endicott, o=MyCompany, c=us to o=Lotus, c=us and in renaming subordinate entries accordingly.

Modify DN operations and replication

Modify DN operations may be classified into two categories:

1. Simple Modify DN operations are those that rename a leaf node, and that are not accompanied by the newSuperior parameter or the **IBMModifyDNRealignDNAttributesControl** control or the **IBMModifyDNTimelimitControl** control.
2. Complex Modify DN operations are those that either rename a mid-tree (non-leaf) node, or that are accompanied by the newSuperior parameter, or that are accompanied by either the **IBMModifyDNRealignDNAttributesControl** control or the **IBMModifyDNTimelimitControl** control.

If basic replication is configured, simple Modify DN operations are always accepted by the master server, and are replicated if replica entries are present in the TDBM, LDBM, or CDBM backend where a Modify DN operation is applied.

If advanced replication is configured, simple Modify DN operations are only accepted by the supplier server when the operation occurs within the same replication context.

A compatible server version is one known to support for Modify DN operations all features and controls implemented by the z/OS LDAP server including:

- the **IBMModifyDNRealignDNAttributesControl** control
- the **IBMModifyDNTimelimitControl** control
- the newSuperior parameter
- rename of non-leaf entries (complex Modify DN operations).

If one or more of these features or controls is not supported by a replica or consumer server, all complex Modify DN operations are refused at the master server. If advanced replication is configured, complex Modify DN operations are only allowed within the same replication context.

Initial validation of compatible server versions in consumer and replica servers

Checks are made of consumer or replica servers by the supplier or master server which are intended to increase the likelihood that complex Modify DN operations will be successfully replicated.

The LDAP server must be able to establish a connection to each of the consumer or replica servers represented by replication agreement entries or replica entries in a TDBM or LDBM backend. When the connection is established to a given consumer or replica server, the supplier or master server determines if the consumer or replica server is at a compatible server version based on a query of the root DSE on that server. If a connection cannot be established to a consumer or replica server, it is assumed that the server does not provide the requisite support for replication of Modify DN operations, and complex Modify DN operations are refused on the consumer or master server. If a connection is established to a consumer or replica server and it is determined that the consumer or replica is not at a compatible server version, complex Modify DN operations are refused at the consumer or master server. In a basic replication environment, the replication of simple Modify DN operations is always permitted, and such operations are always performed at the master server. In an advanced replication environment, simple and complex Modify DN operations must occur within the same replication context, otherwise they are not allowed.

Periodic validation of compatible server versions in basic replication replicas

The following periodic replica checks are only performed in a basic replication environment and not in an advanced replication environment.

The master server may enable or disable processing of complex Modify DN operations, depending on dynamically changing states of replica servers and of replica entries within the master server's TDBM or LDBM backend. It is possible for the server to refuse complex Modify DN operations after having accepted them for some period of time, and it is possible for the server to accept complex Modify DN operations after having refused them for some period of time. Such a change can be triggered by several events. Each replication cycle tests connections to all replica servers defined by replica entries in the TDBM or LDBM backend, and if a connection can no longer be established to any of the replica servers (even if it had been established to the same replica on the previous replication cycle), the master server begins refusing complex Modify DN operations. If all connections succeed but it is determined that one or more of the replica servers is not at a compatible server version (such as might happen, for example, when the replica server has been stopped when running one version of the LDAP server code and subsequently restarted using a different version of the LDAP server code), the master server begins refusing complex Modify DN operations. Only if connections may be established successfully to all replica servers and if they are determined to be running a compatible server version will the master server resume accepting complex Modify DN operations.

Other possible events which may influence whether the master server accepts or refuses complex Modify DN operations involve:

- the addition of new replica entries
- deletion of existing replica entries
- modification of existing replica entries in the TDBM or LDBM backend.

Each of these causes the master server to temporarily suspend processing of complex Modify DN operations, until the check of replica servers at the start of the next replication cycle, at which point the replica server version levels will be used to determine whether the master server resumes accepting complex Modify DN operations.

To determine whether a replica server is at a compatible version level, submit a root DSE search to that server, similar to the following. The `-D` and `-w` options only need to be specified if the replica server does not support anonymous binds.

```
ldapsearch -h ldaphost -p ldapport -D binddn -w passwd  
-s base -b "" objectclass=* ibm-enabledCapabilities
```

where *ldaphost* represents the hostname on which the replica server runs, *ldapport* is the port number on which the replica server is listening, and *binddn* and *passwd* are the distinguished name and password of a user on the replica server.

If the **ibm-enabledCapabilities** attribute is returned on the root DSE search and its values contain 1.3.18.0.2.32.33 (subtree move) or 1.3.18.0.2.32.34 (subtree rename), then the replica server can support those operations.

Loss of basic replication synchronization because of incompatible replica server versions

The LDAP server basic replication model runs periodically, rather than continuously, and the state of the replica is not checked until the start of each replication cycle. A complex Modify DN operation could be accepted or rejected based on inaccurate information about the state of a replica server between the start of two replication cycles. As a consequence, the basic replication process could stall and the synchronization between the master server and its replicas could be lost.

Attention

It is suggested that an LDAP administrator responsible for configuring replication ensure that each replica server is at a compatible server version level before starting a master server which may be the recipient of complex Modify DN operations.

Loss of basic replication synchronization because of incompatible replica server versions - recovery

If at some point a master server accepts a complex Modify DN operation which cannot be replicated, there are several means of recovering from this situation. The best method of recovering from this situation is to ensure that all replica servers are reachable from the master server, and that all replica servers are running at a compatible version level (this may entail stopping some replica servers and restarting them at a compatible version level). Once this state has been reached, queued changes awaiting propagation to replica servers will drain from the queue at the master server and the replication process will resume normal operation.

An alternative is to delete the replica entry from the master server corresponding to the replica server which is currently unreachable or which is running at an incompatible server level. Note that this will result in loss of synchronization with that replica server, and if you want to later restart the offending replica (such as, after it has been started to a compatible server version) it will be necessary to take a backup of the master server contents and restore those contents to the replica server before restarting it, to ensure that the two directories are synchronized.

Chapter 17. Accessing RACF information

RACF provides definitions of users, groups, classes, and general resources, and access control for resources. The LDAP server can provide LDAP access to this information stored in RACF.

Using SDBM, the RACF database backend of the LDAP server, you can accomplish the following tasks:

- Add, modify, and delete RACF users, groups, and general resources. Data set resources are not supported.
- Add, modify, and delete user connections to groups.
- Add and remove users and groups in general resource access lists.
- Modify SETROPTS options that affect classes (for example, RACLIST).
- Retrieve RACF information for users, groups, connections, general resources, and class options.
- Retrieve RACF user password and password phrase envelopes.

The SDBM backend of the LDAP server implements portions of these RACF commands: ADDUSER, ADDGROUP, RDEFINE, ALTUSER, ALTGROUP, RALTER, PERMIT, SETROPTS, DELUSER, DELGROUP, RDELETE, CONNECT, REMOVE, and SEARCH. SDBM uses the **R_admin** "run command" interface to start these RACF commands. As a result, this support is subject to the restrictions and authorization requirements of the **R_admin** interface. For more information about these topics, see *z/OS Security Server RACF Callable Services*. One restriction in particular affects return of search results obtained by using the RACF SEARCH command. See ["RACF restriction on amount of output"](#) on page 355 for more details.

SDBM uses the **R_admin** profile extract functions to retrieve user, group, connection, and resource information. It uses the **R_admin** setropts extract function to retrieve class options information. These interfaces are not subject to any restrictions on the amount of data returned, but they do require appropriate authorization.

Note that the SDBM backend only updates the default RACF on a given system. That is, the AT and ONLYAT clauses of the RACF commands, used to redirect RACF commands, are not used by SDBM.

For more information about the supported RACF commands, see *z/OS Security Server RACF Command Language Reference*.

See ["Setting up for SDBM"](#) on page 62 for information about getting your LDAP server configured with SDBM.

SDBM authorization

SDBM operations can be performed after several different types of binds to the LDAP server. In each of these binds, the LDAP server associates a RACF user ID with the bound user. SDBM starts RACF commands under the context of this RACF user ID, and RACF uses its normal authorization processing to determine what this RACF user ID can do.

The supported bind mechanisms are as follows.

Simple bind to SDBM

The RACF user ID is specified in the bind DN. See ["Binding using a RACF user ID and password or password phrase"](#) on page 318 for more information.

LDBM, TDBM, or CDBM native authentication bind

The RACF user ID specified in the native authentication entry is used. See [Chapter 20, "Native authentication,"](#) on page 397 for more information.

Kerberos bind

The RACF user ID is mapped by SDBM from the Kerberos identity. See ["SDBM mapping"](#) on page 392 for more information.

Certificate bind

The RACF user ID associated with the certificate is used. See [“Support of certificate bind”](#) on page 76 for more information.

RACF authorization

LDAP requests to the SDBM backend are converted to function calls to the RACF R_admin callable service. If the configuration option `radminAuthCheck` is set to yes, RACF FACILITY class authorization check is performed against each user that is bound to the SDBM backend. The following RACF commands grant RACF user USERID required access to the R_admin functions that are used by the SDBM backend.

```
PERMIT IRR.RADMIN.ADDGROUP CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.ADDUSER CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.ALTGROUP CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.ALTUSER CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.CONNECT CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.DELGROUP CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.DELUSER CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.LISTGRP CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.LISTUSER CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.PERMIT CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.RALTER CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.RDEFINE CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.RDELETE CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.REMOVE CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.RLIST CLASS(FACILITY) ID(USERID) ACCESS(READ)
PERMIT IRR.RADMIN.SEARCH CLASS(FACILITY) ID(USERID) ACCESS(REA
```

Binding using a RACF user ID and password or password phrase

The SDBM backend allows for directory authentication (or bind) using the RACF user ID and password or password phrase. The RACF user and group information that make up an identity can be used to establish access control on other LDAP directory entities. This expands use of the RACF identity to the rest of the LDAP-managed namespace. Note the following when using RACF access:

- The RACF user ID must have READ access to the LDAP server profile that is defined in RACF. In the following example, LDAPNAME is the job name of the LDAP server and USERID is the RACF user ID used to bind to the LDAP server:

```
PERMIT LDAPNAME CLASS(APPL) ID(USERID) ACC(READ)
SETROPTS RACLIST(APPL) REFRESH
```

- An LDAP simple bind to a z/OS LDAP server by using RACF access support but having a non-RACF security manager succeeds if the `RACROUTE REQUEST=VERIFY,ENVIR=CREATE` macro function call made by the LDAP server is successful. However, group membership information might not be available for the bound distinguished name if the security manager is not RACF.
- An LDAP simple bind that is made to a z/OS LDAP server by using RACF access support provides a successful or unsuccessful LDAP return code. In addition, if the LDAP return code is `LDAP_INVALID_CREDENTIALS`, additional information is provided in the "message" portion of the LDAP result. The additional information is an LDAP-unique reason code and reason code text in the following format:

```
Rnnnnnn text
```

The following LDAP reason codes are mapped to return codes returned by the `RACROUTE REQUEST=VERIFY,ENVIR=CREATE` macro:

Table 37. LDAP return and reason codes returned to the client when binding to SDBM

LDAP return code	Reason code	Text
LDAP_INVALID_CREDENTIALS	R000104	The password is not correct or the user ID is not completely defined (missing password or UID).
LDAP_INVALID_CREDENTIALS	R000105	A bind argument is not valid.
LDAP_INVALID_CREDENTIALS	R000100	The password expired.
LDAP_INVALID_CREDENTIALS	R000101	The new password is not valid.
LDAP_INVALID_CREDENTIALS	R000102	The user ID has been revoked.
LDAP_OPERATIONS_ERROR	R000208	Unexpected racroute error safRC=safRC racfRC=racfRC racfReason=racfReason

Note:

1. The same reason codes are issued when binding using a password or a password phrase.
2. The use of RACF PassTickets is supported by the z/OS LDAP server when binding through SDBM. The job name that is associated with the LDAP Server started task should be used as the application name when generating RACF PassTickets. For more information about RACF pass tickets, see [Using PassTickets in z/OS Security Server RACF Security Administrator's Guide](#).

Binding with SDBM using password policy

When authenticating with a user in the SDBM backend, the password policy applied is determined by the underlying z/OS Security Server. Therefore, any configured z/OS LDAP password policy does not apply in these scenarios.

When the PasswordPolicy server control is sent on a bind request, the PasswordPolicy response control is returned on the bind response and has additional warning and error information about the authenticating user's password. Based on information returned from the Security Server, the SDBM backend only supports the following PasswordPolicy response control error codes during bind: accountLocked, insufficientPasswordQuality, mustSupplyOldPassword, and passwordExpired. See [“PasswordPolicy” on page 659](#) for more information.

SDBM group gathering

After successfully authenticating to the LDAP server, a list is created of the groups to which the authenticated RACF user ID belongs. Only groups in which the user ID's membership is active (has not been revoked) are included in the list. This group membership list is used in authorization checking when trying to access entries in directories on the LDAP server.

If the SDBM backend is to be used for authentication purposes only and group membership is not needed, consider having your clients use the authenticateOnly server control, to streamline bind processing. This control overrides any extended group membership searching and default group membership gathering and is supported for Version 3 clients. See [Appendix C, “Supported server controls,” on page 653](#) for more information.

The authenticateOnly control is not necessary if there is no TDBM, LDBM, GDBM, or CDBM backend configured. In this case, SDBM does not do any group gathering.

Associating LDAP attributes to RACF fields

Each RACF field in a user, group, connection, and resource profile and in the RACF class options must be associated with an LDAP attribute. The LDAP attribute is used to set the RACF field value in LDAP add and

modify operations and to represent the RACF field in LDAP search output. There are two types of RACF fields:

- The fixed fields are defined by RACF. For each profile, these fields make up all the segments that are supported by SDBM (including the base segment) except the CSDATA segment.
- The custom fields are defined by customers. These fields make up the CSDATA segment in the profile.

Each type is associated to an LDAP attribute in a different way. LDAP uses the R_ADMIN interface to retrieve field values from RACF because certain RACF permissions are required to access these fields. For more information, see [R_admin reference information in z/OS Security Server RACF Callable Services](#) and [Field-level access checking in z/OS Security Server RACF Security Administrator's Guide](#).

Associating LDAP attributes to RACF fixed fields

The fields defined by RACF for user, group, connection, and resource profiles, and for class options (setropts) are mapped to predefined attributes in the LDAP schema. These LDAP attributes cannot be deleted or modified and the attribute names cannot be changed. The following tables show the RACF fixed field names and the associated LDAP attribute names for user profiles (Table 38 on page 320), group profiles (Table 39 on page 324), connection profiles (Table 40 on page 325), resource profiles (Table 41 on page 325) and setropts (Table 42 on page 329). The RACF names in the table are the keywords used to set the field in RACF commands or used by RACF in display output (for display-only fields). Not all names apply to all versions of LDAP and RACF.

<i>Table 38. Mapping of LDAP attribute names to RACF fixed fields (user)</i>		
RACF segment name	RACF keyword in allocuser, adduser, or listuser	LDAP attribute name
User base	ACTIVE or NOACTIVE	racfMFAFactorStatus
User base	ADDCATEGORY	racfSecurityCategoryList
User base	ADDPOLICY	racfMFAPolicy
User base	Multi-value: ADSP, SPECIAL, OPERATIONS, GRPACC, AUDITOR, OIDCARD, UAUDIT, ROAUDIT, or any other one-word values, such as NOEXPIRED and NOOMVS	racfAttributes
User base	AUTH not displayed by LDAP	racfConnectGroupAuthority
User base	CLAUTH	racfClassName
User base	DFLTGRP	racfDefaultGroup
User base	FACTOR	racfMFAFactor
User base	GROUP	racfConnectGroupName
User base	Not modifiable - displayed as LAST-ACCESS	racfLastAccess
User base	NAME	racfProgrammerName
User base	Not modifiable - displayed as PASSDATE	racfPasswordChangeDate
User base	Not modifiable - displayed as PASS-INTERVAL	racfPasswordInterval
User base	PASSWORD	racfPassword

<i>Table 38. Mapping of LDAP attribute names to RACF fixed fields (user) (continued)</i>		
RACF segment name	RACF keyword in allocuser, adduser, or listuser	LDAP attribute name
User base	password envelope - not modifiable	racfPasswordEnvelope
User base	Not modifiable - displayed as PASSWORD ENVELOPED	racfHavePasswordEnvelope
User base	password phrase envelope - not modifiable	racfPassPhraseEnvelope
User base	PHRASE	racfPassPhrase
User base	Not modifiable - displayed as PHRASEDATE	racfPassPhraseChangeDate
User base	Not modifiable - displayed as PHRASE ENVELOPED	racfHavePassPhraseEnvelope
User base	PWFALLBACK or NOPWFALLBACK	racfMFAPWFallback
User base	RESUME	racfResumeDate
User base	REVOKE	racfRevokeDate
User base	SECLABEL	racfSecurityLabel
User base	SECLEVEL	racfSecurityLevel
User base	TAGS	racfMFAFactorTags
User base	UACC - value is not displayed by LDAP	racfConnectGroupUACC
User base	WHEN(DAYS())	racfLogonDays
User base	WHEN(TIME())	racfLogonTime
User base or Group base	Not modifiable - displayed as CREATED	racfAuthorizationDate
User base or Group base	DATA	racfInstallationData
User base or Group base	MODEL	racfDatasetModel
User base or Group base	OWNER	racfOwner
CICS® segment	OPCLASS	racfOperatorClass
CICS segment	OPIDENT	racfOperatorIdentification
CICS segment	OPPRTY	racfOperatorPriority
CICS segment	RSLKEY	racfRslKey
CICS segment	TIMEOUT	racfTerminalTimeout
CICS segment	TSLKEY	racfTslKey
CICS segment	XRFSOFF	racfOperatorReSignon
DCE segment	AUTOLOGIN	racfDCEAutoLogin
DCE segment	DCENAME	racfDCEPrincipal

<i>Table 38. Mapping of LDAP attribute names to RACF fixed fields (user) (continued)</i>		
RACF segment name	RACF keyword in allocuser, adduser, or listuser	LDAP attribute name
DCE segment	HOMECELL	racfDCEHomeCell
DCE segment	HOMEUUID	racfDCEHomeCellUUID
DCE segment	UUID	racfDCEUUID
DFP segment - common to group or user	DATAAPPL	SAFDfpDataApplication
DFP segment - common to group or user	DATACLAS	SAFDfpDataClass
DFP segment - common to group or user	MGMTCLAS	SAFDfpManagementClass
DFP segment - common to group or user	STORCLAS	SAFDfpStorageClass
EIM segment	LDAPPROF	racfLDAPProf
KERB segment	ENCRYPT	racfEncryptType
KERB segment	KERBNAME	krbPrincipalName
KERB segment	Not modifiable - displayed as KEY FROM	racfKerbKeyFrom
KERB segment	Not modifiable - displayed as KEY VERSION	racfCurKeyVersion
KERB segment	MAXTKTLFE	maxTicketAge
LANGUAGE segment	PRIMARY	racfPrimaryLanguage
LANGUAGE segment	SECONDARY	racfSecondaryLanguage
LNOTES segment	SNAME	racfLNotesShortName
NDS segment	UNAME	racfNDSUserName
NETVIEW segment	CONSNAME	racfDefaultConsoleName
NETVIEW segment	CTL	racfCTLKeyword
NETVIEW segment	DOMAINS	racfDomains
NETVIEW segment	IC	racfNetviewInitialCommand
NETVIEW segment	MSGRECV	racfMSGRCVRKeyword
NETVIEW segment	NGMFADMN	racfNGMFADMKeyword
NETVIEW segment	NGMFVSPN	racfNGMFVSPNKeyword
NETVIEW segment	OPCLASS	racfNetviewOperatorClass
User OMVS segment	ASSIZEMAX	racfOmvsMaximumAddressSpaceSize
User OMVS segment	CPUTIMEMAX	racfOmvsMaximumCPUTime
User OMVS segment	FILEPROCMA	racfOmvsMaximumFilesPerProcess
User OMVS segment	HOME	racfOmvsHome
User OMVS segment	MEMLIMIT	racfOmvsMemoryLimit

<i>Table 38. Mapping of LDAP attribute names to RACF fixed fields (user) (continued)</i>		
RACF segment name	RACF keyword in allocuser, adduser, or listuser	LDAP attribute name
User OMVS segment	MMAPAREAMAX	racfOmvMaximumMemoryMapArea
User OMVS segment	PROCUSERMAX	racfOmvMaximumProcessesPerUID
User OMVS segment	PROGRAM	racfOmvInitialProgram
User OMVS segment	SHARED, AUTOUID	racfOmvUidKeyword
User OMVS segment	SHMEMMAX	racfOmvSharedMemoryMaximum
User OMVS segment	THREADSMAX	racfOmvMaximumThreadsPerProcess
User OMVS segment	UID	racfOmvUid
OPERPARM segment	ALTGRP	racfAltGroupKeyword
OPERPARM segment	AUTH	racfAuthKeyword
OPERPARM segment	AUTO	racfAutoKeyword
OPERPARM segment	CMDSYS	racfCMDSYSKeyword
OPERPARM segment	DOM	racfDOMKeyword
OPERPARM segment	HC	racfHcKeyword
OPERPARM segment	INTIDS	racfIntidsKeyword
OPERPARM segment	KEY	racfKEYKeyword
OPERPARM segment	LEVEL	racfLevelKeyword
OPERPARM segment	LOGCMDRESP	racfLogCommandResponseKeyword
OPERPARM segment	MFORM	racfMformKeyword
OPERPARM segment	MIGID	racfMGIDKeyword
OPERPARM segment	MONITOR	racfMonitorKeyword
OPERPARM segment	MSCOPE	racfMscopeSystems
OPERPARM segment	ROUTCODE	racfRoutcodeKeyword
OPERPARM segment	STORAGE	racfStorageKeyword
OPERPARM segment	UD	racfUDKeyword
OPERPARM segment	UNKNIDS	racfUnknidsKeyword
User OVM segment	FSROOT	racfOvmFileSystemRoot
User OVM segment	HOME	racfOvmHome
User OVM segment	PROGRAM	racfOvmInitialProgram
User OVM segment	UID	racfOvmUid
PROXY segment	BINDDN	racfLDAPBindDN
PROXY segment	BINDPW - value is not displayed by LDAP	racfLDAPBindPw
PROXY segment	LDAPHOST	racfLDAPHost
TSO segment	ACCTNUM	SAFAccountNumber

<i>Table 38. Mapping of LDAP attribute names to RACF fixed fields (user) (continued)</i>		
RACF segment name	RACF keyword in allocuser, adduser, or listuser	LDAP attribute name
TSO segment	COMMAND	SAFDefaultCommand
TSO segment	DEST	SAFDestination
TSO segment	HOLDCLASS	SAFHoldClass
TSO segment	JOBCLASS	SAFJobClass
TSO segment	MAXSIZE	SAFMaximumRegionSize
TSO segment	MSGCLASS	SAFMessageClass
TSO segment	PROC	SAFDefaultLoginProc
TSO segment	SECLABEL	SAFTsoSecurityLabel
TSO segment	SIZE	SAFLogonSize
TSO segment	SYSOUTCLASS	SAFDefaultSysoutClass
TSO segment	UNIT	SAFDefaultUnit
TSO segment	USERDATA	SAFUserdata
WORKATTR segment	WAACNT	racfWorkAttrAccountNumber
WORKATTR segment	WAADDR1	racfAddressLine1
WORKATTR segment	WAADDR2	racfAddressLine2
WORKATTR segment	WAADDR3	racfAddressLine3
WORKATTR segment	WAADDR4	racfAddressLine4
WORKATTR segment	WABLDG	racfBuilding
WORKATTR segment	WADEPT	racfDepartment
WORKATTR segment	WANAME	racfWorkAttrUserName
WORKATTR segment	WAROOM	racfRoom
WORKATTR segment	WAEMAIL	racfEmail

<i>Table 39. Mapping of LDAP attribute names to RACF fixed fields (group)</i>		
RACF segment name	RACF keyword in altgroup/ addgroup/ listgrp	LDAP attribute name
Group base	SUPGROUP	racfSuperiorGroup
Group base	Not modifiable - displayed as SUBGROUP(S)	racfSubGroupName
Group base	TERMUACC	racfGroupNoTermUAC
Group base	UNIVERSAL	racfGroupUniversal
Group base	Not modifiable - displayed as USER(S)	racfGroupUserids
User base or Group base	Not modifiable - displayed as CREATED	racfAuthorizationDate

<i>Table 39. Mapping of LDAP attribute names to RACF fixed fields (group) (continued)</i>		
RACF segment name	RACF keyword in altgroup/ addgroup/listgrp	LDAP attribute name
User base or Group base	DATA	racfInstallationData
User base or Group base	MODEL	racfDatasetModel
User base or Group base	OWNER	racfOwner
DFP segment - common to group or user	DATAAPPL	SAFDfpDataApplication
DFP segment - common to group or user	DATACLAS	SAFDfpDataClass
DFP segment - common to group or user	MGMTCLAS	SAFDfpManagementClass
DFP segment - common to group or user	STORCLAS	SAFDfpStorageClass
Group OMVS segment	GID	racfOmvsGroupId
Group OMVS segment	SHARED, AUTOGID	racfOmvsGroupIdKeyword
Group OVM segment	GID	racfOvmGroupId

<i>Table 40. Mapping of LDAP attribute names to RACF fixed fields (connection)</i>		
RACF segment name	RACF keyword in connect	LDAP attribute name
Connection base	Multi-value: ADSP, AUDITOR GRPACC, OPERATIONS, SPECIAL	racfConnectAttributes
Connection base	AUTHORITY	racfConnectGroupAuthority
Connection base	Not modifiable - displayed as CONNECT-DATE	racfConnectAuthDate
Connection base	Not modifiable - displayed as CONNECTS	racfConnectCount
Connection base	Not modifiable - displayed as LAST-CONNECT	racfConnectLastConnect
Connection base	OWNER	racfConnectOwner
Connection base	RESUME	racfConnectResumeDate
Connection base	REVOKE	racfConnectRevokeDate
Connection base	UACC	racfConnectGroupUACC

<i>Table 41. Mapping of LDAP attribute names to RACF fixed fields (resource)</i>		
RACF segment name	RACF keyword in rdefine/ralter/permit	LDAP attribute name
Resource base	Multi-value: SINGLEDSN, TVTOC, WARNING, or any other one-word values, such as NOKERB	racfResourceAttributes
Resource base	ADDCATEGORY	racfSecurityCategoryList
Resource base	ADDMEM	racfMemberList
Resource base	ADDVOL	racfVolumeList
Resource base	Not modifiable - displayed as ALTER COUNT	racfAlterAccessCount
Resource base	APPLDATA	racfApplData

<i>Table 41. Mapping of LDAP attribute names to RACF fixed fields (resource) (continued)</i>		
RACF segment name	RACF keyword in rdefine/ralter/permit	LDAP attribute name
Resource base	AUDIT	racfResourceAudit
Resource base	Not modifiable - displayed as AUTOMATIC	racfAutomatic
Resource base	Not modifiable - displayed as CONTROL COUNT	racfControlAccessCount
Resource base	Not modifiable - displayed as CREATION DATE	racfAuthorizationDate
Resource base	DATA	racfInstallationData
Resource base	FCLASS, FGNERIC, FROM, FVOLUME - value is not displayed by LDAP	racfCopyProfileFrom
Resource base	GLOBALAUDIT	racfResourceGlobalAudit
Resource base	Not modifiable - displayed as LAST CHANGE DATE	racfLastReferenceDate
Resource base	LEVEL	racfLevel
Resource base	NOTIFY	racfNotify
Resource base	OWNER	racfOwner
Resource base	Not modifiable - displayed as READ COUNT	racfReadAccessCount
Resource base	SECLABEL	racfSecurityLabel
Resource base	SECLEVEL	racfSecurityLevel
Resource base	TIMEZONE	racfTimeZone
Resource base	UACC	racfUacc
Resource base	Not modifiable - displayed as UPDATE COUNT	racfUpdateAccessCount
Resource base	WHEN(DAYS())	racfLogonDays
Resource base	WHEN(TIME())	racfLogonTime
Resource base	Any of these PERMIT command keywords: ACCESS, DELETE, FCLASS, FGNERIC, FROM, FVOLUME, ID, RESET, WHEN	racfAccessControl
CDTINFO segment	CASE	racfCdtinfoCase
CDTINFO segment	DEFAULTRC	racfCdtinfoDefaultRc
CDTINFO segment	DEFAULTUACC	racfCdtinfoDefaultUacc
CDTINFO segment	FIRST	racfCdtinfoFirst
CDTINFO segment	GENERIC	racfCdtinfoGeneric
CDTINFO segment	GENLIST	racfCdtinfoGenList
CDTINFO segment	GROUP	racfCdtinfoGroup
CDTINFO segment	KEYQUALIFIERS	racfCdtinfoKeyQualifiers
CDTINFO segment	MACPROCESSING	racfCdtinfoMacProcessing

<i>Table 41. Mapping of LDAP attribute names to RACF fixed fields (resource) (continued)</i>		
RACF segment name	RACF keyword in rdefine/ralter/permit	LDAP attribute name
CDTINFO segment	MAXLENGTH	racfCdtinfoMaxLength
CDTINFO segment	MAXLENX	racfCdtinfoMaxLengthX
CDTINFO segment	MEMBER	racfCdtinfoMember
CDTINFO segment	OPERATIONS	racfCdtinfoOperations
CDTINFO segment	OTHER	racfCdtinfoOther
CDTINFO segment	POSIT	racfCdtinfoPosit
CDTINFO segment	PROFILESALLOWED	racfCdtinfoProfilesAllowed
CDTINFO segment	RACLIST	racfCdtinfoRacList
CDTINFO segment	SECLABELSREQUIRED	racfCdtinfoSecLabelsRequired
CDTINFO segment	SIGNAL	racfCdtinfoSignal
CFDEF segment	FIRST	racfCfdefFirst
CFDEF segment	HELP	racfCfdefHelp
CFDEF segment	LISTHEAD	racfCfdefListHead
CFDEF segment	MAXLENGTH	racfCfdefMaxLength
CFDEF segment	MAXVALUE	racfCfdefMaxValue
CFDEF segment	MINVALUE	racfCfdefMinValue
CFDEF segment	MIXED	racfCfdefMixed
CFDEF segment	OTHER	racfCfdefOther
CFDEF segment	TYPE	racfCfdefType
DLFDATA segment	JOBNAMES	racfDlfddataJobNames
DLFDATA segment	RETAIN	racfDlfddataRetain
EIM segment	DOMAINDN	racfEimDomainDn
EIM segment	KERBREGISTRY	racfEimKerbRegistry
EIM segment	LOCALREGISTRY	racfEimLocalRegistry
EIM segment	OPTIONS	racfEimOptions
EIM segment	X509REGISTRY	racfEimX509Registry
ICSF segment	ASYMUSAGE	racfIcsfAsymUsage
ICSF segment	SYMCPACFRET	racfIcsfSymCpacfRet
ICSF segment	SYMCPACFWRAP	racfIcsfSymCpacfWrap
ICSF segment	SYMEXPORTABLE	racfIcsfSymExportable
ICSF segment	SYMEXPORTCERTS	racfIcsfSymExportCerts
ICSF segment	SYMEXPORTKEYS	racfIcsfSymExportKeys
ICTX segment	DOMAP	racfIctxDoMap
ICTX segment	MAPPINGTIMEOUT	racfIctxMappingTimeOut

<i>Table 41. Mapping of LDAP attribute names to RACF fixed fields (resource) (continued)</i>		
RACF segment name	RACF keyword in rdefine/ralter/permit	LDAP attribute name
ICTX segment	MAPREQUIRED	racfIctxMapRequired
ICTX segment	USEMAP	racfIctxUseMap
IDTPARMS segment	SIGTOKEN	racfIdtSigtoken
IDTPARMS segment	SIGSEQNUM	racfIdtSigseqnum
IDTPARMS segment	SIGCAT	racfIdtSigcat
IDTPARMS segment	SIGALG	racfIdtSigalg
IDTPARMS segment	ANYAPPL	racfIdtAnyappl
IDTPARMS segment	IDTIMEOUT	racfIdtTimeout
KERB segment	DEFTKTLFE	racfKerbDefaultTicketLife
KERB segment	ENCRYPT	racfEncryptType
KERB segment	KERBNAME	krbPrincipalName
KERB segment	Not modifiable - displayed as KEY VERSION	racfCurKeyVersion
KERB segment	MAXTKTLFE	maxTicketAge
KERB segment	MINTKTLFE	racfKerbMinTicketLife
KERB segment	PASSWORD - value is not displayed by LDAP	racfKerbPassword
MFPOLICY segment	FACTORS	racfMfpolicyFactors
MFPOLICY segment	REUSE	racfMfpolicyReuse
MFPOLICY segment	TOKENTIMEOUT	racfMfpolicyTokenTimeout
PROXY segment	BINDDN	racfLDAPBindDn
PROXY segment	BINDPW - value is not displayed by LDAP	racfLDAPBindPw
PROXY segment	LDAPHOST	racfLDAPHost
SESSION segment	CONVSEC	racfSessionConvSec
SESSION segment	INTERVAL	racfSessionInterval
SESSION segment	LOCK	racfSessionLock
SESSION segment	SESSKEY	racfSessionSessKey
SIGVER segment	FAILLOAD	racfSigverFailLoad
SIGVER segment	SIGAUDIT	racfSigverSigAudit
SIGVER segment	SIGREQUIRED	racfSigverSigRequired
SSIGNON segment	KEYENCRYPTED - value is not displayed by LDAP	racfSsignonKeyEncrypted
SSIGNON segment	KEYLABEL	racfSsignonkeylabel
SSIGNON segment	KEYMASKED - value is not displayed by LDAP	racfSsignonKeyMasked
STDATA segment	GROUP	racfStddataGroup

<i>Table 41. Mapping of LDAP attribute names to RACF fixed fields (resource) (continued)</i>		
RACF segment name	RACF keyword in rdefine/ralter/permit	LDAP attribute name
STDATA segment	PRIVILEGED	racfStddataPrivileged
STDATA segment	TRACE	racfStddataTrace
STDATA segment	TRUSTED	racfStddataTrusted
STDATA segment	USER	racfStddataUser

<i>Table 42. Mapping of LDAP attribute names to RACF fixed fields (setropts)</i>		
RACF segment name	RACF keyword in setropts	LDAP attribute name
Setropts base	Multi-value: REFRESH, WHEN(PROGRAM)	racfSetroptsAttributes
Setropts base	AUDIT	racfAudit
Setropts base	CLASSACT	racfClassAct
Setropts base	GENCMD	racfGenCmd
Setropts base	GENERIC	racfGeneric
Setropts base	GENLIST	racfGenList
Setropts base	GLOBAL	racfGlobal
Setropts base	LOGOPTIONS(ALWAYS)	racfLogOptionsAlways
Setropts base	LOGOPTIONS(DEFAULT)	racfLogOptionsDefault
Setropts base	LOGOPTIONS(FAILURES)	racfLogOptionsFailures
Setropts base	LOGOPTIONS(NEVER)	racfLogOptionsNever
Setropts base	LOGOPTIONS(SUCCESSSES)	racfLogOptionsSuccessses
Setropts base	RACLIST	racfRacList
Setropts base	STATISTICS	racfStatistics

Note: The SDBM attribute types that return DN-type values are: racfNotify, racfGroupUserids, racfConnectGroupName, racfDefaultGroup, racfSubGroupName, racfSuperiorGroup, racfConnectOwner, racfOwner, racfStddataUser, racfStddataGroup, racfAudit, racfCdtInfoGroup, racfCdtInfoMember, racfClassAct, racfGenCmd, racfGeneric, racfGenList, racfGlobal, racfLogoptionsAlways, racfLogoptionsDefault, racfLogoptionsFailures, racfLogoptionsNever, racfLogoptionsSuccessses, racfRacList, and racfStatistics.

By default on search responses, these SDBM DN-type attribute values are returned in uppercase format (for example, RACFID=X,PROFILETYPE=USER,CN=SDBM, RACFID=Y,PROFILETYPE=GROUP,CN=SDBM, or PROFILENAME=TMP,PROFILETYPE=FACILITY,CN=SDBM).

However, if the lowest order bit for the decimal bitmask specified in the LDAP_COMPAT_FLAGS environment variable is set to 1 (for example, 1, 3, or 5), these SDBM DN-type attribute values are returned in mixed case format. For example, racfid=X, profiletype=USER,cn=sdbm, racfid=Y, profiletype=GROUP,cn=sdbm, or profilename=TMP, profiletype=FACILITY,cn=sdbm. See “[LDAP_COMPAT_FLAGS environment variable](#)” on page 204 for more information.

Associating LDAP attributes to RACF custom fields

The user and group profile custom fields in the CSDATA segment are not predefined by RACF, but are defined in RACF by the user. If those fields are to be set and displayed using LDAP, then the user must add an attribute to the LDAP schema to represent each custom field. The attribute is defined in the LDAP schema using an **attributeTypes** value and an **IBMAttributeTypes** value. LDAP does not allow more than one attribute to be associated with the same RACF custom field.

- The **attributeTypes** value specifies the object identifier (OID), name, syntax, and equality rule of the attribute. The OID and name must not be in use in the schema. The attribute name can be the same as the RACF custom field name, or it can be different. For example, if the custom field name is phone, the attribute name could be phone, or workphone, or anything else that is not already in use. See [“Attribute types” on page 288](#) for more information about **attributeTypes**.
- The **IBMAttributeTypes** value must include the **RACFFIELD** keyword to identify the RACF custom field associated with the attribute. The **RACFFIELD** value specifies the resource profile name that is used to define the custom field in RACF, with periods (.) changed to dashes (-). For example, if the RACF custom field is defined by the USER.CSDATA.PHONE resource profile, **RACFFIELD** contains USER-CSDATA-PHONE. **RACFFIELD** also optionally specifies the type of RACF custom field. The accepted values are **char**, **flag**, **hex**, **num**, and **qchar**. If the RACF custom field is defined with TYPE (CHAR) FIRST (ANY) OTHER (ANY), then specify **qchar** in **RACFFIELD** to indicate that SDBM should put the attribute value in quotations when creating RACF commands. Otherwise, specify in **RACFFIELD** the same value as was used for TYPE when defining the custom field in RACF. If a type value is not specified in **RACFFIELD**, LDAP assumes that the custom field type is **char**. See [“Schema introduction” on page 272](#) for more information about **IBMAttributeTypes**.

For example, if the phone custom field is defined in the RACF user profile with TYPE (CHAR), the following attribute could be added to the LDAP schema to represent the custom field:

```
attributetypes: (
    phone-OID
    NAME 'phone'
    DESC 'Represents the PHONE field in the RACF user CSDATA segment'
    EQUALITY caseIgnoreMatch
    SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
    SINGLE-VALUE
    USAGE userApplications
)
ibmattributetypes: (
    phone-OID
    ACCESS-CLASS sensitive
    RACFFIELD ('USER-CSDATA-PHONE' 'char')
)
```

Note:

1. A numeric OID can be used instead of the nonnumeric OID phone-OID.
2. If the RACF custom field is defined to be case-sensitive (using MIXED (YES)), change the EQUALITY rule to EQUALITY caseExactMatch. Otherwise, compare operations can fail if mixed case values are involved.
3. The SYNTAX must be IA5 String (1.3.6.1.4.1.1466.115.121.1.26).
4. All RACF custom fields have only a single value, therefore, SINGLE-VALUE is specified.
5. The ACCESS-CLASS is 'sensitive' for most RACF attributes, but can be changed to 'critical' if the field contains data to which access is more restrictive. SDBM does not use the ACCESS-CLASS value, but TDBM, LDBM, and CDBM do.

For completeness, add an object class to the LDAP schema to represent the CSDATA segment in each profile. SDBM always assumes that the object class names are **racfUserCsddataSegment** for the CSDATA segment in the user profile or **racfGroupCsddataSegment** for the CSDATA segment in the group profile. SDBM adds this object class to a user or group entry if the corresponding RACF profile contains the CSDATA segment.

For example, if the PHONE and SSN custom fields are defined in RACF for the user profile and the LDAP attributes `phone` and `socialSecurityNumber` are defined in the LDAP schema to represent the custom fields, the following object class should be added to the LDAP schema:

```
objectclasses: (
    racfUserCsddataSegment-OID
    NAME 'racfUserCsddataSegment'
    DESC 'Represents the CSDATA segment in a z/OS RACF USER profile'
    SUP top
    AUXILIARY
    MAY ( phone $ socialSecurityNumber )
)
```

Note: A numeric OID can be used instead of the nonnumeric OID `racfUserCsddataSegment-OID`.

Special usage of `racfAttributes`, `racfConnectAttributes`, `racfResourceAttributes`, and `racfSetroptsAttributes`

The `racfAttributes` attribute is a multi-valued attribute that can be used to specify any single-word keywords that can be specified on a RACF `ADDUSER` or `ALTUSER` command. For example, `racfAttributes` can be used to add a RACF user entry with `ADSP GRPACC NOPASSWORD` or modify a RACF user entry with `NOGRPACC SPECIAL NOEXPIRED RESUME NOOMVS`. Additional values, such as `PASSWORD`, can be returned in `racfAttributes` that are not returned by the `LISTUSER` command.

Similarly, `racfConnectAttributes` can be used to specify any single-word keywords that are valid on a RACF `CONNECT` command, as can `racfResourceAttributes` for the RACF `RDEFINE` and `RALTER` commands. `racfSetroptsAttributes` can be used for the RACF `SETROPTS` command, but only those values listed in [Table 42 on page 329](#) can be specified.

RACF namespace entries

When the SDBM backend is used to make RACF information accessible over the LDAP protocol, SDBM creates a set of top entries to set up a hierarchical representation of RACF users, groups, connections, classes, resources, and class options. These top entries consist of the suffix, top user entry, top group entry, top connection entry, a top entry for each RACF class (except `DATASET`, which is not supported), and a `setropts` entry. For example, the top entries in [Figure 23 on page 332](#) and [Figure 24 on page 332](#) are:

- `cn=RACFA,o=IBM,c=US` (suffix entry)
- `profileType=User,cn=RACFA,o=IBM,c=US` (top user entry)
- `profileType=Group,cn=RACFA,o=IBM,c=US` (top group entry)
- `profileType=Connect,cn=RACFA,o=IBM,c=US` (top connect entry)
- `profileType=Cdt,cn=RACFA,o=IBM,c=US` (top cdt class entry)
- `profileType=Facility,cn=RACFA,o=IBM,c=US` (top facility class entry)
- `cn=Setropts,cn=RACFA,o=IBM,c=US` (setropts entry)

The top entries cannot be added or deleted. Except for the `setropts` entry, the top entries can only be compared and searched.

The `setropts` entry can be modified, compared, and searched.

The value used for the suffix entry DN is the value specified for the **suffix** option in the SDBM section of the LDAP server configuration file (see [“Setting up for SDBM” on page 62](#)).).

Following is a high-level diagram of the RACF backend.

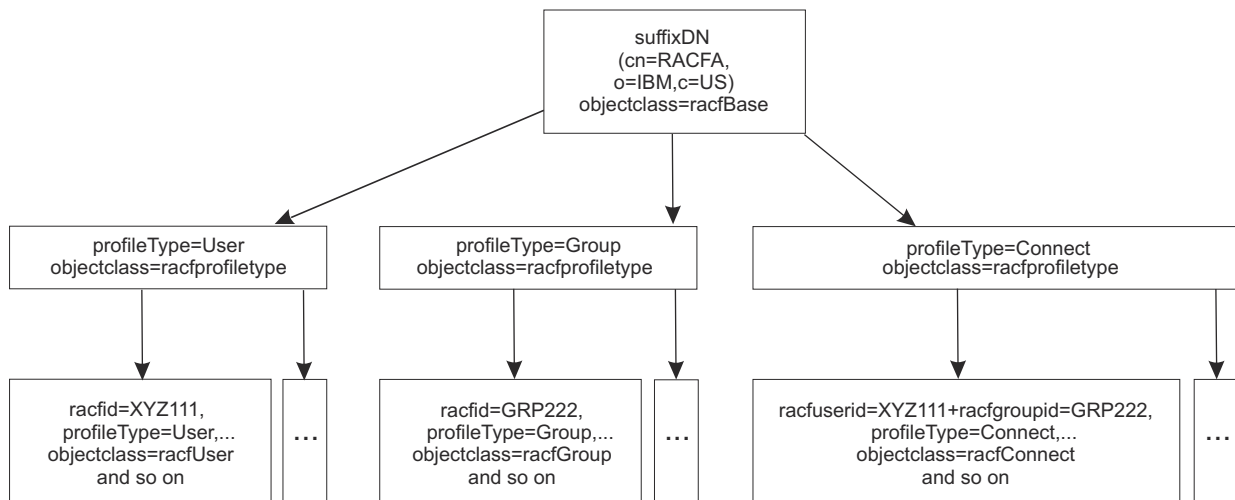


Figure 23. RACF namespace hierarchy (Part 1 of 2)

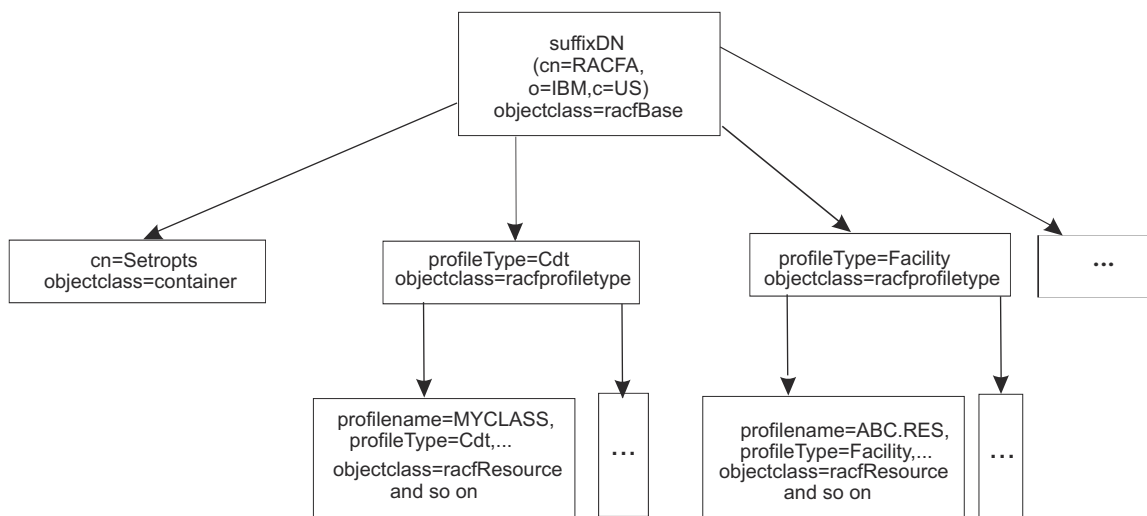


Figure 24. RACF namespace hierarchy (Part 2 of 2)

SDBM schema information

The attributes and object classes used by SDBM to represent RACF values are always in the LDAP server schema, except for any attributes needed for RACF custom fields.

SDBM support for special characters

An SDBM DN, including the SDBM suffix, can contain the following special characters:

- A plus sign (+), double quotation mark ("), or backslash (\) anywhere in a DN.
- A number sign (#) at the beginning of a value in a DN.

When present in a DN, a special character must be escaped by preceding it with a single backslash (\). The suffix in the LDAP server configuration file must use two back slashes (\\) to escape a special character, but only a single backslash is used in a DN.

For example, if the SDBM suffix in the configuration file is

```
suffix cn=\\#plex#1
```

then the DN for the RACF resource profile a+b in class #x#y would be

```
profilename=a\+b,profiletype=#x#y,cn=#plex#1
```

Special characters in a DN returned by SDBM are always escaped by a single backslash. Number signs that are not at the beginning of a value and equal signs (=) might be escaped, depending on the usage of the DN.

When specifying a value containing a special character for an attribute within an add or modify request, escape the special character with a back slash if the attribute is part of a DN, otherwise, do not escape the special character. For instance, to add a user with the default group #d1grp, specify either:

```
racfdefaultgroup: racfid=#d1grp,profiletype=group,cn=#plex#1
```

or

```
racfdefaultgroup: #d1grp
```

within the entry.

When specifying a value containing a special character for an attribute within a search filter, the special character can be escaped or not. For instance, to search for all RACF users starting with #user, use the search filter `racfid=#user*` or `racfid=#\user*`.

Control of access to RACF data

SDBM operations result in issuing RACF commands. Table 43 on page 334 and “SDBM search capabilities” on page 343 indicate which commands are issued for various SDBM operations. The RACF commands are issued under the context of the RACF user ID that is bound to SDBM. RACF determines the results of the RACF commands based on the RACF authority of that user ID. If the RACF command fails, the SDBM operation fails and returns any error information issued by RACF.

In particular, the RACF **search** command can fail because of lack of authority, even if the bound user is able to extract RACF data from user IDs that match the RACF **search**. In this case, SDBM search operations that issue a RACF **search** command can fail and return the following message:

```
ldap_search: Unknown error
ldap_search: additional info: ICH31005I NO ENTRIES MEET SEARCH CRITERIA
```

SDBM operational behavior

Table 43 on page 334 shows how SDBM behaves during different LDAP operations.

Table 43. RACF backend behavior

Target DN	LDAP operation behavior
<i>suffixDN</i>	<p>Add Error: Unwilling to perform</p> <p>Modify Error: Unwilling to perform</p> <p>Delete Error: Unwilling to perform</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare attribute</p> <p>Search base Return requested attributes</p> <p>Search one level Perform a base search against each subordinate of this entry</p> <p>Search subtree See “Searching the entire RACF database” on page 355</p> <p>Bind Error: No credentials</p>
<i>profiletype=User,suffixDN</i>	<p>Add Error: Unwilling to perform</p> <p>Modify Error: Unwilling to perform</p> <p>Delete Error: Unwilling to perform</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare attribute</p> <p>Search base Return requested attributes</p> <p>Search one level See “Searching the entire RACF database” on page 355</p> <p>Search subtree See “Searching the entire RACF database” on page 355</p> <p>Bind Error: No credentials</p>

Table 43. RACF backend behavior (continued)

Target DN	LDAP operation behavior
profiletype=Group,suffixDN	<p>Add Error: Unwilling to perform</p> <p>Modify Error: Unwilling to perform</p> <p>Delete Error: Unwilling to perform</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare attribute</p> <p>Search base Return requested attributes</p> <p>Search one level See “Searching the entire RACF database” on page 355</p> <p>Search subtree See “Searching the entire RACF database” on page 355</p> <p>Bind Error: No credentials</p>
profiletype=Facility,suffixDN	<p>Add Error: Unwilling to perform</p> <p>Modify Error: Unwilling to perform</p> <p>Delete Error: Unwilling to perform</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare attribute</p> <p>Search base Return requested attributes</p> <p>Search one level See “Searching the entire RACF database” on page 355</p> <p>Search subtree See “Searching the entire RACF database” on page 355</p> <p>Bind Error: No credentials</p>

Table 43. RACF backend behavior (continued)

Target DN	LDAP operation behavior
cn=setropts,suffixDN	<p>Add Error: Unwilling to perform</p> <p>Modify Perform a setropts RACF command</p> <p>Delete Error: Unwilling to perform</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare attribute</p> <p>Search base Perform an R_admin setropts extract RACF command</p> <p>Search one level Empty search results (this is a leaf node in the hierarchy)</p> <p>Search subtree Perform an R_admin setropts extract RACF command</p> <p>Bind Error: No credentials</p>
profiletype=Connect,suffixDN	<p>Add Error: Unwilling to perform</p> <p>Modify Error: Unwilling to perform</p> <p>Delete Error: Unwilling to perform</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare attribute</p> <p>Search base Return requested attributes</p> <p>Search one level See “Searching the entire RACF database” on page 355</p> <p>Search subtree See “Searching the entire RACF database” on page 355</p> <p>Bind Error: No credentials</p>

Table 43. RACF backend behavior (continued)

Target DN	LDAP operation behavior
racfid=XYZ111,profiletype=User, suffixDN	<p>Add Perform an ADDUSER RACF command by using USER=XYZ111</p> <p>Modify Perform an ALTUSER RACF command by using USER=XYZ111</p> <p>Delete Perform a DELUSER RACF command by using USER= XYZ111</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare requested attribute with data returned from an R_admin profile extract RACF command by using USER=XYZ111</p> <p>Search base Perform an R_admin profile extract RACF command by using USER=XYZ111</p> <p>Search one level Empty search results (this is a leaf node in the hierarchy)</p> <p>Search subtree Perform an R_admin profile extract RACF command by using USER=XYZ111</p> <p>Bind If bind type is not simple, Error: Unwilling to perform or else use the RACROUTE REQUEST=VERIFY, ENVIR=CREATE macro to verify the user ID and password or password phrase combination. The RACF groups the user belongs to are determined on the next LDAP operation.</p>

Table 43. RACF backend behavior (continued)

Target DN	LDAP operation behavior
racfid=GRP222,profiletype=Group, suffixDN	<p>Add Perform an addgroup RACF command by using GROUP=GRP222</p> <p>Modify Perform an altgroup RACF command by using GROUP=GRP222</p> <p>Delete Perform a delgroup RACF command by using GROUP=GRP222</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare requested attribute with data returned from an R_admin profile extract RACF command by using GROUP=GRP222</p> <p>Search base Perform an R_admin profile extract RACF command by using GROUP=GRP222</p> <p>Search one level Empty search results (this is a leaf node in the hierarchy)</p> <p>Search subtree Perform an R_admin profile extract RACF command by using GROUP=GRP222</p> <p>Bind Error: No credentials</p>

Table 43. RACF backend behavior (continued)

Target DN	LDAP operation behavior
racuserid=XYZ111+racgroupid=GRP222, profiletype=Connect,suffixDN	<p>Add Perform a connect RACF command for USER=XYZ111 by using GROUP=GRP222</p> <p>Modify Perform a connect RACF command for USER=XYZ111 by using GROUP=GRP222</p> <p>Delete Perform a remove RACF command for USER=XYZ111 by using GROUP=GRP222</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare requested attribute with data returned from an R_admin profile extract RACF command by using USER=XYZ111</p> <p>Search base Perform an R_admin profile extract RACF command by using USER=XYZ111</p> <p>Search one level Empty search results (this is a leaf node in the hierarchy)</p> <p>Search subtree Perform an R_admin profile extract RACF command by using USER=XYZ111</p> <p>Bind Error: No credentials</p>

Table 43. RACF backend behavior (continued)

Target DN	LDAP operation behavior
profilename=ABC.RES,profiletype=Facility, suffixDN	<p>Add Perform an rdefine and, possibly, PERMIT RACF commands for PROFILE=ABC.RES in CLASS=FACILITY. A separate PERMIT command is performed for each <code>racfAccessControl</code> attribute value that is specified.</p> <p>Modify Perform an RALTER or PERMIT, or both RACF commands for PROFILE=ABC.RES in CLASS=FACILITY. A separate PERMIT command is performed for each <code>racfAccessControl</code> attribute value that is specified. An RALTER command is performed if an attribute other than <code>racfAccessControl</code> is specified.</p> <p>Delete Perform an rdelete RACF command for PROFILE=ABC.RES in CLASS=FACILITY</p> <p>Modify DN Error: Unwilling to perform</p> <p>Compare Compare requested attribute with data returned from an R_admin profile extract RACF command by using PROFILE=ABC.RES in CLASS=FACILITY</p> <p>Search base Perform an R_admin profile extract RACF command by using PROFILE=ABC.RES in CLASS=FACILITY</p> <p>Search one level Empty search results (this is a leaf node in the hierarchy)</p> <p>Search subtree Perform an R_admin profile extract RACF command by using PROFILE=ABC.RES in CLASS=FACILITY</p> <p>Bind Error: No credentials</p>

If LDAP is running with an SDBM backend, the `ldap_modify` and `ldap_add` APIs can return `LDAP_OTHER` or `LDAP_SUCCESS` and completed a partial update to an entry in RACF. The results match what occurs if the update is done by using the RACF `ALTUSER`, `ALTGROUP`, `CONNECT`, `RALTER`, and `PERMIT` commands. If several RACF attributes are being updated and one of them is in error, RACF might still update the other attributes, without, in some cases, returning an error message. If there is a RACF message, LDAP always returns it in the result.

This is further complicated when adding or modifying a general resource profile because this can involve multiple RACF commands: a `RDEFINE` or `RALTER` command followed by one or more `PERMIT` commands. If one of the commands fails, processing ends but the resource profile is still updated with the results of the prior successful commands.

The RACF `CONNECT` command is used to both add a user connection to a group and to modify a user's connection to a group. As a result, the SDBM add and modify support for connection entries is different from normal LDAP support:

- When adding a connection entry that exists, the entry is modified using the specified attributes. There is no indication returned that the entry existed.
- When modifying a connection entry that does not exist, the entry is added using the specified attributes. There is no indication returned that the entry did not exist.

Notes about specifying attribute values:

1. In LDAP, the format of the value of the Kerberos principal name attribute, `krbPrincipalName`, is `userid@realm`. In SDBM, the `userid` portion of the name is case-sensitive while the `realm` portion of the name is not. However, the entire attribute value is processed as case-sensitive in a compare operation. In addition, SDBM only operates on the RACF local realm. If the realm specified in the value is not the local realm, the operation fails. For example, when searching in SDBM for a user entry using the search filter `krbPrincipalName=krbuser1@MYREALM.COM`, the search fails if `MYREALM.COM` is not the RACF local realm.

To facilitate using the `krbPrincipalName` attribute, the attribute value can be specified without the `@realm` portion. In this case, the realm is assumed to be the RACF local realm. For example, when adding a user entry with `krbuser1` as the `userid` portion of that Kerberos principal name, the `krbPrincipalName` attribute can be specified as

```
krbPrincipalName: krbuser1
```

or

```
krbPrincipalName: krbuser1@MYREALM.COM
```

where `MYREALM.COM` is the RACF local realm.

The `krbPrincipalName` value returned by SDBM from a search is always the complete principal name, `userid@realm`, where `realm` is the RACF local realm.

2. There are several SDBM attributes whose value is a RACF user, group, or class name. For convenience, this value can be specified either as just the RACF name or as the complete LDAP DN. For example, when adding a user with a default group of `grp222`, the `racfDefaultGroup` attribute can be specified as

```
racfDefaultGroup: grp222
```

or

```
racfDefaultGroup: racfid=grp222,profiletype=group,sysplex=myplex
```

where `sysplex=myplex` is the SDBM suffix.

The value returned by SDBM from a search is always the complete LDAP DN.

3. For multi-value attributes, the RACF `ALTUSER` and `RALTER` commands do not always support the ability to both add a value and replace the existing value. As a result, SDBM does not always respect the type of modification (add versus replace) that is specified in a modify command.
 - Values for the following multi-value attributes are always added to the existing value (even if replace is specified): **`racfAttributes`, `racfAudit`, `racfClassAct`, `racfClassName`, `racfConnectAttributes`, `racfGenCmd`, `racfGeneric`, `racfGenList`, `racfGlobal`, `racfLevelKeyword`, `racfLogonDays`, `racfLogOptionsAlways`, `racfLogOptionsDefault`, `racfLogOptionsFailures`, `racfLogOptionsNever`, `racfLogOptionsSuccesses`, `racfMemberList`, `racfMFAFactor`, `racfMFAPolicy`, `racfMformKeyword`, `racfMonitorKeyword`, `racfRacList`, `racfResourceAttributes`, `racfSecurityCategoryList`, `racfSetroptsAttributes`, `racfStatistics`, `racfVolumeList`.**
 - Values for the following multi-value attributes always replace the existing value (even if add is specified): **`racfCdtinfoFirst`, `racfCdtinfoOther`, `racfDlfddataJobNames`, `racfDomains`, `racfIcsfSymExportCerts`, `racfIcsfSymExportKeys`, `racfMfpolicyFactors`, `racfMscopeSystems`, `racfNetviewOperatorClass`, `racfOperatorClass`, `racfResourceAudit`, `racfResourceGlobalAudit`, `racfRoutcodeKeyword`, `racfRslKey`, `racfTslKey`.**
 - Values for the following multi-value attributes either are added to the existing values or replace the existing values, depending on the new and existing values: **`racfAuthKeyword`, `racfAccessControl`, `racfIcsfAsymUsage`, `racfMFAFactorStatus`, `racfMFAFactorTags`.**

For single-value attributes, there is no difference between using an add modification or a replace modification to set the value. For either type of modification, the value is added if the attribute value does not exist and the value replaces the existing attribute value, if there is one.

4. In order to update attributes related to CICS, CICS must be set up on your system; otherwise, errors result.
5. For modify, if a request is made to delete a specific attribute value for an attribute where specific values cannot be selectively deleted, an LDAP_UNWILLING_TO_PERFORM error code is returned. Similarly, if a request is made to delete the entire attribute for an attribute where specific values to delete must be specified, an LDAP_UNWILLING_TO_PERFORM error code is returned.

The following attributes require that specific values deleted be specified: **racfAudit**, **racfClassAct**, **racfClassName**, **racfGenCmd**, **racfGeneric**, **racfGenList**, **racfGlobal**, **racfMemberList**, **racfMFAFactorTags**, **racfRacList**, **racfStatistics**, **racfVolumeList**.

The following attributes allow specifying specific values to delete but also support deleting the entire attribute: **racfAccessControl**, **racfAttributes**, **racfConnectAttributes**, **racfMFAFactor**, **racfMFAPolicy**, **racfResourceAttributes**, **racfSecurityCategoryList**, **racfSetroptsAttributes**.

All other attributes that have a delete command in RACF only allow deleting the entire attribute. If an attempt is made to delete any attribute that has no corresponding delete command in RACF, an LDAP_UNWILLING_TO_PERFORM error code is returned.

6. The **racfCopyProfileFrom** attribute is used to specify any combination of the RACF RDEFINE FCLASS, FGENERIC, FROM, and FVOLUME keywords and values to indicate a resource profile to use as a model when creating a new resource profile. The value that is specified for this attribute must be syntactically correct for an RDEFINE command and is inserted as is in the command. For example, the following uses the RES.MODEL resource profile in the FACILITY class as a model:

```
racfcopyprofilefrom: FROM(RES.MODEL) FCLASS(FACILITY)
```

7. The **racfAccessControl** attribute is used to manage the access control lists for a general resource profile. Each attribute value is used to create a separate RACF **PERMIT** command. Each value must be a syntactically correct RACF PERMIT command, without the class and profile names. SDBM adds the class and profile names before issuing the RACF PERMIT command. It also adds the DELETE keyword for a modify request to delete the value.

Note: When issuing multiple RACF PERMIT commands for the same resource, the order of the PERMIT commands can be critical. SDBM issues a PERMIT command for each **racfAccessControl** value in the order that SDBM receives the values. If you specify multiple add, replace, and delete changes to an attribute in a single modify operation, many **ldapmodify** utilities (including the z/OS client **ldapmodify** utility) might reorder the changes to put all the changes of the same type together. Therefore, the values as presented to SDBM might not be in the original order and the results of the PERMIT commands might not be as you want. To avoid this, separate different **racfAccessControl** attribute changes into separate modify operations.

When LDAP returns the **racfAccessControl** value during a search operation, the value might contain the COUNT field if this is part of the RACF output, for example:

```
racfaccesscontrol: ID(X) ACCESS(READ) COUNT(5)
```

If SDBM finds the COUNT field in a **racfAccessControl** value during an add or modify operation, the field is removed from the value before the value is used to generate a RACF **PERMIT** command. This allows LDAP search output to be used as add or modify input.

When you are using the **racfAccessControl** attribute in a compare operation, the comparison is done only on the value that is specified for the ID keyword within the attribute value. The rest of the attribute value is not used. If the ID value is contained in any access control list within the resource profile, the compare returns LDAP_COMPARE_TRUE. If the attribute value does not have the

ID keyword, has more than one ID value, or the value is not contained in any access list within the resource profile, compare returns LDAP_COMPARE_FALSE. Basically, a racfAccessControl compare operation can be used to determine if a specific RACF user or group appears in the access control lists within a resource profile.

8. The following attributes are only PERMITTED on the RACF ALTUSER command, not the ADDUSER command. As a result, SDBM only supports these attributes on a modify request: racfMFAFactor, racfMFAFactorStatus, racfMFAFactorTags, racfMFAPolicy, and racfMFAPWFallback.

In LDAP, the format of the value of racfMFAFactorStatus is *factorname:status*.

The format value of racfMFAFactorTags is *factorname:tagname:tagvalue*.

The racfMFAPWFallback field is part of the "User Base" and is defined in RACF with a default value. If it is queried in SDBM, this attribute is returned to LDAP, whether or not any other MFA field has been set.

The *factorname* portion indicates the factor that is manipulated. Only one factor can be manipulated in a single RACF ALTUSER command, and therefore, on a single modify request. For example, the MFA-related attributes can be specified as follows:

```
racfMFAFactor: factor01
racfMFAFactorStatus: factor01:active
racfMFAFactorTags: factor01:tag1:abc
racfMFAFactorTags: factor01:tag2:def
racfMFAPWFallback: nopwfallback
racfMFAPolicy: pol01
racfMFAPolicy: pol02
```

The following example can be used to delete one specific tag from the factor, factor01:

```
changetype: modify
delete: racfMFAFactorTags
racfMFAFactorTags: factor01:tag1
```

The following example can be used to delete all tags from the factor, factor01:

```
changetype: modify
delete: racfMFAFactorTags
racfMFAFactorTags: factor01:
```

You can also delete the entire attribute, racfMFAFactor, which removes all existing tags and status from a user's profile.

SDBM search capabilities

SDBM search capabilities are controlled by the extended search setting through the extendedSearch configuration option and can be overridden by the SDBM extended search server control in the client request. For more information about the server control, see [Appendix C, "Supported server controls," on page 653](#).

The following table compares SDBM search behaviors with different extended search settings.

Table 44. SDBM search behaviors with different extended search settings			
Extended search	Search filter support	Search result form	Search restriction
<i>off</i>	Limited support	DN-only entries or complete entries	Subject to the RACF R_admin restriction on the amount of output
<i>basic</i>	Limited support	DN-only entries or complete entries	No restrictions
<i>advanced</i>	Full support	Complete entries	No restrictions

The traditional search (extended search set to off) is subject to the 4096-lines output restriction imposed by the RACF R_admin "run command" interface. Also, the search result can be incomplete if the RACF

database is large. The extended search combines the RACF R_admin "run command" interface and "extract next" interface to make sure that all matched RACF profiles are returned and the search result is complete.

The traditional search and basic extended search depend on RACF to filter results, and only a limited set of search filters are supported. Because the RACF search interface sometimes returns only the profile names, the SDBM search result can be DN-only entries instead of complete entries. The advanced extended search provides more powerful search filter support but degrades the performance because most search filter evaluations require reading many RACF profiles. Use the traditional search or basic extended search if they can provide a similar search capability.

The following table summarizes the SDBM search filters that can be processed by RACF. Other search filters that are not in the table are only supported in advanced extended search mode. This mode allows for the same search filters that can be used in LDBM or TDBM to be used in SDBM, such as (objectclass=racfuser) or (racfPasswordInterval>90).

Filter	Search behavior
krbprincipalname= <i>any_value</i>	<p>Description:</p> <ul style="list-style-type: none"> Find the user profile for the RACF user whose KERB KERBNAME value is <i>any_value</i>. (A valid Network Authentication Service application user identity without wildcards.) <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> profiletype=user,<i>suffix</i> racfid=xxx,profiletype=user,<i>suffix</i> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if using basic extended search and scope includes all users. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> R_usermap Followed by R_admin user profile extract if returns complete entry.
objectclass=*	<p>Description:</p> <ul style="list-style-type: none"> Match any user, group, connect, resource profile, and setropts. <p>Allowed base:</p> <ul style="list-style-type: none"> Any SDBM entry. <p>Returns:</p> <ul style="list-style-type: none"> DN-only entries if not using advanced extended search and scope includes all users, groups, connections, resource profiles, or setropts. Complete entries for other conditions. <p>(continued)</p>

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
objectclass=*	<p>Commands: (continued from preceding row)</p> <ul style="list-style-type: none"> • If scope includes all users: <ul style="list-style-type: none"> – search class(user) filter(*) – Followed by R_admin user profile extract for each user if returns complete entry. – If more than 4096 users returned (extended search only): R_admin user profile extract next to iteratively get rest users. Followed by R_admin user profile extract for each user if returns complete entry. • If scope includes all groups: <ul style="list-style-type: none"> – search class(group) filter(*) – Followed by R_admin group profile extract for each group if returns complete entry. – If more than 4096 groups returned (extended search only): R_admin group profile extract next to iteratively get rest groups. Followed by R_admin group profile extract for each group if returns complete entry. • If scope includes all connects: <ul style="list-style-type: none"> – search class(group) filter(*) – Followed by R_admin group profile extract for each group to get associated users. – Followed by R_admin connect profile extract for each connect if returns complete entry. – If more than 4096 groups returned (extended search mode only): <ul style="list-style-type: none"> - R_admin group profile extract next to iteratively get rest groups. - Followed by R_admin group profile extract for each group to get associated users. - Followed by R_admin connect profile extract for each connect if returns complete entry. <p>(continued)</p>

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
objectclass=*	<p>Commands: (continued from previous row)</p> <ul style="list-style-type: none"> • If scope includes all classes: <ul style="list-style-type: none"> – RACROUTE STAT to retrieve all class names, and for each class do: <ul style="list-style-type: none"> - search class(<i>className</i>) filter(**) - Followed by R_admin resource profile extract for each resource if returns complete entry. - If more than 4096 resources returned (extended search only): <ul style="list-style-type: none"> • R_admin resource profile extract next to iteratively get rest resources. • Followed by R_admin resource profile extract for each resource if returns complete entry. • If scope includes a specific class: <ul style="list-style-type: none"> – RACROUTE STAT to determine if the class exists. – Followed by search class(<i>className</i>) filter(**) – Followed by R_admin resource profile extract for each resource if returns complete entry. – If more than 4096 resources returned (extended search only): <ul style="list-style-type: none"> - R_admin resource profile extract next to iteratively get rest resources. - Followed by R_admin resource profile extract for each resource if returns complete entry. • If scope includes a single user: <ul style="list-style-type: none"> – R_admin user profile extract • If scope includes a single group: <ul style="list-style-type: none"> – R_admin group profile extract • If scope includes a single connect: <ul style="list-style-type: none"> – R_admin connect profile extract; • If scope includes a single resource: <ul style="list-style-type: none"> – R_admin resource profile extract • If scope includes just the cn=setropts entry: <ul style="list-style-type: none"> – R_admin setropts extract

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>profilename=any_value</code>	<p>Description:</p> <p>Find the RACF general resource profiles whose names match <i>any_value</i> (can contain wildcards). RACF profile names might be case-sensitive, depending on the class.</p> <p>Allowed base:</p> <ul style="list-style-type: none"> • <i>suffix</i> • <code>profiletype=className,suffix</code>. • <code>profilename=xxx,profiletype=className,suffix</code> (extended search only). <p>Returns:</p> <ul style="list-style-type: none"> • DN-only entries if not using advanced extended search and scope includes all resources. • Complete entries for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> • If scope includes a single resource: <ul style="list-style-type: none"> – RACROUTE STAT to determine if the class exists followed by R_admin resource profile extract • If scope includes a specific class: <ul style="list-style-type: none"> – RACROUTE STAT to determine if the class exists. – Followed by <code>search class(className) filter(any_value)</code>. – Followed by R_admin resource profile extract for each resource if returns complete entry. – If more than 4096 resources returned (extended search only): <ul style="list-style-type: none"> - R_admin resource profile extract next to iteratively get rest resources. - Followed by R_admin resource profile extract for each resource if returns complete entry. • If scope includes all classes: <ul style="list-style-type: none"> – RACROUTE STAT to retrieve all class names, and for each class do: <ul style="list-style-type: none"> - <code>search class(className) filter(any_value)</code> - Followed by R_admin resource profile extract for each resource if returns complete entry. - If more than 4096 resources returned (extended search only): <ul style="list-style-type: none"> • R_admin resource profile extract next to iteratively get rest resources. • Followed by R_admin resource profile extract for each resource if returns complete entry.

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>racfgroupid=any_value</code>	<p>Description:</p> <ul style="list-style-type: none"> Find connect profiles for members of the RACF groups whose names match <i>any_value</i> (can contain wildcards). <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=connect, suffix</code> <code>racfuserid=xxx+racfgroupid=yyy, profiletype=connect, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entries if not using advanced extended search and scope includes all connects. Complete entries for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> If scope includes a single connect: <ul style="list-style-type: none"> <code>R_admin connect profile extract</code> If no wildcard in <i>any_value</i>: <ul style="list-style-type: none"> <code>R_admin group profile extract</code> to get associated users Followed by <code>R_admin connect profile extract</code> for each user if returns complete entry. If wildcard in <i>any_value</i>: <ul style="list-style-type: none"> <code>search class(group) filter(any_value)</code> Followed by <code>R_admin group profile extract</code> for each group to get associated users. Followed by <code>R_admin connect profile extract</code> for each connect if returns complete entry. If more than 4096 groups returned (extended search only): <ul style="list-style-type: none"> <code>R_admin group profile extract next</code> to iteratively get rest groups. Followed by <code>R_admin group profile extract</code> for each group to get associated users. Followed by <code>R_admin connect profile extract</code> for each user if returns complete entry.

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>racfid=any_value</code>	<p>Description:</p> <ul style="list-style-type: none"> Find user and group profiles for the RACF users and groups whose names match <i>any_value</i>. Wildcards can be used. <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=user, suffix</code> <code>profiletype=group, suffix</code> <code>racfid=xxx, profiletype=user, suffix</code> (extended search only) <code>racfid=yyy, profiletype=group, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entries if not using advanced extended search and scope includes all users or groups. Complete entries for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> If scope includes a single user: <ul style="list-style-type: none"> <code>R_admin user profile extract</code> If scope includes a single group: <ul style="list-style-type: none"> <code>R_admin group profile extract</code> If scope includes all users: <ul style="list-style-type: none"> <code>search class(user) filter(any_value)</code> <ul style="list-style-type: none"> Followed by <code>R_admin user profile extract</code> for each user if returns complete entry. If more than 4096 users returned (extended search only): <ul style="list-style-type: none"> <code>R_admin user profile extract</code> next to iteratively get rest users. Followed by <code>R_admin user profile extract</code> for each user if returns complete entry. If scope includes all groups: <ul style="list-style-type: none"> <code>search class(group) filter(any_value)</code> <ul style="list-style-type: none"> Followed by <code>R_admin group profile extract</code> for each group if returns complete entry. If more than 4096 groups returned (extended search only): <ul style="list-style-type: none"> <code>R_admin user profile extract</code> next to iteratively get rest group. Followed by <code>R_admin user profile extract</code> for each group if returns complete entry.

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>racflnotesshortname=any_value</code>	<p>Description:</p> <ul style="list-style-type: none"> Find user profile for the RACF user whose LNOTES SNAME value is <i>any_value</i> (a valid Lotus Notes for z/OS application user identity without wildcard). <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=user, suffix</code> <code>racfid=xxx, profiletype=user, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if using basic extended search and scope includes all users. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> <code>R_usermap</code> Followed by <code>R_admin user profile extract</code> if returns complete entry.
<code>racfndusername=any_value</code>	<p>Description:</p> <ul style="list-style-type: none"> Find user profile for the RACF user whose NDS UNAME value is <i>any_value</i> (a valid NDS for z/OS application user identity without wildcards) <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=user, suffix</code> <code>racfid=xxx, profiletype=user, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if using basic extended search and scope includes all users. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> <code>R_usermap</code> Followed by <code>R_admin user profile extract</code> if returns complete entry.
<code>racfomvsgroupid=number</code>	<p>Description:</p> <ul style="list-style-type: none"> Find group profile for one of the RACF groups whose OMVS GID values match number. <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=group, suffix</code> <code>racfid=xxx, profiletype=group, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if using basic extended search and scope includes all groups. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> <code>getgrgid(number)</code> Followed by <code>R_admin group profile extract</code> if returns complete entry.

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>racfomvsgroupid;allOMVSids=number</code>	<p>Description:</p> <ul style="list-style-type: none"> Find group profiles for one of the RACF groups whose OMVS GID values match number. <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=group, suffix</code> <code>racfid=xxx, profiletype=group, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if not using advanced extended search and scope includes all groups. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> <code>search class(group)gid(number)</code> Followed by <code>R_admin group profile extract</code> if returns complete entry.
<code>racfomvsuid=number</code>	<p>Description:</p> <ul style="list-style-type: none"> Find user profile for one of the RACF users whose OMVS UID values match number. <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=user, suffix</code> <code>racfid=xxx, profiletype=user, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if using basic extended search and scope includes all users. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> <code>getpwuid(number)</code> Followed by <code>R_admin user profile extract</code> if returns complete entry.
<code>racfomvsuid;allOMVSids=number</code>	<p>Description:</p> <ul style="list-style-type: none"> Find user profiles for one of the RACF users whose OMVS UID values match number. <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=user, suffix</code> <code>racfid=xxx, profiletype=user, suffix</code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if not using advanced extended search and scope includes all users. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> <code>search class(user) uid(number)</code> Followed by <code>R_admin user profile extract</code> if returns complete entry.

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>racfuserid=<i>any_value</i></code>	<p>Description:</p> <ul style="list-style-type: none"> Find connect profiles for members of the RACF users whose names match <i>any_value</i> (can contain wildcards). <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=connect,<i>suffix</i></code> <code>racfuserid=<i>xxx</i>+racfgroupid=<i>yyy</i>,profiletype=connect,<i>suffix</i></code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entry if not using advanced extended search and scope includes all connects. Complete entry for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> If scope includes a single connect: <ul style="list-style-type: none"> <code>R_admin connect profile extract</code> If no wildcard in <i>any_value</i>: <ul style="list-style-type: none"> <code>R_admin user profile extract</code> to get associated groups. Followed by <code>R_admin connect profile extract</code> for each group if returns complete entry. If wildcard in <i>any_value</i>: <ul style="list-style-type: none"> <code>search class(user) filter(<i>any_value</i>)</code> Followed by <code>R_admin user profile extract</code> for each user to get associated groups. Followed by <code>R_admin connect profile extract</code> for each connect if returns complete entry. If more than 4096 groups returned (extended search only): <ul style="list-style-type: none"> <code>R_admin user profile extract next</code> to iteratively get rest users. Followed by <code>R_admin user profile extract</code> for each user to get associated groups. Followed by <code>R_admin connect profile extract</code> for each connect if returns complete entry.

Table 45. SDBM search filters that are processed by RACF (continued)

Filter	Search behavior
<code>(&(racfuserid=<i>any_value1</i>) (racfgroupid=<i>any_value2</i>))</code>	<p>Description:</p> <ul style="list-style-type: none"> Find connection profiles for RACF users whose names match <i>any_value1</i> and who belong to RACF groups whose names match <i>any_value2</i> (can contain wildcards). <p>Allowed base:</p> <ul style="list-style-type: none"> <i>suffix</i> <code>profiletype=connect,<i>suffix</i></code> <code>racfuserid=<i>xxx</i>+racfgroupid=<i>yyy</i>,profiletype=connect,<i>suffix</i></code> (extended search only) <p>Returns:</p> <ul style="list-style-type: none"> DN-only entries if not using advanced extended search and scope includes all connects. Complete entries for other conditions. <p>Commands:</p> <ul style="list-style-type: none"> If scope includes a single connect: <ul style="list-style-type: none"> <code>R_admin connect profile extract</code> If no wildcard in <i>any_value1</i>: <ul style="list-style-type: none"> <code>R_admin user profile extract</code> to get associated groups. Followed by <code>R_admin connect profile extract</code> for each connect if returns complete entry. If no wildcard in <i>any_value2</i>: <ul style="list-style-type: none"> <code>R_admin group profile extract</code> to get associated users. Followed by <code>R_admin connect profile extract</code> for each user if returns complete entry. If wildcard in both <i>any_value1</i> and <i>any_value2</i>: <ul style="list-style-type: none"> <code>search class(group) filter(<i>any_value2</i>)</code> Followed by <code>R_admin group profile extract</code> for each group to get associated users. <code>R_admin connect profile extract</code> for each connect if returns complete entry. If more than 4096 groups returned (extended search mode only): <ul style="list-style-type: none"> <code>R_admin group profile extract</code> next to iteratively get rest groups. Followed by <code>R_admin group profile extract</code> for each group to get associated users. Followed by <code>R_admin connect profile extract</code> for each connect if returns complete entry.

In the preceding table, except for the AND filter for connections, complex search filters that include NOT, AND, OR, LE, or GE constructs cannot be processed by RACF unless advanced extended search is enabled.

The values for the profilename, racfgroupid, racfid, and racfuserid filters can include the wildcards that are supported by RACF. These wildcards are '*' which represents any number of characters, and '%', which represents one character. For example:

```
(&(racfuserid=usr*)(racfgroupid=*grp))
```

searches for all the connections between users whose names begin with `usr` and groups whose names end with `grp`.

To include multiple levels of qualifiers in a resource profile name search, include either `**` or `**` in the `profilename` filter. For example, `profilename=XYZ.**` searches for all resource profiles that have XYZ as the first qualifier. Do not use `**` in the filter because this is not a valid LDAP filter. The result of a search with the filter `profilename=**` is:

```
ldap_search: Protocol error
ldap_search: additional info: R010043 Substring filter for attribute 'profilename' has no value
```

Although an `*` or `**` can be part of a resource profile name, there is no way to indicate in the `profilename` filter that an asterisk or double asterisk is part of the name rather than a wildcard. For example, a search using a filter such as `profilename=ABC*` returns all profile names beginning with ABC, including the `ABC*` profile (if it exists).

Note: The values must comply with the RACF naming conventions.

Restrictions on RACF search classes

Searching resource profiles

To include multiple levels of qualifiers in a resource profile name search, include either `**` or `**` in the `profilename` filter. For example, `profilename=XYZ.**` searches for all resource profiles that have XYZ as the first qualifier. Do not use `**` in the filter because it is not a valid LDAP filter. The result of a search with the filter `profilename=**` is:

```
ldap_search: Protocol error
ldap_search: additional info: R010043 Substring filter for attribute 'profilename' has no value
```

An asterisk (`*`) or double asterisk (`**`) can be part of a resource profile name. However, there is no way to indicate in the `profilename` filter that an asterisk or double asterisk is part of the name rather than a wildcard. For example, a search that uses a filter such as `profilename=ABC*` returns all profile names that begin with ABC, including the `ABC*` profile (if it exists).

Because the RACF resource profile can be defined as mixed-case to allow lowercase characters in the profile name, the `profilename` attribute is defined as case-sensitive in the LDAP server schema. The profile name that is specified in the search filter must be in the correct case to ensure that it can match the resource profile.

The RACF resource profile name can contain multiple qualifiers, and each wildcard in the RACF search command filter can only match a certain qualifier. For that reason, you can use the period (`.`) to indicate which qualifier a wildcard applies to. For example, `profilename=XYZ.*` can be used to match profiles that have XYZ as the first qualifier but `profilename=XYZ*` cannot.

The values must comply with the RACF naming contention. For more information, see [z/OS Security Server RACF Security Administrator's Guide](#).

Due to their unique characteristics and security implication, RACF has restrictions on certain classes such as IDIDMAP, DIGTCERT, and DIGTRING. For example when searching profiles in the IDIDMAP class, you cannot use the FILTER or MASK option to limit the results of the search. For more information about these restrictions, see [SEARCH \(Search RACF database\)](#) in *z/OS Security Server RACF Command Language Reference*.

Searching universal groups

Most of the members of a RACF universal group are not contained in the list of members of the group. As a result, a search of the entry for a universal group does not return most of the members of the group. In addition, a search for the connection entry corresponding to a member of a universal group can return different results depending on the connection search filter that is used:

- If the `racfuserid` part of the connection search filter does not contain a wildcard, then the connection entry is returned for the specified `racfuserid`.
- If the `racfuserid` part of the connection search filter contains a wildcard, then the connection entry for a user is returned only if the user is explicitly contained in the list of members of the universal group.

Searching the entire RACF database

Most searches that query the entire RACF database, for example, a subtree search from any of the top directory entries except the `setopts` entry, return only the DN (distinguished name) attribute. You may then obtain more specific data about a particular user, group, connection, or resource on a follow-up search using a specific DN as the search base.

The exceptions to this are searches using the "application ID" filters:

```
krbprincipalname=<any_name>
racflnotesshortname=<any_value>
racfndsusername=<any_value>
racfomvsgroupid=<number>
racfomvsuid=<number>
```

Because these searches can match only a single RACF user, the entire user entry is returned in the search results.

RACF restriction on amount of output

When processing certain LDAP search requests, SDBM uses the RACF **R_admin** "run command" interface to issue RACF **search** commands. The **R_admin** "run command" interface limits the number of records in its output to 4096. This means that the RACF **search** command output might be incomplete if you have many users, groups, connections, or resources. The restriction only affects those SDBM searches that issue the RACF **search** command. See ["SDBM search capabilities" on page 343](#) to determine which SDBM searches are affected.

RACF restriction on amount of input

RACF limits the number of operands that are specified in RACF commands. If the number of operands surpasses this limit, RACF ignores some of the operands and processes the command. Therefore, an SDBM add or modify operation containing many attributes appears to run successfully but some of the attributes might not be set. For more information, see [z/OS Security Server RACF Command Language Reference](#).

LDAP restriction on RACF data

Except for the RACF user password or password phrase envelopes, all field values sent by RACF to LDAP must consist of printable characters. If a RACF field contains unprintable characters, the value returned in the LDAP output does not match the RACF value and is not printable. If a RACF field contains binary zeros, the LDAP output might be truncated. In particular, make sure that the installation DATA field in RACF user and resource profiles does not contain binary zeros or other unprintable characters.

Retrieving RACF user password and password phrase envelopes

SDBM returns the RACF user password envelope when the **racfPasswordEnvelope** attribute is specified in the attributes to be returned from a search of a RACF user. Similarly, the RACF user password phrase envelope is returned when the **racfPassPhraseEnvelope** attribute is specified on the search. Each envelope is returned by the LDAP server as a binary data berval (binary data and length). If the **racfPasswordEnvelope** and **racfPassPhraseEnvelope** attributes are not specified on the search request, the RACF envelopes are not returned.

Note: When using a utility such as **ldapsearch** to retrieve the password or password phrase envelopes, the returned value is base-64 encoded.

Changing a user password or password phrase in RACF using SDBM

There are two ways to use SDBM to change a user password or password phrase in RACF.

1. The user password or password phrase of the bind user can be changed during an LDAP simple bind to SDBM. The simple bind occurs as part of an LDAP function such as search, add, modify, compare, or delete. The password or password phrase change is provided in the password portion of the LDAP simple bind. The change must be in the following format:

```
currentvalue/newvalue
```

The current and new value must both be passwords or password phrases. An error is returned if one of the values is a password and the other is a password phrase.

The forward slash (/) is used as the indication of a password or password phrase change during the LDAP simple bind. Password or password phrase changes made using the LDAP simple bind to the SDBM backend of the z/OS LDAP server are subject to the system password rules. A password or password phrase change fails with LDAP return code LDAP_INVALID_CREDENTIALS and LDAP reason code of:

```
R000101 The new password is not valid
```

if the new password or password phrase does not pass the rules established on the system.

Note: A forward slash (/) is a legal character in a password phrase (but not in a password). During SDBM bind, a backward slash (\) is an escape character to indicate that the next character is part of the password or password phrase and has no special meaning. The backward slash is removed during bind processing. Therefore, during bind, a forward slash in a password phrase must be preceded by a backward slash to indicate that the forward slash is part of the password phrase and is not the password phrase change indicator. For example, the password phrase `this1slash/ ispartofthevalue2use` must be specified as `this1slash\ / ispartofthevalue2use` during bind. A backward slash is also a legal character in a password phrase (but not in a password). Therefore, a backward slash in a password phrase must be preceded by another backward slash to indicate that it is not an escape character.

Once the bind succeeds, the password or password phrase is changed even if the LDAP function eventually fails.

For example, the following command changes the password phrase for RACF user U1 from abc to xyz, assuming the SDBM suffix is sysplex=sysplexa:

```
ldapsearch -h ldaphost -p ldapport -D racfid=u1,profiletype=user,sysplex=
sysplexa -w abc/xyz -s base -b "" objectclass=*
```

2. To change any RACF user's password, create an LDIF file that modifies the **racfPassword** attribute for that user and then invoke **ldapmodify** to change the password. If the syntax of the new password is not valid, the command fails, returning "ldap_modify: Unknown error". (Note that this response can also be returned under other circumstances.)

For example, the following LDIF file, pw.mod, resets the password for RACF user U1 to xyz, assuming the SDBM suffix is sysplex=sysplexa. The `racfAttributes: noexpired` record is added to result in a new password that is not expired. If `noexpired` is not specified, then the password is reset but is expired, requiring U1 to change the password at next logon.

```
dn: racfid=u1,profiletype=USER,sysplex=sysplexa
changetype: modify
add: x
racfpassword: xyz
racfattributes: noexpired
```

Then, assuming that the RACF user `admin1` has the necessary RACF authorization to update RACF, the command:

```
ldapmodify -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd -f pw.mod
```

modifies the password for `U1`.

A RACF user's password phrase is changed the same way, using the **racfPassPhrase** attribute.

Using LDAP client utilities with SDBM

The LDAP client utilities described in *z/OS IBM Tivoli Directory Server Client Programming for z/OS* can be used to update data in RACF. Following are some examples. These examples assume that the RACF user `admin1` has the necessary RACF authorization to make these RACF updates and that `sysplex=sysplexa` is the SDBM suffix.

Example: adding a user to RACF

If the LDIF file `user.add` contains:

```
dn: racfid=newuser,profiletype=user,sysplex=sysplexa
objectclass: racfUser
racfid: newuser
```

The following command adds user ID `newuser` to RACF:

```
ldapadd -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd -f user.add
```

Note that the only required attribute to add a user is the user ID specified as `racfid`. This mimics the RACF `ADDUSER`

Example: modifying a user in RACF

To add a TSO segment for `newuser`, the LDIF file `user.mods` could contain:

```
dn: racfid=newuser,profiletype=user,sysplex=sysplexa
changetype: modify
objectclass: SAFTsoSegment
SAFAccountNumber: 123
SAFHoldClass: H
SAFLogonSize: 1024
```

The command:

```
ldapmodify -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd -f user.mods
```

modifies the RACF user profile for user ID `newuser`, adding a TSO segment with the specified values.

Example: searching for user information in RACF

To see the information in RACF for `newuser`, the following search command can be performed:

```
ldapsearch -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd -b "racfid=newuser,profiletype=user,sysplex=sysplexa" "objectclass=*"
```

The results that are returned are most of the non-default data that RACF displays on a `listuser` command, but using LDAP attribute names. Following is an example for `newuser`:

```
racfid=NEWUSER,profiletype=USER,sysplex=SYSPLEXA
racfid=NEWUSER
racfauthorizationdate=07/18/05
racfowner=RACFID=ADMIN1,PROFILETYPE=USER,SYSPLEX=SYSPLEXA
```

```

racfpasswordinterval=186
racfdefaultgroup=RACFID=G1,PROFILETYPE=GROUP,SYSPLEX=SYSPLEXA
racflogondays=SUNDAY
racflogondays=MONDAY
racflogondays=TUESDAY
racflogondays=WEDNESDAY
racflogondays=THURSDAY
racflogondays=FRIDAY
racflogondays=SATURDAY
racflogontime=ANYTIME
racfconnectgroupname=RACFID=G1,PROFILETYPE=GROUP,SYSPLEX=SYSPLEXA
racfhavepasswordenvelope=YES
racfhavepassphraseenvelope=YES
racfpassphrasechangedate=06/11/07
racfattributes=PASSWORD
racfattributes=PASSPHRASE
safaccountnumber=123
safholdclass=H
saflogonsize=1024
safmaximumregionsize=0
safuserdata=0000
objectclass=RACFBASECOMMON
objectclass=RACFUSER
objectclass=SAFTSOSEGMENT

```

Example: searching for a user's password and password phrase envelopes in RACF

The following search returns the `racfPasswordEnvelope` and `racfPassPhraseEnvelope` attributes:

```

ldapsearch -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa
-w passwd -L -b racfid=newuser,profiletype=user,sysplex=sysplexa
"objectclass=*" racfpasswordenvelope racfpassphraseenvelope

```

The result returned is:

```

dn: racfid=newuser,profiletype=user,sysplex=sysplexa
racfpasswordenvelope:: base-64_encoded_password_envelope
racfpassphraseenvelope:: base-64_encoded_passphrase_envelope

```

Example: adding a group to RACF

If the LDIF file `group.add` contains:

```

dn: racfid=grp222,profiletype=group,sysplex=sysplexa
objectclass: racfGroup
racfid: grp222

```

The following command adds group ID `grp222` to RACF:

```

ldapadd -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa
-w passwd -f group.add

```

Note that the only required attribute to add a group is the group ID specified as *racfid*. This mimics the RACF **addgroup** command.

The LDAP commands for modifying, searching, and removing a RACF group using SDBM are similar to the corresponding commands for a RACF user. For more information, see the examples in this section for a RACF user.

Example: connecting a user to a group in RACF

To connect `newuser` to group `grp222`, the LDIF file `connect.add` could contain:

```

dn: racfuserid=newuser+racfgroupid=grp222,profiletype=connect,sysplex=sysplexa
objectclass: racfconnect
racfuserid: newuser
racfgroupid: grp222

```

The command:

```
ldapadd -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa
-w passwd -f connect.add
```

makes newuser a member of the grp222 group. Note that grp222 must be an existing RACF group ID, newuser must be an existing RACF user ID, and the only required attributes to add a connection are racfuserid (the user ID) and racfgroupid (the group ID).

Example: searching for information about a user's connection to a group in RACF

To see information about newuser's connection to the grp222 group, the following search can be performed:

```
ldapsearch -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=
sysplexa -w passwd -b "racfuserid=newuser+racfgroupid=grp222,profiletype=connect,sysplex=
sysplexa" "objectclass=*"
```

The result returned is the non-default information from the GROUP section that RACF displays on a LISTUSER command, but using LDAP attribute names. Following is an example for newuser's connection to grp222:

```
racfuserid=NEWUSER+racfgroupid=GRP222,profiletype=CONNECT,sysplex=SYSPLEXA
racfuserid=NEWUSER
racfgroupid=GRP222
racfconnectauthdate=07/18/05
racfconnectowner=RACFID=ADMIN1,PROFILETYPE=USER,SYSPLEX=SYSPLEXA
racfconnectgroupauthority=USE
racfconnectgroupuacc=NONE
racfconnectcount=0
objectclass=RACFBASECOMMON
objectclass=RACFCONNECT
```

To see all the groups that newuser is connected to, either of the following searches can be performed:

```
ldapsearch -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd
-b "profiletype=connect,sysplex=sysplexa" "racfuserid=newuser"
```

or

```
ldapsearch -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd
-b "profiletype=connect,sysplex=sysplexa" "(&(racfuserid=newuser)(racfgroupid=*))"
```

For both commands, the results are:

```
racfuserid=NEWUSER+racfgroupid=G1,profiletype=CONNECT,sysplex=sysplexa
racfuserid=NEWUSER+racfgroupid=GRP222,profiletype=CONNECT,sysplex=sysplexa
```

Note that G1 was the default group to which newuser was connected when newuser was created.

Example: removing a user from a group in RACF

The following command removes newuser from the grp222 group (the equivalent of the RACF REMOVE command):

```
ldapdelete -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd
"racfuserid=newuser+racfgroupid=grp222,profiletype=connect,sysplex=sysplexa"
```

Example: removing a user from RACF

The following command removes the newuser user profile from RACF, also removing all of newuser's connections to groups (the equivalent of a RACF **deluser** command):

```
ldapdelete -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd
"racfid=newuser,profiletype=user,sysplex=sysplexa"
```

Example: adding a resource profile in the facility class and giving a user and a group access to the profile

If the LDIF file `resource.add` contains:

```
dn: profilename=NEW.RESOURCE,profiletype=facility,sysplex=sysplexa
objectclass: racfResource
objectclass: extensibleObject
profilename: NEW.RESOURCE
racfuacc: read
racfnotify: admin1
racfaccesscontrol: ID(u1) ACCESS(UPDATE)
racfaccesscontrol: ID(g1) ACCESS(CONTROL) WHEN(TERMINAL(T2))
```

The following command adds the `NEW.RESOURCE` resource profile to the facility class in RACF and gives the requested access:

```
ldapadd -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa
-w passwd -f resource.add
```

Note: A RACF `REDEFINE` command, followed by two RACF `PERMIT` commands, are issued.

Example: refreshing the RACLIST for the facility class

If the LDIF file `setropts.mod` contains:

```
dn: cn=setropts,sysplex=sysplexa
changetype: modify
racfraclist: facility
racfsetroptsattributes: refresh
```

The command:

```
ldapmodify -h ldaphost -p ldapport -D racfid=admin1,profiletype=user,sysplex=sysplexa -w passwd
-f setropts.mod
```

issues a RACF **setropts** command to refresh the RACLISTed profiles in the facility class.

Note:

1. The PROGRAM class is not refreshed using RACLIST. Instead, issue the **ldapmodify** command with `setropts.mod` containing:

```
dn: cn=setropts,sysplex=sysplexa
changetype: modify
racfsetroptsattributes: when(program)
racfsetroptsattributes: refresh
```

2. Refreshing the CFIELD class using SDBM is not supported.

Deleting attributes

If a request is made to delete the `racfAccessControl`, `racfAttributes`, `racfConnectAttributes`, `racfResourceAttributes`, or `racfSetroptsAttributes` attribute and no values are provided, SDBM adds the following attributes to the appropriate RACF command (even if the profile does not currently have that value):

- `racfAccessControl`- RESET(ALL)
- `racfAttributes` - NOADSP NOAUDITOR NOGRPACC NOOIDCARD NOOPERATIONS NOSPECIAL NOUAUDIT NOROAUDIT
- `racfConnectAttributes` - NOADSP NOAUDITOR NOGRPACC NOOPERATIONS NOSPECIAL
- `racfResourceAttributes` - NOSINGLEDSN NOTVTOC NOWARNING
- `racfSetroptsAttributes` - NOWHEN(PROGRAM)

It is required to specify the value itself on the delete operation when deleting a specific value for these attributes.

For example, to remove the OPERATIONS and AUDITOR values from the racfAttributes values of user ID user1 (leaving any other racfAttributes values the user has), issue an **ldapmodify** command with the following file:

```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
delete: racfAttributes
racfAttributes: OPERATIONS
racfAttributes: AUDITOR
```

To remove all the racfAttributes values listed above of user ID user1, issue an **ldapmodify** command with the following file:

```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
delete: racfAttributes
```

In addition, you can use the racfAttributes attribute to remove an entire segment from a user. For example, to remove the OMVS segment from user ID user1, issue an **ldapmodify** command with one of the following files:

```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
delete: racfAttributes
racfAttributes: OMVS
```

or

```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
add: racfAttributes
racfAttributes: NOOMVS
```

Following are some additional examples of deleting attributes:

- ```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
delete: racfProgrammerName
```

Returns: LDAP\_UNWILLING\_TO\_PERFORM

The racfProgrammerName attribute is one that cannot be deleted.

- ```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
delete: racfBuilding
racfBuilding: 001
```

Returns: LDAP_UNWILLING_TO_PERFORM

You cannot specify a value to be removed for racfBuilding

- ```
dn: racfid=user1,profiletype=user,sysplex=sysplexa
changetype: modify
delete: racfBuilding
```

Expected result: successful removal of the attribute racfBuilding and LDAP\_SUCCESS returned.





---

## Chapter 18. Password policy

Password policy is a set of rules that controls how passwords are used and administered in the LDAP server. These password policy rules are enforced to ensure that password values are changed periodically and meet the syntactic password requirements of your organization. These rules also restrict the reuse of old passwords, ensure that users are locked out after a defined number of failed bind attempts, and automatically expire passwords after a period of time.

The LDAP password policy rules only apply to entries that have a **userPassword** value stored in a TDBM, LDBM, or CDBM backend. Entries that are outside of a configured backend suffix and have their password values stored in the LDAP server configuration file rather than in a TDBM, LDBM, or CDBM are not subject to LDAP password policy. These users include the LDAP root administrator defined in the configuration file (**adminDN** configuration option) when the password value is specified in the **adminPW** configuration option, the master server DN when the password is specified in the **masterServerPW** configuration option, and the peer server DN when the password value is specified in the **peerServerPW** configuration option.

LDAP password policy is checked during authentication and compare operations involving the **userPassword** attribute value to ensure that the password has not expired or the user's account has not been locked from authenticating to the directory. The only supported bind mechanisms for password policy checking are simple, CRAM-MD5, and DIGEST-MD5 when the authenticating user's entry and password resides in a TDBM, LDBM, or CDBM backend. Because LDAP password policy is checked during simple, CRAM-MD5, and DIGEST-MD5 authentications and compare operations involving the **userPassword** attribute value, when the term, authentication, is referenced in this section, it indicates each of these scenarios. LDAP password policy is not checked during anonymous, Kerberos (GSSAPI), or EXTERNAL binds as these authentication mechanisms do not access a password value. LDAP password policy also does not apply to TDBM, LDBM, or CDBM entries participating in native authentication or entries in the SDBM backend. The z/OS security manager handles the password policy for these users. See [“Binding with SDBM using password policy” on page 319](#) and [“Password policy with native authentication” on page 401](#) for more information.

During add and modify requests of password values in the TDBM, LDBM, and CDBM backends, the LDAP password policy is checked to verify that the password syntax is correct, the password is allowed to be changed now, and if the password must be changed currently for the user.

---

### Password policy entries

The server compatibility level must be 6 or greater and the CDBM backend must be configured to use LDAP password policy. See [“serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125](#) for more information about the **serverCompatLevel** configuration option. When the server compatibility level is 6 or greater and the CDBM backend is configured, the LDAP server automatically creates the **cn=pwdpolicy,cn=ibmpolicies** entry in the CDBM backend, if it does not exist.

The **cn=pwdpolicy,cn=ibmpolicies** entry is also known as the global password policy entry, and it controls if password policy is active in the LDAP server. By default, the global password policy is not active (set to false), but is activated by setting the **ibm-pwdPolicy** attribute value to true. When activated, the global password policy entry is the default password policy and applies to all TDBM, LDBM, and CDBM entries that have a **userPassword** attribute value. The default values specified in [Table 46 on page 365](#) are the default values of the global password policy entry.

If an individual or group needs to use a special password policy that is different from the global password policy, additional password policy entries are added under the **cn=ibmpolicies** suffix in the CDBM backend. In these additional password policy entries, it is only necessary to specify a password policy attribute value if it is different from the value specified in the global password policy or the default for the attribute value. Depending on the password policy attributes used in these additional password policy entries, an objectclass attribute value of **pwdPolicy** or **ibm-pwdPolicyExt** is required. Because these objectclasses are auxiliary, it is necessary to include a structural objectclass value, such as **container**,

to these password policy entries. See [Table 46 on page 365](#) for information about the password policy attribute types.

These additional password policy entries are allowed to be referenced by individual or group entries in the directory. The distinguished name of a password policy entry is referenced by a static, dynamic, and nested group by adding or modifying the single-valued **ibm-pwdGroupPolicyDN** operational attribute value in a group entry. See Chapter 23, “Static, dynamic, and nested groups,” on page 413 for more information about group entries. When referenced by a group entry, these password policy entries are referred to as group password policy entries. The distinguished name of a password policy entry is also referenced by an individual user by adding or modifying the single-valued **ibm-pwdIndividualPolicyDN** operational attribute value in a user entry. These password policy entries are referred to as individual password policy entries. Multiple users and groups can point to the same password policy entries. See “Password policy examples” on page 383 for examples on modifying user and group entries to reference password policies.

Individual and group password policy entries are only activated when the **ibm-pwdPolicy** attribute is set to true in their own entries and the **ibm-pwdGroupAndIndividualEnabled** attribute in the global password policy entry is set to true.

**Note:**

1. If the **ibm-pwdIndividualPolicyDN** attribute value is `cn=noPwdPolicy` in a user entry, that user is exempt from any password policy controls. A user can also be exempted from password policy controls if the **ibm-pwdGroupPolicyDN** attribute value is `cn=noPwdPolicy` in the user's groups.
2. The password policy entry must be created before it can be referenced by a user or group entry as an individual or group password policy. When a password policy entry is referenced by any user or group entry in an **ibm-pwdIndividualPolicyDN** and **ibm-pwdGroupPolicyDN** attribute value, the password policy entry cannot be renamed or deleted until all references to the password policy distinguished name (DN) are removed from all individual and group entries.
3. Password policy entries must be under the `cn=ibmpolicies` suffix in the CDBM backend. Entries located elsewhere in the directory are ignored.

See “Password policy evaluation” on page 372 for information about determining the effective password policy if a user belongs to individual and multiple password policy groups.

## Activating password policy

---

When the global password policy entry, `cn=pwdpolicy,cn=ibmpolicies`, is initially created, each attribute value is assigned the default value specified in [Table 46 on page 365](#). If the global password policy is activated and these defaults are not updated, existing users are required to change their passwords on their next successful authentication to the LDAP server. The reason is because the default value for the **pwdMustChange** attribute in the global password policy entry is true that indicates users must change their password values. Before activating the global password policy entry, carefully consider changing the **pwdMustChange** attribute value to false in the global password policy if it is not necessary to force all existing users to change their password values.

When the global password policy is activated, user entries are allowed to have only one **userPassword** attribute value. If there are existing users that have multiple passwords before the global password policy is activated, password policy checking is completed based on the global password policy configuration. When changing password values for users that have multiple **userPassword** values, all existing password values must be replaced with just one **userPassword** value.

## Password policy attributes

---

The password policy attributes in [Table 46 on page 365](#) are specified in individual and group password policy entries. When the global password policy entry is automatically created by the server, it uses the default values specified in this table. If a password policy attribute is not specified in an entry, it defaults to the value determined by the password policy evaluation rules. [Table 46 on page 365](#) describes the

most restrictive value for each attribute for password policy evaluation. See [“Password policy evaluation”](#) on page 372 for more information.

| Table 46. Password policy attributes and default values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Attribute description and example                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
| <b>ibm-pwdGroupAndIndividualEnabled</b><br>A boolean (true or false) indicating if group and individual password policy entries are to be considered when evaluating password policy. When the global password policy entry is initially created by the server, this attribute is set to false indicating that only the global policy is used when evaluating password policy. If set to true, the global, group, and individual password policies are to be considered when evaluating password policy.<br>This is a required attribute of the <b>ibm-pwdGroupAndIndividualPolicies</b> objectclass and is only evaluated in the global password policy entry.<br><b>Default:</b> false<br>Example:<br><pre>ibm-pwdGroupAndIndividualEnabled: false</pre>                                    |  |
| <b>ibm-pwdPolicy</b><br>A boolean (true or false) indicating if this password policy entry is active. If set to true, the password policy rules in this entry are enforced. If set to false, the password policy rules in this entry are not enforced. If this is an individual or group password policy entry, the <b>ibm-pwdPolicy</b> and the <b>ibm-pwdGroupAndIndividualEnabled</b> attributes in the global password policy, <code>cn=pwdpolicy, cn=ibmpolicies</code> , must be set to true to allow activation or evaluation of this password policy entry.<br>This is an optional attribute of the <b>ibm-pwdPolicyExt</b> objectclass.<br><b>Default:</b> false<br><b>Most restrictive value for composite group evaluation:</b> true<br>Example:<br><pre>ibm-pwdPolicy: true</pre> |  |
| <b>ibm-pwdPolicyStartTime</b><br>Specifies the time in Zulu format when an LDAP administrator activated this password policy entry. When the <b>ibm-pwdPolicy</b> attribute is set to true, this attribute automatically resets to the current time. This value is used during password expiration checking.<br>This is an optional attribute of the <b>ibm-pwdPolicyExt</b> objectclass.<br><b>Most restrictive value for composite group evaluation:</b> The oldest defined time is used.<br>Example:<br><pre>ibm-pwdPolicyStartTime: 20091001170933.867354Z</pre>                                                                                                                                                                                                                          |  |

Table 46. Password policy attributes and default values (continued)

## Attribute description and example

### passwordMinAlphaChars

Specifies the minimum number of alphabetic characters (A-Z and a-z) that a password value must have. It must be set to less than or equal to the value in the **pwdMinLength** attribute minus the value in the **passwordMinOtherChars** attribute. If set to 0, there is no minimum number of alphabetic characters that a password value must have. If the number of alphabetic characters cannot be checked (because of a one-way hashed password or other reasons), based on the value of the **pwdCheckSyntax** attribute, the password is accepted without checking it ('0' or '1') or is refused ('2').

This is an optional attribute of the **ibm-pwdPolicyExt** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** See [“Evaluation of a user's individual and composite group password policy” on page 373](#) for more information.

Example:

```
passwordMinAlphaChars: 3
```

### passwordMinOtherChars

Specifies the minimum number of numeric and special characters (other than A-Z and a-z) that a password value must have. It must be set to less than or equal to the value in **pwdMinLength** attribute minus the value in **passwordMinAlphaChars** attribute. If set to 0, there is no minimum number of other characters that a password value must have. If the number of numeric and special characters cannot be checked (because of a one-way hashed encrypted password or other reasons), based on the value of the **pwdCheckSyntax** attribute, either the password is accepted without checking it ('0' or '1') or is refused ('2').

This is an optional attribute of the **ibm-pwdPolicyExt** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** See [“Evaluation of a user's individual and composite group password policy” on page 373](#) for more information.

Example:

```
passwordMinOtherChars: 2
```

### passwordMaxRepeatedChars

Specifies the maximum number of times a given character is used in a password value. If set to 0, there is no limit on the number of repeated characters that a password value must have. If the maximum number of repeated characters cannot be checked (because of a one-way hashed encrypted password or other reasons), based on the value of the **pwdCheckSyntax** attribute, either the password is accepted without checking it ('0' or '1') or is refused ('2').

This is an optional attribute of the **ibm-pwdPolicyExt** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** See [“Evaluation of a user's individual and composite group password policy” on page 373](#) for more information.

Example:

```
passwordMaxRepeatedChars: 2
```

Table 46. Password policy attributes and default values (continued)

## Attribute description and example

### **passwordMaxConsecutiveRepeatedChars**

Specifies the maximum number of successive repetitions of a given character in a password value. If set to 0, the number of consecutive repeated characters is not checked in the password value. If the maximum number of consecutive repeated characters cannot be checked (because of a one-way hashed encrypted password or other reasons), based on the value of the **pwdCheckSyntax** attribute, either the password is accepted without checking it ('0' or '1') or is refused ('2').

For example, if set to 1, a given character cannot be followed by another character of the same type. Therefore, 'aba' is valid and 'aab' is not valid. For example, if set to 2, the maximum number of times a given character can occur consecutively is 2. Therefore, 'aaba' is valid and 'aaab' is not valid.

This is an optional attribute of the **ibm-pwdPolicyExt** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** See [“Evaluation of a user's individual and composite group password policy”](#) on page 373 for more information.

Example:

```
passwordMaxConsecutiveRepeatedChars: 2
```

### **passwordMinDiffChars**

Specifies the minimum number of characters in the new password that must be different from the characters in the old password value. If set to 0, the number of different characters are not checked in the new password value. If the password characters cannot be checked (because of a one-way hashed encrypted password or other reasons), based on the value of the **pwdCheckSyntax** attribute, either the password is accepted without checking it ('0' or '1') or is refused ('2').

This is an optional attribute of the **ibm-pwdPolicyExt** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** See [“Evaluation of a user's individual and composite group password policy”](#) on page 373 for more information.

Example:

```
passwordMinDiffChars: 0
```

### **pwdAllowUserChange**

A boolean (true or false) indicating if users are allowed to change their own passwords. If set to false, users are not allowed to change their own password. If set to true, users are allowed to change their own password if they have the authority. If the **pwdMustChange** attribute is set to true, this attribute must also be set to true to allow users to change their passwords.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** true

**Most restrictive value for composite group evaluation:** false

Example:

```
pwdAllowUserChange: false
```

Table 46. Password policy attributes and default values (continued)

## Attribute description and example

### **pwdAttribute**

Specifies the name of the attribute this password policy applies to. This attribute is only allowed to be set to **userPassword**. If this attribute is attempted to be set to another value, an error is returned on the add or modify request of the password policy entry.

This is a required attribute of the **pwdPolicy** objectclass.

**Default:** **userPassword**

Example:

```
pwdAttribute: userPassword
```

### **pwdCheckSyntax**

Specifies if the user's password value is checked for password policy syntax when adding or modifying a **userPassword** attribute value. The password policy attributes that affect password policy syntax are **passwordMinAlphaChars**, **passwordMinOtherChars**, **passwordMaxRepeatedChars**, **passwordMaxConsecutiveRepeatedChars**, **passwordMinDiffChars**, and **pwdMinLength**.

If set to 0, syntax checking of the password value is not enforced. If set to 1, the password syntax is checked and if it cannot be checked (because of a one-way hashed encrypted password or other reasons) it is accepted. If set to 2, the password syntax is checked and if it cannot be checked (because of a one-way hashed password or other reasons), an error is returned on the add or modify request of the user's password value. For example, if the current **userpassword** stored in the directory is one-way hashed, the **passwordMinDiffChars** comparison of the new and current password cannot be performed.

This is an optional attribute of the **pwdPolicy** objectclass.

**Note:** Password policy syntax checking is not enforced when an LDAP root or password administrator is adding or modifying another user's **userPassword** attribute value. If the LDAP root administrator defined in the configuration file (**adminDN** configuration option) is updating its own **userPassword** attribute value, password policy syntax checking is enforced.

**Default:** 0

**Most restrictive value for composite group evaluation:** The largest value is used.

Example:

```
pwdCheckSyntax: 2
```

### **pwdExpireWarning**

Specifies the number of seconds before a password is due to expire that expiration warning messages are returned during authentication in the **PasswordPolicy** response control. If set to 0, password policy expiration warnings are not returned during authentication in the **PasswordPolicy** response control.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The largest value is used.

Example:

```
pwdExpireWarning: 600
```

Table 46. Password policy attributes and default values (continued)

## Attribute description and example

### **pwdFailureCountInterval**

Specifies the number of seconds when password failures are removed from the failure counter although no successful authentication occurred. If set to 0, the failure counter is only reset by a successful authentication.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The largest value is used.

Example:

```
pwdFailureCountInterval: 600
```

### **pwdGraceLoginLimit**

Specifies the number of times an expired password is used for authentication. If set to 0 and the password expired, authentication fails. When the number of grace logins or authentications is exceeded by the user, the password is automatically expired and authentication fails. There is no time limit that is applied to this attribute.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The smallest value is used.

Example:

```
pwdGraceLoginLimit: 3
```

### **pwdInHistory**

Specifies the maximum number of used password values that are stored in the **pwdHistory** operational attribute of user entries. If set to 0, used password values are not stored in the **pwdHistory** attribute of user entries, therefore, they might be reused. The maximum value for this attribute is 30. The passwords that are stored in the **pwdHistory** operational attribute values are used to check new password values that are modified by the user.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The largest value is used.

Example:

```
pwdInHistory: 15
```

Table 46. Password policy attributes and default values (continued)

## Attribute description and example

### **pwdLockout**

A boolean (true or false) used to indicate if a password might be used for authentication when the maximum number of consecutive failed authentication attempts specified in the **pwdMaxFailure** attribute is exceeded. If set to true, the user's account is eligible to be locked for the number of seconds specified in the **pwdLockoutDuration** attribute value. If set to false, the user's account is not eligible to be locked because of excessive authentication failures.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** false

**Most restrictive value for composite group evaluation:** true

Example:

```
pwdLockout: true
```

### **pwdLockoutDuration**

Specifies the number of seconds a password cannot be used for authentication when the maximum number of consecutive failed authentication attempts in the **pwdMaxFailure** attribute is exceeded and the **pwdLockout** attribute is set to true. If set to 0 and the maximum number of consecutive failed authentication attempts is exceeded, the password cannot be used for authentication until it is reset by an LDAP root or password administrator.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The largest value is used.

Example:

```
pwdLockoutDuration: 600
```

### **pwdMaxAge**

Specifies the maximum age, in seconds, when a modified password expires. If set to 0, the password value does not expire for the user. This value must be greater than or equal to the **pwdMinAge** attribute value.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The smallest value is used.

Example:

```
pwdMaxAge: 6000
```



Table 46. Password policy attributes and default values (continued)

## Attribute description and example

### **pwdMaxFailure**

Specifies the maximum number of consecutive failed authentication attempts allowed. If **pwdMaxFailure** is set to 0, there is no maximum number of consecutive failed authentication attempts and the **pwdLockout** attribute value is ignored. If **pwdMaxFailure** is greater than 0 and the **pwdLockout** attribute is equal to true, then once the maximum number of failed authentication attempts is reached, authentication is not allowed until the lockout time specified in the **pwdLockoutDuration** attribute value is exceeded.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The smallest value is used.

Example:

```
pwdMaxFailure: 5
```

### **pwdMinAge**

Specifies the number of seconds that must elapse between modifications to the password. If set to 0, the password value is modified without waiting for time to elapse. This value must be less than or equal to the **pwdMaxAge** value.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** The largest value is used.

Example:

```
pwdMinAge: 600
```

### **pwdMinLength**

Specifies the minimum length of the password value for the user. If set to 0, there is no minimum password value length checking enforced. If the password length cannot be checked (because of a one-way hashed password or other reasons), based on the value of the **pwdCheckSyntax** attribute, either the password is accepted without checking it ('0' or '1') or is refused ('2').

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** 0

**Most restrictive value for composite group evaluation:** See [“Evaluation of a user's individual and composite group password policy” on page 373](#) for more information.

Example:

```
pwdMinLength: 8
```

Table 46. Password policy attributes and default values (continued)

### Attribute description and example

#### **pwdMustChange**

A boolean (true or false) indicating users must change their passwords after their first successful authentication to the server after a password is set or reset by an LDAP root or password administrator. If set to true, users are required to change their password after their first successful authentication. If set to false, users are not required to change their password upon successful authentication when the password is set or reset by an LDAP root or password administrator. If this attribute is set to true, the **pwdAllowUserChange** attribute must also be set to true to allow users to change their password values.

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** true

**Most restrictive value for composite group evaluation:** true

Example:

```
pwdMustChange: true
```

#### **pwdSafeModify**

A boolean (true or false) indicating the existing or current password value must be sent when changing a password value. If set to true, the existing password value must be sent on the modify request. If set to false, the existing password value does not need to be sent on the modify request. The **ldapchangepwd** utility can be used to change a user's password value. For more information about the **ldapchangepwd** utility, see [ldapchangepwd utility in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

This is an optional attribute of the **pwdPolicy** objectclass.

**Default:** false

**Most restrictive value for composite group evaluation:** true

Example:

```
pwdSafeModify: true
```

**Note:** When the **ibm-pwdPolicy** attribute is changed from false to true in the password policy entry, the **ibm-pwdPolicyStartTime** attribute is automatically set by the server to the current time. This password policy start time is used for performing password expiration and age checking of a user's password value if either of these password policy features are enabled for the user. When a password value is modified, the **pwdChangedTime** attribute value in the user's entry is updated with the time of the password modification. The password policy start time and the last password modification time are used to determine if the user's password expired. However, if the **ibm-pwdPolicy** is changed from false to true later, user passwords that are scheduled to expire might no longer expire at the original time because the password policy start time is set to a more recent time.

## Password policy evaluation

Because users can belong to an individual password policy, belong to multiple groups that have varying password policies, and the global password policy, there are a set of rules that are followed for determining the user's effective password policy when conflicting password policies are in effect.

Individual and group password policies are not evaluated when determining a user's effective password policy until the **ibm-pwdPolicy** and the **ibm-pwdGroupAndIndividualEnabled** attribute values are set to true in the global password policy. In addition, each individual or group password policy is not activated or evaluated for determining a user's effective password policy until the **ibm-pwdPolicy** attribute value is set to true in those entries.

When the password policies are activated, the different levels of password policies (individual, group, and global) are accessed when evaluating a user's effective password policy. The password policies are evaluated in this order, if they exist:

- individual policy entry
- composite group policy entry
- global password policy entry
- default password policy attribute value

Typically, when a password policy attribute is found in any of the password policy entries, the evaluation of that attribute stops and that attribute value is used as part of the user's effective password policy. See [Table 46 on page 365](#) for the default password policy attribute values.

## Evaluation of a user's individual and composite group password policy

A user entry may belong to an individual password policy entry. Because the user also might belong to more than one group, multiple group password policy entries may be evaluated to determine a user's composite group policy. These are the rules for determining a user's effective password policy:

1. If the **ibm-pwdPolicy** attribute value is false or is not specified in the individual or group password policy entry, no attributes defined in the entry are used to determine the effective password policy.
2. If the **ibm-pwdIndividualPolicyDN** attribute value is `cn=noPwdPolicy` in a user entry, that user is exempt from any password policy controls. A user can also be exempted from any password policy controls if all the user's groups that have the **ibm-pwdGroupPolicyDN** attribute have a value of `cn=noPwdPolicy` and the user entry does not have an **ibm-pwdIndividualPolicyDN**. If any of the user's groups has the **ibm-pwdGroupPolicyDN** attribute referring to an active policy, then references to `cn=noPwdPolicy` in the user's other groups are ignored in the composite group policy evaluation.
3. The **ibm-pwdPolicyStartTime** attribute is set to the current system time when **ibm-pwdPolicy** is set to true in the password policy entry. It is set to a new time whenever its value is changed from false to true. In determining the **ibm-pwdPolicyStartTime** value for a composite group, the oldest defined value is used.
4. The password policy attributes **passwordMinAlphaChars**, **pwdMinLength**, and **passwordMinOtherChars** are interdependent. For example, the value of **passwordMinAlphaChars** must be less than or equal to the value in **pwdMinLength** and **pwdMinDiffChars** minus the value in **passwordMinOtherChars**. Because of this interdependency among attribute values, if one attribute is selected from a policy, then the other two attributes are also selected from the same policy.

If an individual password policy is not enabled and there are multiple group password policies enabled, the order of selection is **pwdMinLength**, **passwordMinOtherChars**, **passwordMinAlphaChars**, and **pwdMinDiffChars**. This means that the selection is based on picking the most restrictive (the largest value) for **pwdMinLength**. If multiple group policies have the same largest value for the **pwdMinLength** attribute, then the one with the most restrictive (the largest value) for **passwordMinOtherChars** is selected. If multiple group policies also have the same largest **passwordMinOtherChars** value, then the group policy with the most restrictive (the largest value) **pwdMinDiffChars** is used. After an attribute is selected, the other three attributes are selected automatically from that same policy.

5. The password policy attributes **pwdMinAge**, **pwdMaxAge**, and **pwdExpirationWarning** are interdependent. For example, the value of **pwdMinAge** must be less than or equal to the value in **pwdMaxAge** and the value of **pwdExpireWarning** must be less than or equal to the value in **pwdMaxAge**. Because of this interdependency among attribute values, if one attribute is selected from a policy, then the other two attributes are also selected from the same policy.

If an individual password policy is not enabled and there are multiple group policies enabled, the order of selection is **pwdMaxAge**, **pwdMinAge**, and **pwdExpireWarning**. This means that the selection is based on picking the most restrictive value (the smallest value) for **pwdMaxAge**. In a situation where multiple group policies have the same value for the **pwdMaxAge** attribute, then the one with the most restrictive value (the largest value) for **pwdMinAge** is selected. In a situation where multiple group policies have the same value for the **pwdMaxAge** and **pwdMinAge** attributes, then the one with

the most restrictive value (the largest value) for **pwdExpireWarning** is selected. After an attribute is selected, the other two attributes are selected automatically from that same policy.

6. The **passwordMaxConsecutiveRepeatedChars** attribute is used to restrict the maximum successive repetitions of a given character in the password. **passwordMaxRepeatedChars** and **passwordMaxConsecutiveRepeatedChars** attributes are allowed to be enabled or disabled, independent of each other. However, if both of these attributes are enabled, these rules are applicable:
  - The value of the **passwordMaxRepeatedChars** attribute must be greater than or equal to the value of the **passwordMaxConsecutiveRepeatedChars** attribute.
  - When multiple group password policies are enabled, the **passwordMaxConsecutiveRepeatedChars** value is obtained from the same policy where the **passwordMaxRepeatedChars** attribute value is obtained from. If **passwordMaxRepeatedChars** is disabled in all policies, then the most restrictive value of **passwordMaxConsecutiveRepeatedChars** is used.
7. The password policy attributes **pwdMustChange** and **pwdAllowUserChange** are interdependent. For example, setting the value of **pwdMustChange** to true and **pwdAllowUserChange** to false is not allowed, as this says that a user must change their password after it has been reset by an administrator, but does not give the user the ability to change their password. Because of this, when adding or modifying a policy, this combination is checked for and is not allowed. Therefore, considering this interdependency between the attributes, if one attribute is selected from a policy, then the other attribute is also selected from the same policy.

The default for the **pwdMustChange** and **pwdAllowUserChange** attributes is true. The most restrictive value for the **pwdMustChange** attribute is true. The most restrictive value for the **pwdAllowUserChange** attribute is false. When choosing which group policy supplies these two attributes, the one with the most restrictive value for **pwdAllowUserChange** is chosen. If all the values for **pwdAllowUserChange** are true, then the group with the most restrictive value for **pwdMustChange** is chosen.

8. Attributes in all active group password policy entries are combined to form a union of attributes with the most restrictive attribute values taking precedence. See “Password policy attributes” on page 364 and Table 47 on page 374 for information about how the most restrictive attribute values are determined.

To better understand how a composite group policy is determined, consider some examples given in Table 47 on page 374. The examples in Table 47 on page 374 only display values for the attributes specified in the various groups, not all the default values for the attributes that are not specified.

| Table 47. Composite group password policy examples                                                                                      |                                                                                                                     |                                                                                                     |                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Group X password policy                                                                                                                 | Group Y password policy                                                                                             | Group Z password policy                                                                             | Composite group password policy                                                                                                                                                                                                                                   |
| pwdMaxAge = 86400<br>pwdSafeMode = true<br>pwdMaxFailure = 5<br>ibm-pwdPolicy = true<br>ibm-pwdPolicyStartTime = 20090908153021.242838Z | pwdMaxAge = 43200<br>pwdSafeMode = false<br>ibm-pwdPolicy = true<br>ibm-pwdPolicyStartTime = 20090808153021.242838Z | pwdCheckSyntax = 1<br>ibm-pwdPolicy = true<br>ibm-pwdPolicyStartTime = 20091008153021.242838Z       | pwdMaxAge = 43200<br>pwdSafeMod = true<br>pwdCheckSyntax = 1<br>pwdMaxFailure = 5<br>ibm-pwdPolicy = true<br>ibm-pwdPolicyStartTime = 20090808153021.242838Z                                                                                                      |
| pwdMaxAge = 86400<br>ibm-pwdPolicy = true                                                                                               | pwdMaxAge = 43200<br>pwdSafeMode = true                                                                             | pwdMaxAge = 0<br>ibm-pwdPolicy = true                                                               | pwdMaxAge = 86400<br>pwdSafeMode = false<br>ibm-pwdPolicy = true<br><b>Note:</b> Group Y's password policy is not used in calculating the composite group policy because it does not have an <b>ibm-pwdPolicy</b> attribute and, therefore, it defaults to false. |
| pwdMinLength = 10<br>passwordMinOtherChars = 4<br>passwordMinAlphaChars = 6<br>ibm-pwdPolicy = true                                     | pwdMinLength = 12<br>ibm-pwdPolicy = true                                                                           |                                                                                                     | pwdMinLength = 12<br>ibm-pwdPolicy = true                                                                                                                                                                                                                         |
| pwdMinLength = 10<br>passwordMinOtherChars = 4<br>passwordMinAlphaChars = 6<br>ibm-pwdPolicy = true                                     |                                                                                                                     | pwdMinLength = 10<br>passwordMinOtherChars = 5<br>passwordMinAlphaChars = 3<br>ibm-pwdPolicy = true | pwdMinLength = 10<br>passwordMinOtherChars = 5<br>passwordMinAlphaChars = 3<br>ibm-pwdPolicy = true                                                                                                                                                               |

| Table 47. Composite group password policy examples (continued)                                  |                                                                                                 |                                                                                             |                                                                                                 |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Group X password policy                                                                         | Group Y password policy                                                                         | Group Z password policy                                                                     | Composite group password policy                                                                 |
| passwordMaxConsecutiveRepeatedChars = 0<br>passwordMaxRepeatedChars = 5<br>ibm-pwdPolicy = true | passwordMaxConsecutiveRepeatedChars = 2<br>ibm-pwdPolicy = true                                 | passwordMaxRepeatedChars = 3<br>ibm-pwdPolicy = true                                        | passwordMaxRepeatedChars = 3<br>passwordMaxConsecutiveRepeatedChars = 0<br>ibm-pwdPolicy = true |
| passwordMaxConsecutiveRepeatedChars = 4<br>passwordMaxRepeatedChars = 0<br>ibm-pwdPolicy = true | passwordMaxConsecutiveRepeatedChars = 1<br>passwordMaxRepeatedChars = 0<br>ibm-pwdPolicy = true |                                                                                             | passwordMaxConsecutiveRepeatedChars = 1<br>passwordMaxRepeatedChars = 0<br>ibm-pwdPolicy = true |
| passwordMaxConsecutiveRepeatedChars = 4<br>passwordMaxRepeatedChars = 2<br>ibm-pwdPolicy = true | passwordMaxConsecutiveRepeatedChars = 2<br>passwordMaxRepeatedChars = 3<br>ibm-pwdPolicy = true |                                                                                             | passwordMaxConsecutiveRepeatedChars = 4<br>passwordMaxRepeatedChars = 2<br>ibm-pwdPolicy = true |
| pwdMaxAge = 200000<br>pwdExpireWarning = 100000<br>ibm-pwdPolicy = true                         |                                                                                                 | pwdMaxAge = 200000<br>pwdExpireWarning = 150000<br>ibm-pwdPolicy = true                     | pwdMaxAge = 200000<br>pwdExpireWarning = 150000<br>ibm-pwdPolicy = true                         |
| pwdMaxAge = 200000<br>pwdMinAge = 100000<br>ibm-pwdPolicy = true                                | pwdMaxAge = 200000<br>pwdExpireWarning = 100000<br>ibm-pwdPolicy = true                         | pwdMaxAge = 200000<br>pwdExpireWarning = 150000<br>ibm-pwdPolicy = true                     | pwdMaxAge = 200000<br>pwdMinAge = 100000<br>pwdExpireWarning = 0<br>ibm-pwdPolicy = true        |
| pwdMaxAge = 100000<br>pwdMinAge = 10000<br>pwdExpireWarning = 50000<br>ibm-pwdPolicy = true     | pwdMaxAge = 100000<br>pwdMinAge = 50000<br>pwdExpireWarning = 70000<br>ibm-pwdPolicy = true     | pwdMaxAge = 100000<br>pwdMinAge = 50000<br>pwdExpireWarning = 80000<br>ibm-pwdPolicy = true | pwdMaxAge = 100000<br>pwdMinAge = 50000<br>pwdExpireWarning = 80000<br>ibm-pwdPolicy = true     |

## Effective password policy examples

The **Effective password policy** extended operation is useful for an LDAP administrator to query a user's effective password policy when there are multiple password policies active. This extended operation is supported in the **ldapexop** utility. See “The ldapexop utility” on page 253 for more information.

Table 48 on page 375 displays examples of how a user's effective password policy is determined when individual, group, and global password policies are active.

| Table 48. Effective password policy examples                                                                                                                   |                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Individual password policy                                                                                                                                     | Composite group password policy                                                                                                                                                                                                                                  | Global password policy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Effective password policy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| ibm-pwdpolicy=true<br>ibm-pwdpolicystarttime=20091102173246.353496Z<br>pwdminlength=8<br>pwdgracelogleinlimit=3<br>pwdinhistory=4<br>pwdattribute=userpassword | ibm-pwdpolicy=true<br>ibm-pwdpolicystarttime=20091102173256.250491Z<br>pwdexpirewarning=2592000<br>pwdminlength=10<br>pwdinhistory=5<br>pwdchecksyntax=2<br>passwordminalphachars=5<br>passwordminotherchars=2<br>pwdattribute=userpassword<br>pwdmaxage=5184000 | ibm-pwdpolicy=true<br>ibm-pwdpolicystarttime=20091102163354.065965Z<br>pwdgracelogleinlimit=0<br>pwsafemodify=FALSE<br>pwdlockoutduration=0<br>pwdmaxfailure=5<br>pwdfailurecountinterval=0<br>pwdmaxage=7776000<br>pwdexpirewarning=5184000<br>pwdminlength=5<br>pwdlockout=true<br>pwdallowuserchange=TRUE<br>pwdmustchange=TRUE<br>ibm-pwdgroupandindividualenabled=true<br>passwordmaxconsecutivepeatedchars=0<br>passwordmaxrepeatedchars=0<br>passwordminalphachars=0<br>passwordminotherchars=0<br>passwordmindiffchars=0<br>pwdminage=0<br>pwdinhistory=3<br>pwdchecksyntax=0 | ibm-pwdpolicy=TRUE<br>ibm-pwdpolicystarttime=20091102173246.353496Z<br>passwordmaxconsecutivepeatedchars=0<br>passwordmaxrepeatedchars=0<br>passwordminalphachars=0<br>passwordmindiffchars=0<br>passwordminotherchars=0<br>pwdallowuserchange=TRUE<br>pwdattribute=userpassword<br>pwdchecksyntax=2<br>pwdexpirewarning=2592000<br>pwdfailurecountinterval=0<br>pwdgracelogleinlimit=3<br>pwdinhistory=4<br>pwdlockout=TRUE<br>pwdlockoutduration=0<br>pwdmaxage=5184000<br>pwdmaxfailure=5<br>pwdminage=0<br>pwdminlength=8<br>pwdmustchange=TRUE<br>pwsafemodify=FALSE |

| Table 48. Effective password policy examples (continued)                                                                            |                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Individual password policy                                                                                                          | Composite group password policy                                                                                                                                                                                                                            | Global password policy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Effective password policy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ibm-pwdpolicy=true<br>ibm-pwdpolycystarttime=20091103132230.734257Z<br>pwdgraceloginlimit=8<br>pwdmaxage=2592000<br>pwdminage=86400 | ibm-pwdpolicy=true<br>ibm-pwdpolycystarttime=20091103131723.827250Z<br>pwdminlength=10<br>pwdgraceloginlimit=10<br>pwdmaxage=5184000<br>pwdminage=86400<br>pwdexpirewarning=2592000<br>passwordmindiffchars=2<br>passwordminotherchars=0<br>pwdinhistory=5 | ibm-pwdpolicy=true<br>ibm-pwdpolycystarttime=20091102163354.065965Z<br>pwdgraceloginlimit=10<br>pwsafemodify=FALSE<br>pwdlockoutduration=0<br>pwdmaxfailure=5<br>pwdfailurecountinterval=0<br>pwdmaxage=7776000<br>pwdexpirewarning=5184000<br>pwdminlength=5<br>pwdlockout=true<br>pwdallowuserchange=TRUE<br>pwdmustchange=TRUE<br>ibm-pwdgroupandindividualenabled=true<br>passwordmaxconsecutivepeatedchars=0<br>passwordmaxrepeatedchars=0<br>passwordminalphachars=0<br>passwordminotherchars=1<br>passwordmindiffchars=3<br>pwdminage=2592000<br>pwdinhistory=0<br>pwdchecksyntax=0 | ibm-pwdpolicy=TRUE<br>ibm-pwdpolycystarttime=20091103132230.734257Z<br>ibm-pwdgroupandindividualenabled=TRUE<br>passwordmaxconsecutivepeatedchars=0<br>passwordmaxrepeatedchars=0<br>passwordminalphachars=0<br>passwordmindiffchars=2<br>passwordminotherchars=0<br>pwdallowuserchange=TRUE<br>pwdattribute=userpassword<br>pwdchecksyntax=0<br>pwdexpirewarning=0<br>pwdfailurecountinterval=0<br>pwdgraceloginlimit=8<br>pwdinhistory=5<br>pwdlockout=TRUE<br>pwdlockoutduration=0<br>pwdmaxage=2592000<br>pwdmaxfailure=5<br>pwdminage=86400<br>pwdminlength=10<br>pwdmustchange=TRUE<br>pwsafemodify=FALSE |

In the first row of Table 48 on page 375, the **pwdMinLength**, **pwdGraceloginlimit**, and **pwdInHistory** values are selected from the individual policy as that policy is evaluated first. When the **pwdMinLength** value is selected from the individual policy, the **passwordMinAlphaChars** and **passwordMinOtherChars** values default to 0 because these attributes are interdependent and must come from the same policy. The **pwdExpireWarning**, **pwdCheckSyntax**, **passwordMinAlphaChars**, **passwordMinOtherChars**, and **pwdMaxAge** are selected from the composite group policy because that is evaluated next. The remaining password attribute values are selected from the global password policy.

In the second row of Table 48 on page 375, the **pwdGraceLoginLimit**, **pwdMaxAge**, and **pwdMinAge** are selected from the individual policy because those policies are evaluated first. When the **pwdMaxAge** and **pwdMinAge** are selected from the individual policy, the **pwdExpireWarning** defaults to 0 because these attributes are interdependent and must come from the same policy. The **pwdMinLength**, **passwordMinDiffChars**, **passwordMinOtherChars**, and **pwdInHistory** are selected from the composite group because that is evaluated next. The remaining password attribute values are selected from the global password policy.

## Password policy operational attributes

For user entries that are subject to LDAP password policy, there are several operational attributes that contain password policy state information. The password operational attributes in Table 49 on page 376 are in the critical access class and by default, only an LDAP administrator with the appropriate authority can query and read them. See Chapter 9, “Administrative group and roles,” on page 155 for more information. If other users require access to these attributes, the default ACLs can be changed to allow read access to these attributes. See Chapter 24, “Using access control,” on page 425 for more information.

| Table 49. Password policy operational attributes in user entries |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute and description                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>pwdChangedTime</b>                                            | <p>Specifies the Coordinated Universal Time in Zulu format when the userPassword value was last changed or the ibm-pwdPolicyStartTime attribute value of the effective password policy entry's start time whatever time is later. The pwdChangedTime attribute is only updated when the user's effective password policy has either the pwdMinAge attribute or the pwdMaxAge attribute set to a value other than 0.</p> <p>Example:</p> <pre>pwdChangedTime: 20091021182253.188983Z</pre> |

| Table 49. Password policy operational attributes in user entries (continued) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute and description                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>pwdAccountLockedTime</b>                                                  | <p>Specifies the Coordinated Universal Time in Zulu format when the user's account was locked. If the user's account is not locked, this attribute is not present in the user's entry. If the user's password is reset by an LDAP root or password administrator, this attribute is automatically removed from the entry.</p> <p>Example:</p> <pre>pwdAccountLockedTime: 20091021183747.488417Z</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>pwdExpirationWarned</b>                                                   | <p>Specifies the Coordinated Universal Time in Zulu format of the first password expiration warning for this user.</p> <p>Example:</p> <pre>pwdExpirationWarned: 20091021181746.852469Z</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>pwdFailureTime</b>                                                        | <p>A multi-valued attribute specifying the Coordinated Universal Time in Zulu format of the previous consecutive authentication failures for this user.</p> <p>If the pwdLockout attribute is set to true in the effective password policy entry, then the number of consecutive authentication failures by this user is limited by the pwdMaxFailure attribute value in the effective password policy entry. On a successful authentication, all pwdFailureTime attribute values are removed from the user's entry.</p> <p>If the pwdLockout attribute is set to false in the effective password policy entry, then consider setting pwdLockoutDuration in the effective password policy entry to avoid recording an unlimited number of pwdFailureTime values.</p> <p>Example:</p> <pre>pwdFailureTime: 20091021181836.913647Z</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>pwdGraceUseTime</b>                                                       | <p>A multi-valued attribute specifying the Coordinated Universal Time in Zulu format of the previous grace logins for this user. The number of grace logins that are allowed by this user with an expired password is limited by the pwdGraceLoginLimit attribute value in the effective password policy entry. If grace logins are not allowed by the effective password policy, this attribute is not present in the user's entry. If the user's password is changed before the grace logins limit is exceeded, all pwdGraceUseTime attribute values are removed from the user's entry.</p> <p>Example:</p> <pre>pwdGraceUseTime: 20091013183626.310768Z pwdGraceUseTime: 20091021155707.839414Z</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>pwdHistory</b>                                                            | <p>A multi-valued attribute containing the history of previously used passwords for this user entry. The number of previous password values that are stored for this user is limited by the pwdHistory attribute value in the effective password policy entry. When the current userPassword attribute value is changed for this user, the previous password values in the history are compared to ensure that the user does not reuse an old password value.</p> <p>The format for this attribute is:</p> <pre>pwdHistory: time#syntaxOID#length#data</pre> <p>Where,</p> <p>time is the Coordinated Universal Time in Zulu format when this password value was added to the password history.</p> <p>syntaxOID is the numeric OID that defines the syntax that is used to originally store the password value.</p> <p>length is the number of octets in the old password data.</p> <p>data is the octet representing the password in a tagged base64-encoded printable format. This portion is in the same encryption or hashing format that is used for the original userPassword attribute value. If the data after the encryption tag is not printable in the original userPassword attribute value, it is base64 encoded before it is stored in the pwdHistory attribute value.</p> <p>Example:</p> <pre>pwdHistory: 20101124182146.400909Z#1.3.6.1.4.1.1466.115.121.1.40#33#{AES:KEY}h1zJB229co0VN728TpeU0w== pwdHistory: 20101124182507.050181Z#1.3.6.1.4.1.1466.115.121.1.40#62#{SHA}eyuSkyuA1ZmIMtZWQ7WcBplgTGqiZs1X+sBV+CF0z/tynSBu3Ay= pwdHistory: 20101124181038.800202Z#1.3.6.1.4.1.1466.115.121.1.40#18#{none}c2VjcmlV0MQ==</pre> |
| <b>pwdReset</b>                                                              | <p>A Boolean (true or false) indicating whether the user's password is changed or set by another user. When set to true, the password value must be changed by the user after successful authentication before the user is allowed to perform any other operations. If the userPassword value in this entry is changed by the user, this attribute is removed from the user's entry.</p> <p>Example:</p> <pre>pwdReset: true</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |



Table 49. Password policy operational attributes in user entries (continued)

**Attribute and description**

ibm-pwdAccountLocked

By default, an LDAP root or directory data administrator can query these password policy operational attributes for user entries in a particular state. When a user's account is locked, the user is unable to successfully authenticate to the server. This attribute is not present in the user's entry if the account has never been administratively locked.

Example:

```
ibm-pwdAccountLocked: true
```

By default, an LDAP root or directory data administrator can query these password policy operational attributes for user entries in a particular state. Because these attributes are operational, each attribute name or the special '+' attribute must be specified on the search request so that they are returned on the search response. If the authenticated user has access to operational attributes, the '+' attribute returns all operational attributes other than the `ibm-allMembers`, `ibm-allGroups`, `ibm-entryChecksum`, `ibm-entryChecksumOp`, and `hasSubordinates` attributes.

This example uses the **ldapsearch** utility to retrieve operational attributes.

```
ldapsearch -D adminDn -w adminPw -s sub -b "c=us" "objectclass=*" +
```

The `pwdChangedTime` attribute can be used in a search filter to retrieve a list of candidate users whose passwords might be about to expire. This example assumes that the effective password policy expiration policy is 90 days and searches for all entries of passwords expiring on August 10, 2010. Therefore, this example uses the **ldapsearch** utility to search for all entries when the password was last changed on May 2, 2010:

```
ldapsearch -D adminDn -w adminPw -s sub -b "c=us" "(! (pwdChangedTime>=20100502000000Z))" dn
```

The `pwdAccountLockedTime` attribute is used in a search filter to retrieve a list of candidate users that might be locked. Users are not always locked when this attribute is present in their entries because the effective password policy lockout duration might already be exceeded. This example uses the **ldapsearch** utility to search for all entries that have an `pwdAccountLockedTime` attribute value:

```
ldapsearch -D adminDn -w adminPw -s sub -b "c=us" "(pwdaccountlockedtime=*)" dn
```

The `pwdReset` attribute can be used in a search filter to retrieve a list of candidate users whose password must be changed because the password was reset or changed by another user. If the effective password policy does not enforce password reset, then this search does not retrieve all users that need to change or reset their passwords. This example uses the **ldapsearch** utility to search for all entries that have a `pwdReset` attribute value.

```
ldapsearch -D adminDn -w adminPw -s sub -b "c=us" "(pwdreset=true)" dn
```

## PasswordPolicy control

The **PasswordPolicy** server control is specified on a client request to solicit additional warning and error information related to password policy enforcement, which the server returns in the **PasswordPolicy** response control. For example, during authentication, the **PasswordPolicy** response control can notify the user that the password must be changed, is about to expire, or there are only a few grace logins available before the user's password expires. For add requests, the **PasswordPolicy** response control provides additional error information about the password value syntax. For modify requests, the **PasswordPolicy** response control provides additional error information about the password value syntax, the new password value exists in the password history, or the old password value must be specified.

By default, the z/OS LDAP client utilities send the **PasswordPolicy** server control on these requests to obtain additional warning and error information about password policy enforcement. For more information about the z/OS LDAP client utilities, see [LDAP client utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).



Table 50 on page 379 and Table 51 on page 379 contain summaries of the warnings and errors that are returned by the **PasswordPolicy** response control. See [“PasswordPolicy” on page 659](#) for more information.

| <i>Table 50. PasswordPolicy response control warnings</i> |                                                                                           |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>Warnings and description</b>                           |                                                                                           |
| timeBeforeExpiration                                      | Indicates the number of seconds before the user's password expires.                       |
| graceLoginsRemaining                                      | Indicates the number of times a user is allowed to authenticate with an expired password. |

| <i>Table 51. PasswordPolicy response control errors</i> |                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Errors and description</b>                           |                                                                                                                                                                                                                                                                                                                                                                           |
| passwordExpired                                         | Indicates that the user's password has expired and must be reset by an LDAP root administrator or an administrator with the appropriate authority. See <a href="#">Chapter 9, “Administrative group and roles,” on page 155</a> for more information about administrative role authority.                                                                                 |
| accountLocked                                           | Indicates that the user's account is locked by an LDAP administrator with the appropriate authority, a user with sufficient authority, or the account is locked because of exceeding the maximum number of failed authentications. See <a href="#">Chapter 9, “Administrative group and roles,” on page 155</a> for more information about administrative role authority. |
| changeAfterReset                                        | Indicates the user's password must be changed before the user is allowed to perform any operation other than authentication and modify requests.                                                                                                                                                                                                                          |
| passwordModNotAllowed                                   | Indicates that the password cannot be changed by the user even if the ACLs allow it to be changed.                                                                                                                                                                                                                                                                        |
| mustSupplyOldPassword                                   | Indicates that the old password value must be supplied when changing the user's password value.                                                                                                                                                                                                                                                                           |
| insufficientPasswordQuality                             | Indicates that the new password value did not pass the quality standards specified in the effective password policy.                                                                                                                                                                                                                                                      |
| passwordTooShort                                        | Indicates that the new password value is too short.                                                                                                                                                                                                                                                                                                                       |
| passwordTooYoung                                        | Indicates that the password value is not allowed to be changed because it has been changed too recently.                                                                                                                                                                                                                                                                  |
| passwordInHistory                                       | Indicates that the new password value exists in the password history and cannot be reused again.                                                                                                                                                                                                                                                                          |

A subset of these **PasswordPolicy** response control warnings and errors are returned if the user entry is participating in native authentication or is an SDBM user. See [“Binding with SDBM using password policy”](#) on page 319 and [“Password policy with native authentication”](#) on page 401 for more information.

## Replicating password policy operational attributes

---

If password policy operational attributes in a user's entry are updated during an add, bind, compare, or modify request, these updates are replicated to the configured replica or consumer server. These password policy operational attributes are replicated in an advanced or basic replication environment because:

- The **pwdChangedTime** attribute is replicated to all replica or consumer servers to enable expiration of the user's password on all servers.
- The **pwdReset** attribute is replicated to all replica or consumer servers to deny access to operations other than bind and modifying the user's password value.
- The **pwdHistory** attribute is replicated to all replica or consumer servers to keep the user's password history synchronized across all servers.
- The **pwdAccountLocked**, **pwdExpirationWarned**, **pwdFailureTime**, and **pwdGraceUseTime** attributes are replicated to all replica or consumer servers to enable the password policy to be managed as a whole across the entire replication environment. This allows the number of login failures, the number of grace logins, and the locking of the user's account to be managed as a whole across the entire replication environment.
- The **ibm-pwdAccountLocked** attribute is replicated to all replica or consumer servers to lock the user's entry on all servers in the replication environment.

Because these operational attributes are replicated to all consumer or replica servers, use peer-to-peer or read/write replica servers in a replication environment. This allows all servers to keep the password policy operational attribute values for user entries synchronized on all servers in the replication environment. For example, consider a master-replica replication environment with a password policy that allows users three failed logins before the user's account is locked. If users are attempting to authenticate to the read-only replica server in this environment, the user is only locked out from the read-only replica server when the incorrect password is specified three times. The read-only replica server cannot update the password policy operational attribute values for the entry on the master server. In this example, the user is still allowed to authenticate to the master server although the user is locked out on the replica server. To prevent these types of situations in a replication environment, you should use peer-to-peer replication environments when password policy is configured and active. This enables all servers the ability to update the password policy operational attributes during authentication.

If you use read-only replicas in the advanced replication environment, then enable the read-only replica password policy replication support, also known as 'replication of bind failure on read-only replica'. With this support enabled, the read-only replica binds to the server specified by the **ibm-replicaReferralUrl** attribute in the replication context using the credentials that are passed to it, by the client. The supplier server pointed to by the **ibm-replicaReferralUrl** attribute updates the password policy operational attributes of the user on the supplier and then replicates those attributes to the read-only replica. If the credentials are incorrect, then a **pwdFailureTime** attribute value is added and the account might be locked, if the credentials are correct then all values for the **pwdFailureTime** attribute are removed. When these updates are replicated by the supplier server, the user entry has the same password policy state on all servers in the replication collection.

**Note:** Read-only replica password policy replication supports bind operations using simple authentication, and authentications using compare operations with the **userPassword** attribute. Bind operations that use DIGEST-MD5 or CRAM-MD5 authentication mechanisms, though supported for password policy, do not cause an equivalent update of password policy operational attributes on the master server, and continues to behave as if the read-only replica password policy replication support is disabled.

Read-only replica password policy replication is not supported in the basic replication environment. The server compatibility level must be 8 or greater to support read-only replica password policy replication.

## Enabling read-only replica password policy replication

Use the **ldapdiff** utility to ensure that all user entries have the same password policy operational attribute values on all servers throughout the replication collection. Add the **ibm-slappedReplicateSecurityAttributes** attribute with a value of TRUE to the **cn=Replication, cn=configuration** entry on every server in the replication collection. If a read-only replica does not have the support enabled, it does not bind to the supplier server, therefore, no other servers in the collection know about the failure. If the supplier server does not have the support enabled, an extra value is added to the user entry and early account lock out occurs.

## Disabling read-only replica password policy replication

Update the **ibm-slappedReplicateSecurityAttributes** attribute with a value of FALSE in the **cn=Replication, cn=configuration** entry on every server in the replication collection to disable the support. Pending binds from the read-only replica to the master are discarded when the support is disabled.

## Password policy related extended operations

A set of extended operations are provided that allow an LDAP root administrator or an administrator with the appropriate authority the ability to query the effective password policy for a user or group and to query the status of a user's account. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information about administrative role authority. The **ldapexop** utility is provided to call these password policy extended operations. [Table 52 on page 381](#) summarizes the extended operations including the **ldapexop** operation value. See [“The ldapexop utility” on page 253](#) for more information.

| Table 52. Password policy extended operations |                                              |                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ldapexop operation                            | ldapexop description                         | Overview                                                                                                                                                                                                                                                                                                     |
| acctstatus                                    | Account status extended operation            | This extended operation is used to query the status of a user entry that contains a <b>userPassword</b> value. The status returned is if the user's account is opened, locked by an administrator, or the user's password is expired. See <a href="#">“Account status” on page 669</a> for more information. |
| effectpwdpolicy                               | Effective password policy extended operation | This extended operation is used to query a user's or group's effective password policy entries and the effective password policy attribute values. See <a href="#">“Effective password policy” on page 678</a> for more information.                                                                         |

See [“Effective password policy examples” on page 375](#) and [“Account status extended operation example” on page 386](#) for examples on using these extended operations.

## Overriding password policy and unlocking accounts

An LDAP root administrator or an administrator with the appropriate authority can override typical password policy behavior for specific user entries by modifying the password policy operational attributes. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information about administrative role authority. This section shows examples of how the effective password policy is overridden for specific users.

An LDAP administrator can prevent the password for a specific account or user from expiring by setting the **pwdChangedTime** attribute value to a date far in the future. This example uses the **ldapmodify** utility to set the password expiration time to January 1, 2200 at midnight Coordinated Universal Time.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user1,c=us
changetype: modify
```

```
replace: pwdChangedTime
pwdChangedTime: 22000101000000Z
```

An LDAP administrator can unlock an account, that is locked because of excessive login failures, by removing the **pwdAccountLockedTime** and **pwdFailureTime** attributes from the user entry. This example uses the **ldapmodify** utility to perform these modifications.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user2,c=us
changetype: modify
delete: pwdAccountLockedTime
-
delete: pwdFailureTime
```

An LDAP administrator can unlock an account because the password has expired by setting the **pwdChangedTime** attribute to the current time and removing the **pwdExpirationWarned** and **pwdGraceUseTime** attributes. The **pwdChangedTime** attribute value is set to the current time to avoid the user's password from expiring immediately. This example uses the **ldapmodify** utility to unlock or unexpire the user's account by setting the **pwdChangedTime** attribute to the current time of June 1, 2010 at 1:00 Coordinated Universal Time.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user3,c=us
changetype: modify
replace: pwdChangedTime
pwdChangedTime: 20100601010000Z
-
replace: pwdExpirationWarned
-
replace: pwdGraceUseTime
```

An LDAP administrator can bypass forcing a user to change the password value after a password reset by removing the **pwdReset** attribute. This example uses the **ldapmodify** utility to remove the **pwdReset** attribute.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user4,c=us
changetype: modify
delete: pwdReset
```

An LDAP administrator can force a user to change their password value by setting the **pwdReset** attribute value to true. This example uses the **ldapmodify** utility to set the **pwdReset** attribute value to true.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user5,c=us
changetype: modify
replace: pwdReset
pwdReset: true
```

An LDAP administrator can administratively lock a user's account by setting the **ibm-pwdAccountLocked** operational attribute to true. This prevents the user from authenticating successfully to the LDAP server. This example uses the **ldapmodify** utility to set the **ibm-pwdAccountLocked** attribute value to true.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user6,c=us
changetype: modify
replace: ibm-pwdAccountLocked
ibm-pwdAccountLocked: true
```

An LDAP administrator can administratively unlock a user's account by setting the **ibm-pwdAccountLocked** operational attribute to false. If a user's account is unlocked in this manner, it does not affect the state of the account with respect to being locked because of excessive password failures or an expired password.

```
ldapmodify -D adminDn -w adminPw
dn: cn=user7,c=us
```

```
changetype: modify
replace: ibm-pwdAccountLocked
ibm-pwdAccountLocked: false
```

If the **Server administration** server control is specified (the **-k** option in the **ldapmodify** utility) when modifying the **ibm-pwdAccountLocked** attribute from true to false, the **pwdAccountLockedTime** and **pwdFailureTime** attribute values are also automatically removed from the user's entry. This removes the administrative lock and the lock from excessive password failures. However, it does not affect the state of the account for an expired password.

## Unlocking or unexpiring the account of the LDAP root administrator (adminDN)

If the LDAP root administrator defined in the configuration file (adminDN configuration option) specifies an entry that resides in a CDBM, LDBM, or TDBM backend and the account becomes locked or expired under z/OS LDAP password policy rules, the root administrator is unable to authenticate to the server. If this occurs, the LDAP server UNLOCK modify command is available to unlock or unexpire the account of this root administrator.

To unlock the account of the LDAP root administrator defined in the configuration file (adminDN configuration option), use the LDAP server UNLOCK operator modify command. In this example, *dssrv* is the name of the LDAP server started task. If the command is entered from SDSF, it must be preceded by a slash (/):

```
F dssrv,UNLOCK ADMIN
```

If this command is successful, the account of the LDAP root administrator defined in the adminDN configuration option is unlocked or unexpired. The root administrator is then allowed to authenticate to the LDAP server at which time the password must be changed.

## Password policy examples

This section contains examples of configuring global, group, and individual password policy entries and associating them with users and groups. This section also contains examples of using the **Effective password policy** and **Account status** extended operations.

### Global password policy example

When the global password policy entry, **cn=pwdpolicy,cn=ibmpolicies**, is initially created in the CDBM backend, the policy is not enabled. This example uses the **ldapmodify** utility to activate the global password policy and to change its default values. For more information about the **ldapmodify** utility, see [Ldapmodify and Ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

```
ldapmodify -p port -D adminDn -w adminPw
dn: cn=pwdpolicy,cn=ibmpolicies
replace: x
ibm-pwdpolicy: true
pwdmaxage: 7776000
pwdexpirewarning: 5184000
pwdmaxfailure: 5
pwdlockout: true
pwdinhistory: 3
pwdminlength: 5
pwdchecksyntax: 1
```

After these modifications are made to the global password policy entry, the following policy is in effect for all existing entries that have **userPassword** attribute values:

- Passwords must be changed every 90 days (7776000 seconds) and password expiration warnings are sent on the **PasswordPolicy** response control starting 60 days (5184000 seconds) before the password expires.

- There are a maximum of five login failures before the user's account is locked and must be unlocked by an LDAP root administrator or an administrator with the appropriate authority. See [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information about administrative role authority.
- The previous three password values are kept in the user's password history and the user is unable to reuse these password values.
- The new password value must have a minimum length of five characters.

## Group password policy example

If there are a number of users that must have a password policy that differs from the global password policy, group password policies are used. These users must be placed in a static, dynamic, and nested group and those groups are updated to refer to a password policy entry. This example uses the **ldapadd** utility to add a password policy entry in the CDBM backend to be used as a group password policy. For more information about the **ldapadd** client utility, see [Ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

```
ldapadd -p port -D adminDn -w adminPw
dn: cn=group,cn=ibmpolicies
objectclass: pwdpolicy
objectclass: ibm-pwdpolicyext
objectclass: container
pwdminlength: 10
pwdinhistory: 5
pwdchecksyntax: 2
passwordminalphachars: 5
passwordminotherchars: 2
pwdmaxage: 5184000
pwdexpirewarning: 2592000
pwdattribute: userpassword
ibm-pwdpolicy: true
```

The characteristics are:

- Passwords must be changed every 60 days (5184000 seconds) and password expiration warnings are sent on the PasswordPolicy response control starting 30 days (2592000) before the password is to expire.
- The minimum length of password values is 10 characters, five must be alphabetic characters, and two must be non-alphabetic characters. Password syntax checking is enforced because the **pwdCheckSyntax** attribute is set to two.
- The previous five password values are kept in the user's password history and the user is unable to reuse these password values.

After the password policy entry is created, the group entry that must use this special password policy must be modified to set the **ibm-pwdGroupPolicyDN** operational attribute value. This example uses the **ldapmodify** utility to modify the existing **cn=group, c=us** entry to add an **ibm-pwdGroupPolicyDN** operational attribute value for the **cn=group,cn=ibmpolicies** password policy entry.

```
ldapmodify -p port -D adminDn -w adminPw
dn: cn=group,c=us
add: ibm-pwdgrouppolicydn
ibm-pwdgrouppolicydn: cn=group,cn=ibmpolicies
```

Although the **cn=group,cn=ibmpolicies** password policy entry created earlier is enabled by setting the **ibm-pwdPolicy** attribute value to true, the global password policy must be enabled to evaluate additional password policies (if it is not already). Set the **ibm-pwdGroupAndIndividualEnabled** attribute value to true in the global password policy entry. This example uses the **ldapmodify** utility to enable the evaluation of additional password policies in the LDAP server.

```
ldapmodify -p port -D adminDn -w adminPw
dn: cn=pwdpolicy,cn=ibmpolicies
replace: x
ibm-pwdgroupandindividualenabled: true
```

After the global password policy is enabled to evaluate additional password policies, users that are members of the `cn=group,c=us` group are subject to the password policy specified in the `cn=group,cn=ibmpolicies` entry.

## Individual password policy example

If there are only a few users that must have a password policy that differs from the global password policy, an individual password policy can be created and used. The users that require this special password policy are updated to refer to a password policy entry.

This example uses the **ldapadd** utility to add a password policy entry in the CDBM backend to be used as an individual password policy.

```
ldapadd -p port -D adminDn -w adminPw
dn: cn=individual,cn=ibmpolicies
objectclass: pwdpolicy
objectclass: ibm-pwdpolicyext
objectclass: container
pwdminlength: 8
pwdgracelogleinlimit: 3
pwdinhistory: 4
pwdchecksyntax: 1
pwdattribute: userpassword
ibm-pwdpolicy: true
```

The characteristics are:

- The minimum length of a password value is eight characters with no restrictions on alphabetic or numeric characters.
- The previous four password values are kept in the user's password history and the user is unable to reuse these password values.
- There are three grace logins allowed before the user's password expires.

After the password policy entry is created, the individual users needed to use this special password policy must be modified to set the **ibm-pwdIndividualPolicyDN** operational attribute value. This example uses the **ldapmodify** utility to modify the existing `cn=user5,c=us` entry to add an **ibm-pwdIndividualPasswordPolicyDN** operational attribute value for the `cn=individual,cn=ibmpolicies` password policy entry.

```
ldapmodify -p port -D adminDn -w adminPw
dn: cn=user5,c=us
add: ibm-pwdIndividualPolicydn
ibm-pwdIndividualPolicydn: cn=individual,cn=ibmpolicies
```

Although the `cn=individual,cn=ibmpolicies` password policy entry created earlier is enabled by setting the **ibm-pwdPolicy** attribute value to true, the global password policy must be enabled to evaluate additional password policies (if it is not already). Set the **ibm-pwdGroupAndIndividualEnabled** attribute value to true in the global password policy entry. This example uses the **ldapmodify** utility to enable the evaluation of additional password policies in the LDAP server.

```
ldapmodify -p port -D adminDn -w
adminPw
dn: cn=pwdpolicy,cn=ibmpolicies
replace: x
ibm-pwdgroupandindividualenabled: true
```

After the global password policy is enabled to evaluate additional password policies, the `cn=user5,c=us` entry is subject to the password policy specified in the `cn=individual,cn=ibmpolicies` entry.

## Effective password policy extended operation example

The **Effective password policy** extended operation in the **ldapexop** utility is used to query the effective password policy of a user or group. The **Effective password policy** extended operation displays the

password policy attribute values and the password policy entries that have contributed to the effective password policy for the specified user or group. See “The **ldapexop** utility” on page 253 for more information. This example uses the **Effective password policy** extended operation in the **ldapexop** utility to query the effective password policy for user `cn=user5,c=us`:

```
ldapexop -p port -D adminDn -w adminPw -op effectpwdpolicy -d "cn=user5,c=us"
```

The effective password policy is calculated based on the following entries:

`cn=pwdpolicy,cn=ibmpolicies`

`cn=group,cn=ibmpolicies`

`cn=individual,cn=ibmpolicies`

The effective password policy is:

`ibm-pwdgroupandindividualenabled=TRUE`

`ibm-pwdpolicy=TRUE`

`ibm-pwdPolicyStartTime=20090808153021.4210567Z`

`passwordmaxconsecutivepeatedchars=0`

`passwordmaxrepeatedchars=0`

`passwordminalphachars=0`

`passwordmindiffchars=0`

`passwordminotherchars=0`

`pwdallowuserchange=TRUE`

`pwdattribute=userpassword`

`pwdchecksyntax=2`

`pwdexpirewarning=2592000`

`pwdfailurecountinterval=0`

`pwdgraceloginlimit=3`

`pwdinhistory=4`

`pwdlockout=TRUE`

`pwdlockoutduration=0`

`pwdmaxage=5184000`

`pwdmaxfailure=5`

`pwdminage=0`

`pwdminlength=8`

`pwdmustchange=TRUE`

`pwdsafemodify=FALSE`

#### Note:

1. Because `cn=user5,c=us` has an individual password policy (`cn=individual,cn=ibmpolicies`) and is a member of a group that has an activated group password policy (`cn=group,cn=ibmpolicies`), the effective password policy is calculated based on each of these password policy entries.
2. The **ibm-pwdPolicyStartTime** attribute value returned in the **Effective password policy** extended operation example is a result of the individual password policy start time because that policy is evaluated first.

## Account status extended operation example

The Account status extended operation in the **ldapexop** utility is used to query if the user's account is opened, locked, or the password has expired.

```
ldapexop -p port -D adminDn -w adminPw -op acctstatus -d "cn=user1,c=us"
acctstatus_extended_op: Account is locked.
```

## Changing password values when `pwdsafemodify` is set to true

If the **pwdSafeModify** attribute in the effective password policy is set to true, the current and new password value must be provided when changing a user's **userPassword** attribute value.

The **ldapchangepwd** utility is provided in z/OS and you must specify the current and new password values when modifying the **userPassword** attribute value. For more information about the **ldapchangepwd** utility, see **ldapchangepwd** utility in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*. This example uses the **ldapchangepwd** utility to change the **userPassword** attribute value for user `cn=user1,c=us` from `secret` to `supersecret`.

For example:



```
ldapchangepwd -p port -D cn=user1,c=us -w secret -n supersecret
```

If changing passwords with a non-z/OS LDAP client, use the **ldapmodify** utility to specify the current and new **userPassword** attribute values as shown in the example. This example changes the password for user `cn=user2,c=us` from `secret` to `supersecret`.

```
ldapmodify -p port -D cn=user2,c=us -w secret
dn: cn=user2,c=us
changetype: modify
delete: userpassword
userpassword: secret
-
add: userpassword
userpassword: supersecret
```



---

## Chapter 19. Kerberos authentication

The LDAP server allows clients to authenticate to the server by using IBM's Network Authentication and Privacy Service which is better known as Kerberos Version 5. Kerberos is a trusted vendor-acquired, private-key, network authentication system. In Kerberos, a ticket, a packet of information used by a client to prove its identity, is passed to a server in place of a user name and password. This ticket is encrypted and cannot be duplicated. After the server verifies the client ticket, it sends its own ticket to the client in order for the client to authenticate it. Once the mutual authentication process is complete, the client and server have authenticated each other.

The LDAP server supports Kerberos integrity and confidentiality services. Upon successful completion of a SASL bind operation using the GSS API mechanism, the negotiated quality of protection (QOP) is used for subsequent messages sent over the connection. This QOP continues to be used until the completion of a new SASL bind request. If the new SASL bind request fails, the connection reverts to anonymous authentication with no integrity or confidentiality services.

---

### Setting up for Kerberos

Kerberos Version 5 binds, defined in [RFC 2222 \(tools.ietf.org/html/rfc2222\)](https://tools.ietf.org/html/rfc2222), are performed using the Generic Security Services Application Programming Interface (GSS API) defined in [RFC 2743 \(tools.ietf.org/html/rfc2743\)](https://tools.ietf.org/html/rfc2743) and [RFC 2744 \(tools.ietf.org/html/rfc2744\)](https://tools.ietf.org/html/rfc2744). From this point on the phrase "GSS API bind" is used to refer to Kerberos Version 5 binds. Before attempting to perform a Kerberos GSS API bind, be sure to:

1. Have the Network Authentication and Privacy Service (Kerberos 5) installed and configured and the service started.
2. Create a Kerberos identity for the user ID that starts the LDAP server. For example:

```
ALTUSER LDAPSRV PASSWORD(password) NOEXPIRED KERB(KERBNAME(ldap_prefix/primary-dns-hostname))
```

where *ldap\_prefix* is either *ldap* or *LDAP* and *primary-dns-hostname* is the primary hostname for the system in DNS. The Kerberos principal name associated with the LDAP server can be *ldap\_prefix/primary-dns-hostname@krbRealmName*. The *krbRealmName* is the Kerberos realm in which the LDAP server operates. Use *ldap* to assure interoperability with all LDAP clients. *LDAP* is accepted, but this value is not usable with many non-z/OS LDAP clients.

Example:

```
ALTUSER LDAPSRV PASSWORD(sec1ret) NOEXPIRED KERB(KERBNAME(ldap/
test.server.ibm.com))
```

3. If the KDC (Key Distribution Center) is not located on the same machine as the LDAP server, you must generate a key table for the server. To generate a keytab for the server, issue the following commands:
  - a. First check the version of the server's Kerberos key (this is necessary since the version is updated every time the password is changed):

```
LISTUSER LDAPSRV NORACF KERB
```

- b. Now the **keytab** command can be issued from the z/OS shell with the KEY VERSION from the LISTUSER command:

```
keytab add ldap_prefix/primary-dns-hostname -p password -v key-version
```

The *-k filename* option might also be used if you want to use your own key table rather than the Kerberos default keytab file. It is also important to note that when issuing Kerberos commands all passwords must be in uppercase.

If the KDC and LDAP server are on the same system, you do not need a key table. However, the user ID that starts the server must have at least read access to IRR.RUSERMAP in the FACILITY class when the KRB5\_SERVER\_KEYTAB environment variable in the security server configuration file (`krb5.conf`) is set to 1. Following are the RACF commands to do this:

```
RDEFINE FACILITY IRR.RUSERMAP UACC(NONE)
PERMIT IRR.RUSERMAP CLASS(FACILITY) ID(LDAPSRV) ACCESS(READ)
SETR RACLIST(FACILITY) REFRESH
```

See *z/OS Integrated Security Services Network Authentication Service Administration* for more information about configuring the KDC.

#### 4. Enable your configuration file for Kerberos authentication.

```
Global Section
supportKrb5 on
serverKrbPrinc LDAP/myhost.com@MYREALM.COM
krbLDAPAdmin ibm-kn=ldapadm@MYREALM.COM
krbKeytab none
TDBM Section
krbIdentityMap on
LDBM Section
krbIdentityMap on
SDBM Section
krbIdentityMap on
CDBM Section
krbIdentityMap on
```

#### Note:

- In the preceding example, `myhost.com` is the primary DNS hostname of the LDAP server and `MYREALM.COM` is the Kerberos realm to which the LDAP server belongs.
  - The first portion of the **serverKrbPrinc** identity can either be `ldap` or `LDAP` in the server configuration file and in the Kerberos segment of the RACF ID where it is defined. Use `ldap` to assure interoperability with all LDAP clients. `LDAP` is accepted, but this value is not usable with many non-z/OS LDAP clients. Check your KDC for case requirements.
  - The **serverKrbPrinc** configuration option is optional if the Kerberos principal name (**KERBNAME** field in RACF) of the LDAP server's user ID is "`ldap/primary-dns-hostname`", where *primary-dns-hostname* is the primary DNS hostname of the LDAP server.
5. Start your server. Your LDAP server is now configured with Kerberos support.

## Schema for Kerberos

The LDAP server schema always contains the schema elements needed for Kerberos GSS API Authentication. No additional schema is needed.

Table 53 on page 390 lists the Kerberos object classes and attributes.

| Table 53. Kerberos attributes and object classes |                    |                                                                                                                                                                                           |
|--------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute                                        | Object Class       | Description                                                                                                                                                                               |
| <b>krbRealmName-V2</b>                           | <b>krbRealm-V2</b> | This attribute represents the Kerberos realms of which entries in the LDAP server are members. The entry that contains this attribute also contains the <b>krbPrincSubtree</b> attribute. |
| <b>krbPrincSubtree</b>                           | <b>krbRealm-V2</b> | This attribute is in the same entry as the <b>krbRealmName-V2</b> attribute and it identifies the directory subtrees where entries might contain Kerberos information.                    |

Table 53. Kerberos attributes and object classes (continued)

| Attribute                    | Object Class                  | Description                                                                                                                                                                                                                                                                                                                       |
|------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>krbPrincipalName</b>      | (no object class)             | The attribute is used to define the entry's Kerberos identity. This attribute is used for identity mapping. Currently this attribute is not associated with an object class. This means that for an entry to contain this attribute you can add the object class <b>extensibleObject</b> or define and add your own object class. |
| <b>krbAliasedObjectName</b>  | <b>krbAlias</b>               | This attribute allows an entry to be mapped to another entry's DN.                                                                                                                                                                                                                                                                |
| <b>krbHintAliases</b>        | <b>krbAlias</b>               | This attribute is used as an authorization list. If another entry's DN is in this list and that entry specified this entry as a <b>krbAliasedObjectName</b> then the mapping is allowed.                                                                                                                                          |
| <b>altSecurityIdentities</b> | <b>ibm-securityIdentities</b> | If a user is defined to a not case-sensitive Kerberos server, then the Kerberos identity associated with this entry is stored as an <b>altSecurityIdentities</b> rather than a <b>krbPrincipalName</b> .                                                                                                                          |
| <b>ibm-kn</b>                | (no object class)             | This attribute is a pseudo-DN so that Kerberos identities can be represented as DNs for access control. Currently this attribute is not associated with an object class. This means that for an entry to contain this attribute you can add the object class <b>extensibleObject</b> or define and add your own object class.     |

## Identity mapping

The following sections describe the mapping that is done depending on your configuration. After all the identity mapping takes place, you are left with a list of DNs that are used for access control and group gathering.

### Default mapping

The GSS API bind operation passes a Kerberos identity to the LDAP server which in its initial form cannot be used for access control in the server. This Kerberos identity known as *principal@REALM* is converted to a DN of the form *ibm-kn=principal@REALM*. Now this Kerberos DN is used in access control lists. This is known as the default mapping and is always performed when a SASL bind with a mechanism of GSS API is performed.

For example, if you performed a Kerberos bind as *jeff@IBM.COM* you would be mapped to *ibm-kn=jeff@IBM.COM* and this DN is added to a list of DNs that are used for access control throughout the server.

### TDBM, LDBM, and CDBM mapping

The name specified in the BIND request must match the DN for the source principal used to establish the GSS API context, one of the mapped Kerberos identities, or must be null.

The DN for the source principal is formed as `ibm-kn=principal@REALM` where *principal@REALM* is obtained from the GSS API client credentials. Additional distinguished names can be assigned using Kerberos identity mapping. Kerberos identity mapping for a backend is enabled by setting the **krbIdentityMap** configuration option to **on**.

When Kerberos identity mapping is enabled for a backend, the following steps are performed:

1. Search each naming context managed by the backend for an entry with **objectClass=krbRealm-V2** and **krbRealmName-V2=REALM**, where *REALM* is the realm portion of the bound Kerberos identity. If an entry is found, the **krbPrincSubtree** attribute values for the entry specify the directory subtrees to search in the next step.
2. Search each directory subtree specified by a **krbPrincSubtree** attribute value for entries containing a **krbPrincipalName** attribute with the same value as the bound Kerberos identity. The DN of each matching entry is added to the list of mapped Kerberos identities. If a matching entry also contains the **krbAliasedObjectName** attribute and the aliased entry specified by the **krbAliasedObjectName** attribute contains a **krbHintAliases** attribute value matching the name of the matching entry, then the DN of the aliased entry is also added to the list of mapped Kerberos identities.
3. Search each naming context managed by the backend for entries with **objectClass=ibm-securityIdentities** and either a **userPrincipalName** attribute with the value *principal@realm* or an **altSecurityIdentities** attribute with the value *kerberos:principal@REALM*. *kerberos* is any mixed-case spelling of KERBEROS. The DN of each matching entry is added to the list of mapped Kerberos identities.

Alias and referral search processing is not performed during Kerberos identity mapping.

## SDBM mapping

If an SDBM backend is configured in the LDAP server configuration file and the **krbIdentityMap** configuration option is **on**, then the SDBM backend tries to map the Kerberos identity to the appropriate RACF ID. SDBM checks that the realm specified in the Kerberos identity is the RACF local realm and searches for a RACF user whose KERBNAME value in the KERB segment is the same as the principal in the Kerberos identity. If a RACF ID is found, then the SDBM DN that represents the RACF ID is added to the list of DNs. In this case, the bound user can then perform SDBM operations to access RACF data, under the context of the RACF ID.

## Configuring access control

Since there is now a list of alternate DNs, access control is changed to operate on the list of DNs rather than just a single DN. Group gathering is also performed on all the DNs in the list. The following examples show how access control could be configured for Kerberos binds.

1. Setting up new ACLs in your directory:

Use `ibm-kn=principal@REALM` for your **aclEntry** values.

Example:

```
dn: cn=Scott,o=IBM,c=US
aclEntry: access-id:ibm-kn=jeff@IBM.COM:normal:r
```

If `jeff@IBM.COM` performed a Kerberos bind to the server, he is mapped to `ibm-kn=jeff@IBM.COM` and he would get read access to normal attributes in the Scott entry.

2. Use existing ACLs (Method 1). This method is used for Kerberos identities that are defined to IBM KDCs or case-sensitive KDCs.

- a. Set up and add the realm entry in the database.

Example:

```
dn: krbRealmName-V2=IBM.COM,o=IBM,c=US
objectclass: krbRealm-V2
```

```
krbRealmName-V2: IBM.COM
krbPrincSubtree: o=IBM,c=US
```

This example states that if a bound Kerberos identity has a realm of IBM.COM, then identity mapping is performed in the o=IBM, c=US subtree.

- b. Add the **krbPrincipalName** attribute to your entries.

Example:

```
dn: cn=Jeff,o=IBM,c=US
objectclass: extensibleObject
krbPrincipalName: jeff@IBM.COM
```

In this example, the realm entry for jeff@IBM.COM is found and the o=IBM, c=US subtree is searched for krbPrincipalName = jeff@IBM.COM. Because there is no **krbAliasedObjectName** attribute in the Jeff entry, only the DN cn=Jeff, o=IBM, c=US is added to the DN list along with the default mapping of ibm-kn=jeff@IBM.COM.

Therefore, if cn=Jeff, o=IBM, c=US was already defined in another entry's **aclEntry**, then jeff@IBM.COM still has that access to the entry. For example:

```
dn: cn=Ken,o=IBM,c=US
aclEntry: access-id:cn=Jeff,o=IBM,c=US:normal:w
```

In this example jeff@IBM.COM still maintains access to the cn=Ken, o=IBM, c=US entry since TDBM or LDBM mapping was performed.

- c. The **krbAliasedObjectName** attribute can also be used for identity mapping.

Example:

```
dn: cn=Jeff,o=IBM,c=US
objectclass: extensibleObject
objectClass: krbAlias
krbPrincipalName: jeff@IBM.COM
krbAliasedObjectName: cn=Tim,o=IBM,c=US
```

In this example, the realm entry for jeff@IBM.COM is found and the o=IBM, c=US subtree is searched for krbPrincipalName = jeff@IBM.COM. The search results in cn=Jeff, o=IBM, c=US being added to the DN list. Because there is a **krbAliasedObjectName** attribute in the Jeff entry, it is necessary to look at the Tim entry before adding cn=Tim, o=IBM, c=US to the DN list. In order to use Tim's DN for access control, he must authorize Jeff to do so. Tim's entry must look like the following:

```
dn: cn=Tim,o=IBM,c=US
objectclass: krbAlias
krbHintAliases: cn=Jeff,o=IBM,c=US
```

Since Tim has Jeff listed as a **krbHintAliases** value, the value of **krbAliasedObjectName** cn=Tim, o=IBM, c=US can be added to the DN list. If the Tim entry did not contain the **krbHintAliases** with Jeff as its value, then Tim's DN would not be added to the DN list.

Therefore, if cn=Tim, o=IBM, c=US was already defined in another entry's **aclEntry** then jeff@IBM.COM still has that access to the entry. For example:

```
dn: cn=Kim,o=IBM,c=US
aclEntry: access-id:cn=Tim,o=IBM,c=US:normal:w
```

In this example, jeff@IBM.COM still maintains write access to the Kim entry since TDBM, LDBM, or CDBM mapping was performed and Jeff was aliased to Tim.

3. Use existing ACLs (Method 2). This method is used for not case-sensitive KDCs. Set up your TDBM, LDBM, or CDBM entries with the **altSecurityIdentities** attribute.

Example:

```
dn: cn=Jeff,o=IBM,c=US
objectclass: ibm-securityIdentities
altSecurityIdentities: KERBEROS:jeff@IBM.COM
```

Now if jeff@IBM.COM performs a Kerberos bind he is mapped to ibm-kn=jeff@IBM.COM and cn=Jeff,o=IBM,c=US.

Therefore, if cn=Jeff,o=IBM,c=US was already defined in another entry's **aclEntry** then jeff@IBM.COM still has that access to the entry. For example:

```
dn: cn=Ken,o=IBM,c=US
aclEntry: access-id:cn=Jeff,o=IBM,c=US:normal:w
```

In this example jeff@IBM.COM still maintains write access to the Ken entry since TDBM, LDBM, or CDBM mapping was performed.

## Example of setting up a Kerberos directory

---

The following diagram shows an example of how you could set up a Kerberos directory.

**Note:** Because of space limitations in the diagram, the entries in the example do not contain all the necessary information to make them valid directory entries. For example, object classes and required attributes have been left out of many of the entries.



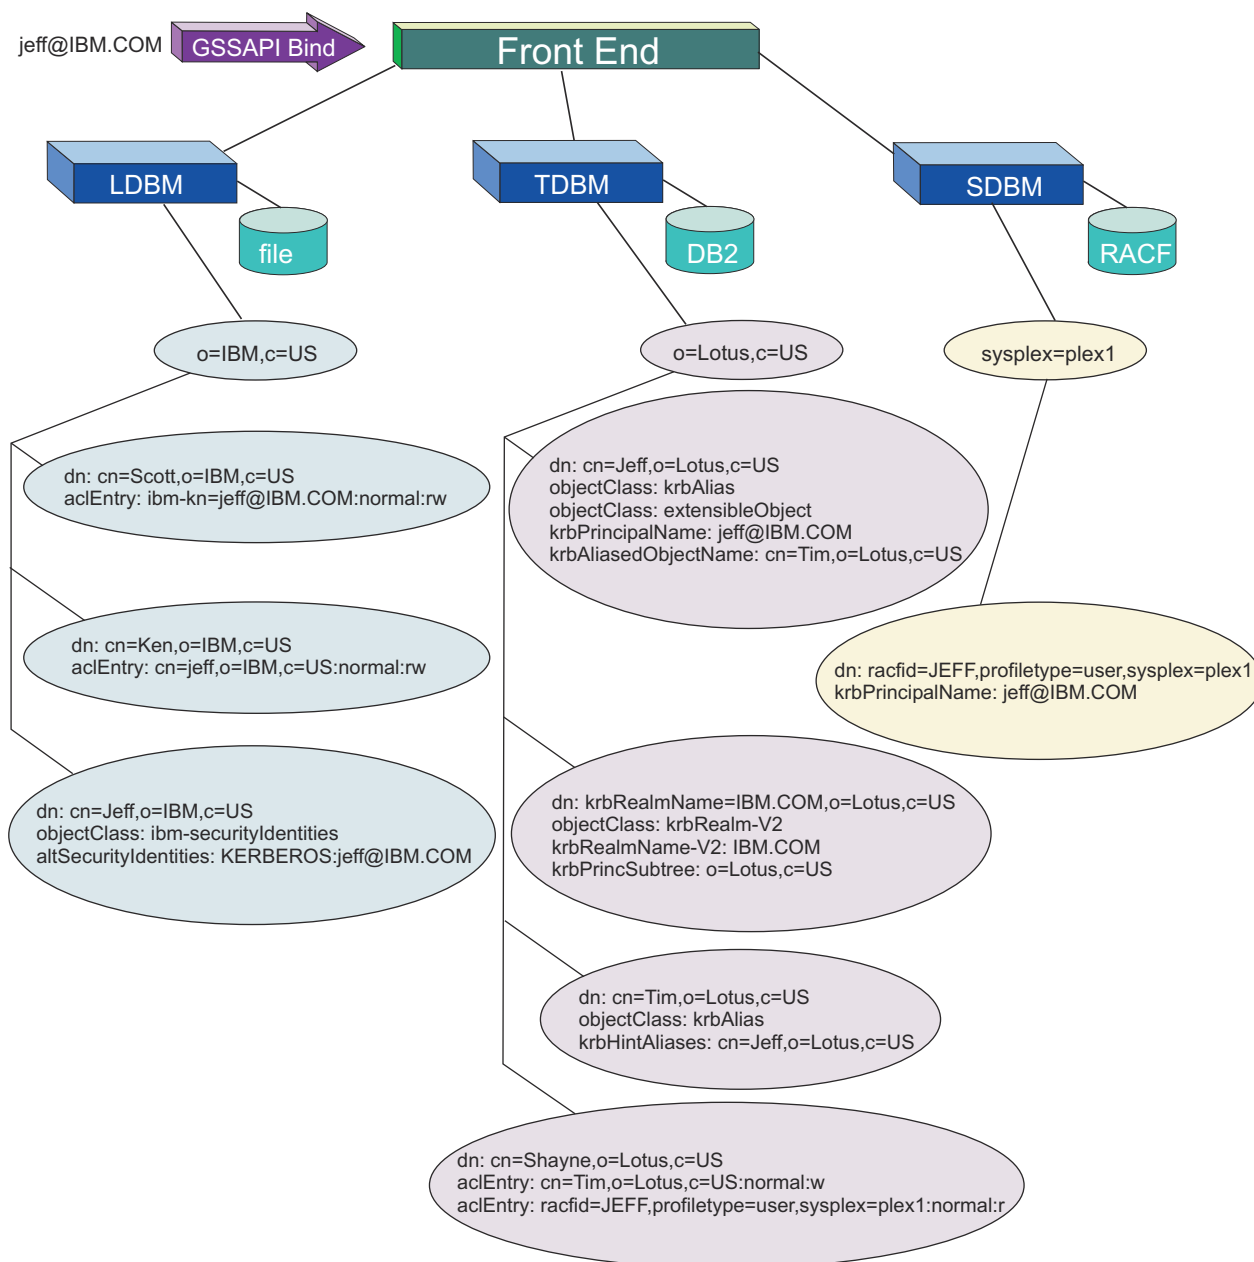


Figure 25. Kerberos directory example

Assume that Kerberos support has been enabled for this server, all backends have set **krbIdentityMap** to **on**, and the JEFF user ID has performed a **kinit** to acquire a Kerberos ticket before issuing the GSS API Kerberos bind.

The user JEFF with a Kerberos identity of `jeff@IBM.COM` is performing a Kerberos GSS API Bind to an LDAP server which has been configured with a TDBM backend, an LDBM backend, and an SDBM backend.

During the bind process the Kerberos identity `jeff@IBM.COM` by default is mapped to `ibm-kn=jeff@IBM.COM` and this value is added to the list of DNs that is used for access control.

After default mapping is performed, each of the backends attempt to perform identity mapping:

1. The LDBM backend first looks for the Kerberos realm object with a `krbRealmName-V2=IBM.COM` and does not find one. Now the backend attempts to find the entry that contains `altSecurityIdentities=KERBEROS:jeff@ibm.com`. The entry with the DN `cn=Jeff,o=IBM,c=US` matches this criteria and the DN is added to the alternate DN list.

2. Now the server moves on to the TDBM backend and tries to find the Kerberos realm object with a `krbRealmName-V2=IBM.COM`. This time the realm object is found so all the **krbPrincSubtree** values of the realm object are collected. Next, the server searches each of these subtrees (in this example, only the `o=Lotus,c=US` subtree) for entries that contain `krbPrincipalName=jeff@IBM.COM`. In this backend the entry `cn=Jeff,o=Lotus,c=US` is found and is added to the DN list. Next the JEFF entry is checked for the **krbAliasedObjectName** attribute. There is a **krbAliasedObjectName** specified so authorization of the alias must be performed. The alias is `cn=Tim,o=Lotus,c=US` so the Tim entry must be checked for the attribute **krbHintAliases** with a value of `cn=Jeff,o=Lotus,c=US`. This value does exist so the DN `cn=Tim,o=Lotus,c=US` is added to the access control DN list.
- Note:** If the value `cn=Jeff,o=Lotus,c=US` did not exist in Tim's **krbHintAliases**, then Tim did not want you to be an alias, so the DN `cn=Tim,o=Lotus,c=US` would not have been added to the DN list.
3. Finally, the server gets to the SDBM backend and invokes a RACF API that attempts to map the Kerberos identity `jeff@IBM.COM` to its associated RACF ID. In this example, the API returns the JEFF user ID and the DN `racfid=JEFF,profiletype=user,sysplex=plex1` is constructed and added to the list of access control DNs.

At this point, the bind has completed and the list of DNs that is used for access control is as follows:

```
ibm-kn=jeff@IBM.COM
cn=Jeff,o=IBM,c=US
cn=Jeff,o=Lotus,c=US
cn=Tim,o=Lotus,c=US
racfid=JEFF,profiletype=user,sysplex=plex1
```

See “Associating DNs, access groups, and additional bind and directory entry access information with a bound user” on page 446 for information about group gathering after a successful bind.

Now that `jeff@IBM.COM` is bound to the server and his list of alternate DNs has been generated, he now has authority to perform other operations:

- Because `jeff@IBM.COM` was mapped to `ibm-kn=jeff@IBM.COM` he has read and write permission to normal attributes in the `cn=Scott,o=IBM,c=US` entry.
- `jeff@IBM.COM` also has read and write permission to the normal attributes in the `cn=Ken,o=IBM,c=US` entry because of his identity also being mapped to `cn=Jeff,o=IBM,c=US`.
- Modify operations would be permitted on the `cn=Shayne,o=IBM,c=US` entry since `jeff@IBM.COM` was also mapped to `cn=Tim,o=Lotus,c=US` and Tim has write access to Shayne.
- Read access is also permitted on the `cn=Shayne,o=IBM,c=US` entry because `jeff@IBM.COM` was mapped to the SDBM DN `racfid=JEFF,profiletype=user,sysplex=plex1` who has read permission to the `cn=Shayne,o=IBM,c=US` entry.

You can see from this example that your access control is based on the combination of all the mapped DN's access control permissions.

## Kerberos operating environments

Because Kerberos Version 5 is interoperable with other Kerberos 5 implementations, there are various different operating environments that can exist.

- Another KDC other than the z/OS KDC can be used to store Kerberos principals. Users get a ticket from the other KDC rather than the z/OS KDC. The LDAP server could also be registered to this other KDC. However a trusted realm between the z/OS KDC and the external KDC must be established.
- Another KDC can be used along with the z/OS KDC where both store Kerberos identities. In this scenario, a trusted realm must be configured between the two realms.
- z/OS user IDs can be set up to contain an external KDC's Kerberos identities so when SDBM identity mapping is performed you can still be mapped to a RACF ID if you are strictly using the external or foreign KDC for Kerberos identities. This is done by setting up a **KERBLINK** and a trusted realm. The following example adds the foreign Kerberos identity `jeff@KRB2000.IBM.COM` to the RACF user JEFF:

```
RDEFINE KERBLINK /.../KRB2000.IBM.COM/jeff APPLDATA('JEFF')
```

---

## Chapter 20. Native authentication

The z/OS LDAP server has the ability to authenticate to the Security Server through the TDBM, LDBM, or CDBM backends by specifying a Security Server password or password phrase on a simple bind to the backend. Authorization information is still gathered by the LDAP server based on the DN that performed the bind operation. The LDAP entry that contains the bind DN should contain either the `ibm-nativeId` or `uid` attribute to specify the Security Server ID that is associated with this entry. The ID and password or password phrase are passed to the Security Server and the verification of the password or password phrase is performed by the Security Server. Another feature of native authentication is the ability to change your password or password phrase on the Security Server by issuing an LDAP modify command.

### Note:

1. The SDBM backend does not have to be configured in order to use native authentication.
2. After a successful native authentication bind, the bound user can send LDAP requests to any of the configured backends. If SDBM is configured, SDBM operations are performed under the context of the Security Server ID that was used during the native authentication bind. For all other backends, LDAP operations are performed using the normal bind information (the bind DN and the groups to which it belongs).
3. The use of RACF passtickets is supported by the z/OS LDAP server when using native authentication. The job name associated with the LDAP server started task should be used as the application name when generating RACF passtickets. For more information about RACF pass tickets, see [Using Passtickets](#) in *z/OS Security Server RACF Security Administrator's Guide*.

---

## Initializing native authentication

To enable native authentication, perform the following steps:

1. Install and configure RACF or another Security Server.
2. Configure an LDAP server to run with an LDBM, TDBM, or CDBM backend and then start the server. Specify the native authentication options in your LDAP server configuration file. For example:

```
TDBM Section
useNativeAuth SELECTED
nativeAuthSubtree o=IBM,c=US
nativeAuthSubtree o=Lotus,c=US
nativeUpdateAllowed ON
```

3. Be sure that the entries that are to perform native authentication contain either the `ibm-nativeId` attribute or a single-valued `uid` attribute with the appropriate Security Server ID as its value. It is important to note that a multi-valued `uid` without an `ibm-nativeId` causes the bind to fail because the LDAP server does not know which ID to use.
4. The RACF user IDs must have READ access to the LDAP server profile defined in RACF. For more information, see [“Binding using a RACF user ID and password or password phrase”](#) on page 318.

---

## Schema for native authentication

The LDAP server schema always contains the schema elements needed for native authentication. No additional schema is needed.

Following is the native authentication attribute type:

### **ibm-nativeId**

Specifies the Security Server ID that is to be associated with this entry.

Following is the native authentication object class:

## ibm-nativeAuthentication

Allows specifying the **ibm-nativeId** attribute in entries.

## Defining participation in native authentication

---

There are many different configuration options for native authentication which are mentioned in this section.

The main configuration option, **useNativeAuth**, can be set to **selected**, **all**, or **off**. If you want all entries in a certain subtree to participate in native authentication then you would choose **all** for this option. However, if you would like specific entries in the specific subtrees to be subject to native authentication, then choose **selected** for the **useNativeAuth** option. When **selected** is used, only entries with the **ibm-nativeId** attribute are subject to native authentication.

Next, consider what portions of your directory should have the ability to participate in native authentication. If the entire directory should participate, then set the **nativeAuthSubtree** configuration option to **all**. If there are different subtrees in your directory which contain entries that need to bind natively or perform native password or password phrase modifications, then you must list all the subtrees with multiple **nativeAuthSubtree** configuration options.

**Note:** If the DN that is listed in the **nativeAuthSubtree** options contains a space character in it, then the entire DN must be enclosed in quotes in the LDAP server configuration file.

In order for an entry to bind natively or perform a native password or password phrase modify, that entry must contain a mapping to the Security Server identity that is associated with the user. This can be accomplished by using either the **ibm-nativeId** attribute or the **uid** attribute. If your directory entries already contain a single-valued **uid** attribute (which holds the Security Server user ID), then these entries are already configured for native authentication if you plan on using the **useNativeAuth all** option. If you do not plan on using **uids** for mapping, then you can specify the **ibm-nativeId** attribute for your Security Server ID associations and this attribute is used with **selected** or **all** specified for the **useNativeAuth** option. If both the **ibm-nativeId** and **uid** attributes exist in an entry, the **ibm-nativeId** value is used. The user ID specified by either the **uid** or **ibm-nativeId** attributes must contain a valid OMVS segment with an OMVS UID value in the Security Server. If a native entry has an existing **userPassword** attribute value because it was originally created under a non-native authentication subtree and the Security Server identity that is specified has not yet been defined in the Security Server, the LDAP server attempts an LDAP simple bind. Similarly, if a Security Server identity is defined but it does not contain an OMVS segment, the LDAP server attempts an LDAP simple bind.

If you use the **useNativeAuth** option, also specify the **nativeUpdateAllowed** option to enable native password or password phrase changes in the Security Server to occur through the TDBM, LDBM, or CDBM backend.

An entry that is participating in native authentication cannot normally contain the **userPassword** attribute. An LDAP add request of an entry that contains a **userPassword** attribute value fails. An LDAP modify request that enables an entry for native authentication removes any existing **userPassword** attribute values for the entry.

## Binding with native authentication

---

Two LDAP operations are affected for binding with native authentication: *bind* and *password or password phrase modify*. A set of criteria is used to determine whether an entry actually participates in native authentication. This criteria changes depending on the configuration options that have been selected. The following table outlines all the possible operating modes for native authentication binding.

| Table 54. Operating modes for native authentication binding                                       |               |                      |              |       |                                                                                                                                                                                            |
|---------------------------------------------------------------------------------------------------|---------------|----------------------|--------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation                                                                                         | useNativeAuth | nativeUpdate Allowed | ibm-nativeId | uid   | Behavior                                                                                                                                                                                   |
| Bind                                                                                              | selected      | any value            | User1        |       | Entry is configured correctly and native authentication is attempted.                                                                                                                      |
| Bind                                                                                              | selected      | any value            |              | User1 | Entry is not correctly configured for native authentication so an LDAP simple bind is attempted. The uid attribute is not used when useNativeAuth is selected.                             |
| Bind                                                                                              | selected      | any value            |              |       | Entry has not been configured for native authentication so an LDAP simple bind is attempted.                                                                                               |
| Bind                                                                                              | all           | any value            | User1        | User2 | The <b>ibm-nativeId</b> attribute is used to attempt native authentication.                                                                                                                |
| Bind                                                                                              | all           | any value            |              | User1 | Entry is configured correctly and native authentication is attempted.                                                                                                                      |
| Bind                                                                                              | all           | any value            |              |       | For ease of implementation, an LDAP simple bind is attempted, even though you have specified that all entries should use native authentication. This entry should be configured correctly. |
| <b>Notes:</b> This table assumes that the entry is located within native authentication subtrees. |               |                      |              |       |                                                                                                                                                                                            |

In native authentication binding, the LDAP server invokes the RACROUTE REQUEST=VERIFY, ENVIR=CREATE macro using the mapped user ID and the password or password phrase supplied in the bind request. The following LDAP reason codes are mapped to return codes returned by the RACROUTE REQUEST=VERIFY,ENVIR=CREATE macro:

| Table 55. LDAP return and reason codes returned to the client when binding with native authentication |             |                                                                                                            |
|-------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------|
| LDAP return code                                                                                      | Reason code | Text                                                                                                       |
| LDAP_INVALID_CREDENTIALS                                                                              | R004111     | The password is not correct.                                                                               |
| LDAP_INVALID_CREDENTIALS                                                                              | R004112     | A bind argument is not valid.                                                                              |
| LDAP_INVALID_CREDENTIALS                                                                              | R004109     | The password has expired.                                                                                  |
| LDAP_INVALID_CREDENTIALS                                                                              | R004128     | Native authentication password change failed. The new password is not valid or does not meet requirements. |
| LDAP_INVALID_CREDENTIALS                                                                              | R004110     | The user ID was revoked.                                                                                   |
| LDAP_OPERATIONS_ERROR                                                                                 | R000208     | Unexpected racroute error safRC=safRC<br>racfRC=racfRC racfReason=racfReason                               |

**Note:** The same reason codes are issued when binding with a password or a password phrase.

## Updating native passwords and password phrases

To update a native password or password phrase, the LDAP server invokes the RACROUTE REQUEST=VERIFY, ENVIR=CREATE macro using the mapped user ID and the old and new passwords or password phrases supplied in the modify delete/add request. The following LDAP reason codes are mapped to return codes returned by the RACROUTE REQUEST=VERIFY,ENVIR=CREATE macro:

| Table 56. LDAP return and reason codes returned to the client when updating the password or password phrase |             |                                                                                                            |
|-------------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------|
| LDAP return code                                                                                            | Reason code | Text                                                                                                       |
| LDAP_INVALID_CREDENTIALS                                                                                    | R004111     | The password is not correct                                                                                |
| LDAP_INVALID_CREDENTIALS                                                                                    | R004112     | A bind argument is not valid                                                                               |
| LDAP_INVALID_CREDENTIALS                                                                                    | R004109     | The password has expired                                                                                   |
| LDAP_INVALID_CREDENTIALS                                                                                    | R004128     | Native authentication password change failed: The new password is not valid, or does not meet requirements |
| LDAP_INVALID_CREDENTIALS                                                                                    | R004110     | The user ID has been revoked                                                                               |
| LDAP_OPERATIONS_ERROR                                                                                       | R004118     | Unexpected racroute error safRC=safRC racfRC=racfRC<br>racfReason=racfReason                               |

**Note:** The same reason codes are issued when updating a password or a password phrase.

### Updating native passwords or password phrases during bind

**Note:** This section applies only to changing native passwords during bind. This method cannot be used to change the userPassword value during a bind to a TDBM, LDBM, or CDBM entry that does not use native authentication.

It is also possible to change the RACF password or password phrase of a TDBM, LDBM, or CDBM entry participating in native authentication during an LDAP simple bind. This may be necessary if the **ldapmodify** command above fails with LDAP return code LDAP\_INVALID\_CREDENTIALS and LDAP reason code:

R004109 The password has expired

The simple bind occurs as part of an LDAP function such as search, compare, add, or modify. The password or password phrase change is provided in the password portion of the LDAP simple bind. The change must be in the following format:

*currentvalue/newvalue*

The current value and the new value must both be passwords or both be password phrases. An error is returned if one of the values is a password and the other is a password phrase.

The forward slash (/) is used as the indication of a password or password phrase change during the LDAP simple bind. Password or password phrase changes made using the LDAP simple bind to a TDBM, LDBM, or CDBM entry participating in native authentication are subject to the system password or password phrase rules. A password or password phrase change fails with LDAP return code LDAP\_INVALID\_CREDENTIALS and LDAP reason code of:

R004128 Native authentication password change failed: The new password is not valid,  
or does not meet requirements

if the new password or password phrase does not pass the rules established on the system.

**Note:** A forward slash (/) is a legal character in a password phrase (but not in a password). During native authentication bind, a backward slash (\) is an escape character to indicate the next character is part of the password or password phrase and has no special meaning. The backward slash is removed during bind processing. Therefore, during bind, a forward slash in a password phrase must

be preceded by a backward slash (\) to indicate that the forward slash is part of the password phrase and is not the password phrase change indicator. For example, the password phrase `this1slash/ispartofthevalue2use` must be specified as `this1slash\ispartofthevalue2use` during bind. A backward slash is a legal character in a password phrase (but not in a password). Therefore, a backward slash in a password phrase must be preceded by another backward slash to indicate that it is not an escape character.

Once the bind succeeds, the password or password phrase is changed even if the LDAP function eventually fails. The `nativeUpdateAllowed` server configuration option setting does not control whether password or password phrase modifications can occur on an LDAP bind operation. The setting of `nativeUpdateAllowed` only controls password or password phrase modifications on an LDAP modify operation.

Assuming an LDBM or TDBM entry `cn=USER1,ou=END,o=IBM,c=US` is participating in native authentication and is mapped to user ID `USER1`, the following command changes the RACF password for user `USER1` from `abc` to `def`:

```
ldapsearch -h ldaphost -p ldapport -D "cn=USER1,ou=END,o=IBM,c=US" -w abc/def -b \
"ou=END,o=IBM,c=US" "objectclass=*
```

## Password policy with native authentication

---

When authenticating with a user in an LDBM, TDBM, or CDBM backend that is participating in native authentication or doing the special delete-add modification of the bound user's **userPassword** attribute value, the password policy applied is determined by the underlying z/OS Security Server. Therefore, any configured z/OS LDAP password policy does not apply in these scenarios.

When the **PasswordPolicy** control is sent on a bind or modify request, the **PasswordPolicy** response control is returned on the bind and modify response and has additional warning and error information about the authenticating user's password or the updating of the native password or password phrase with the special delete-add modification operation. Based on information returned from the Security Server, only the following **PasswordPolicy** response control error codes are supported: **accountLocked**, **changeAfterReset**, **insufficientPasswordQuality**, **mustSupplyOldPassword**, **passwordExpired**, and **passwordModNotAllowed**. See "PasswordPolicy" on page 659 for more information.

Also, note that a native authentication bind using an expired native password succeeds, if the **PasswordPolicy** control is included in the bind request and the **nativeUpdateAllowed reset** configuration file option is specified. After the bind, only the special delete-add modification of the bound user's **userPassword** attribute can be performed to reset the native authentication password. After completion, other LDAP operations can be performed.

## Example of setting up native authentication

---

The following diagram shows an example of how you could set up native authentication.

**Note:** Because of space limitations in the diagram, the entries in the example do not contain all of the necessary information to make them valid directory entries. For example, object classes and required attributes have been left out of many of the entries.



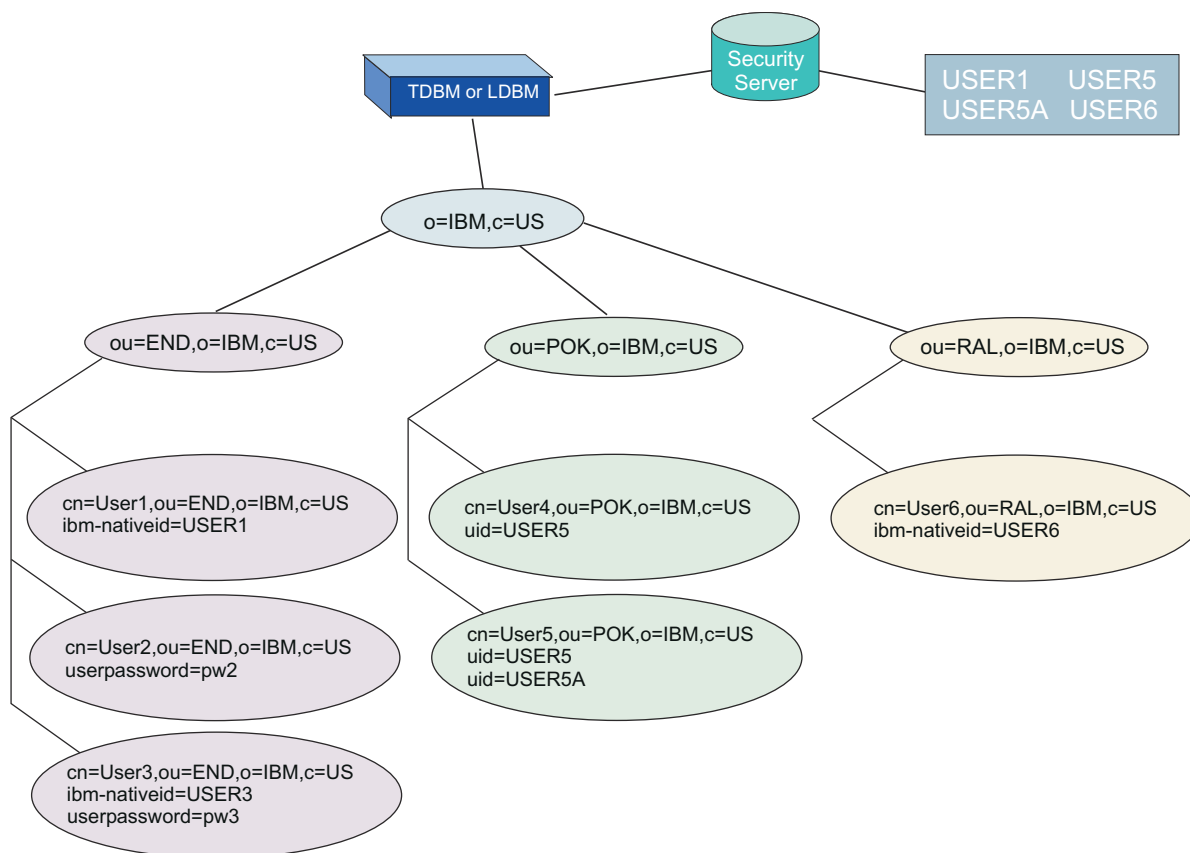


Figure 26. Native authentication example

**Note:** In the behavior table for each of the following examples, a password phrase can be used instead of a password, with the same results.

Example 1:

- Assuming these settings:

**useNativeAuth selected**

**nativeUpdateAllowed on**

**nativeAuthSubtree ou=END,o=IBM,c=US**

**nativeAuthSubtree ou=POK,o=IBM,c=US**

the following table indicates the results of operations involving each user entry:

| Table 57. Behavior of native authentication in example 1 |                                                      |                                                                                                                                                                 |
|----------------------------------------------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LDAP entry                                               | Operation                                            | Behavior                                                                                                                                                        |
| cn=User1,ou=END,o=IBM,c=US                               | Bind                                                 | Can bind natively because the entry contains a valid <b>ibm-nativeId</b> .                                                                                      |
|                                                          | Bind with native password change                     | Can change this native password because the entry contains a valid <b>ibm-nativeId</b> .                                                                        |
|                                                          | modify-delete and modify-add ( <b>userPassword</b> ) | Can change this native password because the entry contains a valid <b>ibm-nativeId</b> .                                                                        |
|                                                          | modify-replace ( <b>userPassword</b> )               | Cannot perform a modify-replace of the <b>userPassword</b> attribute because the entry is subject to native authentication and password replace is not allowed. |



| Table 57. Behavior of native authentication in example 1 (continued) |                                                      |                                                                                                                                      |
|----------------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| LDAP entry                                                           | Operation                                            | Behavior                                                                                                                             |
| cn=User2,ou=END,o=IBM,c=US                                           | All                                                  | Entry is not configured for native authentication so all operations are regular LDAP operations.                                     |
| cn=User3,ou=END,o=IBM,c=US                                           | Bind                                                 | Attempts native authentication but fails because the Security Server ID USER3 is not defined, then a regular LDAP bind is performed. |
|                                                                      | Bind with native password change                     | Cannot change the password on the bind because the Security Server ID USER3 is not defined.                                          |
|                                                                      | modify-delete and modify-add ( <b>userPassword</b> ) | Native password change is attempted but fails because the Security Server ID USER3 is not defined.                                   |
|                                                                      | modify-replace ( <b>userPassword</b> )               | An attempt to modify-replace the <b>userPassword</b> attribute fails because the entry is configured for native authentication.      |
| cn=User4,ou=POK,o=IBM,c=US                                           | All                                                  | Performs regular LDAP operations because the entry does not contain the <b>ibm-nativeId</b> attribute.                               |
| cn=User5,ou=POK,o=IBM,c=US                                           | All                                                  | Performs regular LDAP operations because the entry does not contain the <b>ibm-nativeId</b> attribute.                               |
| cn=User6,ou=RAL,o=IBM,c=US                                           | All                                                  | Performs regular LDAP operations because the entry does not exist in a native subtree.                                               |

Example 2:

- Assume these settings:

**useNativeAuth all**

**nativeUpdateAllowed on**

**nativeAuthSubtree** ou=END,o=IBM,c=US

**nativeAuthSubtree** ou=POK,o=IBM,c=US

the following table indicates the results of operations involving each user entry:

| Table 58. Behavior of native authentication in example 2 |                                                      |                                                                                                                                                                 |
|----------------------------------------------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LDAP Entry                                               | Operation                                            | Behavior                                                                                                                                                        |
| cn=User1,ou=END,o=IBM,c=US                               | Bind                                                 | Can bind natively because the entry contains a valid <b>ibm-nativeId</b> .                                                                                      |
|                                                          | Bind with native password change                     | Can change this native password because the entry contains a valid <b>ibm-nativeId</b> .                                                                        |
|                                                          | modify-delete and modify-add ( <b>userPassword</b> ) | Can change this native password because the entry contains a valid <b>ibm-nativeId</b> .                                                                        |
|                                                          | modify-replace ( <b>userPassword</b> )               | Cannot perform a modify-replace of the <b>userPassword</b> attribute because the entry is subject to native authentication and password replace is not allowed. |
| cn=User2,ou=END,o=IBM,c=US                               | Bind                                                 | Because there are no native attributes in this entry, a regular LDAP bind is attempted.                                                                         |

Table 58. Behavior of native authentication in example 2 (continued)

| LDAP Entry                 | Operation                                            | Behavior                                                                                                                                                                                      |
|----------------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                            | Bind with native password change                     | Cannot change the password on the bind because the entry is not properly set up for native authentication. A regular LDAP bind is attempted.                                                  |
|                            | modify-delete and modify-add ( <b>userPassword</b> ) | Because there are no native attributes on this entry, native authentication password update is not attempted. A regular modification of the <b>userPassword</b> attribute value is attempted. |
|                            | modify-replace ( <b>userPassword</b> )               | Because there are no native attributes on this entry, native authentication password update is not attempted. A regular modification of the <b>userPassword</b> attribute value is attempted. |
| cn=User3,ou=END,o=IBM,c=US | Bind                                                 | Attempts native authentication but fails because the Security Server ID USER3 is not defined, then a regular LDAP bind is performed.                                                          |
|                            | Bind with native password change                     | Cannot change the native password on the bind because the Security Server ID USER3 is not defined.                                                                                            |
|                            | modify-delete and modify-add ( <b>userPassword</b> ) | Native password change is attempted but fails because the Security Server ID USER3 is not defined.                                                                                            |
|                            | modify-replace ( <b>userPassword</b> )               | An attempt to modify-replace the <b>userPassword</b> attribute fails because the entry is configured for native authentication.                                                               |
| cn=User4,ou=POK,o=IBM,c=US | Bind                                                 | Can bind natively because the entry contains a valid <b>uid</b> (with one value).                                                                                                             |
|                            | Bind with native password change                     | Can change this native password because the entry contains a valid <b>uid</b> (with one value).                                                                                               |
|                            | modify-delete and modify-add ( <b>userPassword</b> ) | Can change this native password because the entry contains a valid <b>uid</b> (with one value).                                                                                               |
|                            | modify-replace ( <b>userPassword</b> )               | An attempt to modify-replace the <b>userPassword</b> attribute fails because the entry is configured for native authentication.                                                               |
| cn=User5,ou=POK,o=IBM,c=US | Bind                                                 | Native bind fails because 2 <b>uid</b> values exist.                                                                                                                                          |
|                            | Bind with native password change                     | Cannot change the native password on the bind because 2 <b>uid</b> attribute values exist.                                                                                                    |
|                            | modify-delete and modify-add ( <b>userPassword</b> ) | Cannot change the native password on modify operations because 2 <b>uid</b> attribute values exist.                                                                                           |
|                            | modify-replace ( <b>userPassword</b> )               | An attempt to modify-replace the <b>userPassword</b> fails because the entry is configured for native authentication.                                                                         |
| cn=User6,ou=RAL,o=IBM,c=US | All                                                  | Performs regular LDAP operations because the entry does not exist in a native subtree.                                                                                                        |

## Using native authentication with web servers

---

Many web servers provide a user ID and password challenge for authentication. These can take advantage of native authentication. The web server must be configured to do LDAP authentication. When the challenge to do LDAP authentication is presented, the user can enter the Security Server user ID and password or password phrase (from the system where the LDAP server is running). The web server searches the LDAP directory for an entry where **uid** equals the input user ID. The web server uses the returned DN and the inputted password or password phrase to do an **ldap\_simple\_bind()**. When the LDAP server determines this entry is subject to native authentication, it retrieves the **ibm-nativeId** or **uid** value and verify the password or password phrase with the Security Server. Note that if **useNativeAuth** is set to **selected**, it might be necessary to place the Security Server user ID into both the **uid** and **ibm-nativeId** attributes of this entry to allow the web server processing to work correctly with native authentication.



---

## Chapter 21. CRAM-MD5 and DIGEST-MD5 authentication

The z/OS LDAP server allows clients to authenticate using the CRAM-MD5 (Challenge Response Authentication Mechanism) and DIGEST-MD5 SASL bind mechanisms. CRAM-MD5 is defined in [RFC 2195 \(tools.ietf.org/html/rfc2195\)](https://tools.ietf.org/html/rfc2195). DIGEST-MD5 is defined in [RFC 2831 \(tools.ietf.org/html/rfc2831\)](https://tools.ietf.org/html/rfc2831). Both the CRAM-MD5 and DIGEST-MD5 mechanisms are multi-stage binds where the server sends the client a challenge and then the client sends a challenge response back to the server to complete the authentication. The client challenge response contains a hash of the password entered by the user, the username, and other pieces of data encoded to the specifications of either the CRAM-MD5 or DIGEST-MD5 RFCs.

The CRAM-MD5 and DIGEST-MD5 SASL bind mechanisms are more secure than performing simple binds since the credentials are not passed in clear text. Also, the CRAM-MD5 and DIGEST-MD5 bind mechanisms on the z/OS LDAP server do not require any additional products to be installed or configured.

The z/OS LDAP server DIGEST-MD5 bind mechanism supports the integrity and confidentiality options defined in [RFC 2831 \(tools.ietf.org/html/rfc2831\)](https://tools.ietf.org/html/rfc2831). Upon the successful completion of a DIGEST-MD5 bind, the negotiated quality of protection (qop) is used for subsequent messages sent over the connection. The negotiated qop continues until the completion of a new SASL bind request. If the new SASL bind request fails, the connection reverts to anonymous authentication with no integrity or confidentiality support.

The DIGEST-MD5 authentication mechanism is more secure than the CRAM-MD5 authentication mechanism because it prevents chosen plaintext password attacks. During a DIGEST-MD5 authentication exchange between a client and the server, there is additional information passed which is used to construct a more robust hashing algorithm when compared against a CRAM-MD5 authentication making it more difficult to decipher.

---

### Considerations for setting up a TDBM, LDBM, or CDBM backend for CRAM-MD5 and DIGEST-MD5 authentication

The following are considerations for setting up a TDBM, LDBM, or CDBM backend for CRAM-MD5 and DIGEST-MD5 authentication:

1. In order to use the CRAM-MD5 bind mechanism on the LDAP server, the TDBM, LDBM, or CDBM entries that you bind with should contain a **uid** attribute value. The **uid** attribute type is always present in the minimum schema of the server. There are three ways to perform a CRAM-MD5 bind to the LDAP server:
  - a. Only specifying the bindDN in the bind request in your client application. When using the z/OS LDAP client utilities, such as **ldapsearch**, this is done by only specifying the **-D** option.
  - b. Only specifying the username in the CRAM-MD5 bind mechanism in your client application. The username that is specified must map to one of the **uid** attribute values in one of the TDBM, LDBM, or CDBM entries. When using the z/OS LDAP client utilities, such as **ldapsearch**, this is done by only specifying the **-U** option.
  - c. Specifying both the bindDN in the bind request and the username in the CRAM-MD5 bind mechanism in your client application. The username that is specified must map to one of the **uid** attribute values in one of the TDBM, LDBM, or CDBM entries. The bindDN specified in the bind request must map to the same distinguished name as the username. When using the LDAP client utilities, such as **ldapsearch**, this is done by specifying both the **-D** and the **-U** options.

For more information about the z/OS LDAP client utilities, see *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

Assuming that the password entered on the client application is correct, the CRAM-MD5 bind is successful, otherwise it returns an LDAP credentials error.

2. In order to use the DIGEST-MD5 bind mechanism on the z/OS LDAP server, the TDBM, LDBM, or CDBM entries that you bind with must contain a **uid** attribute value. The **uid** attribute type is always present in the minimum schema of the server. There are two ways to perform a DIGEST-MD5 bind to the z/OS LDAP server:
  - a. Only specifying the username in the DIGEST-MD5 bind mechanism in your client application. The username that is specified must map to one of the **uid** attribute values in one of the TDBM, LDBM, or CDBM entries. When using the z/OS LDAP client utilities, such as **ldapsearch**, this is done by only specifying the -U option.
  - b. Specifying both the username and the authorization DN in the DIGEST-MD5 bind mechanism in your client application. The username that is specified must map to one of the **uid** attribute values in one of the TDBM, LDBM, or CDBM entries. The authorization DN that is specified must map to the same distinguished name as the username. When using the z/OS LDAP client utilities, such as **ldapsearch**, this is done by specifying both the -D and the -U options.

For more information about the z/OS LDAP client utilities, see [LDAP client utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

Assuming that the password entered on the client application is correct, the DIGEST-MD5 bind will be successful, otherwise it will return an LDAP credentials error.

3. It is strongly suggested that the **uid** attribute values specified on the entries to be used for CRAM-MD5 or DIGEST-MD5 authentication be unique across every TDBM, LDBM, and CDBM backend that is configured on the LDAP server. Authentication can fail if more than one entry has the same **uid** attribute value.
4. In order for the CRAM-MD5 and DIGEST-MD5 binds to work properly, the **userPassword** attribute values for the entry must be in clear text (not suggested) or encrypted in either DES or AES. DES and AES encryption are suggested since they both encrypt the **userPassword** and provide clear text decryption. For additional information about AES and DES encryption, see [“Configuring for encryption or hashing” on page 76](#). The z/OS LDAP server needs access to the clear text password so that the CRAM-MD5 and DIGEST-MD5 bind mechanisms work properly against that entry.
5. CRAM-MD5 and DIGEST-MD5 binds are not supported with entries that are participating in native authentication.
6. CRAM-MD5 and DIGEST-MD5 binds are not supported to the SDBM backend.
7. LDAP password policy supports CRAM-MD5 and DIGEST-MD5 binds.

## CRAM-MD5 and DIGEST-MD5 configuration option

The **digestRealm** option in the LDAP server configuration file allows for the specification of a realm name to be used to help create the CRAM-MD5 and DIGEST-MD5 hashes. The value of this option gets passed on the initial challenge from the server to the client once it has been decided that a CRAM-MD5 or DIGEST-MD5 bind is what you want. See the **digestRealm** option at [“digestRealm hostname” on page 100](#). If the **digestRealm** configuration option is not specified, the realm name defaults to the fully qualified hostname of the system where the LDAP server is running assuming that a DNS (Domain Name Server) is available. If the **digestRealm** option is not specified and the fully qualified hostname of the LDAP server cannot be determined because of a problem with the DNS (Domain Name Server), any CRAM-MD5 or DIGEST-MD5 binds attempted will fail.

## Example of setting up for CRAM-MD5 and DIGEST-MD5

The following diagram shows an example of how you could set up your entries in your TDBM or LDBM backend.

**Note:** Because of space limitations in the diagram, the entries in the example do not contain all of the necessary information to make them valid directory entries. For example, object classes and required attributes have been left out of many of the entries.

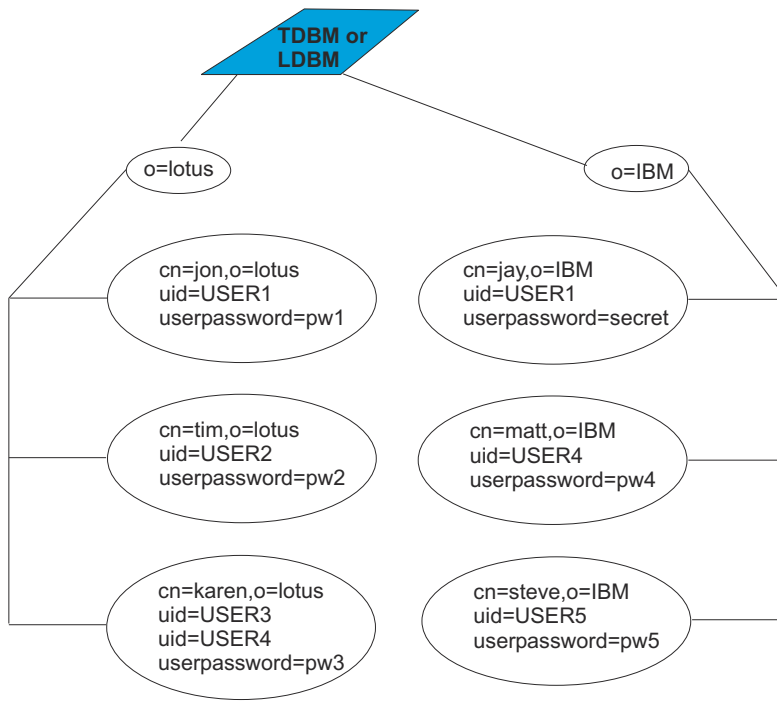


Figure 27. CRAM-MD5 and DIGEST-MD5 authentication example

The following table outlines what happens if you attempt to do a CRAM-MD5 or DIGEST-MD5 bind from a client. The username refers to the -U option on the z/OS LDAP client utilities, while the bindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) is the -D option on the z/OS LDAP client utilities. For more information about the z/OS LDAP client utilities, see [LDAP client utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#). This table assumes that native authentication is not turned on under the subtrees: o=lotus and o=IBM.

| Username | BindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) | Password | Behavior                                                                                                                                                 |
|----------|----------------------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| USER2    |                                                    | pw2      | Bind is successful to cn=tim,o=lotus                                                                                                                     |
| USER2    | cn=tim,o=lotus                                     | pw2      | Bind is successful to cn=tim,o=lotus                                                                                                                     |
| USER2    | cn=jon,o=lotus                                     | pw2      | Bind is not successful because the bindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) cn=jon,o=lotus does not equal the username DN cn=tim,o=lotus       |
| USER1    |                                                    | pw1      | Bind is not successful, because there are multiple entries with the same username value: cn=jon,o=lotus and cn=jay,o=IBM                                 |
| USER1    | cn=jay,o=IBM                                       | secret   | Bind is successful to cn=jay,o=IBM because the username DN cn=jay,o=IBM equals the bindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) cn=jay,o=IBM       |
| USER1    | cn=jon,o=lotus                                     | pw1      | Bind is successful to cn=jon,o=lotus because the username DN cn=jon,o=lotus equals the bindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) cn=jon,o=lotus |

Table 59. Behavior of CRAM-MD5 and DIGEST-MD5 authentication in example (continued)

| Username | BindDN (CRAM-MD5)<br>or authorization DN (DIGEST-MD5) | Password | Behavior                                                                                                                                                            |
|----------|-------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USER3    |                                                       | pw3      | Bind is successful to cn=karen,o=lotus                                                                                                                              |
| USER4    | cn=karen,o=lotus                                      | pw3      | Bind is successful to cn=karen,o=lotus                                                                                                                              |
| USER4    | cn=matt,o=IBM                                         | pw4      | Bind is successful to cn=matt,o=IBM                                                                                                                                 |
| USER3    | cn=karen,o=lotus                                      | bad      | Bind is not successful to username DN cn=karen,o=lotus and bindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) cn=karen,o=lotus because the password is incorrect.   |
| USER5    | cn=nothere,o=lotus                                    | pw5      | Bind is not successful because the username DN cn=steve,o=IBM does not equal the non-existent bindDN (CRAM-MD5) or authorization DN (DIGEST-MD5) cn=nothere,o=lotus |
| BAD      |                                                       | pw1      | Bind is not successful because a <b>uid</b> value equal to BAD was not found in any of the entries in the TDBM or LDBM backend.                                     |



---

## Chapter 22. Using extended operations to access Policy Director data

The use of the extended operations (EXOP) backend, the **GetDnForUserid** and **GetPrivileges** extended operations, and the **IBMLdapProxyControl** are deprecated.

The extended operations (EXOP) backend supports two extended operations that open a connection to the target LDAP server to access z/OS Policy Director data. The **IBMLdapProxyControl** determines the target LDAP server. To set the target LDAP server when using z/OS Policy Director, use the RACF PROXY segment.

The LDAP extended operations are **GetDnForUserid** and **GetPrivileges**. These extended operations are generated when an application on z/OS calls the AZN APIs. When the EXOP backend receives a request for either of these two operations, it uses the required **IBMLdapProxyControl** to open an LDAP connection to a target LDAP server that has been set up to store Policy Director data. Then, depending on the request, the EXOP backend issues LDAP requests to the target server to retrieve the appropriate data.

---

### GetDnForUserid extended operation

For the **GetDnForUserid** extended operation, the EXOP backend retrieves all of a user ID's distinguished names (DNs) stored in the target LDAP server. The client can filter the DNs returned by the EXOP backend by specifying a search base and object class names. The sequence of events for this extended operation is:

- If the client does not specify a search base, the EXOP backend searches for the DN of all entries in all of the target server's naming contexts that contain an **ibm-nativeId** attribute set to the specified user ID and whose set of object classes include all of the optional specified object classes. If there are no naming contexts, no results will be returned.
- If the EXOP backend does not receive entries from the target LDAP server for this first set of searches, it attempts a similar set of searches, maintaining the filtering based on the optional object classes. For the second set of searches, however, instead of searching for entries with an **ibm-nativeId** attribute set to the specified user ID, it searches for entries with a **uid** attribute set to the specified user ID.

If the client does specify a search base, the EXOP backend will attempt the same sequence of searches described above, but instead of searching all of the target LDAP server's naming contexts, it only searches the naming context specified in the search base.

[“GetDnForUserid” on page 679](#) summarizes some different error scenarios for this extended operation and the EXOP backend's response to such scenarios.

---

### GetPrivileges extended operation

For the **GetPrivileges** extended operation, the EXOP backend retrieves all of a subject's Policy Director data. This subject is specified by its DN. The client can specify an optional domain name if the subject does not exist in the domain named DEFAULT. See [“GetPrivileges” on page 683](#) for an ASN.1 description of all of the data that the EXOP backend retrieves when it receives this extended operations request.

To satisfy this request, the EXOP backend performs many searches then combines all of the results prior to returning it to the client. Furthermore, some of the searches may require searches across all of the target LDAP server's naming contexts. For example, to find the groups the subject is a member of, the EXOP backend performs searches under all of the target LDAP server's naming contexts. If there are no naming contexts, no search results will be returned.

[“GetPrivileges” on page 683](#) summarizes some different error scenarios for this extended operation and the EXOP backend's response to such scenarios.



---

## Chapter 23. Static, dynamic, and nested groups

The LDAP server supports group definitions. These group definitions allow for a collection of names to be easily associated for access control checking or in application-specific uses such as a mailing list. See [Chapter 24, “Using access control,” on page 425](#) for additional information about access control checking.

The LDAP server supports static, dynamic, and nested groups. It is possible to query static, dynamic, and nested group memberships with the use of the **ibm-allMembers** and **ibm-allGroups** operational attributes. For a given group entry, the **ibm-allMembers** attribute enumerates all of the members that belong in that group. For a given user entry, the **ibm-allGroups** attribute determines the groups that the user has membership in.

A search request specifying the **ibm-allMembers** or **ibm-allGroups** attribute returns group membership information for just the backend containing the base entry. Access checking is performed for the **member** and **uniqueMember** attributes when obtaining the group membership information. Additional access checking is performed on any of the attributes contained in a dynamic group URL search filter on the **memberURL** attribute. Access checking is not performed on the **memberURL** and **ibm-memberGroup** attributes themselves.

---

### Static groups

A static group is defined as a group where the members are defined individually. The **accessGroup**, **accessRole**, **groupOfNames**, and **ibm-staticGroup** object classes each use a multi-valued attribute that is called **member** to define a list of distinguished names (DNs) that belong to the static group. The **groupOfUniqueNames** object class uses a multi-valued attribute called **uniqueMember** to define a list of distinguished names (DNs) that belong to the static group. The **uniqueMember** attribute type is treated as a distinguished name and not as a distinguished name with an optional unique identifier.

These attributes and object classes are always in the LDAP server schema. Except for the **groupOfNames** and **groupOfUniqueNames** object classes, they cannot be modified. The **groupOfNames** and **groupOfUniqueNames** object classes can be modified in limited ways, as described in [“Changing the initial schema” on page 293](#). One modification you may consider making in these two object classes is to move the **member** or **uniqueMember** attribute from the MUST list to the MAY list. This allows static group entries using these object classes to be created without any members and also allow all the members to be deleted from existing entries.

A typical static group entry is as follows:

```
dn: cn=ldap_team_static,o=endicott
objectclass: groupOfNames
cn: ldap_team_static
member: cn=jon,o=endicott
member: cn=ken,o=endicott
member: cn=jay,o=endicott
```

---

### Dynamic groups

A *dynamic group* is defined as a group in which membership is determined using one or more LDAP search expressions. Each time a dynamic group is used by the LDAP server, a user's membership in the group is decided by determining whether the user entry matches any of the search expressions. The **ibm-dynamicGroup** and **groupOfURLs** object classes each use the multi-valued attribute called **memberURL** to define the LDAP search expression. These object classes and attribute are always in the LDAP server schema and cannot be modified.

Dynamic groups allow the group administrator to define membership in terms of attributes and allow the directory itself to determine who is or is not a member of the group. For example, members do not need to be manually added or deleted when a person moves to a different project or location.

Alias and referral entries are not processed during the group membership search.

The following simplified LDAP URL syntax must be used as the value of `memberURL` attribute to specify the dynamic group search expression.

```
ldap:///baseDN[??[searchScope][?searchFilter]]
```

where

**baseDN**

Specifies the DN of the entry from which the search begins in the directory. The dynamic URL is not used if the base entry is not within the same backend as the dynamic group entry. This parameter is required.

**searchScope**

Specifies the extent of the search. The default scope is `base`.

**base**

Returns information only about the *baseDN* specified in the URL.

**one**

Returns information about entries one level under the *baseDN* specified in the URL. It does not include the *baseDN*.

**sub**

Returns information about entries at all levels under and including the *baseDN*.

**searchFilter**

Is the filter that you want applied to the entries within the scope of the search. For more information about LDAP search filters, see [ldapsearch utility in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#). The default is `"objectclass=*"`.

**Note:** As the format just described suggests, the hostname must not be present in the syntax. The remaining parameters are just like the normal LDAP URL syntax, which is defined in [RFC 2255](#) ([tools.ietf.org/html/rfc2255](http://tools.ietf.org/html/rfc2255)) (except there is no support for extensions in the URL). Each parameter field must be separated by a `?`, even if no parameter is specified. Normally, a list of attributes to return would have been included between the *baseDN* and *searchScope*. An add or modify operation of a dynamic group entry fails if it contains a `memberURL` attribute that is not in the correct format. This prevents introducing an improperly formatted `memberURL` attribute into the LDAP server. If migrating from an Integrated Security Services LDAP server on earlier releases and there are `memberURL` attribute values that not properly formatted in the directory, they are ignored by the LDAP server.

An entry is considered to be a member of the dynamic group if it falls within the search scope and matches the search filter. Alias entries and referral entries are treated as normal entries during the group membership search; no alias dereferencing or referral processing is performed.

A typical dynamic group entry is the following:

```
dn: cn=ldap_team_dynamic,o=endicott
objectclass: groupOfURLs
cn: ldap_team_dynamic
memberURL: ldap:///o=endicott??sub?(ibm-group=ldapTeam)
```

## Dynamic group search filter examples

A single entry in which the scope defaults to `base` and the filter defaults to `"objectclass=*"`:

```
ldap:///cn=Ricardo,ou=Endicott,o=ibm,c=us
```

The "In Flight Systems" team with a scope of one-level and the filter defaults to `"objectclass=*"`:

```
ldap:///ou=In Flight Systems,ou=Endicott,o=ibm,c=us??one
```

A subtree search for all the support staff in Endicott:

```
ldap:///ou=Endicott,o=ibm,c=us??sub?title=*Support
```

A subtree search for all the Garcias or Nguyens whose first name begins with an "A":

```
ldap:///o=ibm,c=us??sub?(&(|(sn=Garcia)(sn=Nguyen))(cn=A*))
```

A search filter that includes escaped percent signs, question marks, and spaces in the base DN (o=deltawing infosystems) and filter ((&(percent=10%)(description=huh?))):

```
ldap:///o=deltawing%20infosystems,c=au??sub?(&(percent=10%25)(description=huh%3f))
```

## Nested groups

A nested group is defined as a group that references other group entries, which can be static, dynamic, or nested groups. The **ibm-nestedGroup** object class uses the multi-valued attribute that is called **ibm-memberGroup** to indicate the DN of the groups that are referenced by the nested group. This object class and attribute are always in the LDAP server schema and cannot be modified. Nested groups allow LDAP administrators to construct and display group hierarchies that describe both direct and indirect group memberships. A group that is referenced within the nested group is ignored if it is not in the same backend as the nested group. The group hierarchy that is established by a nested group cannot loop back to itself. The LDBM or CDBM backend rejects an add or modify operation of a nested group entry if it results in a loop. To be compatible with TDBM in the Integrated Security Services LDAP server on previous releases, the TDBM backend allows such an add or modify operation of a nested group. When the nested group is expanded, such as in an **ibm-allMembers** search of the group, TDBM detects the loop and continues with the next part of the expansion.

**Note:** The **ibm-nestedGroup** object class is an **AUXILIARY** object class and also requires a **STRUCTURAL** object class.

A typical nested group entry is as follows:

```
dn: cn=ldap_team_nested,o=endicott
objectclass: container
objectclass: ibm-nestedGroup
cn: ldap_team_nested
ibm-memberGroup: cn=ldap_team_static,o=endicott
ibm-memberGroup: cn=ldap_team_dynamic,o=endicott
ibm-memberGroup: cn=ldaptest_team_nested,o=endicott
```

## Determining group membership

The members of a group entry are determined depending on the type of group. Note that a group can be multiple types (for instance, both dynamic and static).

1. Static group: The values of the **member** attribute of the group entry if the object class of the group entry is **accessGroup**, **accessRole**, **groupOfNames**, or **ibm-staticGroup**, or the values of the **uniqueMember** attribute if the object class is **groupOfUniqueNames**.
2. Dynamic group: The DN of each entry in this TDBM, LDBM, or CDBM backend that matches the scope and search filter contained in one of the values of the **memberURL** attribute of the group entry. Dynamic group membership is the union of all search expressions that are present on each of the individual **memberURL** attribute values even if the search expressions are contradictory, such as `ldap:///o=ibm??sub?cn=bob` and `ldap:///o=ibm??sub?(!(cn=bob))`. A dynamic search filter is ignored if the base in the search filter is not in the same TDBM, LDBM, or CDBM backend as the dynamic group.
3. Nested group: The members of each static, dynamic, or nested group for each value of the **ibm-memberGroup** attribute in the nested group entry.

Zero-length values are ignored for the **member**, **uniqueMember** and **ibm-memberGroup** attributes.

## Displaying group membership

Two operational attributes can be used for querying aggregate group membership. For a given group entry, the **ibm-allMembers** attribute enumerates the entire set of group membership, including static,

dynamic, and nested members as described by the nested group hierarchy. For a given user entry, the **ibm-allGroups** attribute enumerates the entire set of groups within the same backend as the user entry to which that user has membership, including ancestor groups from nested group hierarchy. As with all operational attributes, they are only returned if explicitly requested and cannot be specified on a search filter.

The **ibm-allGroups** and **ibm-allMembers** search and comparison operations are only supported on entries within the TDBM, LDBM, or CDBM backend. These operations are not supported against users or groups that are present within the SDBM backend.

## ACL restrictions on displaying group membership

The following ACL restrictions only apply when attempting to query **ibm-allMembers** or **ibm-allGroups** operational attributes. These rules do not apply when groups are gathered from all the backends that are participating in group gathering. The entries and attributes that are used to evaluate **ibm-allMembers** and **ibm-allGroups** have ACL restrictions, against which the bound DN must be checked. The members of a group are determined from three sources:

1. For static groups, the bound DN must have read access on the **member** or **uniqueMember** attribute if it is performing an **ibm-allMembers** or **ibm-allGroups** search operation, or compare access if performing a comparison operation. The **member** and **uniqueMember** attributes are in the **normal** access class.
2. For dynamic groups, the bound DN must have search access on all of the attributes that are present in the dynamic group filter for any of the DNs that are returned. The ACL access to the **memberURL** attribute does not matter when resolving **ibm-allMembers** or **ibm-allGroups** attributes.
3. For nested groups, there is no restriction on using the **ibm-memberGroup** attribute, but the restrictions just described apply to the groups referenced in the nested group entry. A referenced group is ignored if it is not in the same TDBM, LDBM, or CDBM backend as the nested group.

Specifying **ibm-allMembers** or **ibm-allGroups** in a search or compare operation also requires that the bound DN have read or compare access to the **ibm-allMembers** or **ibm-allGroups** attribute. Note that the **ibm-allMembers** and **ibm-allGroups** attributes are in the **system** access class.

For more information about access control permissions, see [Chapter 24, “Using access control,”](#) on page 425.

## ACL restrictions on group gathering

If LDAP password policy is active, the list of the static, dynamic, and nested groups that the binding user is a member are gathered at authentication time. If LDAP password policy is not active, the list of static, dynamic, and nested groups are not gathered until the next non-bind request is received. No ACL processing is done when reading group entries for group gathering because it is not possible to know what access rights the binding user has to any of the attributes or subtrees in the directory until all the groups are fully determined.

## Managing group search limits

---

Search operations can consume server resources and impair server performance. The LDAP server provides two configuration options, **sizeLimit** and **timeLimit**, that can be used to control the amount of server resources that are consumed during search operations. These options can limit the number of entries that a search returns and the duration of the search. The configuration limits apply to all users except administrators. However, some non-administrator users may need different search limits than those allowed by the configuration limits, either to allow them to perform larger searches or to limit them to smaller ones. Group search limits provide a way to override the server configuration search limits for groups of users.

## Creating group search limits

A group search limit is created by adding all of the following to a static, dynamic, or nested group entry in an LDBM, TDBM, or CDBM backend:

- **ibm-searchLimits** object class
- **cn**, **ibm-searchSizeLimit**, and **ibm-searchTimeLimit** attributes

The object class and attributes are always in the LDAP server schema.

The **ibm-searchSizeLimit** and **ibm-searchTimeLimit** attributes are used to specify search limits for the members of the group. The value of each attribute can be:

**-1**

This group is not used to determine this limit.

**0**

This group of users has unlimited size or time.

**1 - 2147483647**

This group of users has the specified size or time (in seconds) limit.

## Enabling group search limit processing

Groups containing group search limits can be created and modified at any time, but the limits in the groups are only used when the LDAP server is started with a server compatibility level of 7 or higher. See the **serverCompatLevel** configuration option at [“serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125](#) for more information about the server compatibility level.

## Using the limits from search limit groups

When a non-administrator user binds to the LDAP server and the server compatibility level is 7 or higher, the LDAP server determines all the groups containing group search limits among the groups in which the user belongs and then saves the highest **ibm-searchSizeLimit** and **ibm-searchTimeLimit** attribute values from these groups in the user's bind information. The highest values for size and for time might come from different groups in which the user belongs. Once the user's bind search limits are determined, they remain fixed until the user rebinds, even if the group search limits are later changed in the group entries or the user is added to or removed from groups with group search limits.

When the user issues a search request to the LDAP server, the size and time limits that are applied to the search are determined as follows:

1. The server first determines the server search limits. If the requester has a size or time search limit in the user bind information (from group search limits), that limit is used as the server limit. Otherwise, the server limit is set to the value specified by either the **sizeLimit** or the **timeLimit** configuration option.
2. The size and time limits that are used for the search are the smaller of the server search limit and the limits (if any) specified on the search request.

**Note:** Searches from administrators are not subject to any server limitations, either from configuration options or from group search limits.

## Group examples

---

### Examples of adding, modifying, and deleting group entries

**Adding group entries:** This example creates static group entries using the `accessGroup`, `groupOfUniqueNames`, and `groupOfNames` object classes. Group search limits are also specified in

the first group to allow searches by group members to return up to 200,000 entries and take unlimited time.

```
ldapadd -h 127.0.0.1 -D "cn=admin" -w xxxx -f staticGrps.ldif
```

Where staticGrps.ldif contains:

```
dn: cn=group1, o=Your Company
objectclass: accessGroup
objectclass: ibm-searchLimits
cn: group1
ibm-searchsizelimit: 200000
ibm-searchtimelimit: 0
member: cn=bob, o=Your Company
member: cn=lisa, o=Your Company
member: cn=chris, cn=bob, o=Your Company
member: cn=john, cn=bob, o=Your Company

dn: cn=group2, o=Your Company
objectclass: groupOfUniqueNames
cn: group2
uniquemember: cn=tom, o=Your Company
uniquemember: cn=dan, o=Your Company
uniquemember: cn=sam, o=Your Company
uniquemember: cn=kevin, o=Your Company

dn: cn=group3, o=Your Company
objectclass: groupOfNames
cn: group3
member: cn=david, o=Your Company
member: cn=jake, o=Your Company
member: cn=scott, o=Your Company
member: cn=eric, o=Your Company
```

This example creates a dynamic group entry that has an object class of **groupOfURLs**:

```
ldapadd -h 127.0.0.1 -D "cn=admin" -w xxxx -f dynamicGrp.ldif
```

Where dynamicGrp.ldif contains:

```
dn: cn=dynamic_team,o=Your Company
objectclass: groupOfUrls
cn: dynamic_team
memberurl: ldap:///o=Your Company??sub?(employeeType=ldapTeam)
```

This example creates a nested group entry with an object class of **ibm-nestedGroup** that references cn=dynamic\_team,o=Your Company and cn=group1,o=Your Company.

```
ldapadd -h 127.0.0.1 -D "cn=admin" -w xxxx -f nestedGrp.ldif
```

Where nestedGrp.ldif contains:

```
dn: cn=nested_grp,o=Your Company
objectclass: ibm-nestedGroup
objectclass: container
cn: nested_grp
ibm-memberGroup: cn=dynamic_team,o=Your Company
ibm-memberGroup: cn=group1,o=Your Company
```

**Modifying group entries:** To add a member to a static group, add the user's distinguished name as an additional value for the **member** or **uniqueMember** attribute. Following is an example:

```
ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modStaticGrp.ldif
```

Where modStaticGrp.ldif contains:

```
dn: cn=group1, o=Your Company
changetype: modify
add: member
member: cn=jeff, cn=tim, o=Your Company

dn: cn=group2, o=Your Company
```



```
changetype: modify
add: uniqueMember
uniqueMember: cn=joe,o=Your Company
```

To remove a member from a static group, remove the user's distinguished name from the set of **member** or **uniqueMember** attribute values in the static group entry. Following is an example:

```
ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modStaticGrp.ldif
```

Where modStaticGrp.ldif contains:

```
dn: cn=group1, o=Your Company
changetype: modify
delete: member
member: cn=jeff, cn=tim, o=Your Company

dn: cn=group2, o=Your Company
changetype: modify
delete: uniqueMember
uniqueMember: cn=joe,o=Your Company
```

To add a new search expression to a dynamic group, add the LDAP URL search expression as a value of the **memberURL** attribute. Following is an example:

```
ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modDynamicGrp.ldif
```

Where modDynamicGrp.ldif contains:

```
dn: cn=dynamic_team, o=Your Company
changetype: modify
add: memberURL
memberURL: ldap:///o=Your Company??sub?(employeeType=javaTeam)
```

To remove a search expression from a dynamic group entry, the **memberURL** attribute value containing the search expression must be removed from the group entry. Following is an example:

```
ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modDynamicGrp.ldif
```

Where modDynamicGrp.ldif contains:

```
dn: cn=dynamic_team, o=Your Company
changetype: modify
delete: memberURL
memberURL: ldap:///o=Your Company??sub?(employeeType=javaTeam)
```

To add a new group reference to an existing nested group entry, add the new group's DN as a value of the **ibm-memberGroup** attribute. Following is an example:

```
ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modNestedGrp.ldif
```

Where modNestedGrp.ldif contains:

```
dn: cn=nested_grp, o=Your Company
changetype: modify
add: ibm-memberGroup
ibm-memberGroup: cn=group2,o=Your Company
```

To remove a group reference entry from an existing nested group entry, the **ibm-memberGroup** attribute value containing the group reference DN must be deleted. Following is an example:

```
ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modNestedGrp.ldif
```

Where modNestedGrp.ldif contains:

```
dn: cn=nested_grp, o=Your Company
changetype: modify
delete: ibm-memberGroup
ibm-memberGroup: cn=group2,o=Your Company
```

**Deleting group entries:** To delete a static, dynamic, and nested group entry, delete the directory entry that represents the group. The **ldapdelete** command can be used to perform this delete operation.

This example deletes the static, dynamic, and nested group entries that were created in the preceding examples:

```
ldapdelete -h 127.0.0.1 -D "cn=admin" -w xxx -f deleteGrp.list
```

Where deleteGrp.list contains:

```
cn=nested_grp,o=Your Company
cn=group1,o=Your Company
cn=group2,o=Your Company
cn=group3,o=Your Company
cn=dynamic_team,o=Your Company
```

## Examples of querying group membership

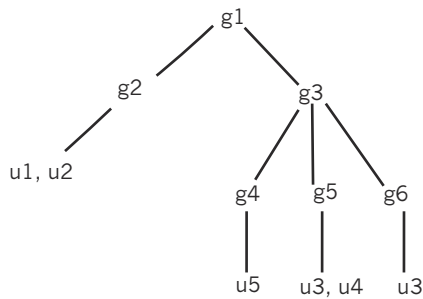


Figure 28. Group hierarchy and membership for the examples

The entries below are used in the following examples:

```
dn: o=ibm
objectclass: organization
aclEntry: group:CN=ANYBODY:normal:rsc:system:rsc
aclPropagate: TRUE
o: ibm
```

```
dn: cn=g1,o=ibm
objectclass: container
objectclass: ibm-nestedGroup
cn: g1
ibm-memberGroup: cn=g2,o=ibm
ibm-memberGroup: cn=g3,o=ibm
aclEntry: group:CN=ANYBODY:normal:rsc:system:rsc
```

```
dn: cn=g2,o=ibm
objectclass: accessGroup
cn: g2
member: cn=u1,o=ibm
member: cn=u2,o=ibm
aclEntry: group:CN=ANYBODY:normal:rsc:system:rsc
aclEntry: access-id:cn=u1,o=ibm:normal:rsc:system:rsc
aclEntry: access-id:cn=u2,o=ibm:normal:rsc:system:rsc:at.member:deny:rsc
```

```
dn: cn=g3,o=ibm
objectclass: container
objectclass: ibm-nestedGroup
cn: g3
ibm-memberGroup: cn=g4,o=ibm
ibm-memberGroup: cn=g5,o=ibm
ibm-memberGroup: cn=g6,o=ibm
```

```
dn: cn=g4,o=ibm
objectclass: accessGroup
cn: g4
aclEntry: group:CN=ANYBODY:normal:rsc:system:rsc
```

```
aclEntry: access-id:cn=u4,o=ibm:normal:rsc:system:rsc:at.member:deny:c
member: cn=u5,o=ibm
```

```
dn: cn=g5,o=ibm
objectclass: container
objectclass: ibm-dynamicGroup
cn: g5
memberURL: ldap:///o=ibm??sub?(|(cn=u3)(cn=u4))
aclEntry: group:cn=ANYBODY:normal:rsc:system:rsc
aclEntry: access-id:cn=u3,o=ibm:normal:rsc:system:rsc:at.ibm-allMembers:deny:rs:
at.ibm-allMembers:grant:c
```

```
dn: cn=g6,o=ibm
objectclass: container
objectclass: ibm-dynamicGroup
cn: g6
memberURL: ldap:///o=ibm??sub?(cn=*3)
```

```
dn: cn=u1,o=ibm
objectclass: person
cn: u1
sn: user
userpassword: secret1
```

```
dn: cn=u2,o=ibm
objectclass: person
cn: u2
sn: user
userpassword: secret2
```

```
dn: cn=u3,o=ibm
objectclass: person
aclEntry: access-id:cn=u1,o=ibm:normal:rsc:system:rsc:at.cn:deny:s
aclEntry: access-id:cn=u2,o=ibm:normal:rsc:system:rsc:at.ibm-allGroups:deny:r
aclEntry: group:cn=ANYBODY:normal:rsc:system:rsc
cn: u3
sn: user
userpassword: secret3
```

```
dn: cn=u4,o=ibm
objectclass: person
aclEntry: group:cn=ANYBODY:normal:rsc:system:rsc
aclEntry: access-id:cn=u3,o=ibm:normal:rsc:system:rsc:at.ibm-allGroups:deny:r
cn: u4
sn: user
userpassword: secret4
```

```
dn: cn=u5,o=ibm
objectclass: person
cn: u5
sn: user
userpassword: secret5
```

```
dn: cn=u6,o=ibm
objectclass: person
cn: u6
sn: user
userpassword: secret6
```

**Note:** The **ibm-allMembers** and **ibm-allGroups** attributes are **system** class attributes. The **member** and **cn** attributes are **normal** class attributes.

**ibm-allGroups** and **ibm-allMembers** search and comparison examples:

Example 1: This example shows an **ibm-allMembers** attribute search on a static group entry.

```
ldapsearch -L -D "cn=u6,o=ibm" -w secret6 -b "cn=g4,o=ibm" "objectclass=*" ibm-
allMembers
```

```
dn: cn=g4,o=ibm
ibm-allmembers: cn=u5,o=ibm
```

Access checking done for cn=u6,o=ibm:

1. Read access to the **ibm-allMembers** attribute in cn=g4,o=ibm.
2. Read access to the **member** attribute in cn=g4,o=ibm.

Example 2: This example shows an **ibm-allMembers** attribute search on a dynamic group entry.

```
ldapsearch -L -D "cn=u6,o=ibm" -w secret6 -b "cn=g5,o=ibm" "objectclass=*" ibm-
allMembers

dn: cn=g5,o=ibm
ibm-allmembers: cn=u3,o=ibm
ibm-allmembers: cn=u4,o=ibm
```

Access checking done for cn=u6,o=ibm:

1. Read access to the **ibm-allMembers** attribute in cn=g5,o=ibm.
2. Search access to the **cn** attribute in the returned entries, cn=u3,o=ibm and cn=u4,o=ibm, from the search filter specified in the **memberURL** attribute.

**Note:** **memberURL** attribute access rights do not matter.

Example 3: This example shows an **ibm-allMembers** attribute search on a nested group entry.

```
ldapsearch -L -D "cn=u6,o=ibm" -w secret6 -b "cn=g3,o=ibm" "objectclass=*" ibm-
allMembers

dn: cn=g3,o=ibm
ibm-allmembers: cn=g3,o=ibm
ibm-allmembers: cn=u3,o=ibm
ibm-allmembers: cn=u4,o=ibm
ibm-allmembers: cn=u5,o=ibm
```

Access checking done for cn=u6,o=ibm:

1. Read access to the **ibm-allMembers** attribute in cn=g3,o=ibm.
2. Read access to the **member** attribute in cn=g3,o=ibm.
3. Search access to the **cn** attribute in the returned entries, cn=u3,o=ibm and cn=u4,o=ibm, from the search filter specified in the **memberURL** attribute of cn=g3,o=ibm.
4. Search access to the **cn** attribute in the returned entries, cn=u3,o=ibm and cn=g3,o=ibm, from the search filter specified in the **memberURL** attribute of cn=g6,o=ibm.

**Note:** Since cn=u3,o=ibm has already been added as an **ibm-allMembers** attribute value, a duplicate value is not added.

**Note:** **ibm-memberGroup** access rights do not matter.

Example 4: This example shows an **ibm-allMembers** attribute search on a dynamic group entry when the bound user is not granted read access to the **ibm-allMembers** attribute.

```
ldapsearch -L -D "cn=u3,o=ibm" -w secret3 -b "cn=g5,o=ibm" "objectclass=*" ibm-
allmembers

dn: cn=g5,o=ibm
```

Access checking done for cn=u3,o=ibm:

1. Read access to the **ibm-allMembers** attribute in cn=g5,o=ibm has been denied. Therefore, no **ibm-allMembers** attribute values are added.

Example 5: This example shows an **ibm-allMembers** attribute search on a static group entry when the bound user does not have read authority on the **member** attribute.

```
ldapsearch -L -D "cn=u2,o=ibm" -w secret2 -b "cn=g2,o=ibm" "objectclass=*" ibm-
allmembers

dn: cn=g2,o=ibm
```

Access checking done for cn=u2,o=ibm:

1. Read access to the **ibm-allMembers** attribute in cn=g2,o=ibm.
2. Read access to the **member** attribute in cn=g2,o=ibm has been denied. Therefore, the **member** attribute value is not added as an **ibm-allMembers** attribute value.

Example 6: This example shows an **ibm-allMembers** attribute search on a dynamic group entry when the bound user does not have search authority in the entries that are to be returned for the attributes that are specified in the dynamic group filter.

```
ldapsearch -L -D "cn=u1,o=ibm" -w secret1 -b "cn=g5,o=ibm" "objectclass=*" ibm-
allmembers

dn: cn=g5,o=ibm
ibm-allmembers: cn=u4,o=ibm
```

Access checking done for cn=u1,o=ibm:

1. Read access to the **ibm-allMembers** attribute in cn=g5,o=ibm.
2. Search access to the **cn** attribute in the returned entries, cn=u3,o=ibm and cn=u4,o=ibm, from the search filter specified in the **memberURL** attribute. However, search access is denied on the **cn** attribute of cn=u3,o=ibm, therefore, it is not added as an **ibm-allMembers** attribute value.

Example 7: This example shows an **ibm-allMembers** comparison operation on a dynamic group entry.

```
ldapcompare -D "cn=u3,o=ibm" -w secret3 "cn=g5,o=ibm" "ibm-allmembers=cn=u3,o=ibm"
ldap_compare: Compare true
```

Access checking done for cn=u3,o=ibm:

1. Compare access to the **ibm-allMembers** attribute in cn=g5,o=ibm.
2. Search access to the **cn** attribute on the returned entries, cn=u3,o=ibm and cn=u4,o=ibm, from the search filter specified in the **memberURL** attribute.

Example 8: This example shows an **ibm-allGroups** attribute search where the user belongs to dynamic and nested group entries.

```
ldapsearch -L -D "cn=u6,o=ibm" -w secret6 -b "cn=u4,o=ibm" "objectclass=*" ibm-
allGroups

dn: cn=u4,o=ibm
ibm-allgroups: cn=g5,o=ibm
ibm-allgroups: cn=g3,o=ibm
ibm-allgroups: cn=g1,o=ibm
```

Access checking done for cn=u6,o=ibm:

1. Read access to the **ibm-allGroups** attribute in cn=u4,o=ibm.
2. Search access on the **cn** attribute in cn=u4,o=ibm from the search filter specified in the **memberURL** attribute in cn=g5,o=ibm.

Since cn=g3,o=ibm has cn=g5,o=ibm as an **ibm-memberGroup** attribute value, cn=g3,o=ibm is added as an **ibm-allGroups** attribute also. cn=g1,o=ibm has cn=g3,o=ibm as an **ibm-memberGroup** value, therefore cn=g1,o=ibm is also added as an **ibm-allGroups** attribute value.

Example 9: This example shows an **ibm-allGroups** attribute search where the user belongs to static and nested group entries.

```
ldapsearch -L -D "cn=u1,o=ibm" -w secret1 -b "cn=u2,o=ibm" "objectclass=*" ibm-
allGroups

dn: cn=u2,o=ibm
ibm-allgroups: cn=g2,o=ibm
ibm-allgroups: cn=g1,o=ibm
```

Access checking done for cn=u1,o=ibm:

1. Read access to the **ibm-allGroups** attribute in cn=u2,o=ibm.
2. Read access to the **member** attribute in cn=g2,o=ibm.

Since cn=g1,o=ibm has an **ibm-memberGroup** attribute value of cn=g2,o=ibm, cn=g1,o=ibm is added as an **ibm-allGroups** attribute value.

Example 10: This example shows an **ibm-allGroups** attribute search where the user being searched belongs to static and nested group entries. The bound user has read authority to the **ibm-allGroups** attribute of the user being searched, but does not have read authority on the **member** attribute in the static group entry.

```
ldapsearch -L -D "cn=u2,o=ibm" -w secret2 -b "cn=u2,o=ibm" "objectclass=*" ibm-
allGroups

dn: cn=u2,o=ibm
```

Access checking done for cn=u2,o=ibm:

1. Read access to the **ibm-allGroups** attribute in cn=u2,o=ibm.
2. Read access to the **member** attribute of cn=g2,o=ibm is denied. Therefore, cn=g2,o=ibm is not added as an **ibm-allGroups** attribute value.

Example 11: This example shows an **ibm-allGroups** search where the bound user does not have read authority on the **ibm-allGroups** attribute.

```
ldapsearch -L -D "cn=u3,o=ibm" -w secret3 -b "cn=u4,o=ibm" "objectclass=*" ibm-
allGroups

dn: cn=u4,o=ibm
```

Access checking done for cn=u3,o=ibm:

1. Read access to the **ibm-allGroups** attribute in cn=u4,o=ibm is denied. Therefore, no **ibm-allGroups** attribute values are added.

Example 12: This example shows an **ibm-allGroups** comparison operation where the bound user is allowed to determine that a user belongs to a nested group entry.

```
ldapcompare -D "cn=u2,o=ibm" -w secret2 "cn=u3,o=ibm" "ibm-allGroups=cn=g1,o=ibm"
```

```
ldap_compare: Compare true
```

Access checking done for cn=u2,o=ibm:

1. Compare access to the **ibm-allGroups** attribute in cn=u3,o=ibm.
2. Search access to the **cn** attribute of cn=u3,o=ibm is granted from the search filter specified in the **memberURL** attribute in cn=g5,o=ibm.

Since cn=g3,o=ibm has cn=g5,o=ibm as an **ibm-memberGroup** attribute value, cn=g3,o=ibm is added as an **ibm-allGroups** attribute also. cn=g1,o=group has cn=g3,o=ibm as an **ibm-memberGroup** value, therefore cn=g1,o=group is also added as an **ibm-allGroups** attribute value. Therefore, the compare operation returns an **LDAP\_COMPARE\_TRUE** to the client application.

# Chapter 24. Using access control

Access control of information in the LDAP server is specified by setting up Access Control Lists (ACLs). LDBM, TDBM, CDBM, or GDBM ACLs provide a means to protect information that is stored in an LDAP directory. Administrators use ACLs to restrict access to different portions of the directory, or specific directory entries. When using the LDBM, TDBM, CDBM, or GDBM backend, ACLs are created and managed by using the `ldap_add` and `ldap_modify` APIs. ACLs can also be entered by using the `ldif2ds` utility (TDBM only).

ACLs are represented by a set of attributes that seem to be a part of the entry. The attributes that are associated with access control, such as `entryOwner`, `ownerPropagate`, `ac1Entry`, and `ac1Propagate`, are unusual in that they are logically associated with each entry, but can have values that depend upon other entries higher in the directory hierarchy. Depending upon how they are established, these attribute values can be explicit to an entry, or inherited from an ancestor entry.

Use of LDAPs SDBM backend allows a user to be authenticated to the directory namespace by using the RACF ID and password. The RACF identity becomes associated with the user's RACF-style distinguished name that was used on the LDAP bind operation. It is then possible to set up ACLs for entries that are managed by the LDBM, TDBM, CDBM, or GDBM backend by using RACF-style user and group DNs. This controls access to LDBM, TDBM, CDBM, or GDBM database directory entries by using the RACF user or group identities.

The LDAP server schema entry also has an ACL that can be set to control access to the schema entry.

## Access control attributes

Access to LDAP directory entries and attributes is defined by Access Control Lists (ACLs). Each entry in the directory contains a special set of attributes that describe who is allowed to access information within that entry. [Table 60 on page 425](#) shows the set of attributes that are related to access control. More in-depth information about each attribute is given following the table.

It is possible to specify access control settings for individual attribute types. This is called attribute-level access control. Also, it is possible to explicitly deny access to information.

| Table 60. ACL and entry owner attributes. A list of ACL and entry owner attributes |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACL attributes                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <code>ac1Entry</code>                                                              | This is a multi-valued attribute that contains the user or group distinguished names or search filters and permissions associated with those users or groups that have access to information in the directory entry (or the entry along with the subtree of information below the entry, depending on the setting of the <code>ac1Propagate</code> attribute).                                                                                                                                                                           |
| <code>ac1Propagate</code>                                                          | This is a single-valued boolean attribute that indicates whether the <code>ac1Entry</code> information applies only to the directory entry it is associated with or to the entire subtree of information including and below the directory entry it is associated with. Note that propagation does not apply to entries that have an explicit <b><code>ac1Entry</code></b> defined for the entry and that propagation stops at the next propagating ACL ( <code>ac1Propagate=TRUE</code> ) that is encountered in the directory subtree. |
| <code>ac1Source</code>                                                             | This is a single-valued attribute that is managed by the LDAP server and cannot be changed by the <code>ldapmodify</code> utility. This attribute, accessible for any directory entry, indicates the distinguished name of the entry that holds the ACL that applies to the entry. This attribute is useful in determining which propagating ACL is used to control access to information in the directory entry.                                                                                                                        |

Table 60. ACL and entry owner attributes. A list of ACL and entry owner attributes (continued)

| ACL attributes         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Entry owner attributes |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| entryOwner             | This is a multi-valued attribute that contains the user or group distinguished names or search filters that are evaluated that are considered owners of the directory entry (or the entry along with the subtree of information below the entry, depending on the setting of the <b>ownerPropagate</b> attribute).                                                                                                                                                                                    |
| ownerPropagate         | This is a single-valued boolean attribute that indicates whether the entryOwner information applies only to the directory entry it is associated with or to the entire subtree of information including and below the directory entry it is associated with. Note that propagation does not apply to entries that have an explicit entryOwner defined for the entry and that propagation stops at the next propagating entryOwner (ownerPropagate=TRUE) that is encountered in the directory subtree. |
| ownerSource            | This is a single-valued attribute that is managed by the LDAP server and cannot be changed by the <b>ldapmodify</b> utility. This attribute indicates the distinguished name of the entry that holds the entryOwner that applies to the entry. This attribute is useful in determining which propagating entryOwner is used to control access to information in the directory entry.                                                                                                                  |

## aclEntry attribute

aclEntry is a multi-valued attribute that contains information pertaining to the access allowed to the entry and each of its attributes. aclEntry lists the following types of information:

- Who has rights to the entry (scope of the protection). Also called the subject.
- What specific attributes and classes of attributes (attribute access classes) that the subject has access to.
- What rights the subject has (permissions to specific attributes and classes of attributes).

## Syntax

Following is the aclEntry attribute value syntax:

```

aclEntry: aclEntry_value
where,
aclEntry_value :- [access-id:|group:|role:] subject_DN [granted_rights]
or,
aclEntry_value :- aclFilter:filter: operation [granted_rights]
subject_DN :- valid DN, the object that privileges are granted to.
filter :- valid search filter, using the following attributes only: ibm-filterSubject,
ibm-filterIP, ibm-filterTimeOfDay, ibm-filterDayOfWeek, ibm-filterBindMechanism, and ibm-filterConnectionEncrypted. See “ACL filters” on page 432 for more information.
operation :- union | replace | intersect. See “ACL filters” on page 432 for more information.
granted_rights :- object_rights | normal_rights | sensitive_rights | critical_rights | restricted_rights |
system_rights | attr_rights
object_rights :- :object:[grant:|deny:] object_rights_list
object_rights_list :- [a|d]
normal_rights :- :normal:[grant:|deny:] attr_rights_list
sensitive_rights :- :sensitive:[grant:|deny:] attr_rights_list
critical_rights :- :critical:[grant:|deny:] attr_rights_list
restricted_rights :- :restricted:[grant:|deny:] attr_rights_list
system_rights :- :system:[grant:|deny:] attr_rights_list

```



```
attr_rights :- :at.attr_name:[grant:|deny:] attr_rights_list
attr_name:- any valid attribute name
attr_rights_list :- [r|w|s|c]
```

The *subject\_DN* is any valid DN that represents the object (entry) to which privileges are being granted. The DN ends when the first granted rights keyword is detected.

The *granted\_rights* is specified as follows where *object\_rights\_list* is one or more elements of the set [a | d], and *attr\_rights\_list* is one or more elements of the set [r | w | s | c].

See “ACL filters” on page 432 for more information about the *filter* and *operation* values.

Multiple specifications for the same access class or attribute type within the same **aclEntry** attribute value are merged into a single specification. For example:

```
group:cn=Anybody:normal:rs:system:rsc:normal:c:normal:deny:w
```

results this merged access list

```
group:cn=Anybody:normal:rsc:normal:deny:w:system:rsc
```

## Scope of protection

The scope of the protection is based on the following types of privilege attributes:

### access-id

The distinguished name of an entry to set permissions for.

### group

The distinguished name of the group entry to set permissions for.

### role

The distinguished name of the group entry to set permissions for.

### aclFilter

The **aclEntry** filter, that if evaluates to true, reduces, augments, or replaces the set of permissions. The server compatibility must be 6 or greater to use an **aclFilter** in an **aclEntry** attribute. See “serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125 for more information about the server compatibility level.

Access control groups can be either static, dynamic, or nested groups. The following object classes are evaluated as group entries for the LDBM, TDBM, and CDBM backends: **ibm-staticGroup**, **groupOfNames**, **groupOfUniqueNames**, **accessRole**, **accessGroup**, **ibm-dynamicGroup**, **groupOfUrls**, and **ibm-nestedGroup**. See Chapter 23, “Static, dynamic, and nested groups,” on page 413 for additional information about static, dynamic, and nested groups.

When specifying a user or group distinguished name in an **aclEntry** attribute value, the **access-id**, **group**, or **role** portions of the value are optional and are accepted for compatibility with older levels of the LDAP server. If replicating to non-z/OS IBM TDS, one of these prefixes are required. The distinguished name that is used does not need to be the name of any entry in the directory. The distinguished name is the name that represents the user that has authenticated to the directory server or the group that the user is a member of.

The access control implementation supports several “pseudo-DNs”. These are used to reference large numbers of subject DNs which, at bind time, share a common characteristic in relation to either the operation being performed or the target object on which the operation is being performed. Currently, three pseudo DNs are defined:

```
group:cn=anybody
group:cn=authenticated
access-id:cn=this
```

The `group:cn=anybody` refers to all subjects, including those that are unauthenticated (considered anonymous users). All users belong to this group automatically. The `group:cn=authenticated` refers

to any DN that is authenticated to the directory. The method of authentication is not considered when using distinguished names in the **aclEntry** attribute value.

The `access-id:cn=this` refers to the bind DN that matches the target object's DN on which the operation is performed.

If the server compatibility is 6 or greater, a search filter can be specified after the **aclFilter** component in an **aclEntry** attribute value. When the search filter evaluates to true, it reduces, augments, or replaces the set of permissions specified. See [“ACL filters” on page 432](#) for more information about the search filters that are allowed to be specified.

Examples:

In this example, the DN type is `access-id` and the DN itself is `cn=personA, ou=deptXYZ, o=IBM, c=US`:

```
access-id:cn=personA, ou=deptXYZ, o=IBM, c=US
```

In this example, the DN type is `group` and the DN itself is `cn=deptXYZRegs, o=IBM, c=US`:

```
group:cn=deptXYZRegs, o=IBM, c=US
```

This is an example of how to use a RACF identity that is established with SDBM in an ACL:

```
access-id:racfid=YourID,profileType=user,sysplex=YourSysplex
group:racfid=YourGrp,profileType=group,sysplex=YourSysplex
```

## Attribute access classes

Attributes requiring similar permission for access are grouped in classes. Attributes are assigned to an attribute access class within the schema definitions. The `IBMAttributeTypes` attribute in the LDAP server schema entry holds the attribute types access class. The three attribute access classes are:

- `normal`
- `sensitive`
- `critical`

Each of these attribute access classes is discrete. If a user has write permission to `sensitive` attributes, then the user does not automatically have write permission to `normal` attributes. This permission must be explicitly defined.

The default attribute access class for an attribute is `normal`. By default, all users have read access to `normal` attributes. There are two additional attribute access classes that are used internally by LDAP for system attributes. These attribute access classes are `restricted` and `system`. You can specify these access classes when granting permissions in ACLs.

For example, the name of a person is typically defined in the `normal` class. Perhaps a social security number is considered `sensitive`, and any password information for the user is considered `critical`. Following are some example definitions that are excerpted from the LDAP server schema. Note that the attribute `userPassword` is defined with access class `critical`.

```
attributetypes: (
 2.5.4.49
 NAME ('dn' 'distinguishedName')
 EQUALITY distinguishedNameMatch
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE userApplications
)
ibmattributetypes: (
 2.5.4.49
 ACCESS-CLASS normal
)

attributetypes: (
 2.5.4.35
 NAME 'userPassword'
```

```
DESC 'Defines the user password'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.40
USAGE userApplications
)
ibmattributetypes: (
 2.5.4.35
 ACCESS-CLASS critical
)
```

It is possible to specify access controls on individual attributes. However, when defining schema an access class is always defined for the attribute type. If not specified, that attribute type is defined to belong to the normal class.

**Note:** The **restricted** attributes are: `aclEntry`, `aclPropagate`, `entryOwner`, and `ownerPropagate`. To update access control information, you must have permissions to read and write these attributes. The **system** attributes include `aclSource` and `ownerSource` and other attributes for which the server controls the values. To update access control information, you must have permission to read and write these attributes. If the **system** keyword is not specified in an **aclEntry** attribute value, the system access is set to 'system:rsc'.

## Access permissions

Following is the set of access permissions.

| Table 61. Permissions that apply to an entire entry |                                |
|-----------------------------------------------------|--------------------------------|
| Permission                                          | Action                         |
| Add                                                 | Add an entry under this entry. |
| Delete                                              | Delete this entry.             |

| Table 62. Permissions that apply to attribute access classes |                                          |
|--------------------------------------------------------------|------------------------------------------|
| Permission                                                   | Type                                     |
| Read                                                         | Read attribute values                    |
| Write                                                        | Write attribute values                   |
| Search                                                       | Search filter can contain attribute type |
| Compare                                                      | Compare attribute values                 |

Following are some examples of valid `aclEntry` values:

```
access-id:cn=Tim, o=Your Company:normal:rwsc:sensitive:rsc:object:ad
role:cn=roleGroup, o=Your Company:object:ad:normal:rsc:sensitive:rsc
group:cn=group1, o=Your Company:system:csr:normal:sw
cn=Lisa, o=Your Company:normal:rwsc:sensitive:rwsc:critical:rwsc:restricted:rwsc:system:rwsc
cn=Ken, o=Your Company:normal:rsc
group:cn=group2,dc=yourcompany,dc=com:normal:rwsc:at.cn:deny:w:sensitive:grant:rsc
cn=Karen,dc=yourcompany,dc=com:at.cn:grant:rwsc:normal:deny:rwsc
cn=Mary,dc=yourcompany,dc=com:normal:rwsc:sensitive:rwsc:critical:deny:rwsc:at.userpassword:w
group:cn=anybody:normal:rsc
group:cn=authenticated:normal:rwsc:sensitive:rsc
access-id:cn=this:normal:rwsc:sensitive:rwsc:restricted:rwsc
aclFilter: (&(ibm-filterTimeOfDay>=09:00)(ibm-filterTimeOfDay<=17:00)(ibm-filterDayOfWeek>=1)
(ibm-filterDayOfWeek<=5)):union:normal:w
```

```
aclFilter: ((ibm-filterSubject=cn=Ken, o=Your Company)(ibm-filterIP=129.176.132.*))
:replace:normal:rWSC:critical:rsc:sensitive:rWSC
```

See [“Access determination” on page 435](#) for information about how the **aclEntry** values are used to determine access.

The **aclEntry** attribute value is defined as a directory string.

When the **aclFilter** scope is not specified, a search using the **aclEntry** attribute matches against the distinguished name in the value. An **aclEntry** value in this format is normalized following the matching rules for a distinguished name. Two **aclEntry** attributes in this format are considered to be the same if they have the same distinguished name.

When the **aclFilter** scope is specified, a search using the **aclEntry** attribute matches against the scope, filter, and operation in the search filter. An **aclEntry** in this format is normalized by normalizing the scope, filter, and the operation. Two **aclEntry** attributes in this format are considered to be the same if they have the same filter and operation.

## aclPropagate attribute

An **aclPropagate** attribute is associated with each entry with an explicit ACL. By default, the entry's explicit ACL is inherited down the hierarchy tree, and its **aclPropagate** attribute is set to TRUE. If set to FALSE, the explicit ACL for the entry becomes an override, pertaining only to the particular entry. The **aclPropagate** syntax is Boolean. See [“Propagating ACLs” on page 444](#) for more information.

## aclSource attribute

Each entry has an associated **aclSource**. This reflects the DN that the ACL is associated. This attribute is kept and managed by the server, but might be retrieved for administrative purposes. This attribute cannot be set, only retrieved.

The derivation of **aclSource** is further explained in [“Propagating ACLs” on page 444](#).

## entryOwner attribute

Each entry has an associated **entryOwner** which are, in essence, the administrators for a particular entry. The **entryOwner** is allowed to be a user or a group, like what is allowed within an **aclEntry** attribute. If the server compatibility level is 6 or greater, a search filter is allowed to be specified to deny or grant administrator rights to users or groups. See [“serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125](#) for more information about server compatibility.

When specifying a user or group distinguished name in an **entryOwner** attribute value, the **access-id**, **group**, or **role** portions of the value are optional and are accepted for compatibility with older levels of the LDAP server. If replicating to non-z/OS IBM TDS, one of these prefixes are required. The distinguished name that is used does not need to be the name of any entry in the directory. The distinguished name is the name that represents the user that has authenticated to the directory server or the group that the user is a member of.

Entry owners are not constrained by permissions given in the **aclEntry**. They have total access to any entry attribute, and can add and delete entries as they want.

Entry owners, LDAP administrators with the appropriate authority, and users who have write permission for **restricted** attributes are the only people who are allowed to change the attributes related to access control. See Chapter 9, “Administrative group and roles,” on page 155 for more information about administrative role authority. If a backend is configured for basic replication as a peer or read-only replica, only an LDAP administrator and the **peerServerDN** or **masterServerDN** can set the access control attributes within the backend directory. If a subtree is configured for advanced replication, only an LDAP administrator and the **ibm-slapdMasterDN** specified on the replication agreement can set the access control attributes within the configured replication context.

The **entryOwner** attribute value is defined as a directory string.

When the **ownerFilter** scope is not specified, a search using the **entryOwner** attribute matches against the distinguished name in the value. An **entryOwner** value in this format is normalized following the matching rules for a distinguished name. Two **entryOwner** attributes in this format are considered to be the same if they have the same distinguished name.

When the **ownerFilter** scope is specified, a search using the **entryOwner** attribute matches against the scope, filter, and the action (**grant|deny**) in the search filter. An **entryOwner** in this format is normalized by normalizing the scope, filter, and the action. Two **entryOwner** attributes in this format are considered to be the same if they have the same filter and action.

**Note:** When a filter is specified in an **aclEntry** attribute, an LDAP administrator's permissions might be reduced. However, when filters are specified in **entryOwner** attribute values, they do not reduce the effective permissions of an LDAP administrator.

## Syntax

Following is the `entryOwner` attribute value syntax:

**entryOwner:** *entryOwner\_value*

where,

*entryOwner\_value* :- [**access-id**:|**group**:|**role**:] *subject\_DN*

or,

*entryOwner\_value* :- **ownerFilter**: *filter*: **grant|deny**

*subject\_DN* :- valid DN, represents the object that privileges are granted.

*filter* :- valid search filter, using the following attributes only: **ibm-filterSubject**,

**ibm-filterIP**, **ibm-filterTimeOfDay**, **ibm-filterDayOfWeek**, **ibm-filterBindMechanism**, and **ibm-filterConnectionEncrypted**. See [“ACL filters” on page 432](#) for more information.

## Scope of protection

The scope of the protection is based on the following types of privilege attributes:

### **access-id**

The distinguished name of an entry to grant administrator rights to.

### **group**

The distinguished name of the group entry to grant administrator rights to.

### **role**

The distinguished name of the group entry to grant administrator rights to.

### **ownerFilter**

The **entryOwner** filter, that if evaluates to true, grants or denies entry owner permissions to the entry. The server compatibility must be 6 or greater to use an **ownerFilter** in an **entryOwner** attribute. See [“serverCompatLevel {3 | 4 | 5 | 6 | 7| 8}” on page 125](#) for more information about server compatibility level.

## ownerPropagate attribute

Owner propagation works the same as ACL propagation. By default, owners are inherited down the hierarchy tree, and their owner propagate attribute is set to TRUE. If set to FALSE, the owner becomes an override, pertaining only to the particular entry. The `ownerPropagate` syntax is boolean.

## ownerSource attribute

Each entry also has an associated `ownerSource`. This reflects the DN that the owner values are associated. This attribute is kept and managed by the server, but can be retrieved for administrative purposes. This attribute cannot be set, only retrieved.

# ACL filters

The access granted to a subject can be altered by using filters on `aclEntry` and `entryOwner` with the `aclFilter` and `ownerFilter` scope of protection. The server compatibility must be 6 or greater to use search filters in `aclEntry` and `entryOwner` attribute values. See “[serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}](#)” on page 125 for more information about server compatibility level.

The syntax of specifying a filter in an `aclEntry` attribute is:

`aclFilter:filter:operation[granted_rights]`

See “[aclEntry attribute](#)” on page 426 for more information about `granted_rights`.

The syntax of specifying a filter in an `entryOwner` attribute is:

`ownerFilter:filter:action`

where,

*filter* :- An IETF RFC 2254 ([tools.ietf.org/html/rfc2254](http://tools.ietf.org/html/rfc2254)) compliant LDAP search filter by using the following attributes.

*operation* :- union | replace | intersect

*action* :- grant|deny

A *filter* can use only the following attributes:

## ibm-filterSubject

This attribute is used to filter a distinguished name. It can be a bind DN, an alternate DN, a pseudo DN, or a group DN. The attribute can be used, for example, in a filter to reduce ACL permissions for a specific group.

## ibm-filterIP

This attribute is used to filter the IPv4 or IPv6 address of a client connection. The value can be any syntactically valid IPv4 or IPv6 address, with or without a trailing wildcard. The supported syntax for IPv6 addresses is defined in IETF RFC 2373 ([tools.ietf.org/html/rfc2373](http://tools.ietf.org/html/rfc2373)). The wildcard can be specified within any IPv4 octet or in any IPv6 group, and must be the final character in the string. For example, the following are all valid:

- 124.\*
- 124.153.242\*
- 05DC:0001:0000:0000:0000:0000:2\*
- 5DC:1::2\*

**Note:** The final two addresses in the list equivalent. All addresses are fully expanded. In other words, insignificant leading zeros are added to each IPv4 octet or IPv6 group to expand it to the maximum number of digits, except for any octet or group with a wildcard is not expanded. If a wildcard is specified with the `::` IPv6 syntax, the wildcard is shifted to the final group of the address. Following are some examples:

Table 63. *ibm-filterIP* expansion examples

| Address                | Fully expanded address                        |
|------------------------|-----------------------------------------------|
| 1.002.03.4             | 001.002.003.004                               |
| 01.02.03*              | 001.002.03*                                   |
| 1:2:3:4:5:6:7:8        | 0001:0002:0003:0004:0005:0006:0007:0008       |
| 1::8                   | 0001:0000:0000:0000:0000:0000:0000:0008       |
| 01:2:30:4:05:6:700:08* | 0001:0002:0030:0004:0005:0006:0700:08*        |
| ::FFFF:129.100.242.10  | 0000:0000:0000:0000:0000:FFFF:129.100.242.010 |

Table 63. *ibm-filterIP expansion examples (continued)*

| Address | Fully expanded address               |
|---------|--------------------------------------|
| 1::*    | 0001:0000:0000:0000:0000:0000:0000:* |

#### **ibm-filterTimeOfDay**

This attribute is used to filter the time of day that the directory entry is accessed. The value is the hh:mm format of 24-hour time, with hh ranging from 00 to 23 and mm ranging from 00 to 59. This can be used, for example, to grant access only during a certain time of day.

#### **ibm-filterDayOfWeek**

This attribute is used to filter the day of week that the directory entry is accessed. The value is an integer mapping the days of the week as follows: Sunday = 0, Monday = 1, Tuesday = 2, Wednesday = 3, Thursday = 4, Friday = 5, Saturday = 6. This can be used, for example, to grant access only during certain days of the week.

#### **ibm-filterBindMechanism**

This attribute is used to filter the bind mechanism that is used to connect to the LDAP server. The following string values can be used to represent bind mechanisms: SIMPLE, EXTERNAL, CRAM-MD5, DIGEST-MD5, and GSSAPI. This can be used, for example, to deny access for SIMPLE binds.

#### **ibm-filterConnectionEncrypted**

This attribute is used to filter whether encryption is used to access the LDAP server. The valid values are TRUE and FALSE. This can be used, for example, to deny access for non-SSL binds or SSL binds done with no cipher specifications.

The *operation* value is required for *aclFilter* values, and specifies the way that ACL filters are applied:

#### **replace**

The effective permission is replaced by the ACL filter permission. For example, to grant clients from a given subnetwork a specific set of permissions only, use **replace**.

#### **union**

The effective permission is joined with the ACL filter permission. This is used to expand permissions when granting, and reduce permissions when denying. For example, to grant clients from a given subnetwork a set of permissions, at a minimum, use **union**.

#### **intersect**

The effective permission is intersected with the ACL filter permission. This is used to reduce permissions. For example, to grant clients from a given subnetwork a set of permissions, if and only if they already have those permissions, use **intersect**.

The *action* value is required for *ownerFilter* values, and must be set to either grant, to grant entry owner access to the entry, or deny, to deny entry owner access when the LDAP search filter evaluates to true.

Filters using incorrect filter syntax, filter attributes, or operation values fail when an attempt is made to add or modify the incorrect *aclEntry* or *entryOwner* attribute value.

Unlike the *aclEntry* attribute, the *entryOwner* attribute cannot reduce permissions for an administrator.

## Initializing ACLs with TDBM or LDBM

The TDBM or LDBM backend adds an ACL to each suffix entry if no **aclEntry** value is specified during the add of this entry (whether the add was done by using **ldapadd** or **ldif2ds**). This improves performance of future ACL modifications made to an ACL placed on the suffix entry. The ACL that is used is:

```
aclEntry: cn=anybody:normal:rsc:system:rsc
aclPropagate: TRUE
```

Similarly, if no entry owner is specified when the suffix entry is created, **entryOwner** is added to the entry with a value set to the root administrator DN (**adminDN** configuration option), along with **ownerPropagate TRUE**.

## Default ACLs with LDBM or TDBM

---

Every entry must have an ACL. If there is no ACL explicitly specified in the entry and no parent entry is propagating its ACL, then a default ACL is assigned to the entry. The default ACL is treated differently than a normal **aclEntry** value. The default value cannot be deleted. If an **aclEntry** value is later added to the entry, explicitly or by inheritance, the entire default **aclEntry** value is replaced. The LDAP server sets the value of the **aclSource** attribute to 'default' when the entry is using the default ACL. The default ACL is:

```
aclEntry: group:cn=anybody:normal:rsc:system:rsc
```

Similarly, every entry must have an entry owner. If none is specified or inherited, a default **entryOwner** value set to the root administrator DN (**adminDN** configuration option) is assigned to the entry. The default value cannot be deleted. If an **entryOwner** value is later added to the entry, explicitly or by inheritance, the entire default **entryOwner** value is replaced. The LDAP server sets the value of the **ownerSource** attribute to 'default' when the entry is using the default owner.

## Initializing ACLs with GDBM

---

When the LDAP server is started with GDBM configured for the first time, the LDAP server creates the change log suffix entry, **cn=changelog**. The **cn=changelog** suffix entry is created with an **entryOwner** value set to the root administrator DN (**adminDN** configuration option) while the **aclEntry** attribute value is set such that non-LDAP administrators do not have access to the changelog entries. The **aclEntry** and **entryOwner** values are propagated in the GDBM backend. The ACL for the GDBM backend is:

```
aclEntry: group=cn=Anybody
```

Only the **aclEntry** and **entryOwner** attributes can be modified. LDAP administrators with the appropriate authority can also access the changelog entries. See Chapter 9, “Administrative group and roles,” on page 155 for more information about administrative role authority.

When GDBM is configured to be file-based, the **aclEntry** and **entryOwner** attributes can be entirely deleted, in which case the default ACL is used. See “Default ACLs with LDBM or TDBM” on page 434 for more information. When GDBM is configured to be Db2-based, these attributes cannot be entirely deleted. The root entry ACL is always propagated to provide access control to the change log entries because change log entries are not created with their own ACL. The change log root entry can be modified if change logging is enabled (the GDBM backend is configured), even if change logging is not on. Change log entries cannot be modified to override the inherited ACL values from the change log suffix entry.

## Initializing ACLs with CDBM

---

When the LDAP server is started with CDBM configured for the first time, the LDAP server creates the following entries:

- **cn=ibmpolicies**
- **cn=pwdpolicy,cn=ibmpolicies** (if server compatibility level is 6 or greater)
- **cn=configuration**
- **cn=Replication,cn=configuration**
- **cn=Log Management,cn=configuration**
- **cn=Replication,cn=Log Management,cn=configuration**
- **cn=admingroup,cn=configuration** (if server compatibility level is 7 or greater)
- **cn=safadmingroup,cn=configuration** (if server compatibility level is 7 or greater)

The **cn=ibmpolicies** suffix entry is created with the same initial ACL as a TDBM or LDBM suffix, that allows read access to anybody and propagates the **aclEntry** and **entryOwner** values. Therefore, only LDAP administrators with the appropriate authority can update the **cn=ibmpolicies** suffix. The **aclEntry** and **entryOwner** values can be modified. If the **aclEntry** and **entryOwner** values are deleted, the default ACL is used.



The `cn=configuration` suffix entry is created with an `entryOwner` value set to the root administrator DN (`adminDN` configuration option) while the `aclEntry` attribute value is set such that non-LDAP administrators do not have access to `cn=configuration` entries. The `aclEntry` and `entryOwner` values are propagated in the `cn=configuration` suffix of the CDBM backend. The `cn=configuration` ACL is:

```
aclEntry: group=cn=Anybody
```

**Note:**

1. It is suggested that you do not entirely delete the `aclEntry` and `entryOwner` values. The default ACL is used if they are deleted and allows users other than LDAP administrators with the appropriate authority access to sensitive configuration related data.
2. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information about administrative role authority.

## Initializing ACLs with schema entry

---

When the LDAP server is started for the first time, the LDAP server creates the LDAP server schema entry, `cn=schema`. The entry is created with the same initial ACL as a TDBM or LDBM suffix that allows read access to anyone. Therefore, only an LDAP root or schema administrator can update the schema. The `aclEntry` and `entryOwner` values can be modified.

## Access determination

---

The same bound user might be granted different access permissions to an entry if:

- the user is an LDAP root administrator and the server is, or is not, in maintenance mode
- the user is the **masterserverDN** or **peerserverDN**
- the user is the entry owner
- the user has specific access permissions set for:
  - the bind DN,
  - alternate DNs,
  - pseudo DNs,
  - groups the bind or alternate DNs are members of
- the user has matching ACL filters

See [“Querying effective permissions” on page 441](#) for using the **GetEffectiveACL** extended operation in the **ldapexop** utility.

The z/OS LDAP server uses the following algorithm to determine the permissions to grant a bound user:

**Note:** When you see “additional access information”, it refers to:

- the IP address of the client connection
- the bind mechanism used to bind to the LDAP server
- if encryption was used to bind to the LDAP server
- the time of day that the directory entry was accessed
- the day of week that the directory entry was accessed

An LDAP root administrator, **masterServerDN**, **peerServerDN**, and **entryOwner** matches are first evaluated:

1. If the bind DN is an LDAP root administrator and the server is in maintenance mode, then
  - full access is given
  - then, the algorithm ends and the server continues to process the request

2. If the bind DN is the **masterServerDN** or **peerServerDN**, then
  - full access is given
  - then, the algorithm ends and the server continues to process the request
3. If the bind DN is an LDAP administrator with the appropriate authority (see [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information about administrative role authority), then
  - full access is first applied
  - then, permissions for all **aclFilter** values matching the LDAP administrator's bind DN and additional access information are applied
  - finally, the algorithm ends and the server continues to process the request
4. If the bind DN matches a base **entryOwner**, or the bind DN and additional access information match an **ownerFilter**, then
  - full access is given if no matching **ownerFilter** specify the deny operator
  - then, the algorithm ends and the server continues to process the request
5. If the alternate DN matches a base **entryOwner**, or the alternate DN and additional access information match an **ownerFilter**, then
  - full access is given if no matching **ownerFilter** specify the deny operator
  - then, the algorithm ends and the server continues to process the request
6. If the group DN that the bind or alternate DN belongs to matches a base **entryOwner**, or the group DN and additional access information match an **ownerFilter**, then:
  - full access is given if no matching **ownerFilter** specify the deny operator
  - then, the algorithm ends and the server continues to process the request

If a match is not found or an **ownerFilter** that was denied access, then **aclEntry** values are evaluated as follows:

1. If no **aclEntry** attributes are specified, then the default permissions are applied, or
2. If the bind is anonymous, and a base **aclEntry** matches the cn=anybody pseudo DN, or filter in an **aclFilter** component match the cn=anybody pseudo DN and additional access information, then:
  - See [Step a.](#)
3. If a base **aclEntry** value matches the bind DN or filter in an **aclFilter** component matches the bind DN and additional access information, then:
  - See [Step a.](#)
4. If a base **aclEntry** value matches the alternate DN or filter in an **aclFilter** component matches the alternate DN and additional access information, then:
  - See [Step b.](#)
5. If the entry DN matches the bind DN, and a base **aclEntry** matches the cn=this pseudo DN, or filter in an **aclFilter** component match the cn=this pseudo DN and additional access information, then:
  - See [Step a.](#)
6. If the entry DN matches an alternate DN, and a base **aclEntry** matches the cn=this pseudo DN, or filter in an **aclFilter** component match the cn=this pseudo DN and additional access information, then:
  - See [Step a.](#)
7. If a base **aclEntry** value matches the group DN that the bind or alternate DN belongs to or filter in an **aclFilter** component match the group DN and additional access information, then:
  - See [Step b.](#)

8. If the bind DN is authenticated, and a base **aclEntry** matches the cn=authenticated pseudo DN, or filter in an **aclFilter** component match the cn=authenticated pseudo DN and additional access information, then:
  - See [Step a](#).
9. If the bind is authenticated, and a base **aclEntry** matches the cn=anybody pseudo DN, or filter in an **aclFilter** component match the cn=anybody pseudo DN and additional access information, then:
  - See [Step a](#).
10. the bound user does not receive any permissions

**Step a.** The algorithm applies permissions and ends as follows:

- any matching base permissions are first applied
- then, any matching **aclFilter** permissions are applied
- finally, the algorithm ends and the server continues to process the request

**Step b.**

- the union of matching base permissions is first applied
- then, any matching **aclFilter** permissions are applied
- finally, the algorithm ends and the server continues to process the request

**Note:** In each of these steps, permissions for matching filters can be set if base permissions are set or not.

If at least one **aclEntry** matches, access to system attributes are always granted read, search, and compare permissions, unless they are explicitly overridden.

The way **aclFilter** permissions are applied depends on the value specified for the operation (replace, union, and intersect). If there are one or more matching **aclFilters**, up to three temporary ACLs are formed from the union of all permissions for each operation. These are applied to the bound user's effective permission as follows:

1. If there are filter permissions for the replace operation, the bound user's base effective ACL is replaced by the replace filter permissions to form a new effective permission.
2. If there are any filter permissions for the union operation, the bound user's new effective permission becomes the union of the union filter permissions and the existing effective permission. The existing effective permission is produced by step 1, or if step 1 did not apply, it is the base effective permission.
3. If there are any filter permissions for the intersect operation, the bound user's new effective permission becomes the intersect of the intersect filter permissions and the existing effective permission. The existing effective permission is produced by step 2, or if step 2 did not apply, then it is the existing effective permission produced by step 1, or if step 1 did not apply, it is the base effective permission.

When using attribute-level permissions or grant/deny support, the order of evaluation of the separate permissions clauses is important. The access control permissions clauses are evaluated in a precedence order, not in the order in which they are found in the ACL entry value. There are four types of permissions settings: access-class grant permissions, access-class deny permissions, attribute-level grant permissions, and attribute-level deny permissions. The precedence for these types of permissions is as follows (from highest precedence to lowest):

- attribute-level deny permissions
- attribute-level grant permissions
- access-class deny permissions
- access-class grant permissions

Using this precedence, a deny permission takes priority over a grant permission (for the same item specified) while attribute-level permissions take precedence over access-class permissions.

A similar grant or deny precedence exists for the grant or deny support provided for **ownerFilter**. A deny always takes precedence over a grant of **entryOwner** access.

## Access determination examples

The following are examples that illustrate the permissions that users have for entries and attribute types.

Example 1:

```
aclEntry: group:cn=Anybody:normal:rsc
```

In this example, unauthenticated (anonymous) users have permission to read, search, and compare all attributes within the **normal** attribute access class. ACL entry values for unauthenticated users use pseudoDN **cn=Anybody**.

Example 2:

```
aclEntry: access-id:cn=personA,ou=deptXYZ,o=IBM,c=US:object:ad:normal:rwc:sensitive:rwc:critical:rsc
```

In this example, the user corresponding to **cn=personA**, **ou=deptXYZ**, **o=IBM**, **c=US** has permission to add entries below the entry, to delete the entry, to read, write, search, and compare both **normal** and **sensitive** attributes, and to read, search and compare **critical** attributes.

Example 3:

```
aclEntry: group:cn=Authenticated:normal:rwc:sensitive:rwc
```

In this example, users who have authenticated to the directory where a specific **aclEntry** value does not apply, are allowed to read, write, search, and compare, **normal** and **sensitive** attributes in the directory entry.

Example 4:

```
aclEntry: cn=Tim,dc=yourcompany,dc=com:at.cn:deny:w:normal:rwc
```

In this example, **cn=Tim**, **dc=yourcompany**, **dc=com** is granted read, write, search, and compare to **normal** attributes except for the **cn** attribute in which write access is denied. Note that the following ACL entry results in the same access:

```
aclEntry: cn=Tim,dc=yourcompany,dc=com:normal:rwc:at.cn:deny:w
```

The evaluation of the permissions clauses is based on precedence, not order in the ACL entry value.

Example 5:

```
aclEntry: cn=Karen,dc=yourcompany,dc=com:normal:rwc:sensitive:rsc:at.userpassword:w:critical:deny:rwc
```

In this example, **cn=Karen**, **dc=yourcompany**, **dc=com** is granted read, search, and compare to **normal** and **sensitive** attributes, and write to **normal** attributes and the **userpassword** attribute. All access to **critical** attributes (except for write in **userpassword**) is turned off.

Example 6:

```
aclEntry: group:cn=group1,dc=yourcompany,dc=com:normal:rwc
aclEntry: group:cn=group2,dc=yourcompany,dc=com:sensitive:rwc:at.cn:deny:w
```

In this example, a member of **group1** is only granted read, write, search, and compare to **normal** attributes. A member of both **group1** and **group2** is granted read, write, search, and compare to **normal** and **sensitive** attributes, excluding write access to the **cn** attribute. This is an example where a member of both groups is granted access to less information than what is granted to each of the two groups individually.

#### Example 7:

```
aclEntry: access-id:cn=Tim,dc=yourcompany,dc=com:normal:rwc:at.cn:rsc
```

In this example, cn=Tim,dc=yourcompany,dc=com is granted read, write, search, and compare on **normal** attributes and read, search, and compare on the **cn** attribute. Note that cn=Tim,dc=yourcompany,dc=com also has write access to the **cn** attribute by virtue of **cn** having an access class of **normal**.

#### Example 8:

```
aclEntry: access-id:cn=Tim,dc=yourcompany,dc=com:normal:rwc:at.cn:deny:rsc
```

In this example, cn=Tim,dc=yourcompany,dc=com is granted read, write, search, and compare on **normal** attributes and denied read, search, and compare on the **cn** attribute. Note that cn=Tim,dc=yourcompany,dc=com still has write access to the **cn** attribute by virtue of **cn** having an access class of **normal**.

#### Example 9:

```
aclEntry: cn=Ken, o=Your Company:normal:rsc
aclEntry: aclFilter: (&(|(ibm-filterSubject=cn=Ken, o=Your Company)
(ibm-filterIP=129.176.132.*))(ibm-filterTimeOfDay>=09:00)
(ibm-filterTimeOfDay<=17:00)(ibm-filterDayOfWeek>=1)
(ibm-filterDayOfWeek<=5)):union:normal:w
```

In this example, cn=Ken, o=Your Company is granted read, write, search, and compare access on **normal** attributes when authenticated from any IP address on Monday through Friday from 9:00 a.m. to 5:00 p.m.. On any other time or day, cn=Ken, o=Your Company is only granted read, search, and compare access on **normal** attributes.

If another user binds from IP address 129.176.132.28 on Monday through Friday from 9:00 a.m. to 5:00 p.m., they are granted write access on **normal** attributes.

#### Example 10:

```
aclEntry: group:cn=group1, o=Your Company:system:rsc:normal:sw
aclEntry: aclFilter: (&(ibm-filterSubject=cn=group1, o=Your Company)
(ibm-filterIP=129.176.*) (ibm-filterBindMechanism=CRAM-MD5)
(ibm-filterConnectionEncrypted=true)):intersect:system:rsc:normal:s
```

In this example, if cn=Ken, o=Your Company is a member of cn=group1, o=Your Company, binds from IP address 129.176.113.76 using a CRAM-MD5 mechanism, over an encrypted SSL connection. cn=Ken, o=Your Company is granted system:rsc and normal:s permissions. Note the intersect operation restricted permissions by disposing of normal:w permissions.

#### Example 11:

```
aclEntry: access-id:cn=Joe,dc=yourcompany,dc=com,o=IBM:normal:r
aclEntry: group:cn=group1,dc=yourcompany,dc=com:normal:rw
aclEntry: group:cn=group2,dc=yourcompany,dc=com:critical:rw
aclEntry: aclFilter: (&(ibm-filterSubject=cn=group1,dc=yourcompany,dc=com)
(ibm-filterIP=129.176.*)):union:normal:sc
```

In this example, if cn=Joe,dc=yourcompany,dc=com,o=IBM is a member of cn=group1,dc=yourcompany,dc=com and binds from IP address 129.176.53.92, cn=Joe,dc=yourcompany,dc=com,o=IBM is only granted read permission on **normal** attributes, for the following reasons:

- There is a specific access-id value for cn=Joe,dc=yourcompany,dc=com,o=IBM, therefore, only that base access-id ACL is granted, and no group ACLs are granted. cn=Joe,dc=yourcompany,dc=com,o=IBM's effective permission, before any filters are applied, is normal:r.
- The resulting subject that is tested for membership in the filter is cn=Joe,dc=yourcompany,dc=com,o=IBM. It does not match, therefore, the ACL filter does not apply.

A member of `cn=group1,dc=yourcompany,dc=com` that binds from IP address 172.191.214.98 is only granted read and write permissions on **normal** attributes.

A member of both `cn=group1,dc=yourcompany,dc=com` and `cn=group2,dc=yourcompany,dc=com` that binds from IP address 129.176.98.112, is granted read, write, search, and compare access on **normal** attributes (because of the union with the filter), and is granted read and write access on **critical** attributes.

Example 12:

```
aclEntry: access-id:cn=Mary,dc=yourcompany,dc=com,o=IBM:normal:rw
aclEntry: group:cn=group1,dc=yourcompany,dc=com:normal:rwc
aclEntry: aclFilter:(!(ibm-filterSubject=cn=group1,dc=yourcompany,dc=com)
(ibm-filterIP=129.176.92.*)):intersect:normal:rsc:critical:r
```

In this example, if `cn=Mary,dc=yourcompany,dc=com,o=IBM` (who is not a member of `group1,dc=yourcompany,dc=com`) binds from IP 129.176.92.113, `cn=Mary,dc=yourcompany,dc=com,o=IBM` is granted read permission on **normal** attributes. This is because `cn=Mary,dc=yourcompany,dc=com,o=IBM`'s effective permission is determined by the intersect of `normal:rwc` and the ACL filter. Note the intersect operation restricted permissions by disposing of `normal:wsc` and `critical:r` while keeping `normal:r` permissions.

Example 13:

```
aclEntry: group:cn=group1,dc=yourcompany,dc=com:normal:rwc
aclEntry: aclFilter:(ibm-filterIP=129.176.*):replace:normal:r
aclEntry: aclFilter:(!(ibm-filterSubject=cn=group1,dc=yourcompany,dc=com))
:replace:normal:deny:w
```

In this example, a member of `cn=group1,dc=yourcompany,dc=com` that binds from IP address 129.176.29.52 is granted read and write access to **normal** attributes. The base **aclEntry** for `cn=group1,dc=yourcompany,dc=com` is first applied, and is then replaced by the **aclEntry** with **aclFilter** for `ibm-filterIP=129.176.*`.

Example 14:

```
aclEntry: aclFilter:(ibm-filterIP=129.176.29.52):intersect:normal:sc
aclEntry: aclFilter:(ibm-filterIP=129.176.*):replace:normal:r
aclEntry: aclFilter:(ibm-filterSubject=cn=group1, o=Your Company)
:union:critical:r
aclEntry: aclFilter:(ibm-filterIP=129.176.29.*):union:sensitive:r
aclEntry: aclFilter:(ibm-filterSubject=cn=Mary, o=Your Company)
:intersect:normal:r
aclEntry: group:cn=group1, o=Your Company:normal:rw
aclEntry: aclFilter:(ibm-filterSubject=cn=group1, o=Your Company)
:replace:normal:rwc
```

In this example, if `cn=Mary, o=Your Company`, a member of `cn=group1, o=Your Company`, binds from IP address 129.176.29.52, `cn=Mary, o=Your Company`'s effective permission is determined by all of the **aclEntry** values as follows:

1. `cn=Mary, o=Your Company`'s base effective permission is granted read and write permissions on **normal** attributes. This is because `cn=Mary, o=Your Company` is a member of `cn=group1, o=Your Company`.
2. The replace filters that match for `cn=Mary, o=Your Company` are then joined to produce one replace filter with read, write, search, and compare access on **normal** attributes. These permissions now become `cn=Mary, o=Your Company`'s effective permission, replacing Mary base effective permission.
3. The union filters that match for `cn=Mary, o=Your Company` are then joined to produce one union ACL with read permissions on **sensitive** and **critical** attributes. These permissions are joined with `cn=Mary, o=Your Company`'s effective permission that was produced in step 2. This produces `cn=Mary, o=Your Company`'s new effective permission, granting read, write, search, and compare permissions on **normal** attributes, and read permissions on **sensitive** and **critical** attributes.
4. Finally, the intersect filters that match for `cn=Mary, o=Your Company` are joined to produce one intersect ACL with read, search, and compare access on **normal** attributes. These permissions

are intersected with the effective permission produced by step 3, to produce `cn=Mary, o=Your Company`'s final effective permission, giving Mary read, search, and compare access on **normal** attributes.

Example 15:

```
entryOwner: ownerFilter:(&(ibm-filterSubject=cn=Ken, o=Your Company)
(ibm-filterIP=129.176.132.*))
```

In this example, `cn=Ken, o=Your Company` is given owner access only when bound from an IP address within the `129.176.132.*` subnetwork.

Example 16:

```
entryOwner: access-id:cn=Ken, o=Your Company
entryOwner: ownerFilter:(&(ibm-filterSubject=cn=Ken, o=Your Company)
(ibm-filterIP=129.176.132.*)):deny
```

In this example, `cn=Ken, o=Your Company` is granted owner access when bound from an IP address that is not within the `129.176.132.*` subnetwork. However, `cn=Ken, o=Your Company` is denied owner access when bound from an IP address that is within the `129.176.132.*` subnetwork.

## Search

In order to read an attribute from the directory, the user must have read permission for the specific attribute or for the attribute access class that the attribute belongs.

## Filter

In order to use an attribute in a search filter supplied on a search operation, the user must have search permission for the specific attribute or for the attribute access class that the attribute belongs.

## Compare

In order to perform a compare operation on an attribute/value combination, the user must have compare permission for the specific attribute or for the attribute class that the attribute belongs.

## Requested attributes

If the user has the search permission on all attributes contained in the filter, the server returns as much information as possible. All requested attributes that the user has read permission for are returned.

For example, allow the `aclEntry` be

```
group:cn=Anybody:normal:rsc:sensitive:c:critical:c
```

and allow the client to perform an anonymous search

```
ldapsearch -b "c=US" "cn=LastName" title userpassword telephoneNumber
```

where `title` is a normal attribute, `telephoneNumber` is a sensitive attribute, and `userpassword` is a critical attribute. Users performing anonymous searches are given the permission granted to the `cn=Anybody` group. In this example, permission exists to the filter because `cn` is in the `normal` attribute access class, and `cn=Anybody` has `s` (search) permission to the `normal` attribute access class. What is returned however, is only the **title** attribute for any matching entry. The `telephoneNumber` and `userPassword` attributes are not returned because `cn=Anybody` does not have read permissions on the sensitive and critical attribute access classes.

## Querying effective permissions

When filters are specified in **aclEntry** or **entryOwner** attribute values in the directory, it might be difficult to determine the permissions that users or groups have to entries. To ease in the determination

of effective ACLs, the **ldapexop** utility provides the **GetEffectiveACL** extended operation. See [“The ldapexop utility”](#) on page 253 for more information.

This extended operation in the **ldapexop** utility allows the specification of search criteria and bound user's information (such as the bind distinguished name, time of day, the day of the week, and IP address where the user is authenticating from). By specifying the search criteria and bound user's information, an LDAP root administrator is allowed to simulate the effective ACLs for multiple users in the directory.

This extended operation returns the following information for each requested entry:

- the entry DN to which access was requested
- the subject and all of its alternate DN's and group DN's for which access was calculated for
- the source attribute values (**aclEntry**, **aclPropagate**, **aclSource**, **entryOwner**, **ownerPropagate**, and **ownerSource**) in effect for the entry
- the applicable attribute values (**aclEntry** and **entryOwner**) used to form the effective permissions
- the calculated effective access class permissions
- the calculated effective attribute permissions

This example performs the **GetEffectiveACL** extended operation for each entry returned on the subtree search of the `dc=yourcompany,dc=com` subtree. The requested subtree search uses `dc=yourcompany,dc=com` as the baseDN, with a filter of `"objectclass=*"`, a search size limit of 100, a search time limit of 10 seconds, and no alias dereferencing. Based on these returned search entries, the **GetEffectiveACL** extended operation calculates the effective ACLs for user `cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com` when a simple bind is done from IP address `129.176.132.92` at 18:30 on a Saturday over a secure SSL connection.

```
ldapexop -D adminDn -w adminPw -op geteffectiveacl -filter "objectclass=*"
-base "dc=yourcompany,dc=com" -s sub -a never -z 100 -l 10
-dn "cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com" -ip 129.176.132.92
-time 18:30 -day 6 -mech SIMPLE -encrypt
```

```
#ENTRY INFORMATION:
dn: dc=yourcompany,dc=com
#SUBJECT INFORMATION:
#Bind DN:
dn: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com

#Alternate DN's:
dn: cn=alt_01
dn: cn=alt_02

#Group DN's:
dn: cn=group_01
dn: cn=group_02

#SOURCE ATTRIBUTE VALUES:
aclEntry: group:cn=Anybody:normal:rsc:system:rsc
aclPropagate: TRUE
aclSource: dc=yourcompany,dc=com
entryOwner: cn=Admin
ownerPropagate: TRUE
ownerSource:dc=yourcompany,dc=com

#APPLICABLE ATTRIBUTE VALUES:
aclEntry: group:cn=Anybody:normal:rsc:system:rsc

#EFFECTIVE ACCESS-CLASS PERMISSIONS:
normal: grant:rsc
system: grant:rsc

#ENTRY INFORMATION:
dn: ou=users,dc=yourcompany,dc=com

#SUBJECT INFORMATION:
```



```

#Bind DN:
dn: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com

#Alternate DNs:
dn: cn=alt_01
dn: cn=alt_02

#SOURCE ATTRIBUTE VALUES:
aclEntry: group:cn=Anybody:normal:rsc:system:rsc
aclPropagate: TRUE
aclSource: dc=yourcompany,dc=com
entryOwner: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com
ownerPropagate: TRUE
ownerSource: dc=yourcompany,dc=com

#APPLICABLE ATTRIBUTE VALUES:
entryOwner: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com

#EFFECTIVE ACCESS-CLASS PERMISSIONS:
restricted:grant:rwc
system:grant:rwc
critical:grant:rwc
sensitive:grant:rwc
normal:grant:rwc
object:grant:ad

#ENTRY INFORMATION:
dn: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com

#SUBJECT INFORMATION:
#Bind DN:
dn: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com

#SOURCE ATTRIBUTE VALUES:
aclEntry: access-id:cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com:normal:rsc:
sensitive:rsc:critical:rsc
aclEntry: aclFilter:(&(ibm-filterSubject=cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com)(ibm-filterIP=129.176.132.*)(|(ibm-filterTimeOfDay<09:00)(ibm-filterTimeOfDay>17:00))(|(ibm-filterDayOfWeek<1)(ibm-filterDayOfWeek>5))):union:object:ad:normal:w
aclEntry: group:cn=Anybody:normal:rsc
aclPropagate: TRUE
aclSource: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com
entryOwner: cn=Admin
ownerPropagate: TRUE
ownerSource: dc=yourcompany,dc=com

#APPLICABLE ATTRIBUTE VALUES:
aclEntry: access-id:cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com:normal:rsc:
sensitive:rsc:critical:rsc
aclEntry: aclFilter:(&(ibm-filterSubject=cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com)(ibm-filterIP=129.176.132.*)(|(ibm-filterTimeOfDay<09:00)(ibm-filterTimeOfDay>17:00))(|(ibm-filterDayOfWeek<1)(ibm-filterDayOfWeek>5))):union:object:ad:normal:w

#EFFECTIVE ACCESS-CLASS PERMISSIONS:
normal: grant:rwc
sensitive: grant:rsc
critical: grant:rsc
object: grant:ad

#ENTRY INFORMATION:
dn: cn=Corey,ou=users,dc=yourcompany,dc=com

#SUBJECT INFORMATION:
#Bind DN:
dn: cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com

#SOURCE ATTRIBUTE VALUES:
aclEntry: access-id:cn=Corey,ou=users,dc=yourcompany,dc=com:normal:rsc:

```

```
sensitive:rsc:critical:rsc
aclEntry: AclFilter: (&(ibm-filterSubject=cn=Corey,ou=users,
dc=yourcompany,dc=com)(ibm-filterIP=129.176.132.*)(|
(ibm-filterTimeOfDay<09:00)(ibm-filterTimeOfDay>17:00))(|
(ibm-filterDayOfWeek<1)(ibm-filterDayOfWeek>5))) :union:object:ad:normal:w
aclEntry: group:cn=Anybody:normal:rsc
aclEntry: access-id:cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com:normal:
rsc:at.telephoneNumber:deny:rsc:at.cn:deny:rsc
aclPropagate: TRUE
aclSource: cn=Corey,ou=users,dc=yourcompany,dc=com
entryOwner: cn=Admin
ownerPropagate: TRUE
ownerSource: dc=yourcompany,dc=com

#APPLICABLE ATTRIBUTE VALUES:
aclEntry: access-id:cn=Joe Shmoe,ou=users,dc=yourcompany,dc=com:normal:
rsc:at.telephoneNumber:deny:rsc:at.cn:deny:rsc

#EFFECTIVE ACCESS-CLASS PERMISSIONS:
normal: grant:rsc

#EFFECTIVE ATTRIBUTE PERMISSIONS:
at.cn: deny:rsc
at.telephoneNumber: deny:rsc
```

## Propagating ACLs

ACLs can be set on any entry in the hierarchy. ACLs (including ACL filters) can propagate through the directory hierarchy. These ACLs, called propagating ACLs, have the `aclPropagate` attribute set to TRUE. All descendants of this entry inherit the ACL set at that point, unless overridden. In order to specify an ACL different from that of its parent, a new ACL must be explicitly set.

When setting the new ACL, there is again a choice of whether to propagate the ACL. If set to TRUE, the ACL propagates down to all descendants. If set to FALSE, the ACL is not propagated; it instead becomes an override ACL. The ACL is not propagated through the hierarchy, but instead applies only to the one particular entry that it is associated with within the hierarchy. If unspecified, `aclPropagate` is set to TRUE.

An entry without an explicit ACL receives its ACL from the nearest propagating ancestor ACL. If there is no propagating ACL, the entry receives the default ACL. Propagated ACLs do not accumulate as the depth in the tree increases. The scope of a propagated ACL is from the explicitly-set propagating ACL through the tree until another explicitly-set propagating ACL is found.

The same rules apply to propagating the entry owner permissions (including ACL filters for entry owners) based on the **ownerPropagate** attribute.

## Example of propagation

Following is the explicit ACL for entry `ou=deptXYZ, o=IBM, c=US`:

```
aclPropagate: TRUE
aclEntry: group:cn=deptXYZRegs, o=IBM, c=US:normal:rsc:sensitive:rsc
aclEntry: access-id:cn=personA, ou=deptXYZ, o=IBM, c=US:object:ad:normal:rsc:sensitive:rsc:critical:rsc
aclEntry: group:cn=Anybody:normal:rsc
aclSource: ou=deptXYZ, o=IBM, c=US
```

In the absence of an explicit ACL for entry `cn=personA, ou=deptXYZ, o=IBM, c=US`, the following is the implicit, propagated ACL for the entry:

```
aclPropagate: TRUE
aclEntry: group:cn=deptXYZRegs, o=IBM, c=US:normal:rsc:sensitive:rsc
aclEntry: access-id:cn=personA, ou=deptXYZ, o=IBM, c=US:object:ad:normal:rsc:sensitive:rsc:critical:rsc
aclEntry: group:cn=Anybody:normal:rsc
aclSource: ou=deptXYZ, o=IBM, c=US
```

In this example, a propagating ACL is set on `ou=deptXYZ, o=IBM, c=US`. No ACL is set on the child `cn=personA, ou=deptXYZ, o=IBM, c=US`. Therefore, the child inherits its ACL value from the

nearest ancestor with a propagating ACL. This happens to be ou=deptXYZ, o=IBM, c=US, which is reflected in the aclSource attribute value. The aclEntry and aclPropagate values are identical to those values in the explicit propagating ACL set at ou=deptXYZ, o=IBM, c=US.

## Examples of overrides

Following is an explicit ACL for entry o=IBM, c=US:

```
aclPropagate: TRUE
aclEntry: group:cn=IBMRegs, o=IBM, c=US:normal:rsc:sensitive:rsc
aclEntry: group:cn=Anybody:normal:rsc
aclSource: o=IBM, c=US
```

Following is an explicit ACL for entry ou=deptXYZ, o=IBM, c=US:

```
aclPropagate: FALSE
aclEntry: group:cn=deptXYZRegs, o=IBM, c=US:normal:rsc:sensitive:rsc
aclEntry: access-id:cn=personA, ou=deptXYZ, o=IBM, c=US:object:ad:normal:rwc:sensitive:rwc:critical:rsc
aclEntry: group:cn=Anybody:normal:rsc
aclSource: ou=deptXYZ, o=IBM, c=US
```

In the explicit ACLs, aclSource is the same as the entry DN. This attribute is generated and managed by the LDAP server; it cannot be set when modifying ACLs.

Following is an implicit ACL for entry cn=personA, ou=deptXYZ, o=IBM, c=US:

```
aclPropagate: TRUE
aclEntry: group:cn=IBMRegs, o=IBM, c=US:normal:rsc:sensitive:rsc
aclEntry: group:cn=Anybody:normal:rsc
aclSource: o=IBM, c=US
```

In this example, a propagating ACL is set on o=IBM, c=US. An override ACL is set (aclPropagate is FALSE) on the child ou=deptXYZ, o=IBM, c=US. Therefore, the ACL set at ou=deptXYZ, o=IBM, c=US pertains only to that particular entry.

The child cn=personA, ou=deptXYZ, o=IBM, c=US inherits its ACL value from the nearest ancestor with a propagating ACL (which is o=IBM, c=US as reflected in the aclSource). The ACL on ou=deptXYZ, o=IBM, c=US is not used because aclPropagate is FALSE.

## Other examples

In these examples, the root administrator DN or **adminDN** configuration option is cn=admin, c=US.

The following example shows the default ACL:

```
aclPropagate: TRUE
aclEntry: group:cn=Anybody:normal:rsc:system:rsc
aclSource: default
ownerPropagate: TRUE
entryOwner: access-id:cn=admin,c=US
ownerSource: default
```

The following example shows a typical ACL for entry cn=personA, ou=deptXYZ, o=IBM, c=US:

```
aclPropagate: TRUE
aclEntry: group:cn=deptXYZRegs, o=IBM, c=US:normal:rsc:sensitive:rsc
aclEntry: access-id:cn=personA, ou=deptXYZ, o=IBM, c=US:object:ad:normal:rwc:sensitive:rwc:critical:rsc
aclEntry: group:cn=Anybody:normal:rsc:system:rsc
aclSource: ou=deptXYZ, o=IBM, c=US
ownerPropagate: TRUE
entryOwner: access-id:cn=deptXYZMgr, ou=deptXYZ, o=IBM, c=US
ownerSource: ou=deptXYZ, o=IBM, c=US
```

This is an inherited ACL and an inherited owner. Both owner properties and ACL properties are inherited from entry ou=deptXYZ, o=IBM, c=US. In this example, members of group cn=deptXYZRegs, o=IBM, c=US have permission to read, search, and compare attributes in both the normal and sensitive attribute access classes. They do not have permission to add or delete entries under this entry. Nor do they have permission to access any information or change any information about attributes

in the `critical` attribute access class. Unauthenticated, and all other bound users, have permission to read, search, and compare attributes in the `normal` and **system** attribute access classes only. The `personA` has add and delete permission on the entry; read, write, search, and compare permissions on `normal` and `sensitive` attributes; and read, search, and compare permission on `critical` attributes. The `deptXYZMgr` had full access to the entry because it is the owner of the entry. As always, an LDAP root or directory data administrator have unrestricted access to the entry.

## Access control groups

---

Access control groups provide a mechanism for applying the same `aclEntry` or **entryOwner** attribute values to an entry for multiple users without having to create an explicit `aclEntry` or **entryOwner** for each user.

For the LDBM, CDBM, and TDBM backends, the following object classes are evaluated as access control group entries: **accessGroup**, **accessRole**, **groupOfNames**, **groupOfUniqueNames**, **ibm-staticGroup**, **groupOfUrls**, **ibm-dynamicGroup**, and **ibm-nestedGroup**. See Chapter 23, “Static, dynamic, and nested groups,” on page 413 for more information about static, dynamic, and nested groups.

## Associating DNs, access groups, and additional bind and directory entry access information with a bound user

---

After a successful bind request, a bind distinguished name is associated with the bound user. Depending upon the bind method, there can also be a list of alternate DNs associated with the bound user.

- For a simple bind, the bind DN is the DN specified in the bind request. There must be an entry in LDAP with that DN. The entry can be in an LDBM, SDBM, CDBM, or TDBM backend, or in a client operation plug-in extension. There are no alternate DNs.
- For a CRAM-MD5 bind, the bind request must specify a DN or a user name. If a DN is specified, there must be an entry in LDAP with that DN. If a user name is specified, there must be an entry in LDAP that contains the user name as a `uid` attribute value. If both a DN and a user name are specified, there must be an entry in LDAP with that DN and the user name must be a `uid` attribute value in that entry. In all of these cases, the bind DN is the DN of the entry. The entry can be in an LDBM, CDBM, or TDBM backend, or in a client operation plug-in extension. There are no alternate DNs. See Chapter 21, “CRAM-MD5 and DIGEST-MD5 authentication,” on page 407 for more information.
- For a DIGEST-MD5 bind, the bind request must specify a user name and may optionally contain an authorization DN. If only a user name is specified, there must be an entry in LDAP that contains the user name as a `uid` attribute value. If both a user name and an authorization DN are specified, there must be an entry in LDAP with the authorization DN as its DN and the user name must be a `uid` attribute value in that entry. In both cases, the bind DN is the DN of the entry. The entry can be in an LDBM, CDBM, or TDBM backend or in a client operation plug-in extension. There are no alternate DNs. See Chapter 21, “CRAM-MD5 and DIGEST-MD5 authentication,” on page 407 for more information.
- For a Kerberos bind, the bind DN is `ibm-kn=principal@REALM` where `principal@REALM` is the Kerberos identity specified in the bind request. There cannot be an entry in an LDBM, CDBM, or TDBM backend or in a client operation plug-in extension corresponding to this DN. Each LDBM, TDBM, CDBM, and SDBM backend that **krbIdentityMap on** is specified in the LDAP server configuration file is contacted to map the Kerberos identity to alternate DNs in that backend. The client operation plug-in extensions are also contacted if they registered a **SLAPI\_TYPE\_ALT\_NAMES** callback type routine and can contribute alternate DNs. See Chapter 19, “Kerberos authentication,” on page 389 for more information.
- For a certificate (EXTERNAL) bind, the bind DN is usually the subject DN from the certificate specified in the bind request. There cannot be an entry in an LDBM, CDBM, or TDBM backend or in a client operation plug-in extension corresponding to this DN. If there is a RACF user associated with the certificate and **replace** is specified for the **sslMapCertificate** option in the LDAP server configuration file, then an SDBM-style DN based on the RACF user name replaces the subject DN as the bind DN. If **add** is specified for the **sslMapCertificate** option, then the bind DN is not changed and the SDBM-style DN

based on the RACF user name is added as an alternate DN. See [“Support of certificate bind”](#) on page 76 for more information.

After the bind DN and alternate DNs (if any) associated with the bound user are determined, the DNs of the groups the bound user belongs to are added to the bind information. If LDAP password policy is active, groups are determined during authentication time. If LDAP password policy is not active, the groups are determined at the beginning of the next non-bind request. The bind DN and group information are used in access control in LDAP operations from the bound user.

**Note:** Group gathering is not performed if any of the following is true:

1. The user binds as the **adminDN**, **peerServerDN**, or **masterServerDN**.
2. The **authenticateOnly** server control is specified as part of the bind request.

The groups are gathered in the following manner:

- The backend or client operation plug-in extension that contains the bind DN is contacted to contribute DNs of any group entries that contain the bind DN or any of the alternate DNs. If the bind DN is not in a backend or a client operation plug-in extension (for example, after a Kerberos bind), this step is skipped.
- Each LDBM, CDBM, or TDBM backend that has **extendedGroupSearching on** specified in the LDAP server configuration file is also contacted to contribute the DNs of any group entries in the backend that contain the bind DN or any of the alternate DNs. The client operation plug-in extensions are also contacted to contribute group DNs if they registered a **SLAPI\_TYPE\_GROUPS** callback type routine. Note that SDBM does not support extended group searching.

Besides bind DN, alternate DNs, and groups, additional data are added to the bind information and to the directory entry access information to further distinguish the identity of the bound user. This information is used when matching ACL filters to determine access control for LDAP operations from the bound user. Search size and time limits are also gathered using group search limits from groups to which the bound user belongs. The following additional data are added to the bound user's bind information:

- IP address of the bound user's client connection
- Bind mechanism used to bind to the LDAP server
- Whether a secure, encrypted SSL connection was used to bind to the LDAP server
- Largest size limit and time limit specified in group search limits

The following data is added to the bound user's directory entry access information when accessing an entry:

- Time of day the bound user accessed the directory entry
- Day of week the bound user accessed the directory entry

## Deleting a user or a group

Deleting a user or a group does not have any cascade effect on any **aclEntry** and **entryOwner** values that include that user or group. The user or group DN is not removed from the ACLs. If another user or group is later created with the same DN, that user or group is granted the privileges of the former user or group.

## Retrieving ACL information from the server

To retrieve all of the ACL information in a namespace, use the `ldapsearch` utility, as shown in the following example:

```
ldapsearch -h 127.0.0.1 -D "cn=admin, dc=Your Company, dc=com" -w xxxxxx
-b "dc=Your Company, dc=com" "(objectclass=*)" aclEntry aclPropagate aclSource
entryOwner ownerPropagate ownerSource
```

```
dn: dc=Your Company, dc=com
aclPropagate: TRUE
aclEntry: CN=ADMIN:normal:rwsc:sensitive:rwsc:critical:rwsc:object:ad
```

```
aclEntry: CN=ANYBODY:normal:rsc:system:rsc
aclSource: dc=Your Company, dc=com
ownerPropagate: TRUE
entryOwner: CN=ADMIN
ownerSource: default
```

This command performs a subtree search starting at the root of the tree (assuming that the root of the tree is "dc=Your Company, c=com") and returns the six ACL attributes for each entry in the tree. It is necessary to specifically request the six ACL attributes because they are considered as "operational" and, therefore, can only be returned on a search if requested. (See RFC 2251 ([tools.ietf.org/html/rfc2251](http://tools.ietf.org/html/rfc2251)).)

ACL information (**aclEntry**, **aclPropagate**, **aclSource**, **entryOwner**, **ownerPropagate**, and **ownerSource**) is returned for all entries. For those entries that contain ACLs, the **aclSource** and **ownerSource** attributes contain the same DN as the entry DN. For those entries that do not contain ACLs, the **aclSource** and **ownerSource** attributes contain distinguished names of the entries that contain the ACL information (**aclEntry** and **entryOwner**) that are used for access control checking of information in that entry.

**Note:**

1. It is possible for the **aclSource** and **ownerSource** attributes to contain the value *default*. This is not a distinguished name but rather represents that the ACL that applies to the entry is the default ACL.
2. If the tree is larger than the **sizeLimit** configuration option in the LDAP server configuration file or on the search request or in the requester's group search limits, then some entries might not be returned. See "[sizeLimit num-limit](#)" on page 128 for more information about the **sizeLimit** configuration option.

You can also use the same method to get the ACL information for a portion of the namespace by specifying the **-b searchbase** parameter on the **ldapsearch** utility, where *searchbase* is the starting point for the search.

## Creating and managing access controls

To create and update ACLs in LDBM, TDBM, CDBM, GDBM, or the schema entry, use a tool implementing **ldap\_modify** APIs, such as **ldapmodify**. The **ldapmodify** utility allows creation, modification, and deletion of any set of attributes that are associated with an entry in the directory. Because access control information is maintained as a set of additional attributes within an entry, **ldapmodify** is a natural choice for administering access control information in LDBM, TDBM, CDBM, GDBM, or the schema entry.

For more information about the utilities, see [LDAP client utilities](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

## Creating an ACL

In order to create an ACL, the **aclEntry** and **aclPropagate** attributes must be added to the information stored for an entry. The **aclEntry** and **aclPropagate** attributes are added to an entry by either specifying them as part of the entry information when the entry is added to the directory or by modifying the entry after it exists to contain the **aclEntry** and **aclPropagate** information.

It is possible to create an ACL without specifying the **aclPropagate** attribute. In this case, the **aclPropagate** attribute is assumed to have a value of **TRUE** and is added into the directory entry automatically, along with the **aclEntry** information.

Because the **ldapmodify** utility is powerful, all the possible ways of adding the **aclEntry** and **aclPropagate** information cannot be shown here. The examples shown here describe the more common uses of the **ldapmodify** utility to add ACL information.

[Figure 29 on page 449](#) shows how to add a propagating ACL with three **aclEntry** values to an existing entry replacing any current **aclEntry** value.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f newAcl.ldif
```

Where newAcl.ldif contains:

```
dn: cn=tim, o=Your Company
changetype: modify
replace: aclEntry
aclEntry: cn=jeanne, o=Your Company:
normal:rsc:sensitive:rsc:critical:rsc
aclEntry: cn=jeff, cn=tim, o=Your Company:normal:rsc
aclEntry: cn=tim, o=Your Company:
normal:rwsc:sensitive:rwsc:critical:rwsc
-
```

*Figure 29. Example of adding propagating ACL to existing entry in directory*

The ACL added in [Figure 29 on page 449](#) is created as a propagating ACL because the `aclPropagate` attribute is not specified and is assumed to be TRUE. This means that the ACL applies to all entries below `cn=tim, o=Your Company` that do not already have an ACL associated with them. Note that the first and last `aclEntry` values span two lines in the `newAcl.ldif` file. In order to do this, the first character on the continued line must be a space character, as shown in the example.

It is not required that an administrator updates all ACL information, the examples in this section all use a root administrator when updating ACLs. Further, the use of `-h 127.0.0.1` implies that the **ldapmodify** utility is performed from the same system that the LDAP server is running and that the LDAP server is listening on TCP/IP port 389. For more details about the `-h`, `-p`, `-D`, and `-w` command-line options, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#). The ACL attributes can be updated from any LDAP client if the user performing the updates has the correct authorization to update the ACL information.

The ACL attributes are defined to be in a special access class called `restricted`. Therefore, in order to allow someone other than an LDAP administrator to update the ACL attributes, they must either be the entry owner or have the correct authorization to `restricted` attributes. [Figure 30 on page 449](#) shows an example of adding an ACL so that `cn=jeanne, o=Your Company` can update the ACL information:

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f newAcl.ldif
```

Where newAcl.ldif contains:

```
dn: cn=jeanne, o=Your Company
changetype: modify
replace: aclEntry
aclEntry: cn=jeanne, o=Your Company:
normal:rsc:sensitive:rsc:critical:rsc:restricted:rwsc
aclEntry: cn=jeff, cn=tim, o=Your Company:normal:rsc
aclEntry: cn=tim, o=Your Company:
normal:rsc
-
add: aclPropagate
aclPropagate: TRUE
-
```

*Figure 30. Example of adding propagating ACL to existing entry in the directory*

The ACL added in [Figure 30 on page 449](#) allows `cn=jeanne, o=Your Company` to update the ACL information for this entry. In addition, because the ACL is a propagating ACL, this allows `cn=jeanne, o=Your Company` to create new ACL information against any entry that is controlled by this ACL. Care must be taken here, however, because it is possible for `cn=jeanne, o=Your Company` to set up an ACL which then does not allow `cn=jeanne, o=Your Company` update capability on the ACL information. If this occurs, a user with sufficient authority (an administrator, for example) must be used in order to reset/change the ACL information.

[Figure 31 on page 450](#) shows an example of adding a non-propagating ACL. A non-propagating ACL applies only to the entry that it is attached and not to the subtree of information that might be stored below the entry in the directory.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f newAcl.ldif
```

Where newAcl.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
replace: aclEntry
aclEntry: cn=tim, o=Your Company:normal:rwsc:sensitive:rwsc:
critical:rwsc:restricted:rwsc
aclEntry: cn=jeff, cn=tim, o=Your Company:normal:rwsc:
sensitive:rwsc:critical:rwsc
aclEntry: cn=jeanne, o=Your Company:normal:rsc
-
replace: aclPropagate
aclPropagate: FALSE
-
```

*Figure 31. Example of setting up a non-propagating ACL*

Setting up a non-propagating ACL is like setting up a propagating ACL. The difference is that the `aclPropagate` attribute value is set to `FALSE`.

## Modifying an ACL

Once an ACL exists for an entry in the directory, it might need to be updated. To do this, the **ldapmodify** utility is used. The examples in this section use the **ldapmodify** utility, however, any LDAP client application issuing LDAP modify operations to the LDAP server might be used. Therefore, modifications to ACL information do not need to be performed from the same system that the LDAP server is running.

Modifications to ACLs can be of a number of different types. The most common modifications are to:

- Add an additional `aclEntry` value to the ACL to allow another person or group access to the entry
- Change an ACL from propagating to non-propagating (not permitted for the GDBM change log suffix, `cn=changelog`)
- Remove an `aclEntry` value that exists in the ACL to disallow another person or group access to the entry that they had before.

[Figure 32 on page 450](#), [Figure 33 on page 451](#), and [Figure 34 on page 451](#) show examples of these modifications, in that order.

[“Access determination” on page 435](#) shows how an additional `aclEntry` value is added to existing ACL information.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modAcl.ldif
```

Where modAcl.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
add: aclEntry
aclEntry: cn=dylan, cn=tim, o=Your Company:
normal:rwsc:sensitive:rwsc:critical:rwsc:restricted:rwsc
-
```

*Figure 32. Example of adding an aclEntry attribute value*

In [Figure 32 on page 450](#), `cn=dylan, cn=tim, o=Your Company` is granted permissions against the `cn=jeff, cn=tim, o=Your Company` entry in the directory. The existing ACL information remains in the entry; the `aclEntry` attribute value for `cn=dylan, cn=tim, o=Your Company` is added to this information.

[Figure 33 on page 451](#) shows how to modify an existing ACL to be non-propagating instead of propagating.



```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modAcl.ldif
```

Where modAcl.ldif contains:

```
dn: cn=tim, o=Your Company
changetype: modify
replace: aclPropagate
aclPropagate: FALSE
-
```

*Figure 33. Example of modifying aclPropagate attribute*

In [Figure 33 on page 451](#), the existing ACL against cn=tim, o=Your Company is modified to be a non-propagating ACL instead of a propagating ACL. This means that the ACL no longer applies to entries below cn=tim, o=Your Company in the directory tree. Instead, the first propagating ACL that is found in an entry above cn=tim, o=Your Company is applied to the entries under cn=tim, o=Your Company. If no propagating ACL is found in the entries above cn=tim, o=Your Company, then the default ACL is used.

[Figure 34 on page 451](#) shows how to remove an aclEntry value from existing ACL information:

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modAcl.ldif
```

Where modAcl.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
delete: aclEntry
aclEntry: cn=dylan, cn=tim, o=Your Company
-
```

*Figure 34. Example of removing a single aclEntry attribute value*

In [Figure 34 on page 451](#), the aclEntry attribute value for cn=dylan, cn=tim, o=Your Company is removed from the ACL information for entry cn=jeff, cn=tim, o=Your Company. Only the distinguished name part of the **aclEntry** value must be specified when deleting the value.

## Deleting an ACL

In order to delete an ACL that is attached to an entry in the directory, the aclEntry and aclPropagate attributes must be deleted from the entry. To do this, use the ldapmodify command to delete the entire attribute (all values) from the entry.

**Note:** This is not allowed for the change log suffix entry, cn=changelog, when GDBM is Db2-based.

[Figure 35 on page 451](#) shows an example of deleting an ACL from an entry.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f delAcl.ldif
```

Where delAcl.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
delete: aclEntry
-
delete: aclPropagate
-
```

*Figure 35. Example of deleting an ACL from an entry*

In [Figure 35 on page 451](#), the existing ACL against cn=jeff, cn=tim, o=Your Company is removed. This means that the ACL no longer applies to the entry. Instead, the first propagating ACL that is found in an entry above cn=jeff, cn=tim, o=Your Company is applied to cn=jeff, cn=tim, o=Your Company. If no propagating ACL is found in the entries above cn=jeff, cn=tim, o=Your Company, then the default ACL is used.

## Creating an owner for an entry

In addition to the access control list control of directory entries, each entry can have assigned to it an entry owner or set of entry owners. As an entry owner, full access is allowed to the entry. Entry owners are granted add and delete permission, including read, write, search, and compare for all attribute classes. Entry owners can add and modify ACL information about the entries that they are specified as the owner.

Entry owners are listed in the `entryOwner` attribute. Like `aclEntry` information, `entryOwner` information can be propagating or non-propagating based on the setting of the `ownerPropagate` attribute. Like the `aclSource` attribute for `aclEntry` information, the `ownerSource` attribute lists the distinguished name of the entry that contains the `entryOwner` attribute that applies to the entry. The **ownerSource** attribute is set by the server and cannot be directly set when modifying the ACLs.

In order to create an entry owner, the `entryOwner` and `ownerPropagate` attributes must be added to the information stored for an entry. The `entryOwner` and `ownerPropagate` attributes are added to an entry by either specifying them as part of the entry information when the entry is added to the directory or by modifying the entry after it exists to contain the `entryOwner` and `ownerPropagate` information.

You can create an entry owner without specifying the `ownerPropagate` attribute. In this case, the `ownerPropagate` attribute is assumed to have a value of `TRUE` and is added into the directory entry automatically.

Because the `ldapmodify` utility is very powerful, all the possible ways of adding the `entryOwner` and `ownerPropagate` information cannot be shown here. The examples shown here describe the more common uses of the `ldapmodify` utility to add entry owner information.

Figure 36 on page 452 shows how to add a propagating entry owner with two `entryOwner` values to an existing entry.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f newOwn.ldif
```

Where `newOwn.ldif` contains:

```
dn: cn=tim, o=Your Company
changetype: modify
replace: entryOwner
entryOwner: cn=joe, o=Your Company
entryOwner: cn=carol, o=Your Company
-
```

Figure 36. Example of adding a propagating set of entry owners to existing entry in the directory

The entry owners added in Figure 36 on page 452 are created as a propagating set of entry owners **since** the `ownerPropagate` attribute is not specified and, therefore, assumed to be `TRUE`. This means that the entry owners apply to all entries below `cn=tim, o=Your Company` that do not already have an entry owner associated with them.

It is not required that an LDAP administrator update all entry owner information, the examples in this section all use the administrator as the entry owner updating ACLs. Further, the use of `-h 127.0.0.1` implies that the `ldapmodify` utility is performed from the same system that the LDAP server is running and that the LDAP server is listening on TCP/IP port 389. For more information about the `-h`, `-p`, `-D`, and `-w` command-line options, see *ldapmodify* and *ldapadd* utilities in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*. The entry owner attributes can be updated from any LDAP client if the user performing the update has the correct authorization to update the entry owner information.

The entry owner attributes such as the ACL attributes are defined to be in a special access class called `restricted`. Therefore, in order to allow someone other than an LDAP administrator to update the entry owner attributes, they must either be the entry owner or have the correct authorization to `restricted` attributes. See Figure 30 on page 449 for an example of allowing users other than an LDAP administrator the ability to update entry owner information.

Figure 37 on page 453 shows an example of adding a non-propagating entry owner. A non-propagating entry owner applies only to the entry that it is attached and not to the subtree of information that might be stored below the entry in the directory.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f newOwn.ldif
```

Where newOwn.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
replace: entryOwner
entryOwner: cn=george, o=Your Company
entryOwner: cn=jane, o=Your Company
-
replace: ownerPropagate
ownerPropagate: FALSE
-
```

*Figure 37. Example of setting up a non-propagating entry owner*

Setting up a non-propagating entry owner is similar to setting up a propagating entry owner. The difference is that the ownerPropagate attribute value is set to FALSE.

## Modifying an owner for an entry

Once an entry owner exists for an entry in the directory, it might need to be updated. To do this, the **ldapmodify** utility is used. The examples in this section use the **ldapmodify** utility, however, any LDAP client application issuing LDAP modify operations to the LDAP server might be used. Therefore, modifications to entry owner information do not need to be performed from the same system that the LDAP server is running.

Modifications to entry owners can be of a number of different types. The most common modifications are to:

- Add an additional entryOwner value to the set of entry owners to allow another person or group to control the entry
- Change an entry owner from propagating to non-propagating (not permitted for the GDBM change log suffix, cn=changelog)
- Remove an entryOwner value that exists in the entry owner set to disallow another person or group access to control the entry that they had control over before.

[Figure 38 on page 453](#), [Figure 39 on page 454](#), and [Figure 40 on page 454](#) show examples of these modifications, in that order.

[Figure 38 on page 453](#) shows how an additional entryOwner value is added to existing entry owner information.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modOwn.ldif
```

Where modOwn.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
add: entryOwner
entryOwner: cn=george, o=Your Company
-
```

*Figure 38. Example of adding an entryOwner attribute value*

In [Figure 38 on page 453](#), cn=george, o=Your Company is granted entry owner control of the cn=jeff, cn=tim, o=Your Company entry in the directory. The existing entry owner information remains in the entry; the entryOwner attribute value for cn=george, o=Your Company is added to this information.

[Figure 39 on page 454](#) shows how to modify an existing entry owner to be non-propagating instead of propagating.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modOwn.ldif
```

Where modOwn.ldif contains:

```
dn: cn=tim, o=Your Company
changetype: modify
replace: ownerPropagate
ownerPropagate: FALSE
-
```

*Figure 39. Example of modifying the ownerPropagate attribute*

In [Figure 39 on page 454](#), the existing entry owner set for cn=tim, o=Your Company is modified to be non-propagating instead of propagating. This means that the entry owner no longer applies to entries below cn=tim, o=Your Company in the directory tree. Instead, the first propagating entry owner set that is found in an entry above cn=tim, o=Your Company is applied to the entries below cn=tim, o=Your Company. If no propagating entry owner is found in the entries above cn=tim, o=Your Company, then the default entry owner is used.

[Figure 40 on page 454](#) shows how to remove an entryOwner value from existing entry owner information:

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modOwn.ldif
```

Where modOwn.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
delete: entryOwner
entryOwner: cn=george, cn=tim, o=Your Company
-
```

*Figure 40. Example of removing a single entryOwner Attribute value*

In [Figure 40 on page 454](#), the entryOwner attribute value for cn=george, cn=tim, o=Your Company is removed from the entry owner information for entry cn=jeff, cn=tim, o=Your Company. Only the distinguished name part of the **entryOwner** value must be specified when deleting the value.

## Deleting an owner for an entry

In order to delete an entry owner set that is attached to an entry in the directory, the entryOwner and ownerPropagate attributes must be deleted from the entry. To do this, use the **ldapmodify** utility to delete the entire attribute (all values) from the entry.

**Note:** This is not allowed for the change log suffix entry, cn=changelog, when GDBM is Db2-based.

[Figure 41 on page 454](#) shows an example of deleting an entry owner set from an entry.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f delOwn.ldif
```

Where delOwn.ldif contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
delete: entryOwner
-
delete: ownerPropagate
-
```

*Figure 41. Example of deleting an entry owner set from an entry*

In [Figure 41 on page 454](#), the existing entry owner set against cn=jeff, cn=tim, o=Your Company is removed. This means that the entry owner information no longer applies to the entry. Instead, the first propagating entry owner set that is found in an entry above cn=jeff, cn=tim, o=Your Company is

applied to `cn=jeff, cn=tim, o=Your Company`. If no propagating entry owner set is found in the entries before `cn=jeff, cn=tim, o=Your Company`, then the default entry owner is used.

## Creating a group for use in ACLs and entry owner settings

Sets of users can be grouped together in the directory by defining them as members of a group in the directory. A directory group, which is used for access control checking, is just another entry in the directory. A static, dynamic, or nested group entry can be used as a group on the **aclEntry** or **entryOwner** attributes. See [Chapter 23, “Static, dynamic, and nested groups,” on page 413](#) for more information about creating, modifying, and deleting static, dynamic, and nested group entries.

When defining access controls or entry owner sets, names of group entries can be used in the same place as user entry names. When access control decisions are performed, a user’s group memberships can be used in determining whether a user can perform the action requested.

Groups are added to access control information in just the same way as user entries are added to access control information. [Figure 42 on page 455](#) shows how to be added to the `aclEntry` information in an existing access control specification for an entry. [Figure 43 on page 455](#) shows how a group can be added as an `entryOwner` to an existing entry owner specification for an entry.

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modAcl.ldif
```

Where `modAcl.ldif` contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
add: aclEntry
aclEntry: group:cn=group1, o=Your Company:normal:rwc:sensitive:rsc
-
```

*Figure 42. Example of adding a group to access control information*

```
$ ldapmodify -h 127.0.0.1 -D "cn=admin" -w xxxx -f modOwn.ldif
```

Where `modOwn.ldif` contains:

```
dn: cn=jeff, cn=tim, o=Your Company
changetype: modify
add: entryOwner
entryOwner: cn=group1, o=Your Company
-
```

*Figure 43. Example of adding a group to entry owner information*



---

## Chapter 25. Basic replication

Once the z/OS LDAP server is installed and configured, users can access the directory, add entries, delete entries, or perform search operations to retrieve particular sets of information.

Replication is a process which keeps multiple directories in sync. Through replication, a change made to one directory is propagated to one or more additional directories. In effect, a change to one directory shows up on multiple different directories.

There are several benefits realized through replication. The single greatest benefit is providing a means of faster searches. Instead of having all search requests directed at a single server, the search requests can be spread among several different servers. This improves the response time for the request completion.

Additionally, the replica provides a backup to the replicating server. Even if the replicating server crashes, or is unreadable, the replica can still fulfill search requests, and provide access to the data.

There are two types of basic replication:

- In peer to peer replication, each LDAP peer server is a read/write server. Updates processed on one peer server are replicated to all the other peer servers. Peer servers are read/write to all users.

**Note:** The basic replication support for peer to peer replication is provided for failover support purposes. With basic peer to peer replication, there is no support for resolving simultaneous updates on multiple peer servers, which can cause a failure of replication. As a result, updates should be targeted to one peer server at a time.

- In basic read-only replication, a single read/write LDAP server (the master) replicates the updates it processes to a set of read-only replica servers.

### Master

All changes to the directory are made to the master server. The master server is then responsible for propagating the changes to all other directories. It is important to note that while there can be multiple directories representing the same information, only one of those directories can be the master.

### Read-only replica

Each of the additional servers which contain a directory replica. These replica directories are identical to the master directory. These servers are read-only to all users and only accept updates from their master server.

If you need more advanced replication choices, see [Chapter 26, “Advanced replication,” on page 473](#).

**Note:** Basic and advanced replication are not allowed in the same server. If both are enabled in the server, the server fails to start.

A basic replication network can contain both peer replica servers and read-only replica servers. In this case, each peer server must act as a master to each read-only replica (in addition to being a peer to all the peer servers), so that updates that occur on any peer server are replicated to all the other peer and read-only replicas in the network.

Basic replication is supported when the servers involved are running in single-server or in multi-server mode. See [“Configuring the operational mode” on page 145](#) for more information about server operating modes.

In z/OS LDAP, basic replication is supported in the LDBM and TDBM backends but is not supported in the SDBM or GDBM backends or the schema entry.

---

## Basic replication in a sysplex

A set of LDAP servers sharing a backend directory in a sysplex can act as a master, read-only, or peer server to LDAP servers that are not in the sysplex. Each LDAP server in the sysplex must have the same replication options (**masterServer**, **masterServerDN**, **masterServerPW**, **peerServerDN**, and

**peerServerPW**) in the backend section of the LDAP server configuration file. Do not make an LDAP server in the sysplex a replica of another LDAP server in the sysplex for a backend directory that they are sharing.

When the set of LDAP servers in the sysplex is set up to be a master or a peer replica server and changes occur to the shared LDAP directory, the LDAP server acting as the owner of the sysplex group replicates the directory changes to the LDAP server replicas that are not in the sysplex. These replicas are identified by replica entries in the shared directory.

When the set of LDAP servers in the sysplex is set up to be a read-only or a peer replica server and directory changes occur to a master or peer LDAP server that is not in the sysplex, that LDAP server replicates the changes to an LDAP server in the sysplex, identified in a replica entry in the directory. The changes are made to the backend directory in the sysplex and are seen by all the LDAP servers sharing the directory in the sysplex.

## ibm-entryuuid replication

---

Basic replication of the **ibm-entryuuid** attribute is performed to any LDAP server that has 1.3.18.0.2.32.3 (the OID for the entry UUID capability) as a value in the **ibm-enabledCapabilities** attribute in the root DSE. z/OS LDAP servers have this capability. If the root DSE of a replica server does not contain the required capability, then the **ibm-entryuuid** attribute are not replicated to that server, however, the entry and other attributes are not replicated.

## Complex modify DN replication

---

Basic replication of Modify DN new superior operations are performed to any LDAP server that has 1.3.18.0.2.32.33 (the OID for the subtree move capability) or 1.3.18.0.2.32.34 (the OID for the subtree rename capability) as a value in the **ibm-enabledCapabilities** attribute in the root DSE. z/OS LDAP servers have this capability. If a replica server is not at a supported level, Modify DN new superior operations fail until the replica is removed from the replica collection.

## Basic replication and ldif2ds

---

**ldif2ds** does not replicate changes when adding entries to the replicating server. If you are using **ldif2ds** to add entries to a replicating server you must also use it to add entries to each replica, with no intervening updates on the replicating server before the replica is loaded.

In order to maintain directory integrity, a load utility (**ldif2ds**) should be used on a read-only or peer replica only when initially populating the replica directory. If a load utility is used to add entries to a replica server after initial population, these changes are not reflected in the master directory. The replica directory might give erroneous information.

## Data encryption or hashing and basic replication

---

When encryption or hashing is configured in an LDBM or TDBM backend participating in a basic replication environment, attribute values subject to encryption or hashing based on the **pwEncryption** or **secretEncryption** configuration options are either replicated in the clear or hashed.

When configuring basic replication in an LDBM backend, the following should be considered when setting the **pwEncryption** and **secretEncryption** configuration options:

1. If the **pwEncryption** or **secretEncryption** configuration option is set to AES or DES, the attribute values eligible for encryption on add or modify requests are sent from the master or peer server to the replica or other peer server in the clear. Because these sensitive attribute values are replicated in the clear, a secure or SSL connection should be configured between the servers to protect this data while it is in transit. See [“Replicating server” on page 459](#) and [“Configuring the replica” on page 464](#) for more information.
2. If the **pwEncryption** configuration option is set to **crypt** and replication is configured between a z/OS LDAP server and a non-z/OS LDAP server, specify **pwCryptCompat off** in the LDBM backend section of the configuration file. This setting indicates that the LDAP server should use the UTF-8 version of the



crypt algorithm to hash eligible values. When eligible attribute values (for example, **userPassword**) for hashing in **crypt** are replicated between z/OS and non-z/OS LDAP servers, the password is the same on both platforms and, therefore, is usable.

If basic replication is configured between two z/OS LDAP servers, verify the **pwCryptCompat** configuration option has the same settings on both servers. This ensures that the values are usable on both servers.

3. If the **pwEncryption** configuration option is set to any other one-way hashing method (for example, SHA, MD5, SSHA, SHA-2 or Salted SHA-2), the master or peer server replicates the tagged hashed value to the replica or other peer server. Therefore, the replica or the other peer server must support the same hashing method to ensure that the values are usable on the other server.

When basic replication is configured in a TDBM backend, the attribute values eligible for encryption or hashing on add or modify requests are always sent from the master or peer server to the replica or other peer server in the clear. A secure or SSL connection should be configured between the servers to protect this data while it is transit. See [“Replicating server” on page 459](#) and [“Configuring the replica” on page 464](#) for more information.

## Replicating server

In order for the basic replication process to occur, the following must happen:

- The replicating server (master or peer) must be aware of each replica that is to receive the change information.
- Each read-only and peer server must be aware of the replicating servers for the directory that it serves. See [“LDAP update operations on read-only replicas” on page 465](#) for more information.

The replicating server becomes aware of the existence of the replica servers when entries with an object class of `replicaObject` are added to the directory. Each of these entries represents a particular replica server. The attribute/value pairs within the replica entry provide the information the replicating server needs in order to locate the replica server and send any updates to that server.

## Replica entries

The `replicaObject` object class is provided in the initial schema. Like other LDAP object class definitions, the `replicaObject` has mandatory and optional attributes. Each of the `replicaObject` attributes are single-valued. The following is a description of the mandatory attributes of **replicaObject**. Values in a replica entry are recognized at server startup and when a replica entry is added or modified. The internal number of how many replication operations have been set aside (the set aside count) for a replica is not reset when the replica entry is modified. To reset the count, either the server must be restarted or the replica entry must be removed and added. See [“Basic replication error log” on page 469](#) for more information about the set aside count.

Table 64. Replica entry schema definition (mandatory attributes)

| Attribute   | Description and example                                                                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| replicaHost | This can be an IPv4 address, IPv6 address, or a hostname of the system where the replica server is running.<br><br>Example:<br><br><pre>replicahost: 9.130.77.27 replicahost: [5f1b:df00:ce3e:e200:20:800:2078:e3e3] replicahost: myMachine.ibm.com</pre> |

| Table 64. Replica entry schema definition (mandatory attributes) (continued) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute                                                                    | Description and example                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| replicaBindDN                                                                | <p>Specifies the LDAP distinguished name that the replicating server uses to bind to the replica when sending directory updates. The <code>replicaBindDN</code> and the <code>masterServerDN</code> or <code>peerServerDN</code> in the replica's LDAP server configuration file must have the same value.</p> <p>Example:</p> <pre>replicaBindDN: cn=Master</pre>                                                                                                                                                                                                                                         |
| replicaCredentials                                                           | <p>Contains the authentication information needed for the replicating server to authenticate to the replica using the <code>replicaBindDN</code>. The <b>replicaCredentials</b> attribute value is encrypted if the <b>secretEncryption</b> option is specified in the LDAP server configuration file. This improves directory security because the bind password is no longer stored in the directory in clear text. The <b>secretEncryption</b> option is also used to encrypt pending updates while they are stored in the replication queue.</p> <p>Example:</p> <pre>replicaCredentials: secret</pre> |
| cn                                                                           | <p>Forms the RDN of the LDAP distinguished name of the <b>replicaObject</b> entry.</p> <p>Example:</p> <pre>cn: myReplica</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

In the examples in [Table 64 on page 459](#), when the replicating server receives and successfully finishes an update request, the update is also sent to `myMachine.ibm.com` on port 389 (the default port). The replicating server performs a bind operation using the DN of `cn=Master` and password of `secret`. See [“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#) for more information specifying the replication server DN and password.

In addition, there are several attributes available that provide additional flexibility in configuring a replica server. For instance, an added description might better describe the replica server, and it might listen on a different port than the default port of 389. Examples of adding a description and changing the port to 400 are shown in [Table 65 on page 460](#), which describes the optional attributes of **replicaObject**.

| Table 65. Replica entry schema definition (optional attributes) |                                                                                                                                                                                                                        |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute                                                       | Description and example                                                                                                                                                                                                |
| replicaPort                                                     | <p>Describes the port number on which the replica is listening for incoming requests. By default, the server listens on port 389.</p> <p>Example:</p> <pre>replicaPort: 400</pre>                                      |
| replicaUpdateTimeInterval                                       | <p>Delays the propagation of additional updates for specified number of seconds. The default is for the replicating server to send updates immediately.</p> <p>Example:</p> <pre>replicaUpdateTimeInterval: 3600</pre> |

| Table 65. Replica entry schema definition (optional attributes) (continued) |                                                                                                                                                                                        |
|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute                                                                   | Description and example                                                                                                                                                                |
| replicaUseSSL                                                               | <p>Determines whether the replicating server should replicate over SSL/TLS. The default is to replicate without using SSL/TLS.</p> <p>Example:</p> <pre>replicaUseSSL: TRUE</pre>      |
| description                                                                 | <p>Provides an additional text field for extra information pertaining to the replica entry.</p> <p>Example:</p> <pre>description: Replica machine in the fourth floor lab</pre>        |
| seeAlso                                                                     | <p>Identifies another directory server entry that might contain information related to this entry.</p> <p>Example:</p> <pre>seeAlso: cn=Alternate Code, ou=Software, o=IBM, c=US</pre> |
| replicaBindMethod                                                           | <p>Identifies the bind method to be used. If it is specified, it must be set to simple.</p> <p>Example:</p> <pre>replicaBindMethod: simple</pre>                                       |

Basic replication only supports simple authentication. SASL EXTERNAL, GSSAPI, DIGEST-MD5, and CRAM-MD5 bind mechanisms are not supported as valid basic replication bind mechanisms.

There are several additional attributes that affect error handling during basic replication. See “Basic replication error log” on page 469 for more information about error handling. These attributes are not in any object class, therefore, the **extensibleObject** object class must be included in the replica entry when adding these attributes to the entry. Table 66 on page 461 describes these attributes.

| Table 66. Additional optional replication attributes |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute                                            | Description and example                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ibm-slapdLog                                         | <p>Specifies the file name of the basic replication error log. This must be a UNIX System Services file (not a data set). The file name can be fully qualified or can be relative to the current working directory of the LDAP server. The current working directory is set when the LDAP server is started to the HOME environment variable if specified, or else to /etc/ldap. This format is not preferred. The value must be unique among all the replica entries in this LDAP server. If this attribute is not present in the replica entry or it has no value, error logging and setting aside does not occur.</p> <p>Example:</p> <pre>ibm-slapdLog: /home/replog/replica1.errlog</pre> |

Table 66. Additional optional replication attributes (continued)

| Attribute              | Description and example                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ibm-slapdReplMaxErrors | <p>Specifies the maximum number of basic replication errors that set aside in the basic replication error log before replication is allowed to stall. If this attribute is not present in the replica entry or if the value is 0, then no operations are set aside. In this case, errors are still logged and basic replication stalls when the first error occurs. This attribute is not used if a replication log file name has not been specified with the <b>ibm-slapdLog</b> attribute.</p> <p>Example:</p> <pre>ibm-slapdReplMaxErrors: 5</pre> |

## Adding replica entries in TDBM or LDBM

In TDBM or LDBM, replica entries can be placed anywhere within the directory tree, although it is suggested that a replica entry be a leaf entry. Placing replica entries in the directory tree then requires that any parent entries of the replica entry be added to the directory before adding the replica entry. These entries must be added to both the replicating server and replica server before addition of the replica entry. This is needed on the replica server because these entries are being added at the replicating server without replication being active. If a replica entry is not placed as a leaf node in the directory tree, the only entries allowed below the replica entry are other replica entries. The LDAP server allows non-replica entries to be placed below replica entries, however, these entries are not replicated to the replica servers.

The replica entry defines a replica for the backend containing the entry. Any changes made to the directory tree managed by that backend is replicated to each replica defined for that backend. The replica entry does not define replicas for other backends in the LDAP server, therefore, if changes to all LDBM and TDBM directory trees managed by the LDAP server are to be replicated, then each backend must contain the appropriate replica entries to define replication for that backend.

The following is an example of a replica entry definition using LDIF format.

```
dn: cn=myReplica,o=Your Company
objectclass: replicaObject
objectclass: extensibleObject
cn: myReplica
replicaHost: myMachine.ibm.com
replicaBindDn: cn=Master
replicaCredentials: secret
replicaPort: 400
replicaUseSSL: FALSE
description: Replica machine in the fourth floor lab
ibm-slapdLog: rol.errlog
ibm-slapdReplMaxErrors: 5
```

## Searching a replica entry

Most of the attributes in a replica entry are operational attributes. When searching a replica entry, the operational attributes are not included in the output unless they or the special + attributes are specified in the attributes to be returned. The following command searches for all replica entries in a suffix and returns the complete replica entries in LDIF format:

```
ldapsearch -h ldaphost -p ldapport -D binddn -w passwd -L -b "suffix"
"objectclass=replicaObject" "*" replicaHost replicaBindDN replicaCredentials
replicaPort replicaUpdateTimeInterval replicaUseSSL replicaBindMethod
```

## Displaying basic replication status

The LDAP server **DISPLAY REPLICAS** operator modify command can be used to display information about the status of replication to each replica server. See [“Displaying performance information and server settings” on page 179](#) for a description of the **DISPLAY REPLICAS** output.

## Basic replication maintenance mode

---

Maintenance mode is the LDAP server setup mode for basic replication. This mode restricts access to the backends in an LDAP server to allow replica backends to be primed for basic replication. Access to the backends is as follows:

- Read-only replica backend: The **masterServerDN** for the replica and an LDAP root administrator (for example, the **adminDN**) have unrestricted access.
- Peer replica backend: The **peerServerDN** for the replica and an LDAP root administrator (for example, the **adminDN**) have unrestricted access.
- Non-replica backends (including the schema entry): An LDAP root administrator (for example, the **adminDN**) have unrestricted access. The **masterServerDN** and **peerServerDN** have no access outside of the backends that specify them.

Other users can bind to the LDAP server, but cannot access any entries within the server.

ACL checking is performed during search operations from **masterServerDN** and **peerServerDN** but not during update and compare operations. Generally, ACLs do not apply when bound as an LDAP administrator, however, ACL filters may or may not reduce administrative rights. In addition, an LDAP root administrator has the capability in maintenance mode to modify attributes that are read-only and are typically only set by the LDAP server, such as **ibm-entryuuid**. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information about administrative group and roles.

**Note:** The LDAP server schema entry is not part of any replica backend. When the LDAP server is not in maintenance mode, **masterServerDN** and **peerServerDN** can only update the LDAP server schema if the schema entry ACL permits them to. An LDAP root or schema administrator can always update the schema.

Pending replication entries are replicated to the other replica servers, but updates performed when in maintenance mode are not replicated.

Specify the **-m** option on the server startup command to start the LDAP server in maintenance mode.

The LDAP server **MAINTMODE** operator modify command can be used to change from maintenance mode to normal mode while the LDAP server is running. It can also be used to put a running server into maintenance mode. The following command can be sent to the LDAP server from the SDSF or the operator's console. If the command is entered from SDSF, it must be preceded by a slash (/).

```
f dssrv,maintmode state
```

where *state* can be **on** to turn maintenance mode on or **off** to turn maintenance mode off (and turn on normal mode).

## Replica server

---

Initialization, or population, of a replica directory requires several steps.

With basic replication, changes to the LDAP server schema entry on the replicating server are not replicated. A separate update of the LDAP server schema on the replica is required each time the schema is updated on the replicating server.

Replica servers must support the LDAP Version 3 protocol.

## Populating a replica

1. Either start the replica and replicating servers in maintenance mode or use the LDAP server MAINTMODE ON operator modify command on each of these LDAP servers to put these servers into maintenance mode.
2. Unload the replicating server's directory contents if there are any entries. For TDBM or LDBM, use the ds2ldif utility (see [“The ds2ldif utility”](#) on page 225).
3. Ensure that the schema for the replica server is the same as the schema for the replicating server.  
  
If the replica and replicating server are both z/OS servers, the schema can be unloaded from the replicating server using ds2ldif and reloaded into the replica by an LDAP root or schema administrator with the **ldapmodify** utility.
4. Using a root administrator user, run the **ldapadd** utility to add a single replica entry into the backend directory on the replicating server to identify the new replica being populated.  
  
Note that in order to load the replica entry, it is also necessary to load any parent entries in the directory hierarchy in hierarchy order.
5. If the replicating server does not contain any entries, go to step [“8”](#) on page 464.
6. Transport the LDIF file created in step [“2”](#) on page 464 to the replica server's location.
7. Load the LDIF file from [“6”](#) on page 464 into the replica server. This can be done using an LDAP root administrator to run the **ldapadd** utility to load the LDIF file. Alternatively for TDBM, the replica server can be stopped and then the **ldif2ds** utility used to load the LDIF file.
8. Configure the replica (see next section).
9. Stop the replica server (if it is running) and then restart it in maintenance mode. If it contains a replica entry that defines this server as a replica of itself, use an LDAP root administrator to run the **ldapdelete** utility to remove that entry.
10. Use the LDAP server MAINTMODE OFF command on the replica server and the replicating server to change these servers to normal mode.

## Configuring the replica

The key to a successful replica configuration rests in ensuring that the values in the replica entry on the replicating server (master or peer) accurately represent the relevant values on the replica server (read-only or peer). Configuring the replica involves specifying appropriate LDAP server configuration file option values to identify:

- the IP address and port on which the replica server should listen for communication from the replicating server
- the type of connection expected by the replicating server when it communicates to the replica server, either over a non-secure or secure connection
- the DN and password used by the replicating server

The following table identifies the relationship between the attributes in the replica entry on a z/OS LDAP replicating server and the configuration options on an IBM replica server. The values specified for these options must be equivalent. An example of what is meant by equivalent is when the replica server is listening on all of its network interfaces, then **replicaHost** must specify either the corresponding hostname or an IP address of one of the addresses.

| Attribute in replica entry on replicating server | Corresponding replica server configuration option or command line parameter                                                  |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>replicaHost</b>                               | The hostname or IP address specified on the <b>listen</b> configuration option or the -l LDAP server command line parameter. |

| Attribute in replica entry on replicating server                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Corresponding replica server configuration option or command line parameter                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| replicaPort                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | The port number that is specified on the <b>listen</b> configuration option or the <b>-l</b> LDAP server command line parameter.                                                                                              |
| replicaUseSSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Use of <b>ldaps://</b> in the prefix of the <b>listen</b> configuration option or the <b>-l</b> LDAP server command line parameter corresponds to TRUE for <b>replicaUseSSL</b> ; use of <b>ldap://</b> corresponds to FALSE. |
| replicaBindDn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | masterServerDN or peerServerDN configuration option                                                                                                                                                                           |
| replicaCredentials                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | masterServerPW or peerServerPW configuration option                                                                                                                                                                           |
| <b>Note:</b> <ol style="list-style-type: none"> <li>1. If the replica server is a non-IBM server, you should consult their documentation for parameters that correspond to the parameters mentioned in the table.</li> <li>2. The value of the <b>listen</b> configuration option or <b>-l</b> command line parameter is an LDAP URL. For additional information about the <b>listen</b> option, see <a href="#">Chapter 8, “Customizing the LDAP server configuration,”</a> on page 83.</li> <li>3. It is preferred that the masterServerDN or peerServerDN be a DN that is dedicated specifically to replication. It should not be used for any other operations.</li> <li>4. The masterServer, masterServerDN, masterServerPW, peerServerDN, and peerServerPW options must follow the <b>database</b> option for that backend in the LDAP server configuration file.</li> <li>5. Usage of the masterServerPW or peerServerPW configuration option is strongly discouraged in production environments. See <a href="#">“Establishing the root administrator DN and basic replication replica server DN and passwords”</a> on page 150 for alternatives.</li> <li>6. The <b>replicaCredentials</b> attribute is encrypted if the <b>secretEncryption</b> configuration option is specified. This improves directory security because the bind password is no longer stored in the directory in clear text. The <b>secretEncryption</b> configuration option is also used to encrypt pending updates while they are stored in the replication queue.</li> </ol> |                                                                                                                                                                                                                               |

## LDAP update operations on read-only replicas

Update operations, such as add, delete, modify, and rename, should not be performed against a read-only replica server. Changes must be made to the master server, which then propagates the change to the read-only replica.

If update operations are sent to a read-only replica server, the replica server returns a referral containing the value in the **masterServer** option in the backend section of the LDAP server configuration file on the replica. The client then redirects the request to the master server. After the master server makes the update, it propagates the change to the read-only replica server, binding as the **replicaBindDn** value in the replica entry corresponding to that replica server (the **replicaBindDn** value must match the **masterServerDN** value in the replica server configuration file).

See [“SSL/TLS and basic replication”](#) on page 468 for information about securing a directory.

## Changing a read-only replica to a master

When using read-only basic replication, you might want to change one of the read-only replicas to be the master. Perhaps the machine where the replica server is installed is being upgraded, and you want this replica to now be the master LDAP server.

The following procedure should be followed to change a read-only replica to a master:



1. If the read-only replica is out of sync with the master server, use the procedure that is described in [“Recovering from basic replication out-of-sync conditions”](#) on page 471.
2. Use the LDAP server MAINTMODE ON operator modify command on the master server and on the replica server to put them into maintenance mode.
3. Using a root administrator DN, unload all the replica entries (entries that describe replica servers) from the master server. Use a search command, like the one shown in [“Searching a replica entry”](#) on page 462, to create LDIF output containing the replica entries for each suffix in the backend. In the LDIF output, remove the replica entry for the read-only replica that is going to become the master. If the master is going to become a read-only replica, add a replica entry for the master in LDIF format to the output.
4. Using a root administrator DN, run **ldapdelete** to remove the replica entries from the master.
5. Using a root administrator DN, run **ldapadd** to add the unloaded replica entries to the replica server.
6. Stop the master and replica server.
7. Remove the masterServer, masterServerDN, and masterServerPW options from the LDAP server configuration file on the replica.
8. If the original master is being eliminated, the database on the master is no longer needed.
  - For TDBM, drop the TDBM Db2 database. The SPUFI script that is used to create the Db2 database also contains the commands to drop the database.
  - For LDBM, remove all the files in the LDBM database directory. See the description of the databaseDirectory option in Chapter 8, [“Customizing the LDAP server configuration,”](#) on page 83 for more information about the location of these files.
9. If the original master is going to become a replica, add the masterServer, masterServerDN, and masterServerPW options to the LDAP server configuration file on the original master. The masterServer value must point to the new master. See [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 for more information about alternatives to specifying the masterServerPW option.
10. Start the new master server and new replica server (if the original master became a replica server).

## Basic peer to peer replication

---

z/OS LDAP peer replication server provides failover support. With this support, if an LDAP server fails, the peer replication server can take over the role of the failing LDAP server and it is then available to process LDAP operations.

A z/OS LDAP peer replication server is a read/write replication server that can send and receive replicated entries. An LDAP server can have both peer replication servers and read-only replication servers defined as **replicaObject** entries.

**Note:** Basic peer to peer replication uses the same replica entry attribute values as shown in [“Replica server”](#) on page 463. The instructions in [“Adding replica entries in TDBM or LDBM”](#) on page 462 also apply to peer replicas.

A basic peer to peer replication environment can be as simple as two LDAP servers that are peers to each other, or as complicated as several LDAP servers, where some servers are read-only replication servers and the other servers are peer replication servers. Every peer replication server must replicate to all other peer and read-only replication servers.

## Server configuration

The **peerServerDN** and **peerServerPW** options in the backend section of the LDAP server configuration file are used to configure a basic peer to peer replication environment. See Chapter 8, [“Customizing the LDAP server configuration,”](#) on page 83 for more information.

**Note:** Usage of the **peerServerPW** configuration option is strongly discouraged in production environments. See [“Establishing the root administrator DN and basic replication replica server DN and passwords”](#) on page 150 for alternatives.



## Basic replication conflict resolution

Minimal conflict resolution is done in a basic peer environment. For example, if peer replication server A receives an update to entry E at the same moment that peer B receives a delete of the same entry, basic replication can stall on server A. Ensure that your peer servers are not receiving conflicting operations. To avoid basic replication stalling, set up a replication error log to set aside replication errors. See [“Basic replication error log” on page 469](#) for more information.

When a conflict occurs, a notification is sent to the console and server log.

## Adding a peer replica to an existing server

---

For failover support, it might be necessary for you to add a peer replica for a backend to an existing server or set of servers. These servers can be stand-alone or already actively replicating.

In order to add a peer replica for a backend to a z/OS LDAP server, you should do the following:

1. Start the new peer replica in maintenance mode. The peer replica must have a **peerServerDN** and **peerServerPW** defined in the backend section of the LDAP server configuration file.
2. Stop the existing servers. For each existing server that is to become a peer server, update its configuration file to include the **peerServerDN** and **peerServerPW** configuration options. Restart the existing read/write servers in maintenance mode. See [“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#) for alternatives to specifying the password in the configuration file.
3. Prime the new peer replica with all the data from an existing server. You can accomplish this by dumping the existing server's directory (for TDBM or LDBM, use **ds2ldif**) and adding the data to the new peer replica (for TDBM or LDBM use **ldapadd** or, for TDBM, use **ldif2ds**). See [“Populating a replica” on page 464](#) for more information.
4. Add a replica entry to the existing servers to point to the new peer replica.
5. Add a replica entry in the new peer replica pointing to the existing server that was used to prime this server.

**Note:** If the existing server was a replicating server with replica entries defined to it, those replica entries might have been copied to the new peer replica in step 3. Ensure that this server does not contain a replica entry that defines this server as a replica of itself.

6. Turn off maintenance mode on all servers.

The existing servers and the new peer replica are now peer read/write replicas.

## Upgrading a read-only replica to be a peer replica of the master server

---

It might be necessary for you to upgrade a read-only replica for a backend to a peer of its master, for example, if a peer of the master failed or further failover support is needed.

You should do the following to change a read-only replica for a backend to a peer replica:

1. Stop both the master server and the read-only replica.
2. Remove the **masterServer**, **masterServerDN**, and **masterServerPW** options from the backend section of the LDAP server configuration file of the read-only replica.
3. Add a **peerServerDN** and **peerServerPW** option to the backend section of each server's configuration file. The two servers are now peer servers. See [“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#) for alternatives to specifying the password in the configuration file.
4. Start both servers in maintenance mode.
5. In this backend, on the read-only replica being upgraded:

- Add a replica entry for each replica that this backend on the master server points to (except the entry that previously pointed to the read-only replica that is being upgraded). This can include both peer servers and read-only replicas. Note that the master server might have other peer servers.
  - Add a replica entry to point to the master.
6. On the master, ensure that the credentials are valid in the replica entry for the read-only replica being upgraded.
  7. Turn off maintenance mode on both servers.

The read-only replica and the master server are now peer read/write replicas for the backend.

## Downgrading a peer server to read-only replica

---

It might be necessary for you to downgrade a backend from a peer server to a read-only replica, for example, if a previously upgraded read-only replica is no longer required to be a peer server, or to prevent out-of-sync conditions between peer servers.

You should do the following to downgrade a peer server to a read-only replica:

1. Stop the peer server.
2. Remove the **peerServerDN** and **peerServerPW** options from the backend section of the LDAP server configuration file.
3. Add **masterServer**, **masterServerDN**, and **masterServerPW** options to the backend section of the peer replica configuration file. If there are more than one peers, add a **masterServer** option for each one. See [“Establishing the root administrator DN and basic replication replica server DN and passwords” on page 150](#) for alternatives to specifying the password in the configuration file.
4. Ensure that the credentials are valid in the replica entry for the newly downgraded peer server on all the replicating servers.
5. Start the server.

The peer server is now a read-only replica for the backend.

## SSL/TLS and basic replication

---

SSL/TLS can be used to communicate between a replicating server (master or peer) and a replica server (read-only or peer).

### Replica server with SSL/TLS enablement (basic)

Set the replica server up for SSL/TLS like a typical SSL/TLS server. It needs its own public-private key pair and certificate, and the LDAP server configuration file needs the standard SSL options (**listen**, **sslKeyRingFile**, and **sslKeyRingFilePW**). See [“Setting up for SSL/TLS” on page 68](#) for more information.

### Replicating the server with SSL/TLS enablement (basic)

The replicating server acts as an SSL/TLS client to the replica server.

To set up the replicating server, you must follow these steps:

1. Run the **gskkyman** utility or the RACDCERT command, this time as if you were the client. The key database file, RACF key ring, or PKCS #11 token must contain the replicating server's key pair and certificate. Receive the replica's self-signed certificate and mark it as trusted.

For more information about the **gskkyman** utility, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*.

For more information about the RACDCERT command, see [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference*.

2. In the LDAP server configuration file on the replicating server:

- Set **sslKeyRingFile** to the replica key database file, RACF key ring, or PKCS #11 token that was just created.
  - If a replica key database file is used, set **sslKeyRingFilePW** to the password for the key database file, or set **sslKeyRingPWStashFile** to the file name where the password is stashed.
3. Ensure that any environment variables that control SSL/TLS settings are properly defined in the LDAP server environment variable file. The environment variables for enabling TLS protocol levels are shared with the server definitions. For example, `GSK_PROTOCOL_TLSV1_3=ON` enables this protocol level for both inbound client connections to the replicating server and for outbound connections from the replicating server to the replica. However, since the replicating server acts as an SSL/TLS client to the replica, the environment variable usage for controlling cipher suites is as described for the client API.

To enable the TLS V1.3 protocol, you need to set environment variables for signature algorithm pair specification.

- When the LDAP server is a replicating server in replication topology, the environment variable `GSK_CLIENT_TLS_KEY_SHARES` for the key share option should be set.
- When the LDAP server is a replica server in replication topology, the environment variable `GSK_SERVER_TLS_KEY_SHARES` for the key share option should be set.
- When the LDAP server is master-peer replication topology, the environment variables `GSK_SERVER_TLS_KEY_SHARES` and `GSK_CLIENT_TLS_KEY_SHARES` should be both set.

For more information about the environment variables, see [Environment variables in z/OS Cryptographic Services System SSL Programming](#).

The SSL cipher format that you should use on the outbound connections to the replicas is controlled by the `LDAP_SSL_CIPHER_FORMAT` environment variable and then either the `GSK_V3_CIPHER_SPECS` or `GSK_V3_CIPHER_SPECS_EXPANDED` environment variable, depending on which format is chosen. The SSL cipher suites on the inbound client connections are controlled by the configured setting of `sslCipherSpecs` and can potentially share the setting that is specified on `GSK_V3_CIPHER_SPECS_EXPANDED`. Where settings are shared for both inbound client connections and outbound connections to replicas, the cipher list must include the necessary cipher suites for both sets of connections.

4. In the replica entry for this replica, take the following actions:
- Set the `replicaPort` attribute to the replica's secure port number.
  - Set the `replicaUseSSL` attribute to `TRUE`.

For more information, see [“Setting up for SSL/TLS” on page 68](#).

Because the replicating server acts as an SSL/TLS client to the replica server, the replicating server binds with the replica server. The bind method that is used is `simple bind`. The SASL external bind method is not supported for basic replication.

## Basic replication error log

---

A replication error log holds information about each error that occurs during basic replication. To avoid stalling basic replication, the failed replication operation is taken off the replication queue so that replication can continue with the next operation. Depending on the error, the LDIF of the failed operation is set aside (added) to the error log.

There is one error log for each replica of a backend. The file name of the error log for a replica is specified by the **ibm-slappedLog** attribute in the replica entry for that replica within the backend. The file name must be unique across the LDAP server. If the attribute does not exist in the replica entry or the attribute has no value, no errors are logged or replication operations set aside during this backend's replication to that replica. In this case, basic replication to that replica stalls every time a failure occurs. The **ibm-slappedReplMaxErrors** attribute in the replica entry is set to control how many failed replication operations can be set aside each time the LDAP server is started before basic replication stalls for that replica.

In a sysplex environment, consider having the basic replication error log file shared by the LDAP servers which are sharing the replicating backend. Only the LDAP server that is the owner of the backend in the sysplex performs replication and writes to the replication error log if an error occurs. However, if that LDAP server stops, another LDAP server in the sysplex becomes owner and handles basic replication. If the error log file is shared, then the new owner can add error information to the same error log rather than beginning a new error log. This centralizes error information and eliminates the need to look for error logs on each server that might have become the backend owner.

The replication error log is used to correct basic replication in two ways:

- Use the error information to determine why replication failed.
- Use the **ldapmodify** utility to run the error log on the replica server, after resolving the basic replication problems. This performs the modifications that were set aside in the error log, therefore, bringing the backend in the replica to the same level as in the replicating server. You must bind as either the **masterserverDN** or **peerserverDN**, depending on the type of replica.

The following is an example of an error log entry:

```
#(051219 13:25:23.146587): modify operation failed for cn=IBMUSER01, o=ibm,c=us to
dceimgtd.pdl.pok.ibm.com:390, rc=32
R004071 Entry cn=IBMUSER01, o=ibm,c=us does not exist
(tdbm_process_request:933)
setting change aside.

dn: cn=IBMUSER01, o=ibm,c=us
changetype: modify
modify: uid
uid: IBMUSER1
-
modify: userpassword
userpassword:: Ym9i
```

The basic replication error log consists of three messages, each using one or more lines:

1. Message one indicates when the error occurred, the entry, and replica server.
2. Message two is the error message returned by the replica server.
3. Message three indicates what is being done. If the operation is set aside, this message is followed by the LDIF of the operation.

All non-LDIF information is prefixed with the comment character # so that the error log can be run through **ldapmodify** to synchronize the two servers.

Following is an example in which a replication error condition is logged but no set-aside of the modification is needed:

```
#(051219 14:13:12.366227): delete operation failed for cn=IBMUSER01,
o=ibm,c=us to dceimgtd.pdl.pok.ibm.com:390, rc=32
R004071 Entry cn=IBMUSER01, o=ibm,c=us does not exist
(tdbm_process_request:933)
Entry is already deleted, ignoring request.
```

There is no LDIF. Notice the third message indicates that request is being ignored.

## Troubleshooting basic replication

If the replica server does not seem to be receiving updates from the replicating server (master or peer), there are several possible reasons. Check the following conditions for a possible quick fix:

- Check for messages from the replicating server.
- Verify that a replica entry for the replica server exists in the backend to be replicated in the replicating server, and was specified correctly to match with the replica server. If **cn=localhost** is used as the suffix for all replica entries for a backend, perform an **ldapsearch** with a base of **cn=localhost** and a filter of **objectClass=\***. Otherwise, perform an **ldapsearch** where the search base is the suffix defined in the backend section of the LDAP server configuration file and the filter is

objectClass=replicaObject. If more than one suffix is configured for TDBM or LDBM, the search must be repeated using each suffix in the search base.

For more information about **ldapsearch**, see [ldapsearch utility](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

- Verify that the **replicaHost** value in the replica entry for that replica specifies the machine on which the replica is running.
- Check that the values listed in the replica entry for that replica match those of the replica server configuration. Specifically, the **replicaPort**, **replicaBindDN**, and **replicaCredentials** should be verified.
- Check that the **replicaUpdateTimeInterval** specified in the replica entry for that replica has been set correctly.
- Verify that the replica server is running by performing an **ldapsearch** against the replica.
- Check that the default referral specified in the LDAP server configuration file in the replica server points to the replicating server.
- If the replica entry **replicaUseSSL** attribute is set to TRUE, verify the **replicaPort** attribute is set to the SSL port configured on the replica server. Verify the **sslKeyRingFile**, and **sslKeyRingFilePW** or **sslKeyRingPWStashFile** values in the LDAP server configuration file on the replica server and on the replicating server are correct.
- When adding many entries, ensure that the region size for the replicating server is sufficient for replicating the entries to the replica. Entries on the replicating server are kept in memory during replication. If the region size is not sufficient, an out of memory condition can occur in the LDAP server. If possible, set the region size on the replicating server to 0M (or unlimited). If that cannot be done, set the region size to 14M (needed to run the LDAP server itself) plus twenty times the size of the largest LDIF file that is to be added to the replicating server.

The **ibm-slapdLog** and **ibm-slapdReplMaxErrors** attributes in a replica entry can be used to configure a replication error log for this replica. If basic replication fails, the error log holds all errors that occurred during replication and the LDIF for the set aside replication operations.

## Recovering from basic replication out-of-sync conditions

If a replica becomes out-of-sync with its replicating server for any reason, and normal replication processing is not correcting the situation, it might be necessary to reload the replica.

The following procedure should be followed to reload a replica:

1. Use the LDAP server MAINTMODE ON operator modify command on the replicating sever and on each of the replica servers to put them into maintenance mode.
2. Using an root administrator DN, unload all the replica entries (entries that describe replica servers) from the master server. Use a search command like the one shown in [“Searching a replica entry”](#) on [page 462](#) to create LDIF output containing the replica entries for each suffix in the backend.
3. Using an root administrator DN, run **ldapdelete** to remove the replica entries from the master. This resets the replication information in the replicating server.
4. For TDBM, run the following SPUFI on the replicating server to be sure that the server successfully completed the removal of the data in the DIR\_REPLICA, DIR\_REPENTRY and DIR\_LONGREPENTRY tables:

```
select count(*) from dbuserid.dir_replica
```

where you substitute your database owner for *dbuserid*. The record count returned should be zero.

5. Stop all the replica servers.
6. Clear out the directory on each replica server.
  - For TDBM, drop and re-create the TDBM Db2 database. See [“Creating the Db2 database and table spaces for TDBM or GDBM”](#) on [page 55](#) for an example of the SPUFI commands needed to do this.

- For LDBM, remove all the files in the LDBM database directory. See the description of the `databaseDirectory` option in Chapter 8, [“Customizing the LDAP server configuration,”](#) on page 83 for more information about the location of these files.
7. Run an unload utility on the replicating server. Use **ds2ldif** twice, once to unload the schema entry and a second time to unload the TDBM or LDBM directory entries.
  8. Start the replica servers in maintenance mode.
  9. Using an administrator DN, run **ldapmodify** to load the schema unloaded from the replicating server onto each replica.
  10. On each replica, load the directory data retrieved above from the replicating server. For LDBM, you must use **ldapadd**. For TDBM, you can use **ldapadd** or use the **ldif2ds** load utility. The **ldapadd** utility must be run using an root administrator. If you use **ldif2ds**, you must stop the replica server before loading entries. In this case, restart the replica in maintenance mode after loading it.
  11. Using an administrator DN, run **ldapadd** to add the replica entries unloaded in step “4” on page 464 back into the replicating server.
  12. Use the LDAP server MAINTMODE OFF operator modify command to take the replicating server and each replica out of maintenance mode.

---

## Chapter 26. Advanced replication

Replication keeps data in multiple directory servers synchronized. Advanced replication includes the following function:

- Allows specific subtrees within the Directory Information Tree (DIT) to be chosen for participation in advanced replication topologies (in contrast to requiring the entire backend to participate or not participate)
- Allows the subtrees participating in an advanced replication environment to have different roles (for example, supplier or consumer)
- Additional replication topology choices can be combined to serve many different directory information architectures and data redundancy requirements
- External error log management using extended operations
- Operational attributes to determine the current state of the advanced replication environment
- External queue management using extended operations
- Password policy updates
- Schema replication

---

### Advanced replication terminology

#### **Cascading replication**

A replication topology with multiple tiers of servers. A peer-master server replicates to a small set of read-only servers that replicate to other servers. Such a topology offloads replication work from the master servers.

#### **Consumer server**

A server that receives changes from replication from another (supplier) server.

#### **Credentials entry**

An entry that identifies the method and required information that the supplier uses in binding to the consumer. For simple binds, it is the distinguished name (DN) and password. This entry is specified in the replication agreement.

#### **Forwarding server**

A read-only server that replicates all changes sent to it. This contrasts to a peer-master server in that a peer-master server does not replicate changes sent to it from another peer-master server; it only replicates changes that are originally made on the peer-master server.

#### **Gateway server**

A server that forwards all replication traffic from the local replication site where it exists to other gateway servers in the replicating network. This server also receives replication traffic from other gateway servers within the replication network, that it forwards to all servers on its local replication site. Gateway servers must be masters (writable).

#### **Master server**

A server that is writable (can be updated) for a given subtree.

#### **Nested subtree**

A subtree within another subtree of the directory.

#### **Peer server**

The term used for a master server when there are multiple masters for a given subtree. A peer server does not replicate changes sent to it from another peer server; it only replicates changes that are originally made on it.

**Replica group**

The first entry created under a replication context has objectclass **ibm-replicaGroup** and represents a collection of servers participating in replication. It provides a convenient location to set ACLs to protect the replication topology information.

**Replica subentry**

Below a replica group entry, one or more entries with objectclass **ibm-replicaSubentry** can be created; one for each server participating in replication as a supplier. The replica subentry identifies the role the server plays in replication: master or read-only. A read-only server might, in turn, have replication agreements to support cascading replication.

**Replicated subtree**

A portion of the Directory Information Tree (DIT) that is replicated from one server to another. Under this design, a given subtree can be replicated to some servers and not to others. A subtree can be writable on a given server, while other subtrees might be read-only.

**Replicating network**

A network that contains connected replication sites.

**Replication agreement**

Information contained in the directory that defines the "connection" or "replication path" between two servers. One server is called the supplier (the one that sends the changes) and the other is the consumer (the one that receives the changes). The agreement contains all the information needed for making a connection from the supplier to the consumer and scheduling replication.

**Replication context**

Identifies a portion of the Directory Information Tree (DIT) that is allowed to be replicated from one server to another. The **ibm-replicationContext** auxiliary object class might be added to an entry to mark it as the root of a replicated area. The configuration information related to replication is maintained in a set of entries created below the base of a replication context.

**Replication filter**

An entry containing the list of attributes that must be replicated or excluded from replication corresponding to a particular type of entry. It can exist anywhere in the Directory Information Tree (DIT) but is always associated with an agreement.

**Replication site**

A gateway server and any master, peer, or replica servers configured to replicate together.

**Replication topology**

The set of entries in a directory that control the type of information that is replicated between LDAP servers and how it is replicated. These objects include:

- Replica groups
- Replica subentries
- Replication agreements
- Replication contexts
- Replication credentials entries
- Replication schedule entries

All LDAP servers in the replicating network must have the same replication topology.

**Replication schedule**

Replication can be scheduled to occur at particular times, with changes on the supplier accumulated and sent in a batch. The replication agreement contains the distinguished name (DN) for the entry that supplies the schedule.

**Supplier server**

A server that sends changes to another (consumer) server.



## Replication topology

When advanced replication is configured, specific entries in the directory are identified as the roots of replication subtrees or replication contexts by adding the auxiliary objectclass **ibm-replicationContext** to them. Each of these replication contexts are replicated independently. The subtree continues down through the Directory Information Tree (DIT) until reaching the leaf entries or other replicated subtrees or contexts. Entries are added below the root of the replicated subtree to contain the replication configuration information. There are one or more replica group entries created directly under each replication context. For each replica group entry, there is a corresponding replica subentry that identifies the role the server plays in the replication environment. Associated with each replica subentry are replication agreements that identify the servers that are supplied (replicated to) by each server and defining the credentials and schedule information.

By using advanced replication, a change made to one server is propagated to one or more additional servers. In effect, a change to one server can show up on multiple different LDAP servers. z/OS IBM Tivoli Directory Server supports either basic or advanced replication but not both at the same time. Advanced replication includes:

- replication of subtrees of the Directory Information Tree to specific servers
- a multitier topology, referred to as cascading replication
- assignment of server role (supplier or consumer) by subtree
- multiple master servers, referred to as peer to peer replication
- gateway servers that replicate across networks

The advantage of replicating by subtrees is that a replica does not need to replicate the entire directory. It can be a replica of a part, or subtree, of the directory.

The advanced replication model changes the concept of master and replica servers. These terms no longer apply to servers, but rather to the roles that a server has regarding a particular replicated subtree. A server can act as a master for some subtrees and as a replica for others. The term, master, is used for a server that accepts client updates for a replicated subtree. The term, replica, is used for a server that only accepts updates from other servers designated as a supplier for the replicated subtree.

The types of directory roles as defined by function are: master-replica, peer-peer, forwarding (cascading), gateway

| Table 67. Server roles |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Option                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Master-replica         | A replica is an additional server that contains a copy of the directory information that is replicated from the master server. The replicated data can be the entire DIT or just a portion of the DIT that is replicated to the replica. The replica server provides a read-only backup of the replicated subtree.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Master-peer            | <p>The master-peer server contains the master directory information from where updates are propagated to the replicas. All changes are made and occur on the master server, and the master is responsible for propagating these changes to the replicas.</p> <p>There can be several servers acting as masters for directory information, with each master responsible for updating other master servers and replica servers. This is referred to as peer replication. Peer replication can improve performance and reliability. Performance is improved by providing a local server to handle updates in a widely distributed network. Reliability is improved by providing a backup master server ready to take over immediately if the primary master fails.</p> <p><b>Note:</b></p> <ol style="list-style-type: none"><li>1. Master servers replicate all client updates, but do not replicate updates received from other masters.</li><li>2. Updates among peer servers can be immediate or scheduled.</li></ol> |

| Table 67. Server roles (continued) |                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Option                             | Description                                                                                                                                                                                                                                                                                                                                                                            |
| Forwarding (Cascading)             | A forwarding or cascading server is a replica server that replicates all changes sent to it. This contrasts to a master-peer server in that a master-peer server only replicates changes that are made by clients connected to that server. A cascading server can relieve the replication workload from the master servers in a network that contains many widely dispersed replicas. |
| Gateway                            | Gateway replication uses gateway servers to collect and distribute replication information effectively across a replicating network. The primary benefit of gateway replication is the reduction of network traffic.                                                                                                                                                                   |

You can request updates on a replica server, but, the update is forwarded to the master server by returning a referral to the client. If the update is successful, the master server then sends the update to the replicas. Until the master has completed replication of the update, the change is not reflected on the replica server where it was originally requested. If replication fails, it is repeated even if the master is restarted. Changes are replicated in the order that they are made on the master. See [“Recovering from advanced replication errors”](#) on page 529 for more information.

If you are no longer using a replica, you must remove the replication agreement entry from the supplier. Leaving the entry causes the server to queue up all updates and uses unnecessary directory space. Also, the supplier continues trying to contact the missing consumer to try sending the data again. When a replication agreement is deleted, replication is halted immediately. That is, any updates in the replication queue are lost.

## Advanced replication overview

This section presents a high-level description of the various advanced replication topologies.

### Master-replica replication

The basic relationship in advanced replication is that of a master server and its replica server. The master server can contain a directory or a subtree of a directory. The master is writable, and means it can receive updates from clients for a given subtree. The replica server contains a copy of the directory or a copy of part of the directory of the master server. The replica is read only; it cannot be directly updated by clients. Instead it refers client requests to the master server, that performs the updates and then replicates them to the replica server.

A master server can have several replicas. Each replica can contain a copy of the masters entire directory, or a subtree of the directory. In the following example, Replica 2 contains a copy of the complete directory of the Master Server, Replica 1, and Replica 3 each contain a copy of a subtree in the Master Server directory.

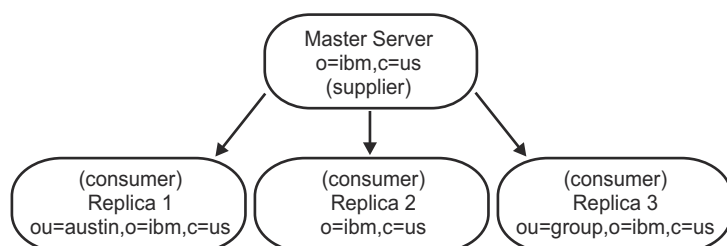


Figure 44. Master-replica replication

The relationship between two servers can also be described in terms of roles, either supplier or consumer. In the previous example, the Master Server is a supplier to each of the replicas. Each replica in turn is a consumer of the Master Server.

## Forwarding (cascading) replication

Forwarding (cascading) replication is a topology that has multiple tiers of servers. A master server replicates to a set of read-only (forwarding) servers that in turn replicate to other servers. Such a topology offloads replication work from the master server. In the example of this type of topology, the master server is a supplier to the two forwarding servers. The forwarding servers serve two roles. They are consumers of the master server and suppliers to the replica servers associated with them. The replica servers are consumers of their respective forwarding servers. For example:

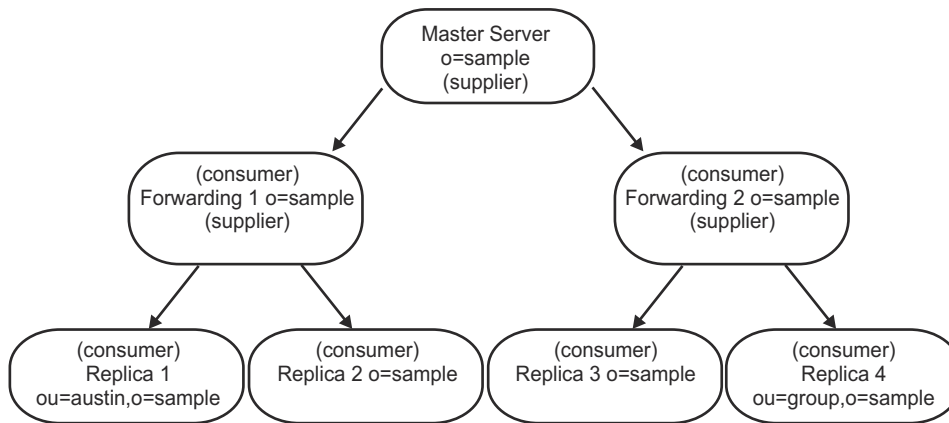


Figure 45. Cascading replication

## Peer-to-peer replication

There can be several servers acting as masters for directory information, with each master responsible for updating other master servers and replica servers. This is referred to as peer replication. Peer replication can improve performance, availability, and reliability. Performance is improved by providing a local server to handle updates in a widely distributed network. Availability and reliability are improved by providing a backup master server ready to take over immediately if the primary master fails. Peer master servers replicate all client updates to the replicas and to the other peer masters, but do not replicate updates received from other master servers.

**Note:** Conflict resolution for add and modify operations in peer-to-peer replication is based on timestamps of entries. See [“Replication conflict resolution”](#) on page 479 for more information.

Figure 46 on page 477 is an example of peer-to-peer replication:

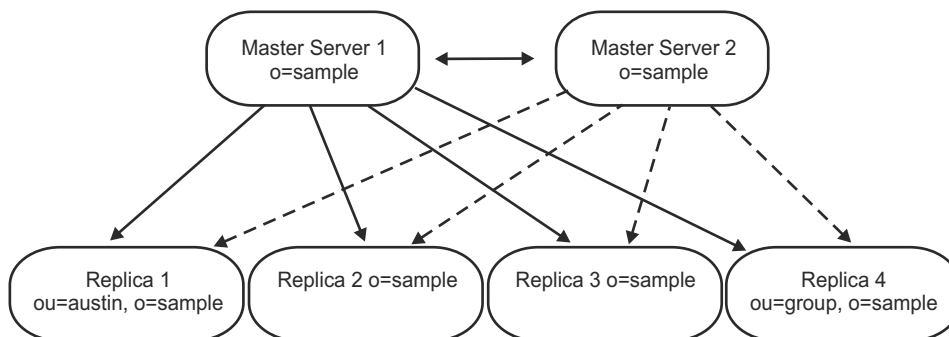


Figure 46. Peer-to-peer replication

## Gateway replication

Gateway replication is a more complex adaptation of peer-to-peer replication that extends replication capabilities across networks. The most notable difference is that a gateway server does replicate changes received from other peer servers through the gateway.

A gateway server must be a master server, that is, writable. It acts as a peer server within its own replication site. That is, it can receive and replicate client updates and receive updates from the other peer-master servers within the replication site. It does not replicate the updates received from the other peer-masters to any servers within its own site.

Within the gateway network, the gateway server acts as a two-way forwarding server. In one instance, the peers in its replication site act as the suppliers to the gateway server and the other gateway servers are its consumers. In the other instance, the situation is reversed. The other gateway servers act as suppliers to the gateway server and the other servers within its own replication site are the consumers.

Gateway replication uses gateway servers to collect and distribute replication information effectively across a replicating network. The primary benefit of gateway replication is the reduction of network traffic. For example:

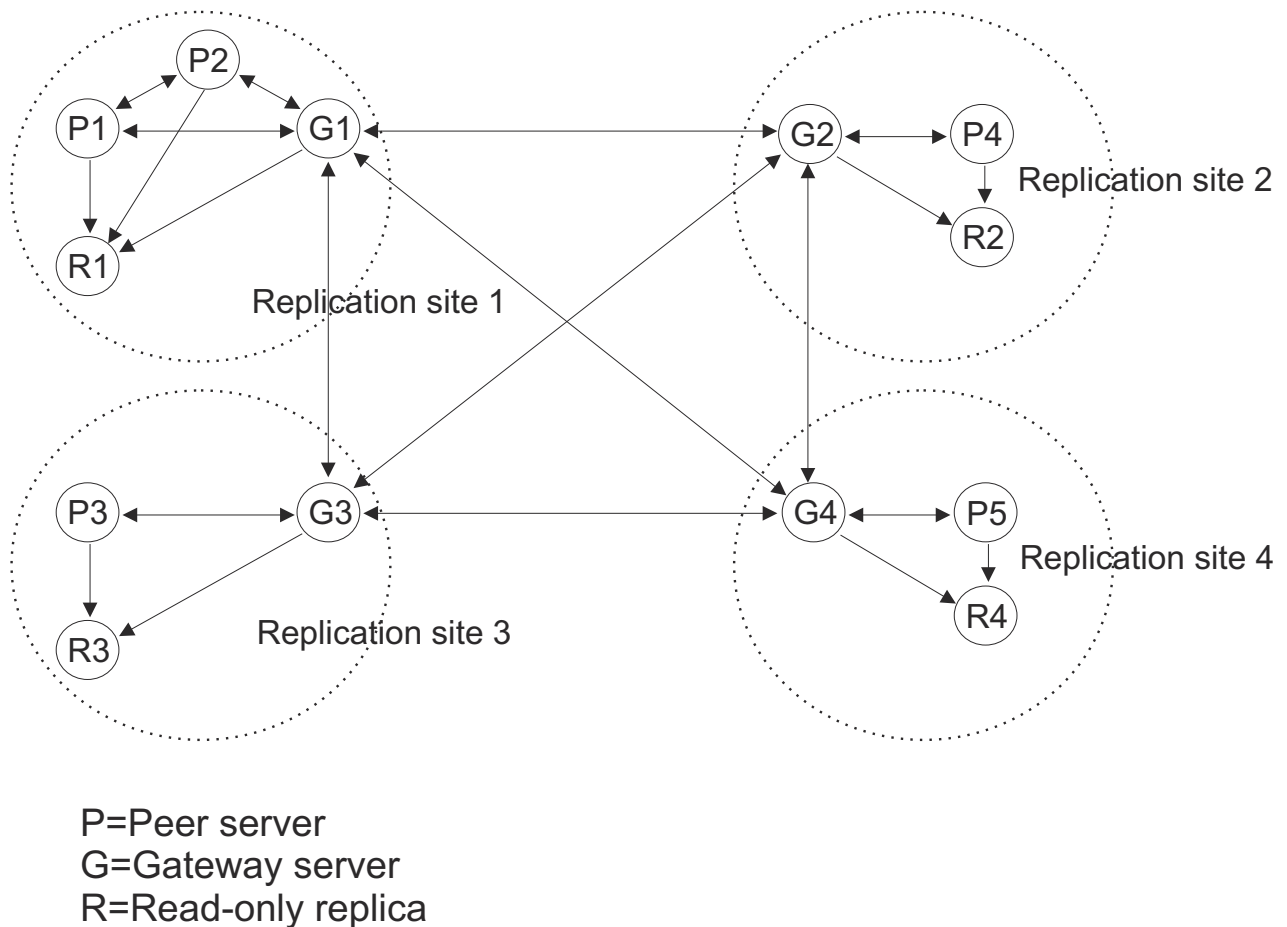


Figure 47. Gateway replication

## Advanced replication features

This topic presents a high-level overview of advanced replication features.

### Partial replication

Partial replication is an advanced replication feature that replicates only the specified entries and a subset of attributes for the specified entries within a subtree. Using partial replication, an LDAP administrator can enhance the replication bandwidth depending on the deployment requirements. The attributes that are to be replicated are specified using a replication filter. For more information about partial replication, see [“Partial replication” on page 519](#).

## Replication scheduling

Replication scheduling is an advanced replication feature that allows updates to be queued and then replicated at a certain time each day or during certain days of the week. Using replication scheduling, an LDAP administrator can schedule advanced replication to occur at optimal times when network traffic is minimal. For more information about replication schedule entries, see [“Schedule entries” on page 488](#).

## Replication conflict resolution

If there are replication conflicts involving delete or modifyDN operations, LDAP administrator intervention might be needed to correct the problems. For example, if an entry is renamed on one server while it is being modified on a second server, the modifyDN might arrive at a replica before the modify. Then when the modify arrives, it fails. In this case, an administrator needs to respond to the error by applying the modify to the entry with the new distinguished name (DN). All information necessary to redo the modify with the correct name is preserved in the replication and error logs. Replication errors are rare occurrences in a correctly configured replication topology, but it is not safe to assume that they never occur.

Conflict resolution for add and modify operations in peer-to-peer replication is based on the **modifyTimestamp** attribute value. The entry update with the most recent **modifyTimestamp** on any server in a multi-master replication environment is the one that takes precedence. Replicated delete and rename (modify DN) requests are accepted in the order received without conflict resolution. When a replication conflict is detected, the replaced entry is archived for recovery purposes in the lost and found log that is specified in the **ibm-slapdLog** attribute of the `cn=Replication,cn=Log Management,cn=configuration` entry.

Updates to the same entry made by multiple servers might cause inconsistencies in directory data because conflict resolution is based on the **modifyTimestamp** value of the entries. The most recent **modifyTimestamp** value takes precedence. If the data on your servers becomes inconsistent, use the synchronization procedure in [“Recovering from advanced replication errors” on page 529](#) to resynchronize the servers.

For advanced replication conflict resolution to work correctly, the supplier server must provide the modified entry's **modifyTimestamp** value before the entry was updated on the supplier. The consumer server uses the **modifyTimestamp** attribute value to determine what to do with a modified entry. If the consumer server receives a **modifyTimestamp** value on an entry that is earlier than the same entry's **modifyTimestamp** in its own server, then the modify request from the supplier server is ignored. However, this same replication conflict resolution does not occur for the schema entry, `cn=schema`. The replicated `cn=schema` entry is always replaced on the consumer server even if the consumer server has a later **modifyTimestamp** value.

## Enabling advanced replication

Before advanced replication entries can be added to the TDBM or LDBM backends, the CDBM backend must be configured in the LDAP server configuration file. The `useAdvancedReplication` configuration option must also be set to on in the CDBM backend. For example:

```
database CDBM GLDBCD31/GLDBCD64
databaseDirectory /var/ldap/cdbm
useAdvancedReplication on
```

### Note:

1. The CDBM backend can only be configured when the server compatibility is 5 or greater. See [“serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}” on page 125](#) for more information about the `serverCompatLevel` configuration option.
2. If `useAdvancedReplication on` is specified in the CDBM backend and basic replication entries with an objectclass of `replicaObject` exist in any configured TDBM or LDBM backends, the server does not start. Entries with an objectclass of `replicaObject` cannot be added when advanced replication is allowed. Basic and advanced replication environments are not supported at the same

time in the z/OS LDAP server. If planning to use an advanced replication environment, all basic replication `replicaObject` entries must be removed from the TDBM or LDBM backends.

3. If there are advanced replication entries in the LDBM and TDBM backends and `useAdvancedReplication` `off` is specified in the CDBM backend, the server does not start because basic replication is intended to be used. Replication contexts, replica groups, replica subentries, and replication agreement entries cannot be added when basic replication is allowed.
4. The `masterServer`, `masterServerDN`, `masterServerPW`, `peerServerDN`, and `peerServerPW` configuration options are not allowed to be specified in any LDBM or TDBM backends when the CDBM backend is configured and the `useAdvancedReplication` option is set to `on`. The `masterServer`, `masterServerDN`, `masterServerPW`, `peerServerDN`, and `peerServerPW` options are only valid when the server is configured to run in a basic replication environment.

The `cn=configuration` suffix contains entries that are used to configure advanced replication support. When the server is first started, the following advanced replication configuration entries under the `cn=configuration` suffix are automatically created:

- `cn=configuration`
- `cn=Replication,cn=configuration`
- `cn=Log Management,cn=Configuration`
- `cn=Replication,cn=Log Management,cn=Configuration`

The `cn=localhost` suffix is a special suffix that is exempt from replication. It is not required, but allowed in any TDBM or LDBM backend. It is an appropriate location for adding supplier entries that do not need to be replicated, such as supplier server credential entries. To create entries under the `cn=localhost` suffix, you must define the suffix in the appropriate backend section of the LDAP server configuration file and also populate the suffix entry. The simplest entry to create is a container object, using the following LDIF:

```
dn: cn=localhost
objectclass: container
```

If advanced replication is being enabled for the first time for a TDBM backend, which was created before z/OS V1R11, the Db2 database must be updated to enable TDBM to be configured in an advanced replication environment. The changes are explained in section 3 of the TDBMMGRT member of the `GLDHLQ.SGLDSAMP` data set.

Follow these steps:

1. Copy the TDBMMGRT member to your own SPUFI input data set. Edit your version of TDBMMGRT. Read the commentary in section 3 to understand what this SPUFI script is going to do. You must replace `-DB2_NAME-`, `-DB2_USERID-`, `-MISC_TABLESPACE-`, `-REPLICA_TABLESPACE-`, and `-STORAGEGROUP-` with the appropriate values for the TDBM database you are migrating.
2. Stop the LDAP server.
3. Use the Db2 SPUFI facility to run your version of TDBMMGRT. The script must be run under a user ID with Db2 SYSADM authority. When the script completes running, scan the output to ensure that it ran successfully.
4. Start the LDAP server.

See [“CDBM backend configuration and policy entries” on page 137](#) for more information about these entries and attribute values that affect advanced replication configuration.

## Supplier server entries

The following sections indicate the entries that must be added or modified in the supplier server to successfully configure advanced replication.

## Replication contexts

A replication context is an entry in the directory with the auxiliary objectclass **ibm-replicationContext** that identifies the root of a replicated subtree. The auxiliary objectclass **ibm-replicationContext** is allowed to be added to any entry in the directory. See [Table 68 on page 481](#) for the optional attribute value for the **ibm-replicationContext** objectclass. The replication configuration information is maintained in a set of entries created below the base of a replication context. If there is more than one replication context present in the same subtree, the replication configuration information under the child replication context entry is used while the replication configuration under the parent entry is ignored.

If the **ibm-replicationContext** auxiliary objectclass is added to a non-suffix level entry in the directory, explicit **aclEntry** and **entryOwner** attribute values are required. When an **entryOwner** attribute value is required, it must start with an *access-id*:. See [“Protecting replication topology entries” on page 517](#) for more information about protecting the replication topology.

Table 68. **ibm-replicationContext** objectclass schema definition (optional attribute)

| Attribute description and example                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ibm-replicaReferralURL</b><br>A single valued attribute that contains an ordered list of LDAP URLs with server name and optional port numbers that are separated by spaces. This list contains a list of servers that have update access to this replication context.<br>Example:<br><pre>ibm-replicaReferralURL: ldap://master1.ibm.com:500 ldaps://master2.ibm.com:636</pre> |

For the example in [Table 68 on page 481](#), assume that a replication context of *o=ibm* is used. When a client attempts an update operation on the consumer server under the *o=ibm* replication context, the referral list in the **ibm-replicaReferralURL** attribute value is sent back to the client indicating the supplier servers for the replication context.

## Replica groups

A replica group entry is created directly under a replication context entry with the structural objectclass **ibm-replicaGroup**. See [Table 69 on page 481](#) for the optional and required attributes for the **ibm-replicaGroup** objectclass. A replica group entry represents a collection of servers participating in replication for the context. Multiple replica group entries are allowed to be created under a replication context. A replica group entry provides a convenient location to set ACLs to protect the replication topology information, however, these entries do not do anything as far as how the replication topology is configured. See [“Protecting replication topology entries” on page 517](#) for more information about protecting the replication topology.

Table 69. **ibm-replicaGroup** objectclass schema definition (optional and required attributes)

| Attribute description and example                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>description</b><br>An optional attribute that provides a text field for extra information pertaining to the replica group entry. This attribute does not affect advanced replication configuration.<br>Example:<br><pre>description: Replica group 1</pre> |



|                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 69. <b>ibm-replicaGroup</b> objectclass schema definition (optional and required attributes) (continued)</i>                                            |
| <b>Attribute description and example</b>                                                                                                                         |
| <p><b>ibm-replicaGroup</b></p> <p>A required attribute value that specifies the name of a replica group.</p> <p>Example:</p> <pre>ibm-replicaGroup: Group1</pre> |

## Replica subentries

A replica subentry is created directly under a replica group with the structural objectclass **ibm-replicaSubentry**. See [Table 70 on page 482](#) for the optional and required attributes for the **ibm-replicaSubentry** objectclass. A replica subentry identifies the role that the server plays in advanced replication (for example master, peer, forwarding, or gateway server). Do not create the replica subentry if the server's role is a read-only replica server. If the auxiliary objectclass **ibm-replicaGateway** is added to a replica subentry, the server's role is a gateway server. See [“Gateway replication” on page 477](#) for more information. There should only be one replica subentry created for a single server under a given replication context.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 70. <b>ibm-replicaSubentry</b> objectclass schema definition (optional and required attributes)</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Attribute description and example</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <p><b>cn</b></p> <p>A required attribute that specifies the common name of the replica subentry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>cn: Subentry 1</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <p><b>description</b></p> <p>An optional attribute that provides an additional text field for extra information pertaining to the replica subentry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>description: Represents the LDAP server (master1) under this replication context</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <p><b>ibm-replicaServerID</b></p> <p>A required attribute that specifies the server ID of the server that this entry represents. To determine the ID of a server, search the root DSE entry for the <b>ibm-serverID</b> attribute. This value must exactly match the <b>ibm-serverID</b> attribute value because it is case-sensitive. This attribute cannot be modified after this entry is created. If this attribute value must be changed, all entries under the replica subentry must be deleted and then added again.</p> <p>A server does not interrogate the replica subentry or any replication agreements beneath it when the <b>ibm-replicaServerID</b> attribute value does not match its own ID. See <a href="#">“Replication agreements” on page 483</a> for more information about replication agreement entries.</p> <p>Example:</p> <pre>ibm-replicaServerID: supplier1</pre> |



|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 70. <b>ibm-replicaSubentry</b> objectclass schema definition (optional and required attributes) (continued)</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Attribute description and example</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><b>ibm-replicationServerIsMaster</b></p> <p>A required boolean (true or false) attribute that indicates whether the server represented by this replica subentry, as determined by the <b>ibm-replicaServerID</b> attribute value, is a master server for the replication context.</p> <p>If set to true, the server that is represented by this replica subentry, as determined by the <b>ibm-replicaServerID</b> attribute, is a master, peer, or gateway server if there are any replication agreement entries for the replication context under this replica subentry. If set to false, the server that is represented by this replica subentry, as determined by the <b>ibm-replicaServerID</b> attribute, is a forwarding server if there are any replication agreement entries for the replication context under this replica subentry.</p> <p>Example:</p> <pre>ibm-replicationServerIsMaster: true</pre> |

For the examples in [Table 70 on page 482](#), the replica subentry represents a supplier server with a server ID of `supplier1`. It is also the master server under the replication context (`o=ibm`) where this replica subentry exists.

## Replication agreements

A replication agreement is an entry in the directory with the structural object class **ibm-replicationAgreement** created directly under a replica subentry to define replication from the server represented by the subentry to another server. See [Table 71 on page 483](#) for the required attributes for the **ibm-replicationAgreement** objectclass. See [Table 72 on page 484](#) for the optional attributes for the **ibm-replicationAgreement** objectclass. A replication agreement entry is like a **replicaObject** entry used in basic replication. This object represents an individual connection from a supplier server to a consumer server. A replica subentry might have any number of replication agreement entries defined under it to specify each supplier agreement this server has under this replication topology.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 71. <b>ibm-replicationAgreement</b> objectclass schema definition (required attributes)</i>                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Attribute description and example</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <p><b>cn</b></p> <p>Common name of the replication agreement entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>cn: agreement1</pre>                                                                                                                                                                                                                                                                                                      |
| <p><b>ibm-replicaConsumerID</b></p> <p>Identifies the server ID of the consumer server. This value matches the <b>ibm-serverID</b> attribute value in the root DSE entry of the consumer server or a warning message is issued in the LDAP server log when the replication agreement initializes. This attribute is case-sensitive and must exactly match the <b>ibm-serverID</b> attribute value on the consumer server.</p> <p>Example:</p> <pre>ibm-replicaConsumerID: consumer1</pre> |

| Table 71. <i>ibm-replicationAgreement</i> objectclass schema definition (required attributes) (continued)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute description and example                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p><b>ibm-replicaCredentialsDN</b></p> <p>Specifies the distinguished name (DN) of the entry containing the credentials entry used to authenticate to the consumer server. See “Credentials entries” on page 486 for more information about credential entries.</p> <p>Example:</p> <pre>ibm-replicaCredentialsDN: cn=consumer1,cn=localhost</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <p><b>ibm-replicaURL</b></p> <p>Specifies the LDAP URL of the consumer server. The LDAP URL syntax is fully documented in <a href="https://tools.ietf.org/html/rfc2255">RFC 2255</a> (<a href="https://tools.ietf.org/html/rfc2255">tools.ietf.org/html/rfc2255</a>).</p> <p>The prefix of the LDAP URL indicates whether a non-secure or secure connection is used between the supplier and consumer servers. If the LDAP URL prefix is <code>ldap://</code>, a non-secure connection is used. If the LDAP URL prefix is <code>ldaps://</code>, a secure connection is used. You should use a secure connection when replicating so that sensitive data, such as <b>userPassword</b> values, are not exposed in the clear. See “SSL/TLS and advanced replication” on page 521 for more information about using SSL/TLS in an advanced replication environment.</p> <p>Example:</p> <pre>ibm-replicaURL: ldaps://consumer1.ibm.com:500</pre> |

For the examples in Table 71 on page 483, when the replicating server receives and successfully finishes an update request, the update is also sent to the consumer server with an ID of `consumer1` that is on hostname `consumer1.ibm.com` on secure port 500. The replicating server performs a simple or SASL EXTERNAL bind operation using the information provided in the credentials entry `cn=consumer1,cn=localhost`.

| Table 72. <i>ibm-replicationAgreement</i> objectclass schema definition (optional attributes)                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute description and example                                                                                                                                                                                                                                                                                                                                                                                        |
| <p><b>description</b></p> <p>Provides an additional text field for extra information pertaining to the replication agreement entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>description: Represents the replication agreement from the supplier1 server to the consumer1 server</pre>                                                                                |
| <p><b>ibm-replicaScheduleDN</b></p> <p>Specifies the DN of a schedule entry that determines when replication updates are sent to this consumer. If a schedule DN is not specified, advanced replication defaults to "immediate" replication mode. See “Schedule entries” on page 488 for more information about advanced replication scheduling.</p> <p>Example:</p> <pre>ibm-replicaScheduleDN: cn=schedule,o=ibm</pre> |

Table 72. *ibm-replicationAgreement* objectclass schema definition (optional attributes) (continued)

## Attribute description and example

### **ibm-replicationCreateMissingEntries**

A boolean (true or false) indicating whether missing parent entries are to be created on the consumer server. If set to true, the missing parent entries are automatically created by the supplier server and replicated to the consumer server. If set to false or if the attribute is not specified, the missing parent entries are not created on the consumer server.

Example:

```
ibm-replicationCreateMissingEntries: true
```

### **ibm-replicationExcludedCapability**

A multi-valued attribute that lists the OIDs of features that the consumer server does not support. Operations related to these capabilities are excluded from the updates sent to the consumer in this replication agreement. If this attribute is not specified, no capabilities are excluded from being replicated.

Only the following capabilities are allowed to be excluded:

- 1.3.18.0.2.32.4 – IBM filtered ACLs (only supported on non-z/OS IBM Tivoli Directory Servers)
- 1.3.18.0.2.32.98 – z/OS IBM Tivoli Directory Server ACL filters

Example:

```
ibm-replicationExcludedCapability: 1.3.18.0.2.32.4
```

### **ibm-replicationFilterDN**

Specifies the DN of a replication filter entry that contains filters that include or exclude the replication of certain entries or attribute types to the consumer server. See [“Partial replication” on page 519](#) for additional information about using partial replication.

Example:

```
ibm-replicationFilterDN: cn=filter,o=ibm
```

### **ibm-replicationOnHold**

A boolean (true or false) indicating whether advanced replication from the replication agreement is suspended or not. If set to true, replication updates from the supplier server to the consumer server are queued until this attribute value is set to false. If set to false or this attribute is not specified, replication updates are handled normally.

This attribute value is also modified by the **Cascading control replication** and the **Control replication** extended operations. See [“Cascading control replication” on page 670](#) for more information about the **Cascading control replication** extended operation. See [“Control replication” on page 674](#) for more information about the **Control replication** extended operation.

Example:

```
ibm-replicationOnHold: false
```

To aid in enforcing the accuracy of the data within the replication agreement entry, when the supplier binds to the consumer, it retrieves the **ibm-serverID** attribute from the root DSE entry and compares it to the **ibm-replicaConsumerID** attribute value. A warning is logged in the LDAP servers job log if these server IDs do not match.

You can designate that part of a replicated subtree not replicate by adding the **ibm-replicationContext** auxiliary class to the root of the subtree, without defining any replica subentries.

# Credentials entries

Because the replication agreement entry can be replicated, a DN to credentials object is used in the **ibm-replicaCredentialsDN** attribute value. This allows the supplier server credentials entry to be stored in an area of the DIT that is not replicated. Replicating the supplier server credentials entries (where 'clear text' passwords must be obtainable) represents a potential security exposure. The cn=localhost suffix in an LDBM or TDBM backend is an appropriate location for the creation of supplier server credential entries. cn=localhost is a special suffix that is exempt from replication. Also, an additional option is needed when using the **ds2ldif** utility to unload its descendant entries. See [“The ds2ldif utility” on page 225](#) for more information.

The objectclass of the entry that is specified in the **ibm-replicaCredentialsDN** attribute value in the replication agreement indicates that the authentication method used by the supplier to authenticate with the consumer server. If the entry's objectclass is **ibm-replicationCredentialsSimple**, the supplier server uses a simple bind to authenticate to the consumer. See [Table 73 on page 486](#) for the required attributes of the **ibm-replicationCredentialsSimple** objectclass. If the entry's objectclass is **ibm-replicationCredentialsExternal**, the supplier server performs a SASL EXTERNAL bind to the consumer server. See [Table 74 on page 487](#) for the optional attributes of the **ibm-replicationCredentialsExternal** objectclass.

A consumer server credentials entry is required on the consumer server to identify the distinguished name that the supplier server is using to perform a simple or SASL EXTERNAL bind. See [“Consumer server entries” on page 498](#) for more information about the consumer server credential entries.

| Table 73. <i>ibm-replicationCredentialsSimple</i> objectclass schema definition (required attributes)                                                                                                                                                                                                                                                                             |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Attribute description and example                                                                                                                                                                                                                                                                                                                                                 |  |
| <b>replicaBindDN</b>                                                                                                                                                                                                                                                                                                                                                              |  |
| Specifies the LDAP distinguished name that the replicating server uses to bind with the consumer server when sending directory updates.                                                                                                                                                                                                                                           |  |
| Example:                                                                                                                                                                                                                                                                                                                                                                          |  |
| replicaBindDN: cn=supplier,cn=localhost                                                                                                                                                                                                                                                                                                                                           |  |
| <b>replicaCredentials</b>                                                                                                                                                                                                                                                                                                                                                         |  |
| Contains the authentication information needed for the replicating server to authenticate with the consumer server using the distinguished name specified in the <b>replicaBindDN</b> attribute value.                                                                                                                                                                            |  |
| This password value is encrypted if it is added or modified when the <b>secretEncryption</b> configuration option is set to <b>AES</b> or <b>DES</b> under the backend containing the replication agreement. If <b>secretEncryption</b> is set to <b>AES</b> or <b>DES</b> , directory security improves because the password is no longer stored in the directory in clear text. |  |
| Example:                                                                                                                                                                                                                                                                                                                                                                          |  |
| replicaCredentials: secret                                                                                                                                                                                                                                                                                                                                                        |  |

For the examples in [Table 73 on page 486](#), the replication agreement uses a simple bind to the consumer server using a bind DN of cn=supplier,cn=localhost and a bind password of secret.

Table 74. **ibm-replicationCredentialsExternal** objectclass schema definition (optional attributes)

## Attribute description and example

### ibm-replicaKeyFile

Specifies the path and file name of the SSL/TLS key database file, the name of the RACF key ring, or the name of the PKCS #11 token to be used by the replication agreement to perform an SASL EXTERNAL bind. Specifying a value here, overrides the default that comes from the **sslKeyRingFile** configuration option. See “[sslKeyRingFile name](#)” on page 131 for the acceptable formats for this attribute value.

**Note:** If a value is specified for this attribute, it must be the same for all replication agreements in the server. The LDAP server only supports having one opened SSL/TLS key database file, RACF key ring, or PKCS #11 token at a time. It is suggested that all SSL certificates that must be used by the server be placed in one SSL/TLS key database file, RACF key ring, or PKCS #11 token.

Example:

```
ibm-replicaKeyFile: /home/server1/server1.kdb
```

### ibm-replicaKeyLabel

Specifies the label of the certificate that is used for LDAP server-client authentication for the SASL EXTERNAL bind. The certificate label must exist in the SSL/TLS key database file, RACF key ring, or PKCS #11 token being used for this credentials entry, as specified by the **ibm-replicaKeyFile** attribute value or the **sslKeyRingFile** configuration option if **ibm-replicaKeyFile** is not specified.

Specifying a value here, overrides the default that comes from the **sslCertificate** configuration option. If the **sslCertificate** configuration option is not specified or is set to **none**, the default SSL certificate in the **ibm-replicaKeyFile** attribute value (or the **sslKeyRingFile** configuration option if **ibm-replicaKeyFile** is not specified) is used. See “[sslCertificate {certificateLabel | none}](#)” on page 129 for more about the **sslCertificate** option.

Example:

```
ibm-replicaKeyLabel: EXTERNAL1
```

### ibm-replicaKeyPwd

Specifies the password protecting access to the SSL/TLS key database file. It can also be used to specify a fully qualified file name where the password for the SSL/TLS key database file is stashed. Only specify this attribute if the **ibm-replicaKeyFile** attribute value (or the **sslKeyRingFile** configuration option if **ibm-replicaKeyFile** is not specified) is an SSL/TLS key database file.

If using an SSL stash file, it must be specified in the following format:

```
file://filename
```

where **filename** is the fully qualified z/OS z/OS UNIX System Services file system location of the SSL stash file.

This password value is encrypted if it is added or modified when the **secretEncryption** configuration option is set to **AES** or **DES** under the backend containing the replication agreement. If **secretEncryption** is set to **AES** or **DES**, directory security improves because the password is no longer stored in the directory in clear text.

Example:

```
ibm-replicaKeyPwd: secret
```

For the examples in Table 74 on page 487, the replication agreement uses a SASL EXTERNAL bind to the consumer server with the SSL certificate label EXTERNAL1 in SSL key database file /home/server1/server1.kdb that has a password of secret.

A SASL EXTERNAL bind requires a secure connection from the replicating server to the replica server. The replication agreement entry must use an **ibm-replicaURL** attribute value with an LDAP URL prefix of `ldaps://` to signify an SSL connection. The replicating server must have read access to the SSL/TLS key database file, RACF key ring, or PKCS #11 token that is specified in the **sslKeyRingFile** configuration option or the **ibm-replicaKeyFile** attribute value in the SASL EXTERNAL supplier server credentials entry. If the optional attribute values in [Table 74 on page 487](#) are not specified in the SASL EXTERNAL supplier server credentials entry, the default SSL configuration in the LDAP server configuration file is used.

See “SSL/TLS and advanced replication” on [page 521](#) for more information about using SSL/TLS in an advanced replication environment.

## Schedule entries

An LDAP administrator can schedule advanced replication to occur at optimal times when network traffic is minimal for each individual replication agreement. Each replication agreement entry is allowed to have an **ibm-replicaScheduleDN** attribute value optionally specified. This attribute value identifies the distinguished name (DN) of a weekly schedule entry, that has an object class of **ibm-replicationWeeklySchedule**. See [Table 75 on page 488](#) for the schema definition of the **ibm-replicationWeeklySchedule** objectclass. The weekly schedule entry allows an LDAP administrator to specify the distinguished name (DN) of additional entries that point to one or more daily replication schedule entries. If the distinguished name in the **ibm-replicaScheduleDN** attribute value cannot be found or is not a weekly schedule entry, advanced replication continues by ignoring the weekly replication schedule.

| <i>Table 75. <b>ibm-replicationWeeklySchedule</b> objectclass schema definition (optional attributes)</i> |                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute description and example                                                                         |                                                                                                                                                                                                                                                             |
| <b>cn</b>                                                                                                 | <p>Common name of the weekly replication schedule entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>cn: myweekly</pre>                                                                                     |
| <b>description</b>                                                                                        | <p>Provides an additional text field for extra information pertaining to the weekly schedule entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>description: Weekly schedule for advanced replication</pre> |
| <b>ibm-replWeeklySchedName</b>                                                                            | <p>Descriptive name for the weekly schedule entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>ibm-replWeeklySchedName: Weekly schedule for agreement 1</pre>                                               |
| <b>ibm-scheduleMonday</b>                                                                                 | <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Monday.</p> <p>Example:</p> <pre>ibm-scheduleMonday: cn=monday,o=ibm</pre>                                                                                               |

|                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 75. <b>ibm-replicationWeeklySchedule</b> objectclass schema definition (optional attributes) (continued)</i>                                                                                      |
| <b>Attribute description and example</b>                                                                                                                                                                   |
| <p><b>ibm-scheduleTuesday</b></p> <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Tuesday.</p> <p>Example:</p> <pre>ibm-scheduleTuesday: cn=tuesday,o=ibm</pre>         |
| <p><b>ibm-scheduleWednesday</b></p> <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Wednesday.</p> <p>Example:</p> <pre>ibm-scheduleWednesday: cn=wednesday,o=ibm</pre> |
| <p><b>ibm-scheduleThursday</b></p> <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Thursday.</p> <p>Example:</p> <pre>ibm-scheduleThursday: cn=thursday,o=ibm</pre>     |
| <p><b>ibm-scheduleFriday</b></p> <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Friday.</p> <p>Example:</p> <pre>ibm-scheduleFriday: cn=friday,o=ibm</pre>             |
| <p><b>ibm-scheduleSaturday</b></p> <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Saturday.</p> <p>Example:</p> <pre>ibm-scheduleSaturday: cn=saturday,o=ibm</pre>     |
| <p><b>ibm-scheduleSunday</b></p> <p>Specifies the distinguished name (DN) of a daily replication schedule entry for Sunday.</p> <p>Example:</p> <pre>ibm-scheduleSunday: cn=sunday,o=ibm</pre>             |

A daily replication schedule entry has an object class of **ibm-replicationDailySchedule**. See Table 76 on page 490 for the schema definition of the **ibm-replicationDailySchedule** objectclass. A daily replication schedule entry allows an LDAP administrator to accomplish the following replication scheduling:

- Configure the time each day to start advanced replication for that replication agreement. This is accomplished by using the multi-valued **ibm-replicationImmediateStart** attribute.
- Allows replication to be turned off by specifying a batch time. This drains the replication queue and replication waits until the next scheduled time once the queue is fully drained. This is done by using the multi-valued **ibm-replicationBatchStart** attribute.
- Advanced replication can be turned on and off multiple times each day.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 76. <b>ibm-replicationDailySchedule</b> objectclass schema definition (optional attributes)</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Attribute description and example</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <p><b>cn</b></p> <p>Common name of the daily schedule entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>cn: mydaily</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <p><b>description</b></p> <p>Provides an additional text field for extra information pertaining to the daily schedule entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>description: Each day stops replication at 6:30 a.m. and then restarts at 9:45 a.m. and continues for the rest of the day until 6:30 a.m. the following day.</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <p><b>ibm-replDailySchedName</b></p> <p>Descriptive name for the daily schedule entry. This attribute does not affect advanced replication configuration.</p> <p>Example:</p> <pre>ibm-replDailySchedName: Daily schedule for replication agreement 1</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <p><b>ibm-replicationBatchStart</b></p> <p>A multi-valued attribute that indicates the time batch replication starts. All updates in the replication queue are replicated at the time specified and then replication waits until the next scheduled time.</p> <p><b>Note:</b> If advanced replication is waiting, it is not allowed to be resumed with either a <b>Cascading control replication</b> extended operation or a <b>Control replication</b> extended operation. However, "replicate now" on a <b>Control replication</b> extended operation can be used to immediately drain the replication queue if replication is waiting. See <a href="#">“Cascading control replication” on page 670</a> for more information about the <b>Cascading control replication</b> extended operation. See <a href="#">“Control replication” on page 674</a> for more information about the <b>Control replication</b> extended operation.</p> <p>The attribute value format is: Thhmmss</p> <p>where:</p> <ul style="list-style-type: none"> <li>hh - Hour based on a 24 hour clock (00 – 23)</li> <li>mm - Minutes (00-59)</li> <li>ss - Seconds (00-59)</li> </ul> <p>Example:</p> <pre>ibm-replicationBatchStart: T063000</pre> <p>This value indicates that queued replication updates are replicated at 6:30 AM until the replication queue is drained; then replication waits.</p> |



Table 76. **ibm-replicationDailySchedule** objectclass schema definition (optional attributes) (continued)

### Attribute description and example

#### **ibm-replicationImmediateStart**

A multi-valued attribute that indicates when advanced replication immediately starts and continues until the next **ibm-replicationBatchStart** attribute value or replication is otherwise suspended.

Advanced replication is allowed to be suspended or resumed with a **Cascading control replication** extended operation or a **Control replication** extended operation. See “Cascading control replication” on page 670 for more information about the **Cascading control replication** extended operation. See “Control replication” on page 674 for more information about the **Control replication** extended operation.

The attribute value format is: Thhmmss

where:

- hh - Hour based on a 24 hour clock (00 – 23)
- mm - Minutes (00-59)
- ss - Seconds (00-59)

Example:

```
ibm-replicationImmediateStart: T094500
```

This value indicates that replication starts at 9:45 a.m..

#### **ibm-replicationTimesUTC**

A boolean (true or false) indicating whether the time values specified in the **ibm-replicationBatchStart** and **ibm-replicationImmediateStart** attributes are in Coordinated Universal Time or local time. If set to true, Coordinated Universal Time is used for time values. If set to false, or the attribute is not specified, local time is used for time values.

Example:

```
ibm-replicationTimesUTC: true
```

Assuming that each daily schedule in the weekly schedule entry uses the examples in Table 76 on page 490, advanced replication occurs daily as follows:

- Because an **ibm-replicationBatchStart** attribute value of T06300 is specified, the replication queue is drained and replication waits at 6:30 a.m. each day. All future replication updates are queued.
- At 9:30 a.m. each day, advanced replication restarts because an **ibm-replicationImmediateStart** attribute value is specified. Replication immediately starts and continues until the next day at 6:30 a.m..

When the LDAP server starts and there is a weekly replication schedule entry configured, advanced replication inherits the state of the most recent **ibm-replicationBatchStart** or **ibm-replicationImmediate** time. If the weekly schedule examples are used in Table 76 on page 490 and the LDAP server starts at 7:00 a.m., replication is suspended until 9:30 a.m. when the next **ibm-replicationImmediate** time is encountered. This processing occurs even if there is a missing daily schedule in the weekly schedule entry.

## Consumer server entries

If the consumer server is a read only replica server, the only required replication-related entry is the consumer server credentials entry. If the consumer server is a peer or forwarding server, a replica subentry and a consumer server credentials entry are required. The consumer server credentials entry must exist under the cn=configuration suffix in the CDBM backend.

**Note:** The consumer server credentials entry differs from the supplier server credentials entry. See “Credentials entries” on page 486 for more information about the supplier server credentials entry.

The consumer server credentials entry is used on the consumer server to verify that it is actually a supplier server performing a simple or SASL EXTERNAL bind. A consumer server only accepts update operations from its supplier server and any LDAP administrator when using the **Server Administration** control. There are two types of consumer server credential entries that can be used, one that has an objectclass of **ibm-slapdReplication** and the other has an objectclass of **ibm-slapdSupplier**.

When a supplier server replicates updates to its consumer server, a special entry is used to indicate that the supplier server has master level access to the consumer server. Master level access bypasses ACL and entry owner restrictions and allows updates to be made even when the server is a read-only consumer, cascading consumer, or under a quiesced replication context. If the supplier server authenticates to the consumer server with a simple bind, the DN specified by the **replicaBindDN** attribute value in the replication agreement entry is used as the bind DN. If the supplier server authenticates to the consumer server with a SASL EXTERNAL bind, the bind DN is extracted from the SSL certificate unless the **sslMapCertificate** configuration options first value is set to **replace**. See “[sslMapCertificate {off | check | add | replace} {fail | ignore}](#)” on page 132 for more information about certificate mapping.

If the **ibm-slapdMasterDN** attribute value in an **ibm-slapdReplication** entry matches the bind DN, the supplier server (or user) is allowed master level access to all replication contexts. If the **ibm-slapdMasterDN** attribute value in an **ibm-slapdSupplier** entry matches the bind DN, the supplier server (or user) is only allowed master level access to the replication contexts indicated by the multi-valued **ibm-replicaSubtree** attribute value.

**Note:** The consumer server credentials entry must be present on both the consumer and supplier servers and exist under the cn=configuration suffix in the CDBM backend. The topology entries are the only way for the servers to know their roles in the topology as a whole, therefore, are needed on all the servers in the topology.

| Table 77. <i>ibm-slapdReplication</i> objectclass schema definition (required and optional attributes) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute description and example                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>cn</b>                                                                                              | <p>A required attribute that specifies the common name of the consumer server credentials entry.</p> <p>Example:</p> <pre>cn: master server</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>ibm-slapdMasterDN</b>                                                                               | <p>Specifies the distinguished name (DN) that the supplier server uses to authenticate with the consumer server.</p> <p>If the supplier server authenticates to the consumer server with a simple bind, this value matches the <b>replicaBindDN</b> attribute value in the simple bind supplier server credentials entry used by the replication agreement entry. If the supplier server authenticates to the consumer server with a SASL EXTERNAL bind, this value matches the bind DN extracted from the SSL certificate unless the <b>sslMapCertificate</b> configuration options first value is set to <b>replace</b>. See “<a href="#">sslMapCertificate {off   check   add   replace} {fail   ignore}</a>” on page 132 for more information about certificate mapping.</p> <p>Example:</p> <pre>ibm-slapdMasterDN: cn=supplier,cn=localhost</pre> |

Table 77. *ibm-slapdReplication objectclass schema definition (required and optional attributes) (continued)*

## Attribute description and example

### ibm-slapdMasterPW

Contains the simple bind authentication information needed for the replicating server to authenticate with the consumer server using the **ibm-slapdMasterDN**. This password value matches the **replicaCredentials** attribute value in the simple bind supplier server credentials entry used by the replication agreement entry.

This password value is encrypted if it is added or modified when the **secretEncryption** configuration option is set to **AES** or **DES** in the CDBM backend. If **secretEncryption** is set to **AES** or **DES**, directory security improves because the password is no longer stored in the directory in clear text.

If a SASL EXTERNAL bind is used, this attribute value is not specified.

**Note:** This value is only used if the entry specified in the **ibm-slapdMasterDN** attribute value does not exist under a configured suffix in the LDAP server.

Example:

```
ibm-slapdMasterPW: secret
```

### ibm-slapdMasterReferral

A single valued attribute that contains the LDAP URL of the supplier server. The LDAP URL syntax is documented in [RFC 2255 \(tools.ietf.org/html/rfc2255\)](https://tools.ietf.org/html/rfc2255).

If an update operation is done by a user other than the supplier server or any LDAP administrator with the Server Administration control, this value is returned as one of the referral values.

See “Replication topology hints and tips” on page 516 for more information about referrals with advanced replication.

Example:

```
ibm-slapdMasterReferral: ldap://master1.ibm.com:500
```

### ibm-slapdNoReplConflictResolution

A boolean (true or false) indicating whether the consumer server participates in replication conflict resolution. If set to true, the consumer server does not participate in conflict resolution. If set to false, or the attribute is not specified, the consumer server does participate in conflict resolution.

Conflict resolution is used to automatically attempt to resolve conflicts with entries that are no longer synchronized between a supplier and consumer server. The **modifyTimestamp** attribute value of the entry is used to detect a conflict between the two servers.

Example:

```
ibm-slapdNoReplConflictResolution: true
```

For the examples in [Table 77 on page 492](#), the supplier server located at `master1.ibm.com` on non-secure port 500 does a simple bind to the consumer server by binding with the `cn=supplier,cn=localhost` entry and specifying a password of `secret`. The consumer server is not configured for conflict resolution.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Table 78. <b>ibm-slapdSupplier</b> objectclass schema definition (required and optional attributes)</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Attribute description and example</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <p><b>cn</b></p> <p>A required attribute that specifies the common name of the consumer server credentials entry.</p> <p>Example:</p> <pre>cn: master server</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <p><b>ibm-slapdMasterDN</b></p> <p>Specifies the distinguished name (DN) that the supplier server uses to authenticate with the consumer server.</p> <p>If the supplier server authenticates to the consumer server with a simple bind, this value matches the <b>replicaBindDN</b> attribute value in the simple bind supplier server credentials entry used by the replication agreement entry.</p> <p>If the supplier server authenticates to the consumer server with a SASL EXTERNAL bind, this value matches the bind DN extracted from the SSL certificate unless the <b>sslMapCertificate</b> configuration options first value is set to <b>replace</b>. See “<a href="#">sslMapCertificate {off   check   add   replace} {fail   ignore}</a>” on page 132 for more information about certificate mapping.</p> <p>Example:</p> <pre>ibm-slapdMasterDN: cn=supplier,cn=localhost</pre>                                                                                                                                                             |
| <p><b>ibm-slapdMasterPW</b></p> <p>Contains the simple bind authentication information needed for the replicating server to authenticate with the consumer server using the <b>ibm-slapdMasterDN</b>. This password value matches the <b>replicaCredentials</b> attribute value in the simple bind supplier server credentials entry used by the replication agreement entry.</p> <p>This password value is encrypted if it is added or modified when the <b>secretEncryption</b> configuration option is set to <b>AES</b> or <b>DES</b> in the CDBM backend. If <b>secretEncryption</b> is set to <b>AES</b> or <b>DES</b>, directory security improves because the password is no longer stored in the directory in clear text.</p> <p>If a SASL EXTERNAL bind is used, this attribute value is not specified.</p> <p><b>Note:</b> This value is only used if the entry specified in the <b>ibm-slapdMasterDN</b> attribute value does not exist under a configured suffix in the LDAP server.</p> <p>Example:</p> <pre>ibm-slapdMasterPW: secret</pre> |
| <p><b>ibm-slapdReplicaSubtree</b></p> <p>A multi-valued attribute that specifies the distinguished names of replication contexts that are subject to this consumer server credentials entry.</p> <p>The bound user has master server level access to the replication contexts that are specified for this attribute.</p> <p>Example:</p> <pre>ibm-slapdReplicaSubtree: o=ibm</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

For the examples in [Table 78 on page 494](#), when the supplier server replicates updates to the o=ibm replication context on the consumer server, the supplier server performs a simple bind using the cn=supplier,cn=localhost entry and specifying a password of secret.

## Things to consider before configuring advanced replication

---

Before setting up an advanced replication configuration, there are some administrative responsibilities that must be considered. In order to ensure that replication is operating smoothly and that your replicas are staying up-to-date, an administrator must take some periodic actions to monitor the replication status. After advanced replication is correctly configured, it continues to automatically propagate updates to all defined replica servers. However, if errors occur, human intervention might be required to fully correct the problem.

Detailed status and error information is available to an LDAP administrator by querying the operational attributes in the replication agreement entries. See [“Monitoring and diagnosing advanced replication problems”](#) on page 525 for a description of the information available. Configuring multiple master servers adds to the potential error cases that an LDAP administrator must be aware of. If the same entry is updated at two different master servers at approximately the same time, those updates are likely to conflict when they are replicated to other servers in the advanced replication topology. The advanced replication conflict resolution support is designed to detect and resolve conflicts that might occur. See [“Replication conflict resolution”](#) on page 479 for more information about replication conflict resolution.

Consider the following when planning an advanced replication environment:

1. Determine if an existing Directory Information Tree (DIT) subtree is to be introduced into a replication topology or if a new subtree is to be added to the server after the replication topology is established. It is suggested that all servers that serve as a supplier server are put into maintenance mode until the replication topology entries are loaded on all servers. This ensures that external updates to the subtree are not lost while configuring advanced replication. See [“Advanced replication maintenance mode”](#) on page 518 for more information.
  - a. If using an existing subtree for advanced replication:
    - i) Modify the subtree to add the auxiliary objectclass **ibm-replicationContext**. If the **ibm-replicationContext** auxiliary objectclass is added to a non-suffix level entry in the directory, explicit **aclEntry** and **entryOwner** attribute values are required. The **entryOwner** attribute value must start with an *access-id*.
    - ii) Unload the entire subtree to an LDIF file by using the **ds2ldif** utility. See [“The ds2ldif utility”](#) on page 225 for additional information about the **ds2ldif** utility.
    - iii) For each server participating in the replication topology, add the unloaded entries to the server by using the **ldapadd** or **ldif2ds** utilities. For more information about the **ldapadd** utility, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#). See [“The ldif2ds utility”](#) on page 235 for additional information about the **ldif2ds** utility.
  - b. If using a new subtree for advanced replication, verify that the subtree has an auxiliary objectclass of **ibm-replicationContext**. For each server participating in the replication topology, add the same entries to all servers by using the **ldapadd** or **ldif2ds** utilities. For more information about the **ldapadd** utility, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#). See [“The ldif2ds utility”](#) on page 235 for additional information about the **ldif2ds** utility.
2. For each consumer server in the replication topology, load master bind and referral information under the **cn=configuration** suffix in the CDBM backend. Consumer server credential entries with an objectclass of **ibm-slappedSupplier** or **ibm-slappedReplication** must be added. If using a consumer server credentials entry with an objectclass of **ibm-slappedSupplier**, the replication context must be added to the **ibm-slappedReplicaSubtree** attribute value. See [“Consumer server entries”](#) on page 498 for more information.
3. For each supplier server in the replication topology, supplier server credential entries must be added for each unique consumer server in the replication context. A supplier server credential entry enables the supplier server to authenticate with the consumer server by using a simple or SASL EXTERNAL bind. If the objectclass of the supplier server credentials entry is **ibm-replicationCredentialsSimple**, a simple bind is used. If the objectclass of the supplier server credentials entry is **ibm-replicationCredentialsExternal**, a SASL EXTERNAL bind is used.

**Note:** There are no requirements for placing supplier server credential entries within a specific subtree. If supplier server credential entries are not replicated, use the `cn=localhost` subtree that does not allow the replication of entries. If supplier server credential entries are replicated outside the scope of the replication context being configured, consider using the `cn=ibmpolicies` subtree. When the `cn=ibmpolicies` subtree is configured for advanced replication, schema modifications are also replicated. See [“Replication of schema and password policy updates” on page 517](#) for more information about schema replication.

The following steps are used to deploy the replication topology on all servers:

1. On a supplier server in the topology, use the **ldapadd** utility with the Server Administration and the Do Not Replicate controls to add the replication topology entries. The replication topology entries are the following:
  - a. Replication context with an objectclass of **ibm-replicationContext**. See [“Replication contexts” on page 481](#) for more information.
  - b. Replica group with an objectclass of **ibm-replicaGroup**. See [“Replica groups” on page 481](#) for more information.
  - c. Replica subentry with an objectclass of **ibm-replicaSubentry**. See [“Replica subentries” on page 482](#) for more information.
  - d. Replication agreement with an objectclass of **ibm-replicationAgreement**. See [“Replication agreements” on page 483](#) for more information.
2. On the replication context added in the previous step, use the **Replication topology** extended operation in the **ldapexop** utility. This synchronizes all replication topology entries for each consumer server in the replication context. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.

When these steps are complete, the supplier servers are moved out of maintenance mode.

## Advanced replication configuration examples

This topic provides examples of the different replication topologies that can be configured. It provides example LDIF data that includes the host names, IP addresses, ports, server IDs, and passwords.

### Suppliers and consumers

In advanced replication, updates are propagated from one LDAP server to another through a replication queue. The server that enters updates into the replication queue is called a supplier. The server that absorbs these changes is called the consumer. The queue is maintained on the supplier.

- **Host names and ports:** Provide the supplier with enough information to connect to the consumer.
- **Server IDs:** Strings that enable one LDAP server to identify other LDAP servers in the topology.
- **Bind DN and passwords:** The supplier connects to the consumer using the LDAP protocol. In LDAP terminology, this is called a bind. The bind requires a bind Distinguished Name (DN) and a password.

The following examples demonstrate setup for a topology consisting of a maximum of three servers.

**Note:** The hostname of the consumer resolves correctly from the supplier. If not, the supplier cannot connect to the consumer and advanced replication fails.

| Table 79. Topology setup |                    |
|--------------------------|--------------------|
| Server                   | Hostname           |
| Server 1                 | server1.us.ibm.com |
| Server 2                 | server2.us.ibm.com |
| Server 3                 | server3.us.ibm.com |

Each LDAP server in [Table 79 on page 496](#) is listening on port 389, which is the default LDAP port.

These examples assume that a simple bind is being done from the supplier server to the consumer server. Each example assumes the following bind DN and password for all supplier-consumer agreements.

- **DN:** cn=bindtoconsumer
- **Password:** iamsupplier

## Server ID

In the examples, the server ID of each server is the role of that server in the topology. That is, in the Master-Replica topology, the master identifies the server ID as Master and the replica is identified as Replica. In the Peer-to-Peer topology, one peer is Peer1 and the other is Peer2. In the Master-Forwarder-Replica topology, the master is Master, the forwarder is Forwarder, and the replica is Replica. In the Gateway topology, the gateway servers are Gateway1 and the other is Gateway2 and the replica is Replica.

Do not change the server ID for a server. When the z/OS LDAP server is first configured with a CDBM backend, the server ID is generated as an IBM entry UUID value in the **ibm-slappedServerID** attribute value in the cn=configuration entry. For convenience, the server ID is published in the rootDSE entry's attribute **ibm-serverID**. The server ID is only allowed to be modified when there are no replica subentries defined in the server. See [“cn=configuration” on page 138](#) for more information about the **ibm-slappedServerID** attribute value.

## Advanced replication related entries summary

For convenience, this section quickly summarizes the various types of entries that are used to build an advanced replication topology.

### Supplier server entries

- **Replication context:** This is the root entry for the subtree that is to be replicated. It must have an auxiliary objectclass of **ibm-replicationContext**. To replicate a subtree o=ibm, c=us, the replication context might be:

```
dn: o=ibm,c=us
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm
```

All other replication entries except for the credential and schedule entries must be under the replication context. The credential and schedule entries can be anywhere in the DIT.

- **Replica group:** This entry is not important apart from the fact that all the advanced replication-related entries exist under this entry. It must have the **ibm-replicaGroup** objectclass. For example:

```
dn: ibm-replicaGroup=default, o=ibm,c=us
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default
```

- **Replica subentry:** These types of entries declare the servers that are taking part in the advanced replication topology. Each server participating in the topology has one subentry. If a server is represented by more than one subentry under a replication context, unexpected behavior might result. This is done by having more than one subentry under a replication context containing the same **ibm-replicaServerID** attribute value. This entry has the **ibm-replicaSubentry** objectclass. For example:

```
dn: ibm-replicaServerId=Peer1,ibm-replicaGroup=default, o=ibm,c=us
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Peer1
ibm-replicationServerIsMaster: true
cn: Peer1
description: Peer1
```



As shown in the replica subentry example, the entry has the server ID of the participating server, `Peer1`. It has an attribute called **ibm-replicationServerIsMaster**. When this attribute is set to true, the server is a read/write copy.

- **Replication agreements:** These types of entries occur under replica subentries. When these entries appear under a specific server's replica subentry, they define a replication agreement from that server to some other server in the topology. For example:

```
dn: cn=Peer2, ibm-replicaServerId=Peer1,ibm-replicaGroup=default,o=ibm,c=us
objectclass: top
objectclass: ibm-replicationAgreement
cn: Peer2
ibm-replicaConsumerId: Peer2
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=Peer1BindCredentials, cn=localhost
description: Replication agreement from Peer1 to Peer2
```

The replication agreement example is from `Peer1` to `Peer2`. The supplier is `Peer1` as the agreement occurs under the subentry for `Peer1`. The consumer is `Peer2`. The server `Peer2` is on `server2.us.ibm.com` and is listening on port 389. `Peer1` binds to `Peer2` using the credentials defined in the entry (`cn=Peer1BindCredentials, cn=localhost`).

- **Replication credentials:** If a simple bind is used by the supplier server to authenticate with the consumer server, this entry defines the bind DN and password that is used. This credential entry uses the **ibm-replicationCredentialsSimple** objectclass. If a SASL EXTERNAL bind is used by the supplier server to authenticate with the consumer server, see “Credentials entries” on page 486 for information about the **ibm-replicationCredentialsExternal** objectclass. For example:

```
dn: cn=Peer1BindCredentials, cn=localhost
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials on Peer1 to be used to bind to other servers.
```

The replication credential example defines the **replicaBindDN** as `cn=bindtoconsumer` and the password as `iamsupplier`. Take note of the description. The same credentials entry can be used for multiple replication agreements.

## Consumer server entries

If the consumer server is a read only replica server, the only required replication-related entry is the consumer server credentials entry. If the consumer server is a peer or forwarding server, a replica subentry and a consumer server credentials entry are required. The consumer server credentials entry identifies the distinguished name and optionally the password value that the supplier server uses to authenticate with the consumer server. There are two types of credential entries that can be used on the consumer.

Type 1 example:

```
dn: cn=Master server,cn=configuration
objectclass: ibm-slapdReplication
cn: master server
ibm-slapdMasterDN: cn=bindtoconsumer
ibm-slapdMasterPW: iamsupplier
ibm-slapdMasterReferral: ldap://localhost:1389
```

Type 2 example:

```
dn: cn=Supplier s1,cn=configuration
objectclass: ibm-slapdSupplier
cn: Supplier s1
ibm-slapdMasterDN: cn=bindtoconsumer
ibm-slapdMasterPW: iamsupplier
ibm-slapdReplicaSubtree: o=ibm,c=us
```

The use of the credential established by type 2 is limited to the `ibm-slapdReplicaSubtree` only. Therefore, suppliers binding with bind DN as `cn=bindtoconsumer` and password as `iamsupplier`



supplies only to the `o=ibm,c=us` subtree, unless another credential entry gives rights to another subtree. The type 1 credential entry is global across the LDAP server. When a type 2 entry is defined in the `cn=configuration` suffix in the CDBM backend, any subtree can be supplied to if a supplier authenticates with bind DN of `cn=bindtoconsumer` and password of `iamsupplier`.

**Note:** The consumer server credentials entry must be present on both the consumer and supplier servers and exist under the `cn=configuration` suffix in the CDBM backend. The topology entries are the only way for the servers to know their roles in the topology as a whole, therefore, are needed on all the servers in the topology.

## Creating a master-replica topology

This example describes deploying the most basic of all the topologies, the master-replica topology. It has one read/write server and one read-only server.



Figure 48. Master-replica topology

- The first step when building a topology is to define:
  1. **Replication context:** `o=ibm,c=us`
  2. **Suppliers:** LDAP server on `server1.us.ibm.com:389` is the only supplier. The server ID is Master. It supplies updates to the LDAP server on `server2.us.ibm.com:389`.
  3. **Consumers:** LDAP server on `server2.us.ibm.com:389` is the only consumer. The server ID is Replica. It consumes updates from the LDAP server on `server1.us.ibm.com:389`.
  4. **read/write servers:** LDAP server on `server1.us.ibm.com:389`, with ID Master is the only read/write server.
  5. **Read-only servers:** LDAP server on `server2.us.ibm.com:389`, with ID Replica is the only read-only server.

**Configuration changes:** Because of these examples, some CDBM changes are needed for the master and the replica server for replication to work correctly.

**Note:** These are done here for this example ONLY. The server ID is only allowed to be modified when there are no replica subentries defined in the server. See [“cn=configuration” on page 138](#) for more information about the `ibm-slapdServerID` attribute value.

### 1. Server IDs:

- On the master server, apply the following modify using the **ldapmodify** utility. For more information about the **ldapmodify** utility, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Master
```

- On the replica server, apply the following modify:

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Replica
```

2. **Consumer server credentials entry:** Add this entry to the replica server using the **ldapadd** utility. For more information about the **ldapadd** utility, see [Ldapmodify and Ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#). For example:

```
dn: cn=Master server,cn=configuration
changetype: add
objectclass: ibm-slappedReplication
cn: master server
ibm-slappedMasterDN: cn=bindtoconsumer
ibm-slappedMasterPW: iamsupplier
ibm-slappedMasterReferral: ldap://server1.us.ibm.com:389
```

- The next step is to build the LDIF file for the topology. This LDIF file is called `masterreplica.ldif`. Copy each of these entries to `masterreplica.ldif` with the necessary changes in the subtree, server IDs, host names, and ports.

1. **Replication context:**

- If the subtree entry exists, use the **ldapmodify** utility to modify the existing entry. For example:

```
dn: o=ibm,c=us
changetype: modify
add: objectclass
objectclass: ibm-replicationContext
```

- If the subtree entry does not exist, add the entry with the **ibm-replicationContext** auxiliary objectclass by using the **ldapadd** utility. For example:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm
```

2. Add the replica group entry using the **ldapadd** utility. For example:

```
dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default
```

3. **Replica subentries:** Because this topology is using a master and a read-only replica server, a replica subentry is only needed for the master server. Read-only replicas do not need a replica subentry. For example, for a subentry for the master:

```
dn: ibm-replicaServerId=Master,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Master
ibm-replicationServerIsMaster: true
cn: Master
description: Master server of the topology
```

Take note of the master subentry carefully. The subentry for the master uses the server ID `Master` and has the server declared as a master server. This server receives updates from clients.

**Note:** The number of subentries is not dependent on the number of physical servers in the topology. Rather, it is dependent on the number and role of the LDAP servers in the topology.

4. **Supplier server credentials entry:** This step defines the credentials that the master uses to bind to the replica. Add an entry with the **ldapadd** utility. For example:

```
dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
```

```
replicaCredentials: iamsupplier
description: Bind Credentials on master to bind to replica
```

Note the DN and password are the same as the pair that was added in the consumer server credentials entry section. Add the entry with the **ldapadd** utility. As a result, updates to this object results in the server attempting to replicate.

5. **Replication agreements:** There is one supplier-consumer relationship in this advanced replication topology. The master supplies updates to the `o=ibm,c=us` subtree to the replica that consumes the changes. Therefore, there is only one agreement: From the master to the replica. Note that the number of agreements is dependent upon the number of supplier-consumer relationships in the topology. For example:

```
dn: cn=Replica, ibm-replicaServerId=Master,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Replica
ibm-replicaConsumerId: Replica
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from master to replica
```

The entry above is under the subentry for the master. It supplies to a consumer with an ID as `Replica`. The replica URL is `ldap://server2.us.ibm.com:389` meaning that the replica is listening on `server2.us.ibm.com` on port 389. This agreement uses the credentials that were created in the last step for the master to bind to the replica. That means the master binds to the replica with a bind DN `cn=bindtoconsumer` and the password `iamsupplier`. Note that there is no agreement under the subentry for the replica. This is natural as the replica is a read-only copy and cannot receive any client updates, therefore, there is no point in having an agreement, because there are no updates to propagate.

- Now that the replication entries have been added, the `masterreplica.ldif` file is as follows:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm

dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default

dn: ibm-replicaServerId=Master,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Master
ibm-replicationServerIsMaster: true
cn: Master
description: Master server of the topology.

dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials on master to bind to replica.

dn: cn=Replica, ibm-replicaServerId=Master,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Replica
ibm-replicaConsumerId: Replica
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from master to replica.
```

The LDIF is different if the replication context exists. Rather than:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm
```

it is:

```
dn: o=ibm,c=us
changetype: modify
add: objectclass
objectclass: ibm-replicationContext
```

For the sake of simplicity, it is assumed that the subtree entry does not exist at all.

- Next, add the `masterreplica.ldif` file on the master server. Use the **ldapadd** utility on the master where the `masterreplica.ldif` file was created. For example:

```
ldapadd -h server1.us.ibm.com -p 389 -D adminDN -w adminPW -f masterreplica.ldif
-k -L
```

The `-L` option on the **ldapadd** utility sends the Do Not Replicate control to the server that indicates not to replicate the topology now. The `-k` option sends the Server Administration control to the server so that the addition of entries continues even when the subtree becomes read-only because of a server ID mismatch.

- Next add the replication topology to the replica also. Use the **ldapexop** utility. For example:

```
ldapexop -h server1.us.ibm.com -p 389 -D adminDN -w adminPW -op repltopology
-rc o=ibm,c=us
```

This is an example of the **Replication topology** extended operation. It propagates the advanced replication topology to all the consumers defined under the `o=ibm,c=us` replication context. See [“The ldapexop utility”](#) on page 253 for additional information about the **ldapexop** utility.

- After the **ldapadd** and **ldapexop** commands are performed successfully, the master-replica topology is ready. The master accepts updates on the `o=ibm,c=us` subtree and propagates them to the replica. The replica does not accept updates. It returns a referral to the master in case a client tries to update it, however, it can handle searches.

## Creating a peer-to-peer replication topology

The peer-to-peer replication topology does not differ much from the master-replica topology. It also has two servers, but, both the servers are now read/write servers. They both supply changes to each other.

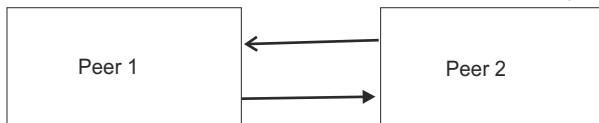


Figure 49. Peer-to-peer topology

- The first step when building a topology is to define:
  1. **Replication context:** `o=ibm,c=us`
  2. **Supplier:** LDAP server on `server1.us.ibm.com:389` with server ID `Peer1` supplies updates to the LDAP server with server ID `Peer2` on `server2.us.ibm.com:389`. LDAP server on `server2.us.ibm.com:389` with server ID `Peer2` supplies updates to the LDAP server with server ID `Peer1` on `server1.us.ibm.com:389`.
  3. **Consumer:** LDAP server with server ID `Peer2` on `server2.us.ibm.com:389` consumes updates from LDAP server with server ID `Peer1` on `server1.us.ibm.com:389`. LDAP server with Server ID

Peer1 on server1.us.ibm.com:389 consumes updates from LDAP server with server ID Peer2 on server2.us.ibm.com:389.

4. **read/write server:** LDAP servers Peer1 and Peer2 on server1.us.ibm.com and server2.us.ibm.com are read/write servers.
5. **Read-only server:** There are no read-only servers in this topology.

**Configuration changes:** Some CDBM changes must be done to both the Peer1 and Peer2 servers for replication to work correctly. Configured servers are current. If you are using the same servers that you used for the Master-Replica setup, undo the changes that you made in [“Creating a master-replica topology”](#) on page 499.

**Note:** These are done here for this example only. The server ID is only allowed to be modified when there are no replica subentries defined in the server. See [“cn=configuration”](#) on page 138 for more information about the `ibm-slapdServerID` attribute value.

#### 1. Server IDs:

- On the Peer1 server (server1.us.ibm.com), apply the following modify using the **ldapmodify** utility. For more information about the **ldapmodify** utility, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Peer1
```

- On the Peer2 server (server2.us.ibm.com), apply the following modify using the **ldapmodify** utility.

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Peer2
```

2. **Consumer server credentials entry:** Add this first entry to the Peer1 server and the second entry to the Peer2 server using the **ldapadd** utility. For more information about the **ldapadd** utility, see [ldapmodify and ldapadd utilities in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

**Note:** An alternative is to add entries with an **ibm-slapdSupplier** objectclass. Also, each peer uses the other peer as the referral. This is useful if a peer must become a read only replica or a forwarding server.

For example, for a consumer side credentials entry for the Peer1:

```
dn: cn=Master server,cn=configuration
changetype: add
objectclass: ibm-slapdReplication
cn: master server
ibm-slapdMasterDN: cn=bindtoconsumer
ibm-slapdMasterPW: iamsupplier
ibm-slapdMasterReferral: ldap://server2.us.ibm.com:389
```

For example, for a credential subentry for the Peer2:

```
dn: cn=Master server,cn=configuration
changetype: add
objectclass: ibm-slapdReplication
cn: master server
ibm-slapdMasterDN: cn=bindtoconsumer
ibm-slapdMasterPW: iamsupplier
ibm-slapdMasterReferral: ldap://server1.us.ibm.com:389
```

- The next step is to build the LDIF file for the replication topology. This LDIF file is called `peer2peer.ldif`. Copy each of these entries to `peer2peer.ldif` with the necessary changes in the subtree, server IDs, host names, and ports.

#### 1. Replication context:

- If the subtree entry exists, use the **ldapmodify** utility to modify the existing entry. For example:

```
dn: o=ibm,c=us
changetype: modify
add: objectclass
objectclass: ibm-replicationContext
```

- If the subtree entry does not exist, add the entry with the **ibm-replicationContext** auxiliary objectclass by using the **ldapadd** utility. For example:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm
```

2. Add the replica group entry using the **ldapadd** utility. For example:

```
dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default
```

3. **Replica subentries:** Because there are two LDAP servers in the topology, you must add two replica subentries; one for Peer1 and another one for the Peer2 server by using the **ldapadd** utility. For example, for a subentry for Peer1:

```
dn: ibm-replicaServerId=Peer1,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Peer1
ibm-replicationServerIsMaster: true
cn: Peer1
description: Subentry for Peer1
```

For example, for a subentry for Peer2:

```
dn: ibm-replicaServerId=Peer2,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Peer2
ibm-replicationServerIsMaster: true
cn: Peer2
description: Subentry for Peer2
```

The subentry for Peer1 identifies the server ID as Peer1 and has the server declared as a master server. The server can receive updates from clients. The subentry for the Peer2 identifies the server ID as Peer2, and it also has the server declared as a master server. This server can also receive updates from LDAP clients that bind to it.

4. **Supplier server credentials entry:** This step defines the credentials that Peer1 and Peer2 use to bind to each other. Add the entry with the **ldapadd** utility. For example:

```
dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials on Peer1 and Peer2 to bind to each other.
```

5. **Replication agreements:** There are two supplier-consumer relationships in this topology. Peer1 supplies updates made to the o=ibm,c=us subtree to Peer2, that consumes the changes. Peer2 also accepts updates from clients on the o=ibm,c=us subtree and sends them to Peer1, that consumes the changes. Therefore, there are two agreements:

- a. from Peer1 to Peer2

b. from Peer2 to Peer1

**Note:** The number of agreements is dependent upon the number of supplier-consumer relationships in the topology.

For example, a replication agreement from Peer1 to Peer2:

```
dn: cn=Peer2, ibm-replicaServerId=Peer1,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Peer2
ibm-replicaConsumerId: Peer2
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Peer1 to Peer2
```

For example, a replication agreement from Peer2 to Peer1:

```
dn: cn=Peer1, ibm-replicaServerId=Peer2,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Peer1
ibm-replicaConsumerId: Peer1
ibm-replicaUrl: ldap://server1.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Peer2 to Peer1
```

The two agreements for this topology are shown. The first one is the agreement from Peer1 to Peer2. It is under the Peer1 subentry. The second one is from Peer2 to Peer1 and it is under the Peer2 subentry. Note the use of the same credentials entry for both agreements. This is acceptable. The credentials entry is added to both Peer1 and Peer2.

- Now that the replication entries have been added, the `peer2peer.ldif` file is as follows:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm

dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default

dn: ibm-replicaServerId=Peer1,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Peer1
ibm-replicationServerIsMaster: true
cn: Peer1
description: Subentry for Peer1.

dn: ibm-replicaServerId=Peer2,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Peer2
ibm-replicationServerIsMaster: true
cn: Peer2
description: Subentry for Peer2.

dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials on Peer1 and Peer2 to bind to each other.

dn: cn=Peer2, ibm-replicaServerId=Peer1,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
```

```

objectclass: top
objectclass: ibm-replicationAgreement
cn: Peer2
ibm-replicaConsumerId: Peer2
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Peer1 to Peer2.

dn: cn=Peer1, ibm-replicaServerId=Peer2, ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Peer1
ibm-replicaConsumerId: Peer1
ibm-replicaUrl: ldap://server1.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Peer2 to Peer1

```

- Next, add the peer2peer.ldif file on the Peer1 server. Use the **ldapadd** utility on the Peer1 where the peer2peer.ldif file was created. For example:

```
ldapadd -h server1.us.ibm.com -p 389 -D adminDN -w adminPW -f peer2peer.ldif -k -L
```

The -L option on the **ldapadd** utility sends the Do Not Replicate control to the server that indicates not to replicate the topology now. The -k option sends the **Server Administration** control to the server so that the addition of entries continues even when the subtree becomes read-only because of a server ID mismatch.

- Next, add the replication topology to the Peer2 also. Use the **ldapexop** utility. For example:

```
ldapexop -h server1.us.ibm.com -p 389 -D adminDN -w adminPW -op repltopology
-rc o=ibm,c=us
```

This is an example of the **Replication topology** extended operation. It propagates the advanced replication topology to all the consumers defined under the o=ibm,c=us replication context. See [“The ldapexop utility” on page 253](#) for additional information about the **ldapexop** utility.

- After the **ldapadd** and **ldapexop** commands are performed successfully, the peer-to-peer topology is ready. Both peers accept updates on and send them to the other peer.

## Creating a master-forwarder-replica (cascading) topology

Another advanced replication topology is the master-forwarder-replica or cascading replication topology.

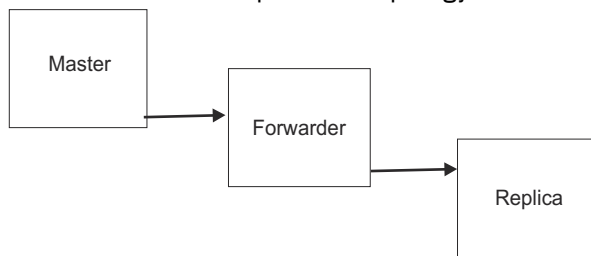


Figure 50. Master-forwarder-replica topology

The forwarder server is a specialized replica server. As previously stated, replica servers are read-only as is a forwarder server. Replica servers do not transmit changes that are consumed by them. However, forwarder servers replicate changes that they have consumed. To supply changes further down the topology, forwarders have agreements under their subentries.

**Note:** Gateway replication topologies are similar, however, forwarders are specialized replicas while gateways are specialized masters.

This topology must have one more server included: server3.us.ibm.com

- The first step when building a topology is to define:
  1. **Replication context:** o=ibm,c=us



2. **Supplier:** LDAP server on server1.us.ibm.com:389 with server ID Master supplies updates to the LDAP server with server ID Forwarder on server2.us.ibm.com:389. LDAP server on server2.us.ibm.com:389 with server ID Forwarder supplies updates to the LDAP server with server ID Replica on server3.us.ibm.com:389.
3. **Consumer:** LDAP server with server ID Forwarder on server2.us.ibm.com:389 consumes updates from LDAP server with server ID Master working on server1.us.ibm.com:389. LDAP server with server ID Replica on server3.us.ibm.com:389 consumes updates from the LDAP server with server ID Forwarder working on server2.us.ibm.com:389.
4. **read/write server:** LDAP server on server1.us.ibm.com:389, with ID Master is the only read/write server.
5. **Read-only server:** LDAP server on server2.us.ibm.com:389 and server3.us.ibm.com:389, with IDs, Forwarder and Replica are read-only.

**Configuration changes:** Some configuration changes must be made to the Master, Forwarder, and Replica servers for replication to work correctly. Configured servers are current. If reusing the same servers that were used for the Master-Replica setup, undo the changes that were made in [“Creating a master-replica topology”](#) on page 499. If reusing the same servers that were used for the Peer-Peer setup, undo the changes that were made in [“Creating a peer-to-peer replication topology”](#) on page 502.

**Note:** These are done here for this example only. The server ID is only allowed to be modified when there are no replica subentries defined in the server. See [“cn=configuration”](#) on page 138 for more information about the **ibm-slapdServerID** attribute value.

#### 1. Server IDs:

- On the Master server (server1.us.ibm.com), apply the following modify using the **ldapmodify** utility. For information about the **ldapmodify** utility, see [ldapmodify](#) and [ldapadd](#) utilities in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Master
```

- On the Forwarder server (server2.us.ibm.com), apply the following modify using the **ldapmodify** utility.

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Forwarder
```

- On the Replica server (server3.us.ibm.com), apply the following modify using the **ldapmodify** utility.

```
dn: cn=configuration
changetype: modify
replace: ibm-slapdserverid
ibm-slapdserverid: Replica
```

2. **Consumer server credentials entry:** Add this first entry to the Forwarder server and the second entry to the Replica server using the **ldapadd** utility.

**Note:** An alternative is to add entries with an **ibm-slapdSupplier** objectclass.

For example, for a consumer server credentials entry for the Forwarder:

```
dn: cn=Master server,cn=configuration
changetype: add
cn: master server
ibm-slapdMasterDN: cn=bindtoconsumer
ibm-slapdMasterPW: iamsupplier
ibm-slapdMasterReferral: ldap://server1.us.ibm.com:389
objectclass: ibm-slapdReplication
```

For example, for a consumer server credentials entry for the Replica:

```
dn: cn=Master server,cn=configuration
changetype: add
cn: master server
ibm-slapdMasterDN: cn=bindtoconsumer
ibm-slapdMasterPW: iamsupplier
ibm-slapdMasterReferral: ldap://server1.us.ibm.com:389
objectclass: ibm-slapdReplication
```

- The next step is to build the LDIF file for the replication topology. This LDIF file is called `mfr.ldif`. Copy each of these entries to `mfr.ldif` with the necessary changes in the subtree, server IDs, host names, and ports.

#### 1. Replication context:

- If the subtree entry exists, use the **ldapmodify** utility to modify the existing entry. For example:

```
dn: o=ibm,c=us
changetype: modify
add: objectclass
objectclass: ibm-replicationContext
```

- If the subtree entry does not exist, add the entry with the **ibm-replicationContext** auxiliary objectclass by using the **ldapadd** utility. For example:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm
```

#### 2. Add the replica group entry using the **ldapadd** utility. For example:

```
dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default
```

- #### 3. Replica subentries:
- Because this topology is using a master, a forwarding, and a read-only replica server, replica subentries are only needed for the Master and for the Forwarder servers. The read-only Replica server does not need a replica subentry. The following entries can be added using the **ldapadd** utility.

For example, for a subentry for Master:

```
dn: ibm-replicaServerId=Master,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Master
ibm-replicationServerIsMaster: true
cn: Master
description: Subentry for Master
```

For example, for a subentry for Forwarder:

```
dn: ibm-replicaServerId=Forwarder,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Forwarder
ibm-replicationServerIsMaster: false
cn: Forwarder
description: Subentry for the Forwarder
```

The subentry for Master identifies the server ID as Master and has the server declared as a master server. The server can receive updates from clients. The subentry for the Forwarder identifies the server ID as Forwarder, and is declared as a non-master server. It cannot get updates from clients.

4. **Supplier server credentials entry:** This step defines the credentials that the Master uses to bind to the Forwarder. Add the entry with the **ldapadd** utility. For example:

```
dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials on master to bind to forwarder
```

5. **Replication agreements:** There are two supplier-consumer relationships in this topology. Master supplies updates made to the o=ibm,c=us subtree to Forwarder, that consumes the changes and then supplies these changes to the Replica. Therefore, there are two agreements:

- a. From Master to Forwarder
- b. From Forwarder to Replica

**Note:** The number of replication agreements is dependent upon the number of supplier-consumer relationships in the topology.

For example, a replication agreement from Master to Forwarder:

```
dn: cn=Forwarder, ibm-replicaServerId=Master,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Forwarder
ibm-replicaConsumerId: Forwarder
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Master to Forwarder
```

For example, a replication agreement from Forwarder to Replica:

```
dn: cn=Replica, ibm-replicaServerId=Forwarder,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Replica
ibm-replicaConsumerId: Replica
ibm-replicaUrl: ldap://server3.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Forwarder to Replica
```

The two agreements for this topology are shown. The first one is the agreement from Master to Forwarder. It is under the Master subentry. The second one is from Forwarder to Replica and it is under the Forwarder subentry. Note the use of the same credentials entry for both agreements. This is acceptable. The consumer server credentials entry is added to both Master and Forwarder servers.

- Now that the replication entries have been added, the `mfr.ldif` file is as follows:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm

dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default

dn: ibm-replicaServerId=Master,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Master
```

```

ibm-replicationServerIsMaster: true
cn: Master
description: Subentry for Master.

dn: ibm-replicaServerId=Forwarder,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
ibm-replicaServerId: Forwarder
ibm-replicationServerIsMaster: false
cn: Forwarder
description: Subentry for the Forwarder.

dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials on master to bind to forwarder.

dn: cn=Forwarder, ibm-replicaServerId=Master,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Forwarder
ibm-replicaConsumerId: Forwarder
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Master to Forwarder

dn: cn=Replica, ibm-replicaServerId=Forwarder,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Replica
ibm-replicaConsumerId: Replica
ibm-replicaUrl: ldap://server3.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Forwarder to Replica

```

- Next, add the `mfr.ldif` file on the Master server. Use the **ldapadd** utility on the Master where the `mfr.ldif` file was created. For example:

```
ldapadd -h server1.us.ibm.com -p 389 -D adminDN -w adminPW -f mfr.ldif -k -L
```

- Next, add the `mfr.ldif` file on the Forwarder server. Use the **ldapadd** utility on the Master server and target the Forwarder server. For example:

```
ldapadd -h server2.us.ibm.com -p 389 -D adminDN -w adminPW -f mfr.ldif -k -L
```

The `-L` option on the **ldapadd** utility sends the **Do Not Replicate** control to the server that indicates not to replicate the topology now. The `-k` option sends the **Server Administration** control to the server so that the addition of entries continues even when the subtree becomes read-only because of a server ID mismatch.

- Next, add the replication topology to the Replica also. Use the **ldapexop** utility. For example:

```
ldapexop -h server2.us.ibm.com -p 389 -D adminDN -w adminPW -op repltopology -rc
o=ibm,c=us
```

This is an example of the **Replication topology** extended operation. It propagates the advanced replication topology to the Replica defined under the `o=ibm,c=us` replication context. See [“The ldapexop utility”](#) on page 253 for additional information about the **ldapexop** utility.

- After the **ldapadd** and **ldapexop** commands are performed successfully, the master-forwarder-replica topology is ready. The Master accepts updates, that go to the Forwarder and then to the Replica. If you intend to add another replica to the topology, under the forwarder, you must add another subentry for the replica, and add an agreement from the forwarder to that replica.

## Creating a gateway topology

A gateway topology requires at least two gateway servers. Gateway topologies are created in a similar manner to a master-forwarder-replica (cascading) topology. A gateway topology includes gateway master servers that forward all replication traffic from the local replication site where it exists to other gateway servers in the replicating network. A gateway server also receives replication traffic from other gateway servers within the replication network and forwards updates to all servers on its local replication site.

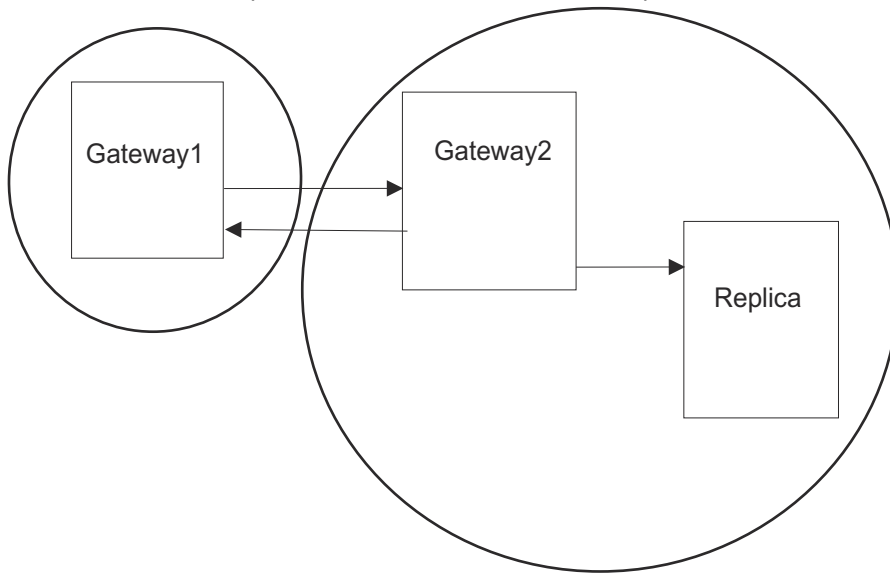


Figure 51. Gateway topology

In a gateway topology, gateway servers are distinguished from normal master servers by including the **ibm-replicaGateway** objectclass for the replica subentry in the replication context. As previously stated, a server is a master if the server ID in the replica subentry within the replication context equals the servers server ID and the subentry's **ibm-replicationServerIsMaster** attribute is set to **true**. See [“Replica subentries” on page 482](#) for more information about replica subentries.

- The first step when building a topology is to define:
  1. **Replication context:** `o=ibm,c=us`
  2. **Supplier:** LDAP server on `server1.us.ibm.com:389` with server ID `Gateway1` supplies updates to the LDAP server with server ID `Gateway2` on `server2.us.ibm.com:389`. LDAP server on `server2.us.ibm.com:389` with server ID `Gateway2` supplies updates to the LDAP server with server ID `Gateway1` on `server1.us.ibm.com:389` and to the LDAP server with server ID `Replica` on `server3.us.ibm.com:389`.
  3. **Consumer:** LDAP server with server ID `Gateway2` on `server2.us.ibm.com:389` consumes updates from LDAP server with server ID `Gateway1` on `server1.us.ibm.com:389`. LDAP server with server ID `Gateway1` on `server1.us.ibm.com:389` consumes updates from LDAP server with server ID `Gateway2` on `server2.us.ibm.com:389`. LDAP server with server ID `Replica` on `server3.us.ibm.com:389` consumes updates from LDAP server with server ID `Gateway2` on `server2.us.ibm.com:389`.
  4. **read/write servers:** LDAP servers `Gateway1` and `Gateway2` on `server1.us.ibm.com` and `server2.us.ibm.com` are read/write servers.
  5. **Read-only server:** LDAP server `Replica` on `server3.us.ibm.com` is a read-only server.

**Configuration changes:** Some configuration changes must be made to the `Gateway1`, `Gateway2`, and `Replica` servers for replication to work correctly. Configured servers should be current. If reusing the same servers that were used for the Master-Replica setup, undo the changes that were made in [“Creating a master-replica topology” on page 499](#). If reusing the same servers that were used for the Peer-Peer setup, undo the changes that were made in [“Creating a peer-to-peer replication topology” on](#)

page 502. If reusing the same servers that were used for the Master-forwarder-replica setup, undo the changes that were made in [“Creating a master-forwarder-replica \(cascading\) topology”](#) on page 506.

**Note:** These are done here for this example only. The server ID is only allowed to be modified when there are no replica subentries defined in the server. See [“cn=configuration”](#) on page 138 for more information about the **ibm-slappedServerID** attribute value.

### 1. Server IDs:

- On the Gateway1 server (server1.us.ibm.com), apply the following modify using the **ldapmodify** utility. For more information about the **ldapmodify** utility, see [ldapmodify and ldapadd utilities](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

```
dn: cn=configuration
changetype: modify
replace: ibm-slappedserverid
ibm-slappedserverid: Gateway1
```

- On the Gateway2 server (server2.us.ibm.com), apply the following modify using the **ldapmodify** utility.

```
dn: cn=configuration
changetype: modify
replace: ibm-slappedserverid
bm-slappedserverid: Gateway2
```

- On the Replica server (server3.us.ibm.com), apply the following modify using the **ldapmodify** utility.

```
dn: cn=configuration
changetype: modify
replace: ibm-slappedserverid
ibm-slappedserverid: Replica
```

2. **Consumer server credentials entry:** Add the first entry to the Gateway1 server, the second entry to the Gateway2 server, and the third entry to the Replica server using the **ldapadd** utility. For more information about the **ldapadd** utility, see [ldapmodify and ldapadd utilities](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

**Note:** An alternative is to add entries with an **ibm-slappedSupplier** objectclass.

For example, for a consumer server credentials entry for Gateway1:

```
dn: cn=Master server,cn=configuration
changetype: add
cn: master server
ibm-slappedMasterDN: cn=bindtoconsumer
ibm-slappedMasterPW: iamsupplier
ibm-slappedMasterReferral: ldap://server2.us.ibm.com:389
objectclass: ibm-slappedReplication
```

For example, for a consumer server credentials entry for Gateway2:

```
dn: cn=Master server,cn=configuration
changetype: add
cn: master server
ibm-slappedMasterDN: cn=bindtoconsumer
ibm-slappedMasterPW: iamsupplier
ibm-slappedMasterReferral: ldap://server1.us.ibm.com:389
objectclass: ibm-slappedReplication
```

For example, for a consumer server credentials entry for Replica:

```
dn: cn=Master server,cn=configuration
changetype: add
cn: master server
ibm-slappedMasterDN: cn=bindtoconsumer
ibm-slappedMasterPW: iamsupplier
ibm-slappedMasterReferral: ldap://server2.us.ibm.com:389
objectclass: ibm-slappedReplication
```

- The next step is to build the LDIF file for the replication topology. This LDIF file is called **gateway.ldif**. Copy each of these entries to **gateway.ldif** with the necessary changes in the subtree, server IDs, host names, and ports.

### 1. Replication context:

- If the subtree entry exists, use the **ldapmodify** utility to modify the existing entry. For example:

```
dn: o=ibm,c=us
changetype: modify
add: objectclass
objectclass: ibm-replicationContext
```

- If the subtree entry does not exist, add the entry with the **ibm-replicationContext** auxiliary objectclass by using the **ldapadd** utility. For example:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm
```

### 2. Add the replica group entry using the **ldapadd** utility. For example:

```
dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default
```

3. **Replica subentries:** Because this topology is using two gateways and a read-only replica server, replica subentries are only needed for the Gateway1 and for the Gateway2 servers. The read-only Replica server does not need a replica subentry. The following entries can be added using the **ldapadd** utility.

For example, for a subentry for Gateway1 (note that an objectclass of **ibm-replicaGateway** has been added to this entry to indicate that it is a gateway server):

```
dn: ibm-replicaServerId=Gateway1,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
objectclass: ibm-replicaGateway
ibm-replicaServerId: Gateway1
ibm-replicationServerIsMaster: true
cn: Gateway1
description: Subentry for Gateway1.
```

For example, for a subentry for Gateway2 (note that an objectclass of **ibm-replicaGateway** has been added to this entry to indicate that it is a gateway server):

```
dn: ibm-replicaServerId=Gateway2,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
objectclass: ibm-replicaGateway
ibm-replicaServerId: Gateway2
ibm-replicationServerIsMaster: true
cn: Gateway2
description: Subentry for Gateway2.
```

The subentry for Gateway1 identifies the server ID as Gateway1 and has the server declared as a gateway server. The Gateway1 server can receive updates from clients. The subentry for Gateway2 identifies the server ID as Gateway2 and has the server declared as a gateway server. The Gateway2 server can receive updates from clients.

4. **Supplier server credentials entry:** This step defines the credentials that Gateway1 uses to bind to Gateway2, Gateway2 uses to bind to Gateway1, and Gateway2 uses to bind to Replica. Add the entry with the **ldapadd** utility. For example:

```
dn: cn=ReplicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: ReplicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials used on the gateway servers.
```

5. **Replication agreements:** There are three supplier-consumer relationships in this topology. Gateway1 supplies updates made to the o=ibm,c=us subtree to Gateway2. Gateway2 supplies updates made to the o=ibm,c=us subtree to Gateway1 and to Replica. Therefore, there are three agreements:

- a. from Gateway1 to Gateway2
- b. from Gateway2 to Gateway1
- c. from Gateway2 to Replica

**Note:** The number of replication agreements is dependent upon the number of supplier-consumer relationships in the topology.

For example, a replication agreement from Gateway1 to Gateway2:

```
dn: cn=Gateway2,ibm-replicaServerId=Gateway1,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Gateway2
ibm-replicaConsumerId: Gateway2
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Gateway1 to Gateway2.
```

For example, a replication agreement from Gateway2 to Gateway1:

```
dn: cn=Gateway1,ibm-replicaServerId=Gateway2,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Gateway1
ibm-replicaConsumerId: Gateway1
ibm-replicaUrl: ldap://server1.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Gateway2 to Gateway1.
```

For example, a replication agreement from Gateway2 to Replica:

```
dn: cn=Replica, ibm-replicaServerId=Gateway2,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Replica
ibm-replicaConsumerId: Replica
ibm-replicaUrl: ldap://server3.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Gateway2 to Replica.
```

The three agreements for this topology are shown above. The first one is the agreement from Gateway1 to Gateway2. It is under the Gateway1 subentry. The second one is from Gateway2 to Gateway1 and it is under the Gateway2 subentry. The third one is from Gateway2 to Replica and it is also under the Gateway2 subentry. Note the use of the same credentials entry for all three agreements. This is acceptable. The consumer server credentials entry is added to Gateway1, Gateway2, and Replica servers.



- Now that the replication entries have been added, the **gateway.ldif** file is as follows:

```
dn: o=ibm,c=us
changetype: add
objectclass: top
objectclass: organization
objectclass: ibm-replicationContext
o: ibm

dn: ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaGroup
ibm-replicaGroup: default

dn: ibm-replicaServerId=Gateway1,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
objectclass: ibm-replicaGateway
ibm-replicaServerId: Gateway1
ibm-replicationServerIsMaster: true
cn: Gateway1
description: Subentry for Gateway1.

dn: ibm-replicaServerId=Gateway2,ibm-replicaGroup=default, o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicaSubentry
objectclass: ibm-replicaGateway
ibm-replicaServerId: Gateway2
ibm-replicationServerIsMaster: true
cn: Gateway2
description: Subentry for Gateway2.

dn: cn=replicaBindCredentials, o=ibm,c=us
changetype: add
objectclass: ibm-replicationCredentialsSimple
cn: replicaBindCredentials
replicaBindDN: cn=bindtoconsumer
replicaCredentials: iamsupplier
description: Bind Credentials used on the gateway servers.

dn: cn=Gateway2,ibm-replicaServerId=Gateway1,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Gateway2
ibm-replicaConsumerId: Gateway2
ibm-replicaUrl: ldap://server2.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Gateway1 to Gateway2.

dn: cn=Gateway1,ibm-replicaServerId=Gateway2,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Gateway1
ibm-replicaConsumerId: Gateway1
ibm-replicaUrl: ldap://server1.us.ibm.com:389
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Gateway2 to Gateway1.

dn: cn=Replica, ibm-replicaServerId=Gateway2,ibm-replicaGroup=default,o=ibm,c=us
changetype: add
objectclass: top
objectclass: ibm-replicationAgreement
cn: Replica
ibm-replicaConsumerId: Replica
ibm-replicaUrl: ldap://server3.us.ibm.com:389
```

```
ibm-replicaCredentialsDN: cn=ReplicaBindCredentials, o=ibm,c=us
description: Replication agreement from Gateway2 to Replica.
```

- Next, add the **gateway.ldif** file on the Gateway2 server. Use the **ldapadd** utility on Gateway2 where the **gateway.ldif** file was created. For example:

```
ldapadd -h server2.us.ibm.com -p 389 -D adminDN -w adminPW -f gateway.ldif -k -L
```

The **-L** option on the **ldapadd** utility sends the **Do Not Replicate** control to the server that indicates not to replicate the topology now. The **-k** option sends the Server Administration control to the server so that the addition of entries continues even when the subtree becomes read-only because of a server ID mismatch.

- Next, add the replication topology to the Gateway1 and Replica servers. Use the **ldapexop** utility. For example:

```
ldapexop -h server2.us.ibm.com -p 389 -D adminDN -w adminPW -op repltopology
-rc o=ibm,c=us
```

This is an example of the **Replication topology** extended operation. It propagates the advanced replication topology to the Gateway1 and Replica servers defined under the **o=ibm,c=us** replication context. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.

- After the **ldapadd** and **ldapexop** commands are performed successfully, the gateway topology is ready. The Gateway1 server accepts updates that go to the Gateway2 server. The Gateway2 server also accepts updates that are then forwarded to the Gateway1 and Replica servers.

## Replication topology hints and tips

The following is helpful information about replication topologies.

1. When setting up the advanced replication topologies, all master servers are in maintenance mode until all the topology entries have been loaded on all servers participating in the topology. The Do Not Replicate and Server Administration controls are also used when adding entries for configuring advanced replication topologies. This precludes updates to master servers that would be lost if they are received before all server responsibilities (replica, master, forwarder, gateway) and relationships (replication agreement) being established.
2. All peers in a topology must supply to every other server in the topology unless they are separated by gateways. If they are separated by gateways, all the peers under a gateway must supply to all other servers including the gateway. This is because peers do not replicate changes supplied by other peers. That leads to peers receiving the updates they initiated.
3. All gateways in a topology must supply to each other. There must be at least two gateways in a topology for them to be useful.
4. Read-only servers do not accept updates that clients send. When an update is attempted against a read-only server, the referral list returned to the client is established from the following:
  - a. The **ibm-replicationContext** objectclass allows for an optional attribute, **ibm-replicaReferralURL**. As stated previously, the **ibm-replicationContext** auxiliary objectclass must be added to the root of the subtree. This objectclass identifies the subtrees that are replication contexts. The **ibm-replicaReferralURL** attribute can hold a space delimited list of LDAP URLs. The URLs specified appears first in the list of referrals returned to the client. See [“Replication contexts” on page 481](#) for more information about replication contexts.
  - b. The **cn=configuration** subtree in the CDBM backend allows a consumer server credentials entry with an objectclass of **ibm-slappedReplication** to be stored. If this object exists and contains a value for the **ibm-slappedMasterReferral** attribute, the value is appended to referral list set by the replication context. If the replication context does not define a referral list with the **ibm-replicaReferralURL** attribute, this is the only value sent to the client. See [“Consumer server entries” on page 491](#) for more information about consumer server entries.
  - c. If the LDAP server configuration file has a **referral** configuration option specified and there are no consumer server credentials entries in the **cn=configuration** subtree with an **ibm-**

**slapdMasterReferral** value, the **referral** option values are appended to the referral list set by the replication context. If the replication context does not have a referral list specified with the **ibm-replicaReferralURL** attribute and the consumer server credentials entry is not providing a referral list, the **referral** option is the only value sent to the client. See [Chapter 8, “Customizing the LDAP server configuration,”](#) on page 83 for more information about the **referral** configuration option.

## Replication of schema and password policy updates

---

Advanced replication allows the replication of schema, password policy entries, and other entries under the **cn=ibmpolicies** suffix. Schema, password policy, and other updates can be replicated by configuring a replication topology under the **cn=ibmpolicies** suffix in the CDBM backend. By default, schema and password policy updates are not replicated unless a replication topology is configured in the **cn=ibmpolicies** suffix.

Before configuring schema replication, verify that the schema between the servers is already synchronized by using the **ldapdiff** utility. See [“The ldapdiff utility”](#) on page 245 for more information about the **ldapdiff** utility. If using the **ldapdiff** utility for schema comparison, the **-S** option must be specified. Make sure the **-L** option is specified so that schema differences are stored in an output LDIF file. The **ldapdiff** utility does not automatically fix schema differences on the consumer server. The schema on the consumer server must be manually modified with the output schema LDIF file generated by the **ldapdiff** utility.

Before configuring replication of password policy and other entries in the **cn=ibmpolicies** suffix, verify that the entries are already synchronized by using the **ldapdiff** utility. If LDAP password policy is active on both servers, make sure that each server is configured to use the same password policy rules.

Schema replication and replication of entries in the **cn=ibmpolicies** suffix is the same as configuring advanced replication in the LDBM or TDBM backends. See [“Advanced replication configuration examples”](#) on page 496 for information about configuring advanced replication, however, change the suffix used in those examples with **cn=ibmpolicies**. When the advanced replication entries are properly configured in the CDBM backend, the server performs schema replication and replication of entries in the **cn=ibmpolicies** suffix.

## Protecting replication topology entries

---

The default propagating ACLs inherited from a suffix or root entry might be inappropriate for controlling access to the replication topology entries. To protect access to all replication topology entries in the server, make sure that the **ibm-slapdReplRestrictedAccess** attribute value is set to true in the **cn=replication,cn=configuration** entry. When the **ibm-slapdReplRestrictedAccess** attribute is true, only an LDAP root, directory data, or replication administrator, and the master server DN for the replication context is allowed access to the replication topology entries. See [“cn=Replication,cn=configuration”](#) on page 140 for more information about the **ibm-slapdReplRestrictedAccess** attribute.

## Unconfiguring advanced replication

---

If advanced replication is no longer needed, perform the following steps on the supplier server to remove the replication topology entries:

1. Ensure that the supplier server is in maintenance mode. See [“Advanced replication maintenance mode”](#) on page 518 for more information about advanced replication maintenance mode.
2. Bind to the supplier server as an LDAP administrator. See [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information about administrative role authority.
3. Delete the replication agreement entry.
4. Delete the replica subentry.
5. Delete the replica group.

6. Delete the **ibm-replicationContext** attribute value from the objectclass attribute type from the replication context.
7. Move the supplier server out of maintenance mode. See [“Advanced replication maintenance mode” on page 518](#) for more information about advanced replication maintenance mode.

On the consumer server, perform the following steps to remove the replication topology entries:

1. Ensure that the consumer server is in maintenance mode. See [“Advanced replication maintenance mode” on page 518](#) for more information about advanced replication maintenance mode.
2. Bind to the consumer server as an LDAP administrator. See Chapter 9, “Administrative group and roles,” on page 155 for more information about administrative role authority.
3. Delete the replication agreement entry.
4. Delete the replica subentry.
5. Delete the replica group.
6. Delete the **ibm-replicaReferralURL** attribute from the replication context.
7. Delete the **ibm-replicationContext** attribute value from the objectclass attribute type from the replication context.
8. If the server is no longer a consumer server for any other replication contexts, delete the consumer server credentials entry with an objectclass of **ibm-slappedReplication**.
9. If there are any consumer server credentials entries with an objectclass of **ibm-slappedSupplier** that have only one **ibm-slappedReplicaSubtree** attribute value equal to the replication context that is being deleted, the entry can be deleted, or else, delete the **ibm-slappedReplicaSubtree** attribute value from the consumer server credentials entry.
10. Move the consumer server out of maintenance mode. See [“Advanced replication maintenance mode” on page 518](#) for more information about advanced replication maintenance mode.

Once all replication topology entries are removed from the supplier and consumer servers, the **useAdvancedReplication** configuration option in the CDBM backend is set to **off** in both servers.

At this point, advanced replication is no longer configured between these two servers and each server is distinctly managing the data in the subtree that made up the replication context.

## Advanced replication maintenance mode

---

Maintenance mode allows an LDAP root administrator to set up the server for advanced replication. This mode restricts access to all entries in an LDAP server. This allows the advanced replication topology to be fully configured on all servers participating in advanced replication.

While the LDAP server is in maintenance mode, an LDAP root administrator (for example, the **adminDN**) has unrestricted access to all entries in the server and can update operational attributes, such as **ibm-entryuuid** and **modifyTimestamp**, in the server. The operational attribute values in the replicateOperationalAttributes control are allowed to be updated when bound as an LDAP root administrator in maintenance mode. When the server is not in maintenance mode, an LDAP root administrator must specify the Server Administration control for the server to honor the operational attribute values in the replicateOperationalAttributes control. See Appendix C, “Supported server controls,” on page 653 for more information about the replicateOperationalAttributes and Server Administration controls.

Consumer servers under maintenance mode continue to accept updates from supplier servers.

Pending replication entries are replicated to consumer servers, but, updates performed when in maintenance mode are not replicated.

Other users can bind to the LDAP server, but cannot access any entries within the server.

Specify the **-m** option on the server startup command to start the LDAP server in maintenance mode.

The LDAP server MAINTMODE operator modify command can be used to change from maintenance mode

to normal mode while the LDAP server is running. It can also be used to put a running server into maintenance mode.

The following command can be sent to the LDAP server from the SDSF or the operators console. If the command is entered from SDSF, it must be preceded by a slash (/).

```
f dssrv,maintmode state
```

where **state** can be **on** to turn on maintenance mode or **off** to turn maintenance mode off (and turn on normal mode).

## Partial replication

Partial replication is an advanced replication feature that replicates only the specified entries and a subset of attributes for the specified entries within a subtree. The entries and attributes that are to be replicated are specified by an LDAP administrator with the appropriate authority. See [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information about administrative role authority. Using partial replication, an administrator can enhance the replication bandwidth depending on the deployment requirements. With partial replication support, an LDAP administrator can allow entries that have certain object class values to be replicated to a consumer server. For example, entries that have an objectclass of **person** and only the **cn**, **sn**, **userPassword** attributes are allowed to be replicated but not the **description** attribute.

The replication filter entry can be specified in each individual replication agreement entry in the **ibm-replicationFilterDN** attribute value. See [“Replication agreements”](#) on page 483 for more information. A replication filter entry has a structural objectclass of **ibm-replicationFilter**. See [Table 80 on page 519](#) for the required attribute values for the **ibm-replicationFilter** objectclass. If an **ibm-replicationFilterDN** attribute value is not a valid replication filter entry or does not exist, replication for the replication agreement is suspended. If replication from the replication agreement is suspended, the replication filter entry must be added to the directory or the **ibm-replicationFilterDN** attribute value must be removed from the replication agreement entry. When replication is suspended for the replication agreement, it can be resumed by using the **Control replication** extended operation in the **ldapexop** utility. See [“The ldapexop utility”](#) on page 253 for more information about the **ldapexop** utility.

The attributes that are to be replicated are specified using a replication filter in the **ibm-replicationFilterAttr** attribute. A set of attributes pertaining to an object class constitutes a replication filter. The list of attributes selected for an object class can either be a part of an inclusion list or an exclusion list. An inclusion list is list of attributes that are selected for replication while an exclusion list is list of attributes that are not selected for replication. See [Table 80 on page 519](#) for the required attribute values for the format of the **ibm-replicationFilterAttr** attribute values.

*Table 80. **ibm-replicationFilter** objectclass schema definition (required attributes)*

| Attribute description and example                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>cn</b><br>Common name of the replication filter entry. This attribute does not affect advanced replication configuration.<br>Example:<br><pre>cn: filter1</pre> |

| Table 80. <i>ibm-replicationFilter</i> objectclass schema definition (required attributes) (continued)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute description and example                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <p><b>ibm-replicationFilterAttr</b></p> <p>A multi-valued attribute that specifies a replication filter. A replication filter is based on the object class values of entries that are replicated. The filter can be an inclusion or exclusion filter.</p> <p>The following is the replication filter format:</p> <pre>(objectclass=objclass):[!](attr1[,attr2]...)</pre> <p>where,</p> <p>objclass Specifies a valid objectclass in the servers schema. If an * is specified, then all other objectclasses not specified by other <b>ibm-replicationFilterAttr</b> attribute values (if any) in the replication filter entry, are subject to this replication filter.</p> <p>! If specified, indicates that the attribute type list is an exclusion list, otherwise, it is an inclusion list.</p> <p>attr1, attr2 Specifies a list of valid attribute types in the servers schema. If an exclusion list, the attribute types in this list are not replicated for entries that have an objectclass value of objclass. If an inclusion list, the attribute types in this list are replicated for entries that have an objectclass value of objclass. An * can be specified to indicate all attribute types for the objclass.</p> <p>The following attributes are always replicated, irrespective of their presence in the exclusion list:</p> <ul style="list-style-type: none"> <li>• Object class attributes of an entry</li> <li>• Naming attribute</li> <li>• All operational attributes (for example, <b>ibm-entryuuid</b> attribute values)</li> </ul> <p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. If an attribute type is present in both an inclusion and an exclusion list, the exclusion takes precedence.</li> <li>2. If there is not an <b>ibm-replicationFilterAttr</b> attribute value with objclass equal to *, no replication with entries that have an objectclass other than the ones explicitly specified is done. This acts as if an <b>ibm-replicationFilterAttr</b> attribute value of (objectclass=*) : ! (*) is specified on the replication filter entry.</li> </ol> <p>Example:</p> <pre>ibm-replicationFilterAttr: (objectclass=person):(cn,sn)</pre> |

The example in [Table 80 on page 519](#) allows the following replication to occur:

- Entries with an objectclass of **person** only have their **cn** and **sn** attribute values replicated.
- Entries with other objectclasses are not replicated.

## Replication filter examples

The following are examples that explain the usages of replication filters:

### Example 1

```
dn: cn=replicationfilter, cn=localhost
objectclass: ibm-replicationFilter
ibm-replicationFilterAttr: (objectclass=person):(*)
ibm-replicationFilterAttr: (objectclass=*) : !(*)
```

The first **ibm-replicationFilterAttr** filter value indicates entries with an objectclass of **person** have all their attributes replicated. The second **ibm-replicationFilterAttr** filter value indicates entries with an objectclass other than **person** are not replicated. This means that only entries with an objectclass of **person** are replicated and no other entries are replicated.

## Example 2

```
dn: cn=replicationfilter, cn=localhost
objectclass: ibm-replicationFilter
ibm-replicationFilterAttr: (objectclass=javaObject):(javaClassName,description)
ibm-replicationFilterAttr: (objectclass=javaNamingReference):(javaReferenceAddress)
ibm-replicationFilterAttr: (objectclass=*): !(javaReferenceAddress)
```

The first **ibm-replicationFilterAttr** filter value indicates entries with an objectclass of **javaObject** has their **javaClassName** and **description** attributes replicated. The second **ibm-replicationFilterAttr** filter value indicates entries with an objectclass of **javaNamingReference** has the **javaReferenceAddress** attribute replicated. The third **ibm-replicationFilterAttr** filter value indicates that the **javaReferenceAddress** attribute is not replicated for any entries other than **javaObject** and **javaNamingReference**.

Therefore, if an entry has an objectclass of **javaObject**, the **javaClassName** and **description** attributes are replicated. If an entry has an objectclass of **javaObject** and an auxiliary objectclass of **javaNamingReference**, the **javaClassName**, **description**, and **javaReferenceAddress** attributes are replicated. If an entry has an objectclass other than **javaObject** or **javaNamingReference**, all attributes except **javaReferenceAddress** are replicated.

## Example 3

```
dn: cn=replicationfilter, cn=localhost
objectclass: ibm-replicationFilter
ibm-replicationFilterAttr: (objectclass=person):(cn,sn,userPassword)
ibm-replicationFilterAttr: (objectclass=inetOrgPerson):!(userPassword,employeeNumber)
ibm-replicationFilterAttr: (objectclass=*): !(*)
```

The first **ibm-replicationFilterAttr** filter value indicates entries with an objectclass of **person** have their **cn**, **sn**, and **userPassword** attribute values replicated. The second **ibm-replicationFilterAttr** filter value indicates that entries with an objectclass of **inetOrgPerson** do not have their **userPassword** and **employeeNumber** attribute values replicated. The third **ibm-replicationFilterAttr** filter value indicates that no other attributes are replicated if the objectclass is something other than **person** or **inetOrgPerson**.

Therefore, if an entry has an objectclass of **person**, the attributes **cn**, **sn**, and **userPassword** are replicated. If an entry has objectclasses of **person** and **inetOrgPerson**, only the **cn** and **sn** attributes are replicated. Because the **userPassword** attribute is present in both the inclusion and exclusion list, the **userPassword** attribute is eliminated because exclusion takes precedence over inclusion. If any other entry has an objectclass other than **person** or **inetOrgPerson**, no attributes are replicated.

## SSL/TLS and advanced replication

SSL/TLS can be used to communicate between a replicating server (supplier, gateway, forwarder, or peer) and a replica server (consumer, gateway, forwarder, or peer).

### Replica server with SSL/TLS enablement (advanced)

Set up the replica server for SSL/TLS by updating the LDAP server configuration file if it is not already configured for SSL/TLS. An LDAP URL with a prefix of `ldaps://` is required in the `listen` configuration option in the replica server so that a secure connection can be configured. For more information, see [“Setting up for SSL/TLS” on page 68](#).

If a SASL EXTERNAL bind is performed between the replicating and replica servers, the replica server must be configured to use server and client authentication. The `sslAuth` configuration option must be set to `serverClientAuth`. The replica server must have the replicating servers certificate in its key database file, RACF key ring, or PKCS #11 token. For more information, see [“Setting up for SSL/TLS” on page 68](#).



## Replicating server with SSL/TLS enablement (advanced)

The replicating server acts as an SSL/TLS client to the replica server. To set up the replicating server to use simple binds, you must:

1. Run the **gskkyman** utility or the RACDCERT command as if you were the client.
  - For more information about the **gskkyman** utility, see [gskkyman overview](#) in *z/OS Cryptographic Services System SSL Programming*.
  - For more information about the RACDCERT command, see [RACDCERT \(Manage RACF digital certificates\)](#) in *z/OS Security Server RACF Command Language Reference*.

The key database file, RACF key ring, or PKCS #11 token must contain the replicating servers key pair and certificate. Receive the replicas self-signed certificate and mark it as trusted.

2. In the LDAP server configuration file on the replicating server:
  - Set the `sslKeyRingFile` configuration option to the replica key database file, RACF key ring, or PKCS #11 token that was just created.
  - If a key database file is used, set `sslKeyRingFilePW` to the password for the key database file, or set `sslKeyRingPWStashFile` to the file name where the password is stashed.
3. Ensure that any environment variables that control SSL/TLS settings are properly defined in the LDAP server environment variable file. The environment variables for enabling TLS protocol levels are shared with the server definitions. For example, `GSK_PROTOCOL_TLSV1_3=ON` enables this protocol level for both inbound client connections to the replicating server and for outbound connections from the replicating server to the replica. However, since the replicating server acts as an SSL/TLS client to the replica, the environment variable usage for controlling cipher suites is as described for the client API. The SSL cipher format that you should use on the outbound connections to the replicas is controlled by the `LDAP_SSL_CIPHER_FORMAT` environment variable and then either the `GSK_V3_CIPHER_SPECS` or `GSK_V3_CIPHER_SPECS_EXPANDED` environment variable, depending on which format is chosen.

To enable TLS V1.3 protocol, you need to set environment variables for signature algorithm pair specification.

- When the LDAP server is a replicating server in replication topology, the environment variable `GSK_CLIENT_TLS_KEY_SHARES` for the key share option should be set.
- When the LDAP server is a replica server in replication topology, the environment variable `GSK_CLIENT_TLS_KEY_SHARES` for the key share option should be set.
- When the LDAP server is master-peer replication topology, the environment variables `GSK_SERVER_TLS_KEY_SHARES` and `GSK_CLIENT_TLS_KEY_SHARES` should be both set.

For more information about the environment variables, see [Environment variables](#) in *z/OS Cryptographic Services System SSL Programming*.

The SSL cipher suites on the inbound client connections are controlled by the configured setting of `sslCipherSpecs` and can potentially share the setting that is specified on `GSK_V3_CIPHER_SPECS_EXPANDED`. Where settings are shared for both inbound client connections and outbound connections to replicas, the cipher list must include the necessary cipher suites for both sets of connections.

4. The `ibm-replicaURL` attribute value in the replication agreement entry must use an LDAP URL with a prefix of `ldaps://` to indicate that an SSL connection is used between the replicating and replica servers. For information about the `ibm-replicaURL` attribute value, see [Table 71 on page 483](#)

This procedure can also be used to set up the replicating server to use SASL EXTERNAL binds. The SSL-related configuration options in the LDAP server configuration file, if specified, represent the default values for the related optional attributes in `ibm-replicationCredentialsExternal` objects. These defaults can be overridden by specifying the optional attributes. For more information about SASL EXTERNAL credentials entries, see [Table 74 on page 487](#).

Because the replicating server acts as an SSL/TLS client to the replica server, the replicating server binds with the replica server.



## Displaying advanced replication configuration

---

Because many replication topologies can be configured in the LDAP server at one time, the LDAP server `DISPLAY REPLICAS` operator modify command is used to allow an LDAP administrator to easily query the current state of all configured replication contexts and replication agreements in the LDAP server. This command allows an LDAP administrator to verify that the advanced replication topologies are configured properly and are working as expected. See [“Displaying performance information and server settings” on page 179](#) for more information about the LDAP server `DISPLAY REPLICAS` operator modify command.

If the LDAP server `DISPLAY REPLICAS` operator modify command output indicates that there are problems in a replication agreement entry, LDAP search requests can be used to query the replication agreement entry's operational attributes to determine the replication problems. See [“Monitoring and diagnosing advanced replication problems” on page 525](#) for more information.

## Command line tasks for managing replication

---

This topic contains information about the use of the tools that are at your disposal to check the current advanced replication status for each of your configured replication agreements. These procedures can be used to recover from out of sync conditions between servers participating in advanced replication.

### Advanced replication related extended operations

A set of extended operations is provided to allow administrators the opportunity to manage all aspects of advanced replication. Specifically, the extended operations allow an administrator to do the following:

- Propagate any replication topology entries to all consumers
- Manage the replication queue, especially in the context of replication scheduling
- Manage any replication-related errors
- Manage the quiesce state of the replication context
- Suspend or resume replication processing

The extended operations also allow for an administrator to manage a specific server and then have the server cascade the management operation to any of its consumers. These extended operations require the user to bind as an LDAP root administrator or an administrator with the appropriate authority. See [“Administrative roles and extended operations” on page 163](#) for more information about administrative role authority to run these extended operations. The **ldapexop** utility is provided to invoke the advanced replication extended operations. This utility provides a command-line interface to all the advanced replication extended operations. See [“The ldapexop utility” on page 253](#) for more information.

[Table 81 on page 524](#) summarizes the extended operations with their **ldapexop** operation value.

**Note:** The term *cascade* is used to describe the process of a supplier server issuing an extended operation it processed to one or all of its consumers.

Table 81. Description of advanced replication extended operations on the ldapexop utility

| ldapexop operation | ldapexop description                                    | Overview                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cascrepl           | <b>Cascading control replication</b> extended operation | <p>This extended operation can quiesce, unquiesce, or force immediate replication of all pending changes (even if scheduling is dictated another way). When the extended operation is performed on the supplier that this extended operation was issued against, it proceeds to cascade the extended operation to one or all of its consumers.</p> <p>If forcing immediate replication of all pending changes, two variants of the extended operation can be issued. If the replication of all pending changes must complete before the cascade step, an administrator can use the <b>wait</b> option. If there are no dependencies on the completion of the replication operations before cascading, the <b>replnow</b> option can be used. See <a href="#">“Cascading control replication”</a> on page 670 for more information about the <b>Cascading control replication</b> extended operation.</p> |
| controlqueue       | <b>Control replication queue</b> extended operation     | <p>This extended operation can skip one or all pending changes in the advanced replication queue. See <a href="#">“Control replication queue”</a> on page 677 for more information about the <b>Control replication queue</b> extended operation.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| controlrepl        | <b>Control replication</b> extended operation           | <p>This extended operation suspends or resumes all advanced replication-related activity.</p> <p>Also, given any replication schedule objects that might exist, resuming replication does not necessarily cause the immediate replication of any pending changes. Instead, in addition to resume, this extended operation can be used to begin the immediate replication of any pending changes, even if replication schedule objects have deferred replication. See <a href="#">“Control replication”</a> on page 674 for more information about the <b>Control replication</b> extended operation.</p>                                                                                                                                                                                                                                                                                                 |
| controlreplerr     | <b>Control replication error log</b> extended operation | <p>This extended operation can delete, retry, or show, any replication operations that resulted in an unsuccessful return code returned to the supplier from the consumer.</p> <p>The show options returns an LDIF representation of the unsuccessful replication operation. See <a href="#">“Control replication error log”</a> on page 675 for more information about the <b>Control replication error log</b> extended operation.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

| Table 81. Description of advanced replication extended operations on the ldapexop utility (continued) |                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ldapexop operation                                                                                    | ldapexop description                                   | Overview                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| quiesce                                                                                               | <b>Quiesce or unquiesce context</b> extended operation | <p>This extended operation can quiesce or unquiesce a replication context.</p> <p>A quiesced replication context typically cannot accept any LDAP update operations. To perform LDAP update operations on a quiesced context, the update operations must be done by an LDAP administrator with the appropriate authority and using the Server Administration control. See Chapter 9, “Administrative group and roles,” on page 155 for more information about administrative role authority. See “Quiesce or unquiesce context” on page 684 for more information about the <b>Quiesce or unquiesce context</b> extended operation.</p> |
| repltopology                                                                                          | <b>Replication topology</b> extended operation         | <p>This extended operation propagates advanced replication topology-related entries to all consumers. It then cascades this extended operation to all the consumers. This results in a cascading of the topology-related entries to all servers that participate in replication for a given replication context. See “Replication topology” on page 686 for more information about the <b>Replication topology</b> extended operation.</p>                                                                                                                                                                                             |

## Viewing replication configuration information

A great deal of information related to replication activity is available using searches. To see the replication topology information related to a particular replicated subtree, you can do a subtree search with the base set to the DN of the subtree and the filter set as (**objectclass=ibm-repl\***) to find the subentry that is the base of the topology information.

```
ldapsearch -p port -D adminDN -w adminPW -b baseDn objectclass=ibm-repl*
```

The objects returned includes the replica group itself, plus the following:

- Entries with an objectclass of **ibm-replicaSubentry** for each server that replicates data within this replication context. These entries are replica subentries that contain a server ID attribute and the role that servers plays in the replication topology. See “Replica subentries” on page 482 for more information about replica subentries.
- For each replica subentry, there is a replication agreement entry for each consumer server that receives replication updates from the server described by the replica subentry. See “Replication agreements” on page 483 for more information about replication agreement entries.

## Monitoring and diagnosing advanced replication problems

An LDAP administrator can monitor the state of advanced replication processing and troubleshoot problems by using LDAP search requests to retrieve operational attributes available for the roots of the replication contexts (entries with an objectclass of **ibm-replicationContext**) and replication agreements (entries with an objectclass of **ibm-replicationAgreement**). Because these are operational attributes, either the + attribute or each individual attribute must be requested on a search request in order to be returned. Also, operational attributes cannot be used in search filters.

The following tables describe the operational attributes for the replication context and replication agreement entries. Replication context entries use the auxiliary objectclass of **ibm-replicationContext** and replication agreement entries use the structural objectclass **ibm-replicationAgreement**. See [Table](#)

82 on page 526 for the operational attributes for the **ibm-replicationContext** objectclass. See Table 83 on page 526 for the operational attributes for the **ibm-replicationAgreement** objectclass.

When retrieved for a replication context or replication agreement entry, the operational attributes provide information concerning that entry. It is important to take notice of attributes that have values that contain *failureId* or *changeId* values. The *failureId* and *changeId* numbers increase sequentially. However, some numbers might be skipped by the server for various reasons. For example, if Db2 is restarted while the server is running, the *changeId* might skip numbers. These IDs are often required when working with the **Control replication error log** and the **Control replication queue** extended operations with the **ldapexop** utility. See “The ldapexop utility” on page 253 for more information about the **ldapexop** utility.

| Table 82. <b>ibm-replicationContext</b> operational attributes |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute and description                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>ibm-replicationThisSeverIsMaster</b>                        | A Boolean (true or false) value that indicates whether the server is the master of the replication context. If set to true, the server is the master of the replication context. If set to false, the server is a not the master of the replication context.                                                                                                                                                                                                                                                                                                                              |
| <b>ibm-replicationIsQuiesced</b>                               | <p>A Boolean (true or false) value that indicates whether the replication context is quiesced. If set to true, the replication context is quiesced. If set to false, the replication context is not quiesced.</p> <p>Updates under a quiesced replication context are restricted to an LDAP root administrator if using the Server Administration control (OID 1.3.18.0.2.10.15), and any replication master DN's with authority under this context. Advanced replication continues for a quiesced context. If the server is restarted, all replication contexts are then unquiesced.</p> |

See Table 68 on page 481 for the optional non-operational attribute for the **ibm-replicationContext** objectclass.

| Table 83. <b>ibm-replicationAgreement</b> operational attributes |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute and description                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>ibm-replicationChangeLDIF</b>                                 | <p>The LDIF representation of the next pending change that has not yet been replicated and has resulted in advanced replication being stalled to the consumer server. If there is not a stalled replication change, the value is N/A.</p> <p>Examples of when an advanced replication queue might be stalled include:</p> <ol style="list-style-type: none"> <li>1. A replication change failed because of an LDAP_TIMEOUT return code.</li> <li>2. The backend replication table has reached the maximum number of errors allowed on the supplier server within this backend while attempting to replicate a change to a consumer server. See “cn=Replication,cn=configuration” on page 140 for more information about the <b>ibm-slapdReplMaxErrors</b> attribute value.</li> </ol> |
| <b>ibm-replicationFailedChangeCount</b>                          | <p>Specifies the number of advanced replication operations that have failed in this replication agreement. This number is shared among all replication agreement entries on the backend level by the <b>ibm-slapdReplMaxErrors</b> attribute in the CDBM backend configuration entry cn=Replication, cn=Configuration. See “cn=Replication,cn=configuration” on page 140 for more information about the <b>ibm-slapdReplMaxErrors</b> attribute value.</p>                                                                                                                                                                                                                                                                                                                            |

Table 83. **ibm-replicationAgreement** operational attributes (continued)

## Attribute and description

### **ibm-replicationFailedChanges**

A multi-valued attribute that lists all the logged replication operations that have failed. The number of attribute values is shared among all replication agreement entries on the backend level by the **ibm-slapdReplMaxErrors** attribute in the CDBM backend configuration entry `cn=Replication,cn=Configuration`. See [“cn=Replication,cn=configuration” on page 140](#) for more information about the **ibm-slapdReplMaxErrors** attribute value.

A string value of the form: *failureId timestamp returnCode numOfAttempts changeId operation entryDn*

The *failureId* identifies the update that has failed to replicate to the consumer server. The *failureId* is used with the **Control replication error log** extended operation to display, delete, or retry the failing replication update. The **ldapexop** utility supports the **Control replication error log** extended operation. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.

The *timestamp* is the time in Zulu format when this operation was last attempted to be replicated to the consumer server.

The *returnCode* is the LDAP return code from the consumer server.

The *numOfAttempts* is the number of times the error has been tried again on the consumer server.

The *changeId* is the ID that this *failureId* had when it was in the pending replication queue.

The *operation* indicates the update operation that encountered the failure. It has one of the following values: `add`, `delete`, `modify`, or `modifydn`.

The *entryDn* indicates the distinguished name of the entry that caused the failure.

Example:

```
ibm-replicationfailedchanges: 1 20050407202221Z 68 1 170814 add cn=entry-85,o=IBM,c=US
failureId: 1
timestamp: 20050407202221Z
returnCode: 68
numOfAttempts: 1
changeId: 170814
operation: add
entryDn: cn=entry-85,o=IBM,c=US
```

### **ibm-replicationLastActivationTime**

Specifies the Zulu format timestamp when advanced replication actively began replicating queued updates.

### **ibm-replicationLastChangeID**

Specifies the replication change ID of the last successfully completed advanced replication update.

### **ibm-replicationLastFinishTime**

Specifies the Zulu format timestamp when advanced replication updates in the queue were all attempted and the server awaits a new scheduled start time or more operations to appear in the advanced replication queue. See [“Schedule entries” on page 488](#) for more information about replication schedule entries.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Table 83. <b>ibm-replicationAgreement</b> operational attributes (continued)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Attribute and description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <p><b>ibm-replicationLastresult</b></p> <p>A description of the result from the last advanced replication operation or connection attempt to a consumer server.</p> <p>A string value of the form: <i>timestamp changeId returnCode operation entryDn</i>.</p> <p>The <i>timestamp</i> is the time in Zulu format when this operation was last attempted to be replicated to the consumer server.</p> <p>The <i>changeId</i> is the ID of the last replication update.</p> <p>The <i>returnCode</i> is the LDAP return code from the consumer server.</p> <p>The <i>operation</i> indicates the last LDAP operation. It has one of the following values: add, connect, delete, or modify,</p> <p>The <i>entryDn</i> indicates the distinguished name of the entry that was last added, deleted, modified, or renamed. If <i>operation</i> is connect, <i>entryDn</i> is set to NULL.</p> <p>Example:</p> <pre>ibm-replicationLastresult: 20050412140436Z 19 81 add cn=testpendingchange,o=ibm,c=us timestamp: 20050412140436Z changeId: 19 returnCode: 81 operation: add entryDn: cn=testpendingchange,o=ibm,c=us</pre> |
| <p><b>ibm-replicationLastresultAdditional</b></p> <p>The descriptive reason code message text that supplements the return code message with the purpose of providing additional information from the last replication attempt.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <p><b>ibm-replicationNextTime</b></p> <p>Specifies the Zulu format timestamp of the next time advanced replication would begin if pending changes existed. When this value is set to <b>19000101000000z</b>, replication begins immediately when a change is ready to be replicated if the <b>ibm-replicationState</b> operational attribute is set to <b>active</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <p><b>ibm-replicationPendingChangeCount</b></p> <p>The number of replication operations that are waiting to be replicated to a consumer server.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <p><b>ibm-replicationPendingChanges</b></p> <p>A multi-valued attribute that lists all changes waiting to be replication to a consumer server.</p> <p>A string value of the form: <i>changeId operation entryDn</i></p> <p>The <i>changeId</i> is the ID of the pending replication update.</p> <p>The <i>operation</i> indicates the LDAP operation that is pending. It has one of the following values: add, delete, modify, or modifydn.</p> <p>The <i>entryDn</i> indicates the distinguished name of the entry that is to be added, deleted, modified, or renamed.</p> <p>Example:</p> <pre>ibm-replicationpendingchanges: 19 add cn=test1,o=ibm,c=us changeId: 19 operation: add entryDn: cn=test1,o=ibm,c=us</pre>                                                                                                                                                                                                                                                                                                                                                                                               |

Table 83. **ibm-replicationAgreement** operational attributes (continued)

| Attribute and description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>ibm-replicationState</b></p> <p>Identifies the current state of the advanced replication queue. It has one of the following values:</p> <p><b>active</b><br/>Indicates that advanced replication is occurring from this replication agreement.</p> <p><b>binding</b><br/>Indicates that the replication agreement is in the process of authenticating with the consumer server.</p> <p><b>connecting</b><br/>Indicates that the replication agreement is attempting to contact the consumer server.</p> <p><b>on hold</b><br/>Indicates that the replication agreement is on hold. Replication updates to the consumer server are queued until the replication agreement is resumed.</p> <p><b>ready</b><br/>Indicates immediate replication mode, ready to send updates as they occur.</p> <p><b>retrying</b><br/>Indicates that the server retries the current change every 60 seconds until it succeeds. The retrying state occurs when a consumer server is restarted, the replication backend table is full, the current replicated update is failing, or when there is an LDAP_TIMEOUT return code from the consumer server. Retrying is a likely symptom that advanced replication might be stalled and LDAP administrator intervention is required to get it running again. See for the steps on how to recover from out of sync conditions between supplier and consumer servers.</p> <p><b>suspended</b><br/>Indicates that the replication agreement is suspended. No additional replication updates are sent to the consumer server by this agreement (until it returns to the ready state).</p> <p><b>waiting</b><br/>Indicates that the replication agreement is currently waiting for the next scheduled replication to occur. See <a href="#">“Schedule entries” on page 488</a> for more information about replication schedule entries.</p> |

See Table 71 on page 483 for the required non-operational attributes for the **ibm-replicationAgreement** objectclass. See Table 72 on page 484 for the optional nonoperational attributes for the **ibm-replicationAgreement** objectclass.

## Recovering from advanced replication errors

Replication errors can be handled proactively, before they are allowed to accumulate, or reactively, after replication has already stalled. Replication stalls occur when the number of failures reaches the limit as specified by the **ibm-slappedReplMaxErrors** attribute value in the `cn=Replication,cn=configuration` entry. See [“cn=Replication,cn=configuration” on page 140](#) for more information about the `cn=Replication,cn=configuration` entry.

When replication is stalled, the latest failed change occupies the beginning of the pending changes queue. The latest failed change gets retried every minute until it succeeds or the failed change is removed from the queue by an LDAP administrator with the appropriate authority. See [Chapter 9, “Administrative group and roles,” on page 155](#) for more information about administrative role authority. When this failed change occupies the lead position in the pending replication queue, all other replication updates are blocked and replication is stalled.

The options for handling stalled replication are:

1. Increase the size of the **ibm-slappedReplMaxErrors** attribute in the `cn=Replication,cn=configuration` entry. This allows more replication failures to be stored in the backend where the replication agreement entry exists.
2. Delete or retry one or more failed replication changes.

3. Skip the latest failed replication change.
4. If the stalled replication problem is severe enough, the entire replication context where the replication agreement entry exists might need to be resynchronized. In order to do this, you must:
  - a. Quiesce the replication context
  - b. Suspend replication for all replication agreements
  - c. Delete all failed replication changes for all replication agreements
  - d. Skip all pending changes for all replication agreements
  - e. Resynchronize the replication context
  - f. Resume replication for the suspended replication agreements
  - g. Unquiesce the replication context

The following operational attributes in the replication agreement entry can be queried to determine what to do:

1. The **ibm-replicationChangeLdif** operational attribute in the replication agreement entry shows the LDIF representation of the latest failure. The **ibm-replicationLastresult** and **ibm-replicationLastresultAdditional** operational attributes in the replication agreement have further detail for the reason the change failed.
2. The **ibm-replicationPendingChanges** operational attribute in the replication agreement shows the change ID, the operation type, and the target DN of the next changes to be replicated. The number of pending changes that are displayed is limited by the **ibm-slappedMaxPendingChangesDisplayed** attribute in the `cn=Replication,cn=configuration` entry. See [“cn=Replication,cn=configuration” on page 140](#) for more information about the **ibm-slappedMaxPendingChangesDisplayed** attribute. See [Table 83 on page 526](#) for more information about the **ibm-replicationPendingChanges** operational attribute.
3. The **ibm-replicationFailedChanges** operational attribute in the replication agreement shows each of the failed changes, including the failure ID. See [Table 83 on page 526](#) for more information about the **ibm-replicationFailedChanges** operational attribute.
4. The **Control replication error log** extended operation can be used to display information about a failure by providing the *failureId* obtained from the **ibm-replicationFailedChanges** operational attribute. The **controlreplerr** extended operation -show option in the **ldapexop** utility can be used to display the latest failure. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.

When the latest and all previous failures are understood, an LDAP administrator must decide whether to fix the replication failures individually or resynchronize the entire replication context. The options are:

1. Increase the size of the **ibm-slappedReplMaxErrors** attribute in the `cn=Replication,cn=configuration` entry. This allows more replication failures to be stored in the backend where the replication agreement entry exists. See [“cn=Replication,cn=configuration” on page 140](#) for more information about the **ibm-slappedReplMaxErrors** attribute.
2. Delete or retry one or more failed changes for the replication agreement by using the **Control replication error log** extended operation with the **ldapexop** utility. The **-retry** option on the **controlreplerr** extended operation in the **ldapexop** utility allows a single failure (identified by its *failureId*) to be retried or all failures to be retried. The ability to retry all failures is especially useful when you have corrected the problem that caused a change to fail the first time. When a failed change is retried successfully, it is removed from the list of failed changes and there is space for a new one. The **-delete** option on the **controlreplerr** extended operation in the **ldapexop** utility allows a single failure (identified by its *failureId*) to be deleted or all failures to be deleted. This delete option is especially useful when a change is deemed to be unnecessary, the problem has been fixed manually, or a synchronization tool such as the **ldapdiff** utility has been used to resynchronize the directories. Deleting a failed change frees space in the list of failed changes so that a new failure can be added. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility. See [“The ldapdiff utility” on page 245](#) for more information about the **ldapdiff** utility.



3. Skip the latest failure for the replication agreement by using the **Control replication queue** extended operation. The **ldapexop** utility supports the **Control replication queue** extended operation that allows the next pending change (identified by its *changeId*) or all pending changes to be skipped. This extended operation is useful when the **ibm-slappedReplMaxErrors** attribute in the `cn=Replication,cn=configuration` entry is set to 0 in which case the replication failure is not allowed and replication stalls on the first failure. Also, the **Control replication queue** extended operation is useful when replication failures are not deleted, the **ibm-slappedReplMaxErrors** attribute value is increased, or after using the **ldapdiff** utility to resynchronize the replication context. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.
4. If there are multiple failed and pending replication changes, the entire replication context where the replication agreement entry exists might need to be resynchronized. In order to do this, you must:
  - a. Quiesce the replication context on all servers in the replication topology by using the **Cascading control replication** extended operation on the **ldapexop** utility. The **Cascading control replication** extended operation is targeted against the master server which in turn quiesces the replication context on all consumer servers. A quiesced replication context only accepts updates from an LDAP root administrator when using the Server Administration control and any replication master server DN's with authority under this context. See [“Cascading control replication” on page 670](#) for more information about the **Cascading control replication** extended operation. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.
  - b. Suspend replication for all replication agreements in the replication context by using the **Control replication** extended operation on the **ldapexop** utility. A suspended replication agreement queues all replication changes updates until it is resumed. See [“Control replication” on page 674](#) for more information about the **Control replication** extended operation.
  - c. Use the **ldapdiff** utility with the `-L` option to compare the replication contexts on each of the servers within the replication context. The `-L` option allows the entry differences to be written to an output LDIF file. See [“The ldapdiff utility” on page 245](#) for more information about the **ldapdiff** utility.
  - d. Delete all failed replication changes for all replication agreements by using the **Control replication error log** extended operation on the **ldapexop** utility. See [“Control replication error log” on page 675](#) for more information about the **Control replication error log** extended operation.
  - e. Skip all pending replication changes by using the **Control replication queue** extended operation on the **ldapexop** utility. See [“Control replication queue” on page 677](#) for more information about the **Control replication queue** extended operation.
  - f. Resynchronize the replication context by using the `fix` option on the **ldapdiff** utility.
  - g. Resume replication for all suspended replication agreements by using the **Control replication** extended operation on the **ldapexop** utility.
  - h. Unquiesce the replication context on all servers in the replication topology by using the **Cascading control replication** extended operation on the **ldapexop** utility.

The other methodology for handling replication failures is to take a proactive, preventive approach. An LDAP administrator monitors the replication failure queue and resolves problems before the queue reaches capacity and replication stalls. An LDAP administrator with the appropriate authority can use the **Control replication error log** extended operation and the **ibm-replicationFailedChanges** and **ibm-replicationState** operational attributes in the replication agreement entry to monitor the current replication status. See Chapter 9, [“Administrative group and roles,” on page 155](#) for information about administrative authority.

## Advanced replication error recovery example

This advanced replication error recovery example uses the master-replica topology that was configured in [“Creating a master-replica topology” on page 499](#). This example assumes the **ibm-slappedReplMaxErrors** attribute value in the `cn=Replication,cn=configuration` entry is set to one.

An LDAP administrator periodically monitors the replication status of the replication agreement in the `o=ibm,c=us` replication context by querying the replication agreement operational attribute values. See [Table 83 on page 526](#) for more information about the replication agreement operational attributes.

**Note:** Operational attributes are only returned on search requests when either the `+` attribute is specified or each operational attribute is requested.

The current replication status from the master to the replica can be determined by using the following **ldapsearch** command to retrieve the replication agreement entry. For more information about the **ldapsearch** utility, see [ldapsearch utility in z/OS IBM Tivoli Directory Server Client Programming for z/OS](#).

```
ldapsearch -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -b o=ibm,c=us
"(objectclass=ibm-replicationAgreement)" "*" ibm-replicationChangeLdif
ibm-replicationFailedChangeCount ibm-replicationFailedChanges ibm-replicationLastActivationTime
ibm-replicationLastChangeID ibm-replicationLastFinishTime ibm-replicationLastresult
ibm-replicationLastresultAdditional ibm-replicationNextTime ibm-replicationPendingChangeCount
ibm-replicationPendingChanges ibm-replicationState
```

The **ldapsearch** command returns the following entry:

```
cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default, o=ibm, c=us
objectclass=top
objectclass=ibm-replicationAgreement
ibm-replicaconsumerid=Replica
ibm-replicaurl=ldap://server1.us.ibm.com:389
ibm-replicacredentialsdn=cn=ReplicaBindCredentials,o=ibm, c=us
description=Replication agreement from master to replica
cn=Replica
ibm-replicationonhold=FALSE
ibm-replicationstate=retrying
ibm-replicationpendingchanges=46 modify OU=SUB,O=IBM,C=US
ibm-replicationpendingchangelcount=1
ibm-replicationnexttime=19000101000000
ibm-replicationlastresultadditional=R004071 DN 'OU=SUB,O=IBM,C=US' does not exist
(ldbm_process_request:406)
ibm-replicationlastresult=20090206145054Z 46 32 modify OU=SUB,O=IBM,C=US
ibm-replicationlastfinishtime=20090206144954Z
ibm-replicationlastchangeid=45
ibm-replicationlastactivationtime=20090206144354Z
ibm-replicationfailedchanges=12 20090206144954Z 32 1 45 add cn=entry,ou=sub,o=ibm,c=us
ibm-replicationfailedchangelcount=1
ibm-replicationchangeldif=
dn: ou=sub,o=ibm,c=us
control: 2.16.840.1.113730.3.4.2 true
control: 1.3.18.0.2.10.19 false:: MIGPMCAKAQIwGwQNbw9kaWZpZXJzTmFtZTEKBAhjbj1
hZG1pbjAwcGEtMCsED21vZGlmeVRpbWVzdGFtcDEYBBYyMDA5MDIwNjE0NDg1My41ODM4MjVhMDk
KAQIwNAQYUmwVbG1jYXRpb25CYXN1VG1tZXN0YW1wMRGfjIwMDkwMjA2MTM0ODQ2Ljc4Njg4NFo
=
changetype: modify
add: description
description: A small division
```

The following analysis of the replication agreement entry can be performed:

1. The **ibm-replicationState** operational attribute value is set to `retrying`, which indicates replication is currently stalled. Replication is stalled because the number of replication failures exceeds one. (The **ibm-slapdMaxReplErrors** attribute value has been set to one in the `cn=Replication,cn=configuration` entry).
2. The **ibm-replicationChangeLdif** operational attribute in the replication agreement shows the LDIF representation of the latest failure. The LDIF shows that the last failure is a modify of the `ou=sub,o=ibm,c=us` entry on the consumer server. The **ibm-replicationLastresult** and **ibm-replicationLastresultAdditional** operational attributes in the replication agreement indicate that the modify failed on the consumer server because the `ou=sub,o=ibm,c=us` entry does not exist.
3. The **ibm-replicationPendingChanges** operational attribute in the replication agreement shows the *changeId* of the next pending update is 46. The next pending change is also the same modify operation of the `ou=sub,o=ibm,c=us` entry. It will be replicated to the consumer server after the add failure in the **ibm-replicationFailedChanges** operational attribute is resolved.
4. The **ibm-replicationFailedChanges** operational attribute in the replication agreement shows one failed replication update. The attribute value indicates that the *failureId* is 12, the LDAP return code

from the consumer server is 32, it is an add operation of the cn=entry, ou=sub, o=ibm, c=us entry, and the supplier server has tried once to replicate the update.

To determine why the addition of the cn=entry, ou=sub, o=ibm, c=us entry failed, the **ldapexop** utility can be used to perform a **Control replication error log** extended operation to show the failed replication change. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.

The following **ldapexop** command can be used to show the LDIF representation of failed replication change that has a *failureId* of 12.

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op controlreplerr
-ra "cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default,
o=ibm,c=us" -show 12
```

The **ldapexop** command returns the following:

```
dn: cn=entry,ou=sub,o=ibm,c=us
control: 2.16.840.1.113730.3.4.2 true
control: 1.3.18.0.2.10.19 false:: MIGnMDAKAQAwKwQPbW9kaWZ5dGltZXN0YW1wMRgEFjI
wMDkwMjA2MTQ0MzU0LjY1NzcwMFowIAoBADABBA1tb2RpZm11cnNuYW1lMQoECGNuPWfkbWluMDA
KAQAwKwQPY3JlYXRldGltZXN0YW1wMRgEFjIwMDkwMjA2MTQ0MzU0LjY1NzcwMFowHwBADAaBAX
jcmVhdG9yc25hbWUxCgQIY249YWRtaW4=
changetype: add
cn: entry
ibm-entryuuid: A091A000-4CAA-198C-8D7D-402084027431
sn: entry
objectclass: person
objectclass: top
```

An LDAP administrator can either fix the replication differences manually or use the **ldapdiff** utility to resynchronize the replication contexts on all servers in the replication topology. The **ldapdiff** utility is a useful tool for comparing and verifying that the entries within a replication context on supplier and consumer server are synchronized. For the purposes of this example, an LDAP administrator has chosen to resynchronize the replication context by using the **ldapdiff** utility. See [“The ldapdiff utility” on page 245](#) for more information about the **ldapdiff** utility.

Before you use the **ldapdiff** utility to compare or fix entries within a replication context, quiesce the replication context on all servers within the replication topology by using the **Cascading control replication** extended operation quiesce option on the **ldapexop** utility. See [“The ldapexop utility” on page 253](#) for more information about the **ldapexop** utility.

The following **ldapexop** command quiesces the o=ibm, c=us replication context on the master and replica server in the replication topology:

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op cascrepl -action
quiesce -rc "o=ibm,c=us"
```

After the replication context is quiesced on all servers, the **Control replication** extended operation can be used to suspend replication for all replication agreements within the replication context.

The following **ldapexop** command suspends replication for all replication agreements in the replication context o=ibm, c=us. The cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default, o=ibm, c=us is the only replication agreement within the o=ibm, c=us replication context so that it is the only agreement that is suspended.

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op controlrepl
-action suspend -rc "o=ibm,c=us"
```

The following **ldapdiff** command is run to compare the entries within the replication context o=ibm, c=us on the master server on server1.us.ibm.com and the replica server on server2.us.ibm.com. If there are any differences between the two servers, they are written to the output LDIF file called differences.ldif. The **ldapdiff -a** option is specified to write the Server

Administration control to the output LDIF for each entry that is different between the two servers. See “Server Administration” on page 666 for more information about the Server Administration control.

```
ldapdiff -a -b "o=ibm,c=us" -L differences.ldif -sh server1.us.ibm.com -sp 389
-sD adminDn -sw adminPw
-ch server2.us.ibm.com -cp 389 -cD adminDn -cw adminPw
```

where differences.ldif contains:

```
dn: ou=sub,o=ibm,c=us
control: 1.3.18.0.2.10.15 true
control: 1.3.18.0.2.10.19 false::
MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWfkbWlUMDAKAQAwKwQP
Y3JlYXRlVGltZVN0YW1wMRgEFjIwMDkwMjA2MTM0ODQ2Ljc4Njg4NFowIAoB
ADAbBA1tb2RpZm11cnNOYW1lMQoECGNuPWfkbWlUMDAKAQAwKwQPbW9kawZ5
VGltZVN0YW1wMRgEFjIwMDkwMjA2MTM0ODUzLjU4MzgyNV0=
changeType: add
ibm-entryuuid: C01B9000-3FBE-198C-98A7-402084027431
ou: sub
description: A small division
objectclass: organizationalUnit
objectclass: top

dn: cn=entry,ou=sub,o=ibm,c=us
control: 1.3.18.0.2.10.15 true
control: 1.3.18.0.2.10.19 false::
MIGnMB8KAQAwGgQMY3JlYXRvcnNOYW1lMQoECGNuPWfkbWlUMDAKAQAwKwQP
Y3JlYXRlVGltZVN0YW1wMRgEFjIwMDkwMjA2MTM0ODUzLjU4MzgyNV0=
ADAbBA1tb2RpZm11cnNOYW1lMQoECGNuPWfkbWlUMDAKAQAwKwQPbW9kawZ5
VGltZVN0YW1wMRgEFjIwMDkwMjA2MTM0ODUzLjU4MzgyNV0=
changeType: add
ibm-entryuuid: A091A000-4CAA-198C-8D7D-402084027431
objectclass: person
objectclass: top
sn: entry
cn: entry
```

The contents of the differences.ldif file indicates that the ou=sub,o=ibm,c=us entry does not exist on the consumer server. This explains why the addition of the child entry cn=entry,ou=sub,o=ibm,c=us failed on the consumer server.

Before synchronizing entries within a replication context on the master and replica servers, all replication failures are deleted and all pending replication changes are skipped. Replication failures are deleted by using the **Control replication error log** extended operation on the **ldapexop** utility. Pending replication changes are skipped by using the **Control replication queue** extended operation on the **ldapexop** utility.

The following **ldapexop** command deletes all failed replication failures from the backend replication table,cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default, o=ibm, c=us:

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op controlreplerr
-delete all -ra "cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default,
o=ibm, c=us"
```

The following **ldapexop** command skips (deletes) all pending replication changes from the replication queue:

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op controlqueue
-skip all -ra "cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default,
o=ibm, c=us"
```

To synchronize the o=ibm, c=us replication context on the master and replica servers, run the **ldapdiff** utility again with the -F (Fix) option specified or use the **ldapmodify** command to add the entries in the differences.ldif file to the consumer server.

Because the master and replica servers are now synchronized, the replication agreement can now be resumed and the replication context unquiesced. The replication agreement is resumed by using the **Control replication** extended operation on the **ldapexop** utility. The replication context is unquiesced on all servers in the replication topology by using the **Cascading control replication** extended operation on the **ldapexop** utility.

The following **ldapexop** command resumes replication for the replication agreement, cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default, o=ibm, c=us:

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op controlrepl
-action resume -ra "cn=Replica, ibm-replicaServerId=Master, ibm-
replicaGroup=default,
o=ibm, c=us"
```

The following **ldapexop** command unquiesces the replication context o=ibm, c=us on all servers in the replication topology:

```
ldapexop -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -op cascrepl
-action unquiesce -rc "o=ibm,c=us"
```

The current replication status from the master to the replica can be determined by using the following **ldapsearch** command to retrieve the replication agreement entry:

```
ldapsearch -p 389 -h server1.us.ibm.com -D adminDn -w adminPw -b "o=ibm,c=us"
"(objectclass=ibm-replicationAgreement)" "*" ibm-replicationChangeldif
ibm-replicationFailedChangeCount ibm-replicationFailedChanges ibm-replicationLastActivationTime
ibm-replicationLastChangeID ibm-replicationLastFinishTime ibm-replicationLastresult
ibm-replicationLastresultAdditional ibm-replicationNextTime ibm-replicationPendingChangeCount
ibm-replicationPendingChanges ibm-replicationState
```

The **ldapsearch** command returns the following entry:

```
cn=Replica, ibm-replicaServerId=Master, ibm-replicaGroup=default, o=ibm, c=us
objectclass=top
objectclass=ibm-replicationAgreement
ibm-replicaconsumerid=Replica
ibm-replicaurl=ldap://server2.us.ibm.com:389
ibm-replicacredentialsdn=cn=ReplicaBindCredentials,o=ibm, c=us
description=Replication agreement from master to replica
cn=Replica
ibm-replicationonhold=FALSE
ibm-replicationstate=ready
ibm-replicationpendingchangeCount=0
ibm-replicationnexttime=19000101000000
ibm-replicationlastfinishtime=20090206165454Z
ibm-replicationlastchangeid=46
ibm-replicationlastactivationtime=20090206144354Z
ibm-replicationfailedchangeCount=0
ibm-replicationchangelid=N/A
```

Because the **ibm-replicationState** operational attribute value in the replication agreement entry is set to ready, replication from the master to the replica is now no longer stalled.



---

## Chapter 27. Alias

Alias support provides a means for a TDBM, LDBM, or CDBM directory entry to point to another entry in the same directory. An alias entry can also be used to create a convenient public name for an entry or subtree, hiding the more complex actual name of the entry or subtree.

Alias support involves:

- Creating an alias entry which points to another entry
- Dereferencing during search: when a distinguished name contains an alias, the alias is replaced by the value it points to and search continues using the new distinguished name.

For example, you can create an alias entry to provide a simple name for the z/OS LDAP department:

```
"ou=LDAPZOS,o=IBM"
```

The alias entry points to the actual z/OS LDAP department:

```
"ou=DEPTC8NG,ou=Poughkeepsie,o=IBM_US,o=IBM"
```

This provides easier access to the entries of the z/OS LDAP developers, using public names such as:

```
"cn=kmoirg,ou=LDAPZOS,o=IBM"
```

This name is dereferenced during search to:

```
"cn=kmoirg,ou=DeptC8NG,ou=Poughkeepsie,o=IBM_US,o=IBM"
```

and the information for that entry is returned.

---

### Impact of aliasing on search performance

Usage of aliases in a directory can cause a large increase in the amount of processing that takes place during search, even if no alias entries are actually involved in the particular search that was requested. To minimize the impact to search performance:

- Do not add aliases to the directory if they are not needed. There is no impact on search if there are no aliases in the directory.
- Only perform a search with dereferencing when aliases are involved in the search. Again, the impact on search is avoided if no dereferencing is requested.

**Note:** The search request from the LDAP client specifies whether to do dereferencing. The default value for dereferencing varies between different LDAP clients. If the default is to do dereferencing (this is the case with some Java clients), make sure to specifically reset this value to do no dereferencing when you issue search requests for which you do not want to do dereferencing.

- If you do want to use aliases in a directory, use them efficiently to minimize the number of alias entries. For example, use an alias entry for the root of a subtree (such as the alias for a department entry in the example above) rather than creating an alias entry for each individual entry within the subtree.

---

### Alias entry

An alias entry contains:

- one of two object classes:
  - **aliasObject** - AUXILIARY object class
  - **alias** - STRUCTURAL object class

**Note:** This requires an object class such as **extensibleObject** to allow the naming attributes for the entry.

- **aliasedObjectName** attribute
  - its value is the distinguished name that the alias points to

These object classes and attributes are always part of the LDAP server schema.

Below is an example of an alias entry:

```
dn: ou=LDAPZOS,o=IBM
objectclass: organizationalUnit
objectclass: aliasObject
ou: LDAPZOS
aliasedobjectname: ou=DeptC8NG,ou=Poughkeepsie,o=IBM_US,o=IBM
```

or

```
dn: ou=LDAPZOS,o=IBM
objectclass: alias
objectclass: extensibleobject
ou: LDAPZOS
aliasedobjectname: ou=DeptC8NG,ou=Poughkeepsie,o=IBM_US,o=IBM
```

## Alias entry rules

An alias is a directory entry containing either the **alias** structural object class or the **aliasObject** auxiliary object class. Both of these object classes require the **aliasedObjectName** attribute (the **aliasedEntryName** alternate name can also be used). The **extensibleObject** object class should also be specified if the **alias** object class is used in order to add the RDN attributes for the alias entry.

An alias entry must be a leaf entry. This means that no ancestor of an entry can be an alias entry. In addition, an alias entry cannot also be a referral entry. A suffix entry can be an alias entry. In this case, the suffix will have no entries below it.

The value of the **aliasedObjectName** attribute does not have to be an existing entry. However, an error will be returned when dereferencing the alias if the value of the **aliasedObjectName** attribute does not refer to an entry in the same backend as the alias entry. The value cannot be the distinguished name of the alias entry; in other words, an alias entry cannot dereference to itself.

## Dereferencing an alias

All or part of a distinguished name (DN) can be an alias. Dereferencing a DN consists of the systematic replacement of an alias within the DN by the value of the **aliasedObjectName** attribute of the alias. This creates a new DN that must then be checked to see if it contains an alias that needs to be dereferenced. This process continues until the final dereferenced DN contains no alias within its name. An error will be returned if a circular chain is detected, that is, when a particular alias entry is encountered more than once. The final dereferenced DN must be the DN of an entry in the same backend as the original DN. This entry must either exist or be under a referral entry.

Alias dereferencing is performed only during search operations. Alias entries are not dereferenced for any other LDAP operation.

Aliases are not dereferenced when performing a null-based subtree search since all entries in all LDBM, TDBM, and CDBM backends are included in the search scope.

Duplicate objects will not be returned by a search operation. Duplicate objects can be encountered during a search if an alias points to an entry higher in the tree or if two aliases point to the same entry.

Dereferencing is only used to determine the entries that will be included in the search. The entries actually returned as search results must match the search filter. The DN of returned entries is the dereferenced DN. Using the above example, a search for `cn=John Doe, ou=LDAPZOS,o=IBM` will return an entry with DN `cn=John Doe,ou=DeptC8NG,ou=Poughkeepsie,o=IBM,c=US` if the `cn=John Doe,ou=DeptC8NG,ou=Poughkeepsie,o=IBM,c=US` entry matches the search filter.



Access checking is not performed when dereferencing an alias entry. Normal access checking will be performed for the dereferenced entry. Therefore, a search can dereference aliases even though the requester might not have any permissions to those alias entries.

## Dereferencing during search

### Dereference options

A flag value controls what alias dereferencing will be done during a search operation. This flag is sent by the client on the search request. The flag can have one of four values:

#### **LDAP\_DEREF\_NEVER (0)**

do not dereference any alias entries. Alias entries encountered during the search operation are processed as 'normal' entries and are returned if they match the search filter.

#### **LDAP\_DEREF\_SEARCHING (1)**

dereference alias entries within the scope of the search but do not dereference the search base entry (if it contains an alias). The search base is processed as a 'normal' entry (even if it is an alias entry) and is returned if it matches the search filter and is in the search scope.

#### **LDAP\_DEREF\_FINDING (2)**

dereference the search base entry (if it contains an alias) but do not dereference any other alias entries within the search scope. Alias entries within the search scope of the dereferenced base are processed as 'normal' entries and are returned if they match the search filter.

#### **LDAP\_DEREF\_ALWAYS (3)**

dereference the search base entry (if it contains an alias) and dereference alias entries within the scope of the search. All alias entries encountered during the search operation are dereferenced.

### Dereferencing during finding the search base

In a search request with **LDAP\_DEREF\_FINDING** or **LDAP\_DEREF\_ALWAYS**, dereferencing the search base just establishes a new search base. The results are equivalent to those from a search request that specifies the new base is its base.

### Dereferencing during searching in subtree searches

In a search request with **LDAP\_DEREF\_SEARCHING** or **LDAP\_DEREF\_ALWAYS** and subtree scope, dereferencing each entry under the base produces additional bases of subtrees to be searched. The aliases under each additional base are also dereferenced during search to find yet more subtree bases, and so on. When all the additional subtrees have been identified, the search filter is applied to all the non-alias entries in all the subtrees and the entries that match the filter are returned.

### Dereferencing during searching in one-level searches

In a search request with **LDAP\_DEREF\_SEARCHING** or **LDAP\_DEREF\_ALWAYS** and one-level scope, dereferencing each alias entry that is one level below the search base yields additional entries to search (even though they are no longer one level below the search base). The search filter is then applied to these additional entries and to the non-alias entries that are one level below the search base and the entries that match the filter are returned.

### Dereferencing and root DSE subtree search

Aliases are never dereferenced when performing a subtree search starting at the root DSE (this is also known as a null-based subtree search). All alias entries are processed like 'normal' entries, as if **LDAP\_DEREF\_NEVER** was specified.

### Errors during dereferencing

The common dereferencing errors and the resulting return codes are:

- loop detected during dereferencing: **LDAP\_ALIAS\_PROBLEM** (x'21')
- no entry in this backend for dereferenced DN: **LDAP\_ALIAS\_DEREF\_PROBLEM** (x'24')

## Alias examples

The following figure shows the directory structure used in the examples. The dashed lines indicate aliases. The dashed oval indicates the position of an aliased entry in the directory hierarchy, but the aliased entry does not actually exist.

**Note:** Fictitious attribute types are used in the figure.

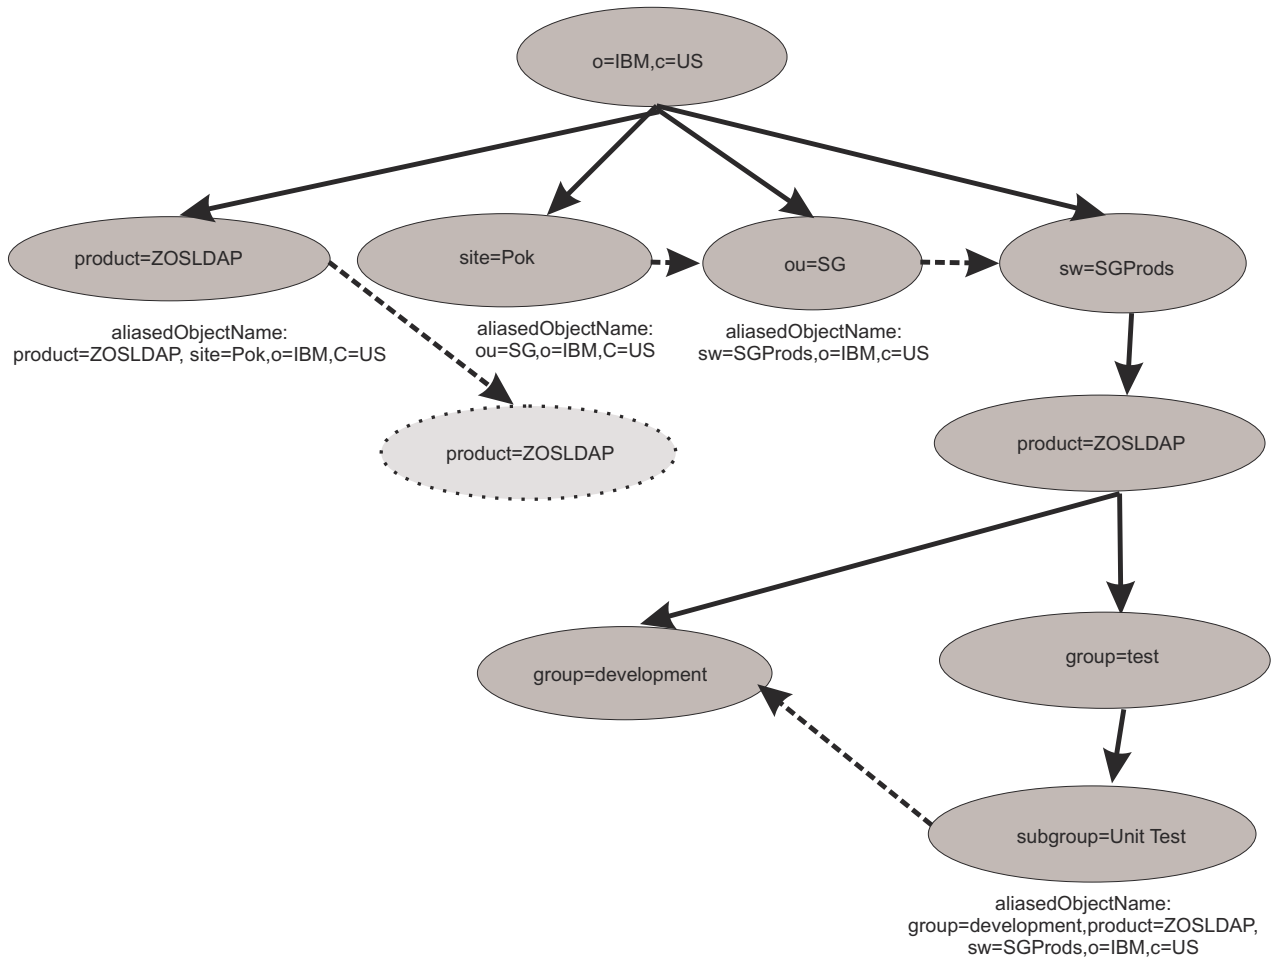


Figure 52. Alias example

The following search examples show the entries that are returned for various combinations of search base, search scope, and dereference option. The filter in each example is `objectclass=*`. Cases that are affected by alias dereferencing are indicated with an **\***.

Example 1: Perform a search from the base `sw=SGProds, o=IBM, c=US`.

**scope = base**

- Returned entries with **LDAP\_DEREF\_NEVER**, **LDAP\_DEREF\_SEARCHING**, **LDAP\_DEREF\_FINDING**, or **LDAP\_DEREF\_ALWAYS** specified:

"sw=SGProds, o=IBM, c=US"

**scope = one-level**

- Returned entries with **LDAP\_DEREF\_NEVER**, **LDAP\_DEREF\_SEARCHING**, **LDAP\_DEREF\_FINDING**, or **LDAP\_DEREF\_ALWAYS** specified:

```
"product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

**scope = subtree**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_FINDING** specified:

```
1. "sw=SGProds, o=IBM, c=US"
2. "product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
3. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
4. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
5. "subgroup=Unit Test, group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_SEARCHING** or **LDAP\_DEREF\_ALWAYS** specified:

```
1. "sw=SGProds, o=IBM, c=US"
2. "product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
3. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
4. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US" (returned only once)
```

Example 2: Perform a search from the base site=Pok, o=IBM, c=US.

**scope = base**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
"site=Pok, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_FINDING** or **LDAP\_DEREF\_ALWAYS** specified:

```
"sw=SGProds, o=IBM, c=US"
```

**scope = one-level**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
No entries returned
```

- Returned entries with **LDAP\_DEREF\_FINDING** or **LDAP\_DEREF\_ALWAYS** specified:

```
"product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

**scope = subtree**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
"site=Pok, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_FINDING** specified:

```
1. "sw=SGProds, o=IBM, c=US"
2. "product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
3. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
4. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
5. "subgroup=Unit Test, group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_ALWAYS** specified:

```
1. "sw=SGProds, o=IBM, c=US"
2. "product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
3. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

```
4. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US" (returned only once)
```

Example 3: Perform a search from the base "product=ZOSLDAP, o=IBM, c=US".

**scope = base**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
"product=ZOSLDAP, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_FINDING** or **LDAP\_DEREF\_ALWAYS** specified:

```
"product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

**scope = one-level**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
No entries returned
```

- Returned entries with **LDAP\_DEREF\_FINDING** or **LDAP\_DEREF\_ALWAYS** specified:

```
1. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
2. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

**scope = subtree**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
"product=ZOSLDAP, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_FINDING** specified:

```
1. "product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
2. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
3. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
4. "subgroup=Unit Test, group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_ALWAYS** specified:

```
1. "product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
2. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
3. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US" (returned only once)
```

Example 4: Perform a search from the base "group=test, product=ZOSLDAP, o=IBM, c=US".

**scope = base**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
Error - LDAP_NO_SUCH_OBJECT
```

- Returned entries with **LDAP\_DEREF\_FINDING** or **LDAP\_DEREF\_ALWAYS** specified:

```
"group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

**scope = one-level**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
Error - LDAP_NO_SUCH_OBJECT
```

- Returned entries with **LDAP\_DEREF\_FINDING** specified:

```
"subgroup=Unit Test, group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

- Returned entries with **LDAP\_DEREF\_ALWAYS** specified:

```
"group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
```

**scope = subtree**

- Returned entries with **LDAP\_DEREF\_NEVER** or **LDAP\_DEREF\_SEARCHING** specified:

```
Error - LDAP_NO_SUCH_OBJECT
```

- Returned entries with **LDAP\_DEREF\_FINDING** specified:

1. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
2. "subgroup=Unit Test, group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"

- Returned entries with **LDAP\_DEREF\_ALWAYS** specified:

1. "group=test, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"
2. "group=development, product=ZOSLDAP, sw=SGProds, o=IBM, c=US"



---

## Chapter 28. Change logging

The change log is a set of entries in the directory that contain information about changes to objects. Depending on configuration options, information about a change to a TDBM, LDBM, or CDBM entry, to the LDAP server schema entry (cn=schema), or to an object controlled by an application (for example, a RACF user, group, user-group connection, or general resource profile) can be saved in a change log entry. An LDAP search operation can be used to retrieve change log entries to obtain information about what changes have taken place.

Each LDAP server contains one change log. The change log entries are created in the same order as the changes are made and each change log entry is identified by a change number value, beginning with 1, that is incremented each time a change number is assigned to a change log entry. Therefore, the change number of a new change log entry is always greater than all the change numbers in the existing change log entries.

The change log is implemented in the GDBM backend. The change log uses a hard-coded suffix, cn=changelog. This suffix is a semi-reserved name when the GDBM backend is configured. The change log root (cn=changelog) must not overlap any suffix in any TDBM, SDBM, or LDBM backend and the change log suffix cannot be the source or target of a rename operation. If GDBM is not configured, the user can use cn=changelog as a 'normal' suffix in a TDBM, SDBM, or LDBM backend, however, this is not suggested because that suffix has to be renamed to avoid an overlap if GDBM is configured in the future.

Change logging is enabled by configuring GDBM in the LDAP server configuration file. Change log processing is controlled by configuration options in the GDBM backend. The **changeLogging** configuration option turns change logging on or off. The **changeLogMaxEntries** and **changeLogMaxAge** configuration options determine when removal of old change log entries takes place. See Chapter 8, “Customizing the LDAP server configuration,” on page 83 for more information. If the **changeLogMaxEntries** and **changeLogMaxAge** configuration options are not specified or are both set to 0, there are no limits on the size of the change log. With this configuration, the change log must be periodically manually pruned by an LDAP root or directory data administrator to prevent it from exhausting all available space in the z/OS UNIX System Services directory or in Db2.

The **changeLoggingParticipant** configuration option can be used to specify if an LDBM, TDBM, or CDBM backend wants change log entries to be created for changes to entries in its backend. Similarly, the configuration option can be specified in the GDBM backend to determine if a change log entry should be created for a change to the LDAP server schema. If the option is not specified for a TDBM, LDBM, CDBM or GDBM backend, the default is to create change log entries for changes to that TDBM, LDBM, or CDBM backend or to the LDAP server schema.

If the GDBM backend is configured and the cn=changelog root entry does not exist in the GDBM backend when the server is started, the LDAP server generates the root entry. The root entry is created with a propagated ACL that allows an LDAP root or directory data administrator update access to the change log. All other administrators have read access to the change log. The ACL is propagated to the change log entries. The user needs to use an LDAP modify operation to change this ACL to an appropriate ACL for his usage of the change log. The **aclEntry** and **entryOwner** attributes are the only attributes that can be modified. The **aclPropagate** and **ownerPropagate** attributes will always be TRUE.

Modifications to the change log are not logged. This means that no change sequence number will be returned for a persistent search request issued for the change log (cn=changelog).

---

### Configuring the GDBM backend

**Note:** You can use the LDAP configuration utility, **dsconfig**, to configure GDBM.

The GDBM backend is configured in one of two ways: Db2-based (like TDBM) or file-based (like LDBM). In either configuration:

1. There can be at most one GDBM backend in the configuration file.

2. The `suffix` option cannot be specified in the GDBM backend.
3. If the `changeLoggingParticipant` option is specified, it controls whether a change log entry is created for a change to the LDAP server schema. Change log entries are never created for any changes to GDBM entries, including the suffix entry.

## Configuring a Db2-based GDBM backend

When configuring a Db2-based GDBM backend, the following configuration file options are required:

```
database GDBM GLDBGD31/GLDBGD64 [name]
dbuserid dbowner
```

The `aclSourceCacheSize`, `attrOverflowSize`, `dnToEidCacheSize`, `dsnaoini`, `entryCacheSize`, `entryOwnerCacheSize`, `filterCacheBypassLimit`, `filterCacheSize`, `include`, `multiserver`, `persistentSearch`, `readonly`, `serverName`, `sizeLimit`, and `timeLimit` options can also be specified in the GDBM configuration section. The `changeLogging`, `changeLoggingParticipant`, `changeLogMaxAge`, and `changeLogMaxEntries` configuration options can be specified to control change logging activity. See Chapter 8, “Customizing the LDAP server configuration,” on page 83 for more information about these options.

When using Db2 to store its entries, the GDBM database is identical to a TDBM database and is created in the same way using the same SPUFI script. A Db2-based GDBM backend cannot share a database with a TDBM backend. If the GDBM (Db2-based) backend is run in 64-bit mode, then Db2 version 9 with PTF UK50918 or Db2 version 10 or later is required.

## Configuring a file-based GDBM backend

When configuring a file-based GDBM backend, the following configuration file options are required:

```
database GDBM GLDBGD31/GLDBGD64 [name]
```

The `commitCheckpointEntries`, `commitCheckpointTOD`, `databaseDirectory`, `fileTerminate`, `filterCacheBypassLimit`, `filterCacheSize`, `include`, `multiserver`, `persistentSearch`, `readOnly`, `sizeLimit`, and `timeLimit` are options can also be specified in the GDBM configuration section. The `changeLogging`, `changeLoggingParticipant`, `changeLogMaxAge`, and `changeLogMaxEntries` configuration options can be specified to control change logging activity. See Chapter 8, “Customizing the LDAP server configuration,” on page 83 for more information about these options.

When using files to store its entries, the GDBM database is identical to an LDBM database and is created in the same way. Like LDBM, a file-based GDBM backend can run in 64-bit mode.

## Additional required configuration

Additional configuration is required for RACF to be able to log changes to a RACF user, group, connection, or resource profile:

- The SDBM backend must be configured. The SDBM suffix is needed to create a DN for the change log entry for a modification to a RACF user, group, connection, or resource profile. SDBM is also needed to retrieve the RACF user's new password or other changed fields. The following option must be specified in the SDBM section of the configuration file to allow change log entries to be created for changes to resource profiles:

```
enableResources on
```

- LDAP Program Call support must be enabled in the LDAP server containing the change log. To do this, add the following option to either the global section of the configuration file or to the command used to start the LDAP server:

```
listen ldap://:pc
```



**Note:** This listen parameter for LDAP Program Call support is in addition to any other listen parameters you have specified.

There is no additional configuration needed to log changes to a TDBM, LDBM, or CDBM entry or to the LDAP server schema entry. If you do not want to create change log entries for changes to entries within a TDBM, LDBM, or CDBM backend, add the following configuration option to that backend section. You can add the same option to the GDBM section of the configuration file to stop the creation of change log entries for changes to the LDAP server schema entry:

```
changeLoggingParticipant off
```

## When changes are logged

---

Change log records can be created when the change logging is activated and the GDBM backend is not in read-only mode.

### RACF changes

An extended operation, **changeLogAddEntry**, is provided to allow an application to log changes to data that it controls. The initial use of this interface is by RACF to log changes to a RACF user, group, user-group connection, or general resource profile when the profile is added, modified, or deleted. The RACF changes can be driven through the LDAP server or be made directly to RACF. For a user password or password phrase change, RACF includes information that the password or password phrase changed in the change log entry. For other user changes, RACF does not provide specific field information at this time.

The creation of a change log entry when using this interface is entirely separate from the change to RACF, even if the RACF change is made using LDAP. The result is that a RACF change can occur without a change log entry being created (for example, if the LDAP server is not running or if the change log entry creation fails).

### TDBM, LDBM, CDBM, and schema changes

If change logging is activated, each add, modify, delete, or modify DN operation of an entry in any TDBM, LDBM, or CDBM backend or modify of the LDAP server schema entry results in the creation of a change log entry, except for the following:

- Change log entries are not created for entries that are added to a TDBM backend when using the load utility, **ldif2ds**.
- If the `changeLoggingParticipant off` option in the LDAP server configuration file is specified for this backend, then no changes in this backend are logged. The option can be specified for the GDBM backend to stop logging changes to the LDAP server schema entry.

The change log entry is created after the change to the TDBM, LDBM, or CDBM backend entry or the LDAP server schema has been committed. This change is not rolled back if the change log record cannot be created.

## Change log schema

---

The following object classes and their attributes define a change log entry. These object classes and attributes are always in the LDAP server schema.

- objectclass: **changeLogEntry**

**changenumber**

an integer assigned to this change log entry

**targetDN**

the DN to which the change was applied. For RACF, this DN is created from a user, group, class, or resource name that is passed in by RACF and the SDBM suffix.

**changeType**  
**add | modify | delete | modrdn**

**changeTime**  
the time stamp of when the change is made (not when this entry is created)

**changes**  
the added entry or the modifications, in LDIF format. This is fully supported for change log entries created by TDBM, LDBM, CDBM, and the LDAP server schema. However, the values for the **userPassword**, **secretKey**, **replicaCredentials**, **ibm-slappedAdminPw**, **ibm-slappedMasterPw**, and **ibm-replicaKeyPw** attributes are replaced with **\*ComeAndGetIt\*** in the change log entry. For change log entries created by RACF, this attribute is only present when a RACF user password or password phrase is changed, and contains either **\*ComeAndGetIt\*** or **\*NoEnvelope\***, for example:

```
replace: racfPassword
racfPassword: *ComeAndGetIt*
-
```

**newRDN**  
the new RDN specified in a TDBM, LDBM, or CDBM modify DN operation

**deleteOldRdn**  
a boolean indicating if the old RDN was deleted in a TDBM, LDBM, or CDBM modify DN operation

**newSuperior**  
the new superior distinguished name specified in a TDBM, LDBM, or CDBM modify DN operation

- objectclass: **ibm-changelog**

**ibm-changeInitiatorsName**  
the DN of the entity that initiated the change. For RACF, this DN is created from a user ID that is passed in by RACF and the SDBM suffix.

**Note:** If a RACF user's password or password phrase is changed using the *currentvalue/newvalue* support on a bind to the SDBM backend or on a bind using native authentication, the **ibm-changeInitiatorsName** value is created from the user ID under which the LDAP server is running (and not the bound user).

The change log root entry and change log entries also have the standard operational attributes: the ACL attributes, **creatorsname**, **createtimestamp**, **modifiersname**, **modifytimestamp**, and **ibm-entryuuid** (change log root only).

## Change log entries

---

The change log consists of:

- One root (suffix) entry, named **cn=changelog**.
- One or more leaf entries, named **changenumber=nnn,cn=changelog**.

**root entry**

The change log root entry is generated by the LDAP server, when change logging is first enabled. The root entry cannot be created, renamed, or deleted by the user. The generated root entry contains a propagated ACL that allows an LDAP root or directory data administrator update access to the change log. All other administrators have read access to the change log. An appropriately authorized user can modify the root entry to change the ACL. Operations on the change log root are not replicated and do not result in the creation of a change log entry.

The generated root entry is:

```
dn: cn=changelog
objectclass: container
cn: changelog
aclentry: group:cn=Anybody
aclPropagate: TRUE
```

```
entryowner: access-id:adminDN
ownerPropagate: TRUE
```

The change log root entry should be modified using the modify operation to set access control for the change log. Only the **aclEntry** and **entryOwner** attributes can be modified. When GDBM is configured to be file-based, the **aclEntry** and **entryOwner** attributes can be entirely deleted, in which case the default ACL is used. See [“Default ACLs with LDBM or TDBM” on page 434](#) for more information. When GDBM is configured to be Db2-based, these attributes cannot be entirely deleted. The root entry ACL is always propagated to provide access control to the change log entries because change log entries are not created with their own ACL. The change log root entry can be modified if change logging is enabled (the GDBM backend is configured), even if change logging is not on.

### leaf entry

Each change log entry is created as a leaf entry directly under the change log root entry, using the **changeLogEntry** and **ibm-changelog** objectclasses and attributes as previously described.

- Change log entries are only created by the LDAP server. The user cannot directly add a change log entry. Also, the user cannot modify or rename a change log entry. Change log entries inherit the ACL of the change log root entry.
- Change log entries are deleted by the LDAP server when the change log is trimmed because of reaching a limit specified by the **changeLogMaxEntries** and **changeLogMaxAge** options in the configuration file. Change log entries can also be deleted by the user through a normal delete operation.
- User operations (search, compare, delete) on change log entries are allowed if change logging is enabled (the GDBM backend is configured), even if change logging is off. Add and trim operations by the LDAP server are not performed when change logging is off.
- If the GDBM backend is in read-only mode, delete and modify operations are not allowed. Add and trim operations by the LDAP server are not performed.
- Operations on change log entries are not replicated and do not result in the creation of change log entries.

The following is an example of a change log entry created by RACF:

```
dn: CHANGENUMBER=1815,CN=CHANGELOG
objectclass: CHANGELOGENTRY
objectclass: IBM-CHANGELOG
objectclass: TOP
changenumber: 1815
targetdn: RACFID=KEN,PROFILETYPE=USER,CN=MYRACF
changetime: 20030611161820.374472Z
changetype: MODIFY
changes: replace: racfPassPhrase
racfPassPhrase: *ComeAndGetIt*
-

ibm-changeinitiatorsname: RACFID=SUADMIN,PROFILETYPE=USER,CN=MYRACF
```

## Searching the change log

The change log can be searched using the standard LDAP search APIs or command utilities .

- You can use any attribute in the search filter. A common search is with a "changenumber >= *nnn*" filter, where *nnn* is the largest changenumber value that was retrieved the previous time the search was done (the changenumber=*nnn* entry is retrieved again to ensure that the next part of the change log has not been trimmed).
- The change log entries matching the search filter are returned in increasing changenumber order.
- You cannot depend on there being change log entries for all consecutive change numbers. Some change numbers might be skipped.
- The change log (including the root entry) can be searched if change logging is enabled (the GDBM backend is configured), even if change logging is off.

## Passwords in change log entries

---

To avoid including passwords in the **changes** attribute of a change log entry, the values of the **userpassword**, **secretkey**, **replicacredentials**, **ibm-replicatekeypwd**, **ibm-slapdadminpw**, **ibm-slapdmasterpw**, **racfpassword**, and **racfpassphrase** attributes are replaced by \*ComeAndGetIt\*. You can use a search command to retrieve the password. For a RACF password or password phrase, see Chapter 17, “Accessing RACF information,” on page 317 for more information.

## Unloading and loading the change log

---

The unload utility (**ds2ldif**) cannot be used to unload the contents of the change log. You should use the search operation to do this. Change log entries cannot be loaded into the change log. Both the add operation and the load utility (**ldif2ds**) fail when processing change log entries.

## Trimming the change log

---

When change logging is on, the LDAP server periodically trims the change log based on the limits set in the LDAP server configuration file.

If a change log entry exceeds the age limit set using the **changeLogMaxAge** configuration option, it is removed from the log.

If the number of change log entries exceeds the limit set using the **changeLogMaxAge** configuration option, the change log entries with the lowest **changenumber** values are removed. The number of entries that are removed depends on how GDBM is configured. When GDBM is file-based, entries are removed until the number of entries remaining is at the limit. When GDBM is Db2-based, entries are removed until the number of entries remaining is about 95% of the limit. For example, if **changeLogMaxAge** is 1000 and the number of entries in the change log reaches 1001, the 51 lowest entries are deleted to reduce the number of entries to 950.

The change log is checked for trimming when the server is started (for a Db2-based change log only) and when change log entries are added. When Db2-based, the change log is also periodically trimmed, with a frequency determined by the server based on the change log limits and contents. The frequency cannot be directly modified. No trimming is performed when the GDBM backend is in read-only mode. Trimming is performed when the LDAP server is in maintenance mode (and GDBM is not read-only).

## Change log information in the root DSE entry

---

The following attributes in the root DSE entry allow applications to determine the location of the change log and effectively use it. The attributes appear whenever change logging is enabled (the GDBM backend is configured), whether or not change logging is currently on.

**changelog=cn=changelog**

The location of the change log.

**firstchangenumber=nnn**

The lowest change number currently in use in the change log. A zero indicates no change log entries.

**lastchangenumber=nnn**

The highest change number currently in use in the change log. A zero indicates no change log entries.

## Multi-server considerations

---

When running GDBM in multi-server mode, the change log is shared by all of the LDAP servers in the same cross-system group. Each LDAP server must have an identical GDBM backend configured to avoid the possibility of not logging a change that should be logged (or the reverse). Note that each TDBM, LDBM, and CDBM backend must run in the same mode as GDBM. They must all run in multi-server mode or all not run in multi-server mode.

## How to set up and use the LDAP server for logging changes

### 1. Update the LDAP server configuration file:

- a. Add the GDBM backend section, including a change log size and age limit, if you want. GDBM can be configured to be Db2-based or file-based. The following example starts change logging using a Db2-based change log with a maximum size of 1000 entries. Entries are automatically deleted when they become a day old.

```
database gdbm GLDBGD31/GLDBGD64
dbuserid dbu1
changeLogging on
changeLogMaxEntries 1000
changeLogMaxAge 86400
```

- b. If you plan to log changes to RACF users, groups, user-group connections, and general resource profiles, you must also:

Add the SDBM backend section, including the **suffix** and, optionally, the **enableResources** configuration options. The **enableResources** configuration option is only needed when logging changes to resource profiles. Following is an example:

```
database sdbm GLDBSD31/GLDBSD64
suffix cn=myRacf
enableResources on
```

Enable the PC Callable support (used by RACF to add change log entries to the LDAP server) by specifying the following option in the global section of the configuration file:

```
listen ldap://:pc
```

- c. If you do not want to log changes to entries in a TDBM, LDBM, or CDBM backend or to the LDAP server schema entry, add the following option to the TDBM, LDBM, CDBM, or GDBM backend section (the GDBM backend controls change logging for the schema entry):

```
changeLoggingParticipant off
```

2. If GDBM is Db2-based, create the Db2 database to be used by the change log. This involves updating and executing a SPUFI script. The database owner in the script must match the **dbuserid** value in the GDBM section of the configuration file. See [“Creating the Db2 database and table spaces for TDBM or GDBM”](#) on page 55 for more information.
3. If you plan to log changes to RACF users, groups, connections, and resource profiles, perform the RACF configuration required to support creation of an LDAP change log entry for RACF changes to those profiles. If you plan to retrieve RACF password or password phrase envelopes, you need to perform the RACF configuration required to support creation and retrieval of the password or password phrase envelopes. See [Activating LDAP change notification](#) for more information.
4. Restart the LDAP directory server. For a Db2-based GDBM backend in 64-bit mode, this will look similar to the following.

**Note:** The GDBM-0002 is a backend name assigned by the LDAP server or is the name specified on the **database** configuration option for the GDBM backend:

```
database GDBM GLDBGD64 GDBM-0002
aclSourceCacheSize: 100
attrOverflowSize: 255
changeLogging: on
changeLogMaxAge: 86400
changeLogMaxEntries: 1000
changeLoggingParticipant: on
dbuserid: DBU1
dnToEidCacheSize: 1000
entryCacheSize: 5000
entryOwnerCacheSize: 100
filterCacheBypassLimit: 100
filterCacheSize: 5000
multiserver: off
```

```

persistentSearch: off
readOnly: off
sizeLimit: 1000
suffix 1: CN=CHANGELOG
timeLimit: 3600

```

For a file-based GDBM backend in 31-bit mode, this will look similar to:

```

database GDBM GLDBGD31 GDBM-0002
changeLogging: on
changeLogMaxAge: 86400
changeLogMaxEntries: 1000
changeLoggingParticipant: on
commitCheckpointEntries: 10000
commitCheckpointTOD: 00:00
databaseDirectory: /var/ldap/gdbm
fileTerminate: recover
multiserver: off
persistentSearch: off
readOnly: off
sizeLimit: 1000
suffix 1: CN=CHANGELOG
timeLimit: 3600

```

If GDBM fails to start, the following message is issued:

```
GLD1106E GDBM-0002 backend initialization failed.
```

5. At this point, change logging is started. Depending on your configuration, a change to a RACF user, group, connection, or resource profile, or to a TDBM, LDBM, or CDBM entry, or to the LDAP server schema entry will result in the creation of a change log entry in the LDAP server.
6. If you want, modify the ACL on the change log root entry, cn=changelog, for your usage of the change log. The initial ACL restricts update access to the change log to an LDAP root or directory data administrator. All other administrators have read access to the change log.

For example, to give read access to the change log to RACF user CLREADER, create an ldif file, cl.ldif, similar to the following:

```

dn: cn=changelog
changetype: modify
add: aclentry
aclentry:access-id:racfid=clreader,profiletype=user,cn=myRacf:normal:rsc:
sensitive:rsc:critical:rsc:system:rsc
-

```

You should then modify the change log ACL by issuing a modify command similar to the following:

```
ldapmodify -h ldaphost -p ldapport -D adminDn -w adminPw -f cl.ldif
```

7. You can search, delete, and compare change log entries using the LDAP client interfaces and command line utilities. In particular, all change log entries can be viewed using a search similar to the following:

```
ldapsearch -h ldaphost -p ldapport -D adminDn -w adminPw -b "cn=changelog" "objectclass=*"
```

Part of the output from this search would look like:

```

cn=changelog
objectclass=top
objectclass=container
cn=changelog

CHANGENUMBER=1,CN=CHANGELOG
objectclass=CHANGELOGENTRY
objectclass=IBM-CHANGELOG
objectclass=TOP
changenumber=1
targetdn=RACFID=U2,PROFILETYPE=USER,cn=myRacf
changetime=20030611204814.257756Z
changetype=MODIFY
changes=replace: racfPassword
racfPassword: *ComeAndGetIt*
-

```

```
ibm-changeinitiatorsname=RACFID=SUSET3,PROFILETYPE=USER,cn=myRacf
```

8. If the **changes** attribute of a change log entry contains any of the following lines:

```
racfPassword: *NoEnvelope*
racfPassword: *ComeAndGetIt*
racfPassPhrase: *NoEnvelope*
racfPassPhrase: *ComeAndGetIt*
userpassword: *ComeAndGetIt*
replicacredentials: *ComeAndGetIt*
secretkey: *ComeAndGetIt*
ibm-slapdadminpw: *ComeAndGetIt*
ibm-slapdmasterpw: *ComeAndGetIt*
ibm-replicakeypwd: *ComeAndGetIt*
```

then a password in the RACF user profile, TDBM, LDBM, or CDBM entry was changed. If the value is `*ComeAndGetIt*`, then you can try to retrieve the actual password value. See [“Passwords in change log entries”](#) on page 550 for information about retrieving passwords.

9. The LDAP root DSE entry contains useful information about the LDAP change log, including its suffix, and the lowest and highest change numbers currently in use. A command similar to the following one obtains this information:

```
ldapsearch -h ldaphost -p ldapport -D adminDn -w adminPw -s base -b "" "objectclass=*"
```

Part of the output from this search would look like:

```
changelog=cn=changelog
firstchangenumber=1
lastchangenumber=202
```

**Note:** The LDAP server occasionally skips one or more change numbers, so it cannot be assumed that there is a change log entry for every number between 1 and 202. In addition, skips are created if you delete a change log entry that does not have the lowest number. Change numbers that are generated by the LDAP server are not guaranteed to be consecutive, but will always increase.





---

## Chapter 29. Referrals

Referrals provide a way for servers to refer clients to additional directory servers. With referrals you can:

- Distribute namespace information among multiple servers.
- Provide knowledge of where data resides within a set of interrelated servers.
- Route client requests to the appropriate server.

Following are some of the advantages of using referrals:

- Distribute processing overhead, providing primitive load balancing.
- Distribute administration of data along organizational boundaries.
- Provide potential for widespread interconnection, beyond the boundaries of the organizations.

This topic describes how to create referral entries in a TDBM or LDBM backend and how to configure a default referral for the LDAP server.

A referral entry can be added to a TDBM or LDBM backend to indicate that the backend does not contain that entry or any entries below it and to identify another LDAP server that may contain those entries. A referral entry returns referral information to the LDAP client if the target of a client operation is at or below the referral entry or if a search operation includes the referral entry within its search scope.

A default referral can be added to the LDAP server configuration file to identify another LDAP server that may contain entries that do not fall within any of the suffixes in this LDAP server. If the target of an operation is not at or below any suffix defined in the LDAP server, the LDAP server returns the default referral to the client.

This topic also contains information about how to associate multiple servers using referrals and an example of associating a set of servers through referrals, basic replication (see Chapter 25, “Basic replication,” on page 457), and advanced replication (see Chapter 26, “Advanced replication,” on page 473).

---

### Using the referral object class and the `ref` attribute

The referral object class and the `ref` attribute are used to facilitate distributed name resolution or to search across multiple servers. The `ref` attribute appears in an entry in the referencing server. The value of the `ref` attribute points to the corresponding entry maintained in the referenced server. While the distinguished name (DN) in a value of the `ref` attribute is typically that of an entry in a naming context below the naming context held by the referencing server, it is permitted to be the distinguished name of any entry. A multi-valued `ref` attribute may be used to indicate different locations for the same resource. If the `ref` attribute is multi-valued, all the DNs in the values of the `ref` attribute should have the same value.

A referral entry must be a leaf entry. This means that no ancestor of an entry can be a referral entry. In addition, a referral entry cannot also be an alias entry.

### Creating referral entries

Following is an example configuration that illustrates the use of the `ref` attribute.

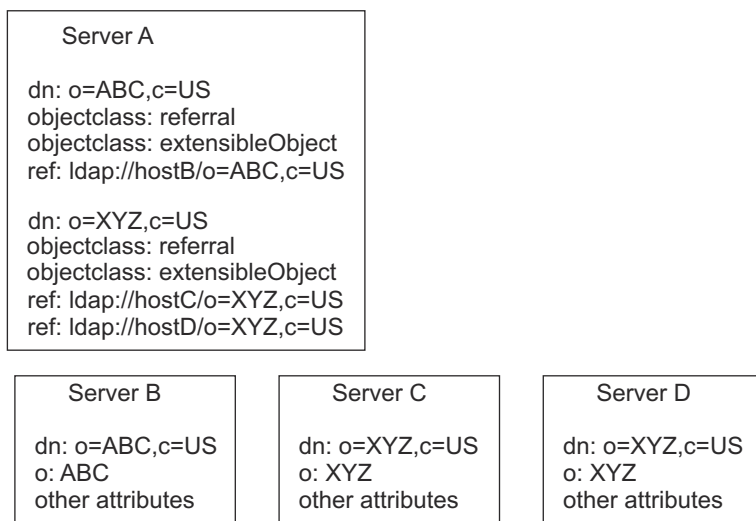


Figure 53. Example using the ref attribute

In the example, Server A holds references to two entries: o=ABC , c=US and o=XYZ , c=US. For the o=ABC , c=US entry, Server A holds a reference to Server B and for the o=XYZ , c=US entry, Server A holds references to two equivalent servers, Server C and Server D.

The preferred setup of referrals is to structure the servers into a hierarchy based on the subtrees they manage. Then, provide "forward" referrals from servers that hold higher information and set the default referral to point back to its parent server.

## Associating servers with referrals

In order to associate servers through referrals:

- Use referral entries to point to other servers for subordinate references
- Define the default referral to point somewhere else, typically to the parent server

These steps are defined as follows:

### Pointing to other servers

Use referral entries to point to the other servers for subordinate references that are portions of the namespace below this server which are not serviced directly.

Referral entries are created in TDBM and LDBM backends. Referral entries consist of:

#### dn

Specifies the distinguished name. It is the portion of the namespace served by the referenced server.

#### objectclass

Specifies referral. Also, include the object class extensibleObject.

#### ref

Specifies the location of the referenced server. There is no required format for the value, however, the Db2 LDAP client can only follow a **ref** value which is in LDAP URL format. An LDAP URL has one of the following formats:

```

ldap://hostname:port/DN
ldaps://hostname:port/DN

```

The default port (389 for a non-SSL connection or 636 for an SSL connection) is used if a port is not specified as part of the LDAP URL. The DN of the referral entry is used if a DN is not specified as part of the LDAP URL. The ldap:// form is for a non-SSL connection while the ldaps:// form is for an SSL connection. The ldaps:// form is required if you are using non-standard ports and want to

allow SSL connections to the referenced server. The DN value in the LDAP URL should match the DN of the referral entry. The **ref** attribute may be multi-valued, with each value specifying the LDAP URL of a different server. When multiple values are used, each LDAP URL should contain the same DN, and each server should hold equivalent information for the portion of the namespace represented by the DN. Note that you cannot specify a 0-length value for the **ref** attribute.

The z/OS LDAP server automatically adds the **extensibleObject** object class to a referral entry if it is not specified. This allows the RDN attributes to be added to the referral entry.

Following is an example:

```
dn: o=IBM,c=US
objectclass: referral
objectclass: extensibleObject
ref: ldap://Host1:389/o=IBM,c=US
ref: ldap://Host2:389/o=IBM,c=US
ref: ldap://Host3:1389/o=IBM,c=US
```

A TDBM or LDBM backend can contain any number of referral entries in its directory.

## Defining the default referral

Define the default referral to point to another server which services other portions of the namespace unknown to the referencing server. The default referral can be used to point to:

- The immediate parent of this server (in a hierarchy)
- A "more knowledgeable" server, such as the uppermost server in the hierarchy
- A "more knowledgeable" server which possibly serves a disjoint portion of the namespace.

The default referral is specified using the **referral** option in the LDAP server configuration file and applies to all backends in the LDAP server. The value of the option must be an LDAP URL. Multiple default referrals may be specified. However, each one specified is considered equivalent; that is, each server referenced by a default referral should present the same view of the namespace to its clients.

The default referral LDAP URL does not include the DN portion and a DN, if specified, is ignored. The default port (389 for a non-SSL connection or 636 for an SSL connection) is used if a port is not specified as part of the LDAP URL. The `ldap://` form is for a non-SSL connection while the `ldaps://` form is for an SSL connection. The `ldaps://` form is required if you are using non-standard ports and want to allow SSL connections to the referenced server. Following is an example:

```
referral ldap://host3.ibm.com:999
```

For SSL/TLS note, a non-secure client referral to a secure port is not supported. Also, a secure client referral to a non-secure port is not supported.

## Processing referrals

When LDAP clients request information from LDAP servers which do not hold the needed data, servers can pass back referral URLs which indicate one or more other servers to contact. The clients can then request the information from the referenced server. The z/OS client API, by default, chases referrals returned from servers. However, client applications can suppress referral chasing through the `ldap_set_option()` API. In this case, the application retrieves the referral from the LDAP client and processes it within the application. This options scope of the option is the LDAP handle, so a client could open multiple connections to one or more servers, some of which would chase referrals automatically, and some of which would not.

Servers present the referral URLs differently depending on the LDAP protocol version being used by the client. Referrals are presented to LDAP Version 2 clients in the error string, as the protocol does not provide a specific mechanism for indicating referrals. In LDAP Version 3, protocol elements are specifically defined to allow servers to present referral information to clients.

## Using LDAP Version 2 referrals

Referrals are not supported by the LDAP Version 2 protocol. In order to provide referral information to LDAP Version 2 clients, the referral information is returned as part of the error string in the result message. Since clients do not generally examine the error string for results indicating LDAP\_SUCCESS, the LDAP server returns LDAP\_PARTIAL\_results instead of LDAP\_SUCCESS if referral information is present in the error string. Referral information might be present for any result other than LDAP\_SUCCESS.

The referral information in the error string is returned as follows, where '\n' indicates a newline character:

```
Referral:\n
ldap://hostname:port/DN\n
...
```

where `Referral:` is followed by a new line character (\n) and `ldap://hostname:port/DN\n` is an LDAP URL followed by a new line character. The ellipses (...) indicate a list of multiple referrals; that is, more LDAP URLs followed by new line characters.

## Limitations with LDAP Version 2 referrals

Multiple referrals are only presented for partial search results when it is necessary to contact more than one additional server to complete the entire request. This would indicate that multiple referral entries were found in the referencing server that matched the search criteria. If chasing referrals, the client contacts every server presented in the list to continue the search request. For referral entries that have multi-valued `ref` attributes, the server sends only one of the LDAP URLs to a client using LDAP Version 2 protocol. This is because there is no provision for distinguishing between equivalent servers to contact (as indicated by multi-valued `ref` attributes) and multiple servers which must be contacted to complete a search request.

A second limitation of referrals in LDAP Version 2 is that operations can sometimes be ambiguous in their intent regarding whether the operation was targeted for "real" entries in the namespace, as opposed to the referral entries themselves. For searches, referral entries are only presented as referrals, since the usual intent of a search is to look at the real entries in the namespace. Server administrators must therefore use other means to examine existing referral entries, such as examining the database, or reviewing `ds2ldif` output. For update operations, default referrals for upward references are presented as referrals, so that read-only replica servers can forward update operations to the master replica. However, subordinate references indicated by a referral entry are not followed for update operations, rather they operate on the referral entry itself. This is necessary to allow an administrator the ability to delete or modify existing referral entries. Erroneous changes caused by misdirected update operations are generally avoided through access protection and schema rules.

## Using LDAP Version 3 referrals

In LDAP Version 3, referrals are defined as part of the protocol. The LDAP Version 2 limitations mentioned above are overcome by elements of the protocol and extensions to the protocol. There are two methods of passing back referral information in the LDAP Version 3 protocol: referrals and search continuation references.

If the target of a request is a referral entry or is below a referral entry, or if the target does not fall within any of the suffixes in the LDAP server and a default referral is configured, then a result code of LDAP\_REFERRAL is presented by the server to indicate that the contacted server does not hold the target entry of the request. The referral field is present in the message and indicates another server (or set of servers) to contact. Referrals can be returned in response to any operation request except unbind and abandon which do not have responses. When multiple URLs are present in a given referral response, each one must be equally capable of being used to progress the operation.

If the target of a search is found in the directory but a referral entry is encountered during the rest of a one-level or subtree search, a referral is not returned. Instead, one or more search continuation references are returned. Search continuation references are intermixed with returned search entries. Each one contains a URL to another server (or set of servers) to contact, and represents an unexplored subtree of the namespace which potentially satisfies the search criteria. When multiple URLs are present

in a given search continuation reference, each one must be equally capable of being used to progress the operation.

As mentioned earlier, the other limitation in LDAP Version 2 referral processing is related to the inability of a client to specify whether a request was targeted for a normal entry or a referral entry. For LDAP Version 3, this difficulty is overcome with a protocol extension in the form of the `manageDsaIT` control. (Appendix C, “Supported server controls,” on page 653 describes `manageDsaIT` in detail.) For typical client requests where the control is absent, whenever the server encounters an applicable referral entry while processing the request, either a referral or search continuation reference is presented. When the client request includes this control, the server does not present any referrals or search continuation references, but instead treats the referral entries as normal entries. In this case, even superior references through the use of default referrals are suppressed. The z/OS LDAP client operations utilities support the `-M` option to indicate that the requester is managing the namespace, and therefore wants to examine and manipulate referral entries as if they were normal entries. An exception to the processing that was just described is that referral entries are always treated as normal entries during the second phase of a persistent search, even if the `manageDsaIT` control is not specified on the persistent search request. See “PersistentSearch” on page 660 for more information.

## Bind considerations for referrals

When LDAP clients chase referrals from one server to another, they typically need to bind to the referenced server before redirecting the original request. If you distribute your directory across multiple servers connected by referrals, you must consider the capabilities of the applications which access your directory, how they chase referrals, and how they can bind to the referenced servers.

For example, the z/OS LDAP client utilities like **`ldapsearch`** and **`ldapmodify`** use the bind DN and password specified on the utility invocation, both when binding to the original target server and also when chasing referrals to other servers. If you want the LDAP client utilities to automatically chase referrals across servers, then the same bind DN and password must be accepted on each of the servers connected by referrals.

If you use an approach where there are no common bind identities, then your applications will either be limited to unauthenticated access or they will require the ability to bind appropriately to each server when chasing referrals.

Consider the following approaches:

1. Use unauthenticated access for reading information to avoid the need to bind with a common identity. This makes sense if the data in the directory is general reference information that does not need to be protected.
2. Establish an 'authentication' backend for identity information that is the same on each server. This could be an SDBM backend, where the common authentication identities are in RACF, or a TDBM or LDBM backend that is the same on each server (replication could be used to ensure this). Access control over the other entries in the referral servers uses the distinguished names from the authentication backend to control access to the entries.
3. If you use the LDAP root administrator DN (`adminDN` configuration option) to access the entries, configure the administrator DN and password identically in each of the referral servers.

## Example: Associating servers through referrals and basic replication

Following are the steps involved in distributing the namespace using referrals.

1. Plan your namespace hierarchy.

```
country - US
company - IBM, Lotus
organizationalUnit - IBM Austin, IBM Endicott, IBM HQ
```

2. Set up multiple servers, each containing portions of the namespace.

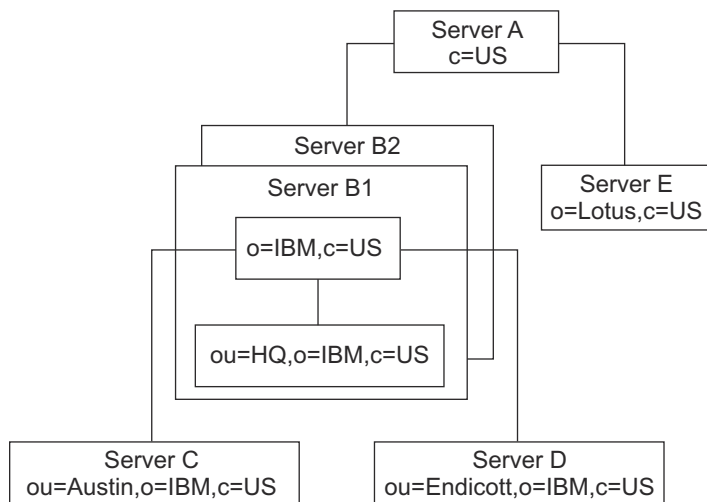


Figure 54. Setting up the servers

Following is a description of each server:

#### Server A

Perhaps just a server used to locate other servers in the US. With no other knowledge, clients can come here first to locate information for anyone in the US.

#### Server B1

A hub for all data pertaining to IBM in the US. Holds all HQ information directly. Holds all knowledge (referrals) of where other IBM data resides.

#### Server B2

A replica of Server B1.

#### Server C

Holds all IBM Austin information.

#### Server D

Holds all IBM Endicott information.

#### Server E

Holds all Lotus information.

- Set up referral entries to point to the descendants in other servers.

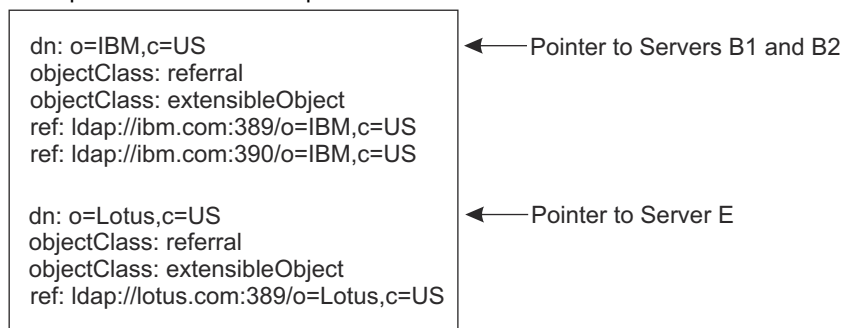


Figure 55. Server A database (LDIF input)

- Servers can also define one or more default referrals that point to "more knowledgeable" servers for anything that is not underneath them in the namespace.

The default referrals go in the configuration file, not the backend.

**Note:** The default referral LDAP URLs do not include the DN portion.

```
General Section

referral ldap://ibm.com:389
referral ldap://ibm.com:390

listen ldap://:789
.
.
.
tdbm database definitions
database tdbm GLDBTD31/GLDBTD64
suffix "ou=Endicott,o=IBM,c=US"
```

*Figure 56. Server D configuration file*

#### 5. Putting it all together.

[Figure 57 on page 562](#), [Figure 58 on page 563](#), and [Figure 59 on page 564](#) show these same six servers, showing the referral entries in the database including the default referrals which are used for superior references. Also included in Servers B1 and B2 are sample definitions for replication, setting up Server B2 as a replica of Server B1. This ensures that these two servers remain identical. Servers B1 and B2 are on the same system, but use different ports.

Server A: Services   
 host name "US.white.pages.com"

Configuration File

listen ldap://:1234  
  
 database tdbm GLDBTD31/GLDBTD64  
 dbuserid userA  
 suffix "c=US"

Directory

dn: c=US  
 objectClass: country  
  
 dn: o=IBM,c=US  
 objectClass: referral  
 objectClass: extensibleObject  
 ref: ldap://ibm.com:389/o=IBM,c=US  
 ref: ldap://ibm.com:390/o=IBM,c=US  
  
 dn: o=Lotus,c=US  
 objectClass: referral  
 objectClass: extensibleObject  
 ref: ldap://lotus.com:389/o=Lotus,c=US

Server E: Services   
 host name "lotus.com"

Configuration File

referral ldap://US.white.pages.com:1234  
 listen ldap://:389  
  
 database tdbm GLDBTD31/GLDBTD64  
 dbuserid userE  
 suffix "o=Lotus,c=US"

Directory

dn: o=Lotus,c=US  
 objectClass: organization

Figure 57. Referral example summary (servers A and E)



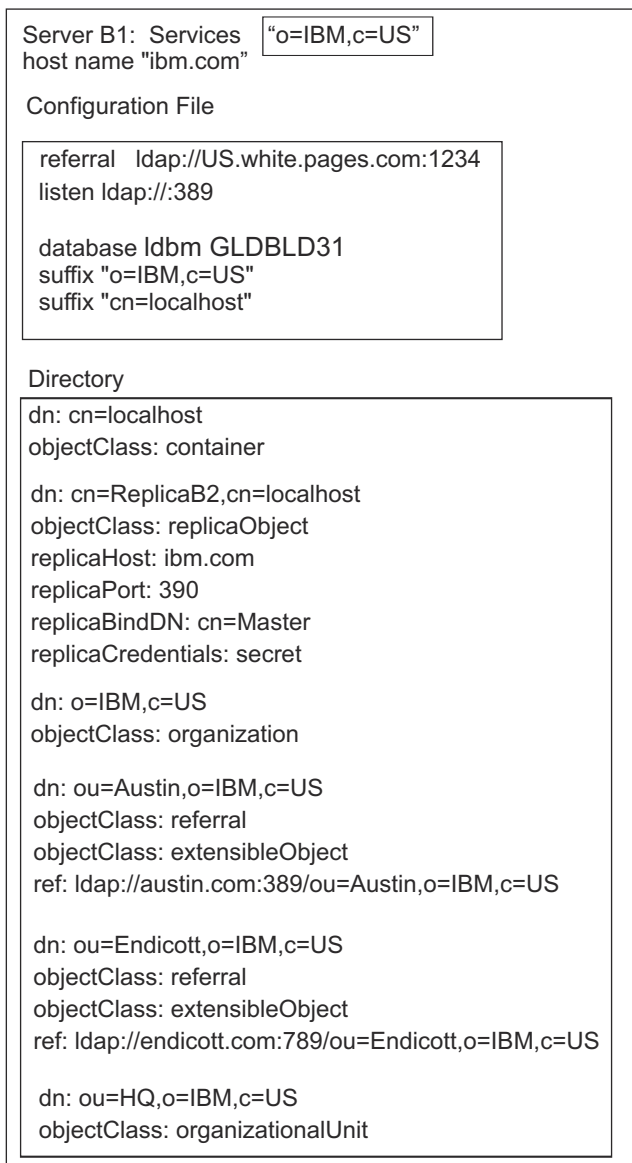
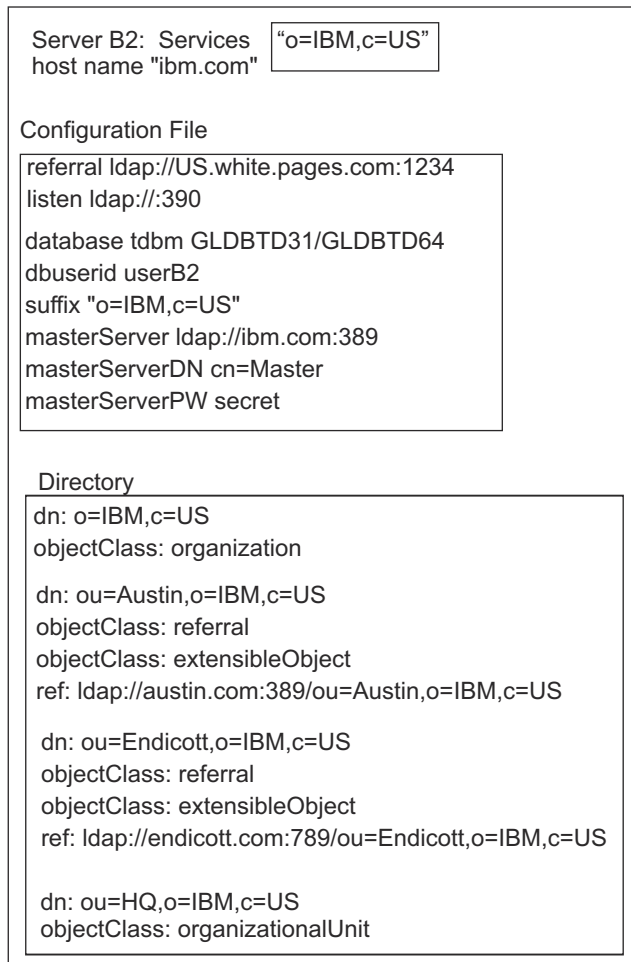


Figure 58. Referral example summary (server B1)



*Figure 59. Referral example summary (server B2)*

---

## Chapter 30. Client considerations

When an LDAP application is communicating with an LDAP server, consider the following special topics:

- Root DSE
- Monitor Support
- UTF-8 data over the LDAP Version 2 protocol
- Attribute types stored and retrieved in lowercase
- Abandon behavior

### Root DSE

---

The root DSE is the entry at the top of the LDAP server directory information tree. All the **namingcontexts** (suffixes) in the LDAP server are directly below the root DSE. The root DSE contains information about the LDAP server, including the **namingcontexts** that are configured and the capabilities of the server.

The root DSE can be searched by specifying a zero-length base distinguished name. The search scope can be either base or subtree (the one-level scope is not supported).

### Root DSE search with base scope

A root DSE search with base scope returns the contents of the root DSE. The root DSE attributes describe the LDAP server. The only search filter that is supported is **objectclass=\***. There is no access control checking for the root DSE, but an anonymous bind fails if **allowAnonymousBinds off** is specified in the LDAP server configuration file. The **supportedcontrol**, **supportedextension**, and **namingcontexts** attributes may contain values that are contributed by plug-in extensions that are configured in the LDAP server.

The following example uses the **ldapsearch** utility to request a base search of the root DSE and shows sample output for the search:

```
ldapsearch -h ldaphost -p ldapport -s base -b "" "objectclass=*"
```

Following is an example of the information that the LDAP server reports on a search of the root DSE. A subset of these values might appear in your root DSE based on the server configuration choices you made.

```
vendorname=International Business Machines (IBM)
vendorversion=z/OS V2R4
ibmdirectoryversion=z/OS V2R4
ibm-serverid=Master
ibm-slapdServerCompatibilityLevel=7
altserver=ldap://host2.ibm.com:999
subschemasubentry=cn=schema
supportedldapversion=2
supportedldapversion=3
supportedcontrol=1.3.18.0.2.10.20
supportedcontrol=2.16.840.1.113730.3.4.3
supportedcontrol=2.16.840.1.113730.3.4.2
supportedcontrol=1.3.18.0.2.10.10
supportedcontrol=1.3.18.0.2.10.11
supportedcontrol=1.3.18.0.2.10.15
supportedcontrol=1.3.18.0.2.10.18
supportedcontrol=1.3.18.0.2.10.19
supportedcontrol=1.2.840.113556.1.4.319
supportedcontrol=1.2.840.113556.1.4.473
supportedcontrol=1.3.18.0.2.10.2
supportedcontrol=1.3.6.1.4.1.42.2.27.8.5.1
supportedcontrol=1.3.18.0.2.10.23
supportedcontrol=1.3.18.0.2.10.27
supportedcontrol=1.3.18.0.2.10.24
supportedcontrol=1.3.18.0.2.10.34
supportedextension=1.3.6.1.4.1.1466.20037
supportedextension=1.3.18.0.2.12.62
```

```

supportedextension=1.3.18.0.2.12.48
supportedextension=1.3.18.0.2.12.82
supportedextension=1.3.18.0.2.12.75
supportedextension=1.3.18.0.2.12.58
supportedextension=1.3.18.0.2.12.37
supportedextension=1.3.18.0.2.12.15
supportedextension=1.3.18.0.2.12.16
supportedextension=1.3.18.0.2.12.17
supportedextension=1.3.18.0.2.12.19
supportedextension=1.3.18.0.2.12.54
supportedextension=1.3.18.0.2.12.56
namingcontexts=CN=CONFIGURATION
namingcontexts=CN=IBMPOLICIES
namingcontexts=CN=CHANGELOG
namingcontexts=CN=MYRACF
namingcontexts=O=IBM,C=US
namingcontexts=SECAUTHORITY=DEFAULT
ibm-supportedcapabilities=1.3.18.0.2.32.24
ibm-supportedcapabilities=1.3.18.0.2.32.26
ibm-supportedcapabilities=1.3.18.0.2.32.30
ibm-supportedcapabilities=1.3.18.0.2.32.28
ibm-supportedcapabilities=1.3.18.0.2.32.7
ibm-supportedcapabilities=1.3.18.0.2.32.98
ibm-supportedcapabilities=1.3.6.1.4.1.4203.1.5.1
ibm-supportedcapabilities=1.3.18.0.2.32.55
ibm-supportedcapabilities=1.3.18.0.2.32.3
ibm-supportedcapabilities=1.3.18.0.2.32.33
ibm-supportedcapabilities=1.3.18.0.2.32.34
ibm-supportedcapabilities=1.3.18.0.2.32.31
ibm-supportedcapabilities=1.3.18.0.2.32.63
ibm-supportedcapabilities=1.3.18.0.2.32.17
ibm-supportedcapabilities=1.3.18.0.2.32.19
ibm-supportedcapabilities=1.3.18.0.2.32.5
ibm-supportedcapabilities=1.3.18.0.2.32.54
ibm-supportedcapabilities=1.3.18.0.2.32.57
ibm-supportedcapabilities=1.3.18.0.2.32.77
ibm-supportedcapabilities=1.3.18.0.2.32.88
ibm-supportedCapabilities=1.3.18.0.2.32.68
ibm-supportedcapabilities=1.3.18.0.2.32.94
ibm-supportedcapabilities=1.3.18.0.2.32.1
ibm-supportedcapabilities=1.3.18.0.2.32.29
ibm-supportedcapabilities=1.3.18.0.2.32.18
ibm-supportedcapabilities=1.3.18.0.2.32.44
ibm-supportedcapabilities=1.3.18.0.2.32.51
ibm-supportedcapabilities=1.3.18.0.2.32.52
ibm-supportedcapabilities=1.3.18.0.2.32.56
ibm-supportedcapabilities=1.3.18.0.2.32.65
ibm-supportedcapabilities=1.3.18.0.2.32.43
ibm-supportedcapabilities=1.3.18.0.2.32.2
ibm-supportedcapabilities=1.3.18.0.2.32.95
ibm-supportedcapabilities=1.3.18.0.2.32.6
ibm-supportedcapabilities=1.3.18.0.2.32.99
ibm-supportedcapabilities=1.3.18.0.2.32.105
ibm-enabledcapabilities=1.3.18.0.2.32.24
ibm-enabledcapabilities=1.3.18.0.2.32.26
ibm-enabledcapabilities=1.3.18.0.2.32.7
ibm-enabledcapabilities=1.3.6.1.4.1.4203.1.5.1
ibm-enabledcapabilities=1.3.18.0.2.32.98
ibm-enabledcapabilities=1.3.18.0.2.32.3
ibm-enabledcapabilities=1.3.18.0.2.32.33
ibm-enabledcapabilities=1.3.18.0.2.32.34
ibm-enabledcapabilities=1.3.18.0.2.32.31
ibm-enabledcapabilities=1.3.18.0.2.32.56
ibm-enabledcapabilities=1.3.18.0.2.32.2
ibm-enabledcapabilities=1.3.18.0.2.32.5
ibm-enabledcapabilities=1.3.18.0.2.32.54
ibm-enabledcapabilities=1.3.18.0.2.32.57
ibm-enabledcapabilities=1.3.18.0.2.32.77
ibm-enabledcapabilities=1.3.18.0.2.32.88
ibm-enabledcapabilities=1.3.18.0.2.32.68
ibm-enabledcapabilities=1.3.18.0.2.32.28
ibm-enabledcapabilities=1.3.18.0.2.32.55
ibm-enabledcapabilities=1.3.18.0.2.32.17
ibm-enabledcapabilities=1.3.18.0.2.32.94
ibm-enabledcapabilities=1.3.18.0.2.32.6
ibm-enabledcapabilities=1.3.18.0.2.32.1
ibm-enabledcapabilities=1.3.18.0.2.32.29
ibm-enabledcapabilities=1.3.18.0.2.32.18
ibm-enabledcapabilities=1.3.18.0.2.32.44
ibm-enabledcapabilities=1.3.18.0.2.32.51
ibm-enabledcapabilities=1.3.18.0.2.32.52
ibm-enabledcapabilities=1.3.18.0.2.32.65

```

```

ibm-enabledcapabilities=1.3.18.0.2.32.43
ibm-enabledcapabilities=1.3.18.0.2.32.95
ibm-enabledcapabilities=1.3.18.0.2.32.105
ref=ldap://hostk.ibm.com:391
supportedsaslmmechanisms=CRAM-MD5
supportedsaslmmechanisms=DIGEST-MD5
supportedsaslmmechanisms=EXTERNAL
ibm-sasldigestrealmname=MYHOST.IBM.COM
changelog=cn=changelog
firstchangenumber=24213
lastchangenumber=24322

```

Following are Object Identifiers (OIDs) for supported and enabled capabilities:

| Table 84. Object Identifiers (OIDs) for supported and enabled capabilities |                                             |                                                                                                                                                            |
|----------------------------------------------------------------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>OID assigned</b>                                                        | <b>Short name</b>                           | <b>Description</b>                                                                                                                                         |
| 1.3.6.1.4.1.4203.1.5.1                                                     | Retrieval of operational attributes         | Indicates that this server supports the <b>+</b> attribute on search requests to return operational attributes.                                            |
| 1.3.18.0.2.32.1                                                            | Advanced replication                        | Identifies that this server supports advanced replication that includes subtree and cascading replication.                                                 |
| 1.3.18.0.2.32.2                                                            | Entry Checksum                              | Indicates that this server supports the <b>ibm-entryChecksum</b> and <b>ibm-entryChecksumOp</b> operational attributes.                                    |
| 1.3.18.0.2.32.3                                                            | Entry UUID                                  | Identifies that this server supports the <b>ibm-entryuuid</b> operational attribute.                                                                       |
| 1.3.18.0.2.32.5                                                            | Password policy                             | Indicates that this server supports password policies.                                                                                                     |
| 1.3.18.0.2.32.6                                                            | Sort by DN                                  | Indicates that this server supports using the <b>ibm-slapdDN</b> attribute to sort by DN.                                                                  |
| 1.3.18.0.2.32.7                                                            | System restricted ACL support               | Indicates that the server supports specification and evaluation of ACLs on system and restricted attributes.                                               |
| 1.3.18.0.2.32.17                                                           | Group search limits                         | Indicates that this server supports using groups to specify search size and time limits.                                                                   |
| 1.3.18.0.2.32.18                                                           | cn=ibmpolicies advanced replication subtree | Indicates that this server supports the replication of the cn=ibmpolicies subtree. This support is only available when advanced replication is configured. |
| 1.3.18.0.2.32.19                                                           | Max age ChangeLog entries                   | Specifies that the server can retain changelog entries that are based on age.                                                                              |
| 1.3.18.0.2.32.24                                                           | Monitor operation counts                    | The server provides monitor operation counts for initiated and completed operation types.                                                                  |

Table 84. Object Identifiers (OIDs) for supported and enabled capabilities (continued)

| OID assigned     | Short name                                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.3.18.0.2.32.26 | Null-based subtree search                                             | Indicates that the server supports null-based subtree search operations, which search all the LDBM, TDBM, and CDBM entries in the server.                                                                                                                                                                                                                                                                                    |
| 1.3.18.0.2.32.28 | TLS capabilities                                                      | Specifies that the server can perform Transport Layer Security (TLS).                                                                                                                                                                                                                                                                                                                                                        |
| 1.3.18.0.2.32.29 | Non-blocking advanced replication                                     | Indicates that this server can ignore some errors that are received from a consumer (replica) server that would normally cause an update to be retransmitted periodically until a successful return code is received.                                                                                                                                                                                                        |
| 1.3.18.0.2.32.30 | Kerberos capability                                                   | Specifies that the server can perform Kerberos authentication.                                                                                                                                                                                                                                                                                                                                                               |
| 1.3.18.0.2.32.31 | <b>ibm-allMembers</b> and <b>ibm-allGroups</b> operational attributes | Indicates that a backend supports searching on the <b>ibm-allGroups</b> and <b>ibm-allMembers</b> operational attributes. The members of a static, dynamic, or group can be obtained by performing a search on the <b>ibm-allMembers</b> operational attribute. The static, dynamic, and nested groups that a member DN belongs to can be obtained by performing a search on the <b>ibm-allGroups</b> operational attribute. |
| 1.3.18.0.2.32.33 | Modify DN (subtree move)                                              | Indicates that a subtree can be moved to another subtree, within a backend. This move uses a new superior. It can also use a new RDN.                                                                                                                                                                                                                                                                                        |
| 1.3.18.0.2.32.34 | Modify DN (subtree rename)                                            | Indicates that a subtree can be renamed. The DN of each entry under the subtree is also changed. This rename uses a new RDN but not a new superior.                                                                                                                                                                                                                                                                          |
| 1.3.18.0.2.32.43 | Advanced replication configuration                                    | Indicates that this server supports configuration of supplier servers in an advanced replication environment.                                                                                                                                                                                                                                                                                                                |
| 1.3.18.0.2.32.44 | Global updates support                                                | Indicates that this server supports the advanced replication of global updates using the replication topology in the cn=ibmpolicies subtree in the CDBM backend.                                                                                                                                                                                                                                                             |

Table 84. Object Identifiers (OIDs) for supported and enabled capabilities (continued)

| OID assigned     | Short name                                                           | Description                                                                                                                                                                                                                                                                                                                                                               |
|------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.3.18.0.2.32.51 | Advanced replication conflict resolution maximum entry size          | Indicates that this server supports the <b>ibm-slappedReplConflictMaxEntrySize</b> attribute on a CDBM entry with an objectclass of <b>ibm-slappedReplicationConfiguration</b> . This attribute value indicates the maximum number of bytes that an entry can contain and still can be resent to a target server as a result of advanced replication conflict resolution. |
| 1.3.18.0.2.32.52 | Lost and found log                                                   | Indicates that this server supports the lost and found log for archiving replaced entries as a result of the advanced replication conflict resolution.                                                                                                                                                                                                                    |
| 1.3.18.0.2.32.54 | Password policy account lockout                                      | Indicates that this server supports the password policy account lockout feature.                                                                                                                                                                                                                                                                                          |
| 1.3.18.0.2.32.55 | SSL FIPS processing mode                                             | Indicates that this server supports SSL FIPS mode processing.                                                                                                                                                                                                                                                                                                             |
| 1.3.18.0.2.32.56 | Updated <b>ibm-entryChecksumOp</b> operational attribute calculation | Indicates that this server supports an updated algorithm for the checksum calculation of the <b>ibm-entryChecksumOp</b> operational attribute.                                                                                                                                                                                                                            |
| 1.3.18.0.2.32.57 | LDAP password global start time                                      | Indicates that the server supports the <b>ibm-pwdPolicyStartTime</b> attribute in the <code>cn=pwdpolicy,cn=ibmpolicies</code> entry.                                                                                                                                                                                                                                     |
| 1.3.18.0.2.32.63 | Salted SHA (SSHA)                                                    | Indicates that this server supports the Salted SHA hashing of password values.                                                                                                                                                                                                                                                                                            |
| 1.3.18.0.2.32.65 | Filter replication                                                   | Identifies that this server supports filtered replication that allows only required entries and a subset of attributes to be replicated. This support is only available when advanced replication is configured.                                                                                                                                                          |
| 1.3.18.0.2.32.68 | Administrative roles                                                 | Indicates that this server allows administrative roles to be defined and used for administrative group members.                                                                                                                                                                                                                                                           |
| 1.3.18.0.2.32.77 | Multiple password policies                                           | Indicates that this server allows multiple password policy entries to be defined and used.                                                                                                                                                                                                                                                                                |

Table 84. Object Identifiers (OIDs) for supported and enabled capabilities (continued)

| OID assigned      | Short name                                                   | Description                                                                                                                                                                                   |
|-------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.3.18.0.2.32.88  | Password policy maximum consecutive repeated characters      | Indicates that this server supports password policies that restrict the maximum number of consecutive repeated characters in password values.                                                 |
| 1.3.18.0.2.32.94  | Fine grained time stamps                                     | Indicates that this server supports advanced replication with fine grained time stamps that include microseconds.                                                                             |
| 1.3.18.0.2.32.95  | <b>ibm-replicationWaitOnDependency</b> attribute replication | Indicates that this server supports the replication of the <b>ibm-replicationWaitOnDependency</b> attribute from the advanced replication agreement entry.                                    |
| 1.3.18.0.2.32.98  | ACL filter support                                           | Indicates that this server supports specifying a filter in the access control attributes to further control access to an object.                                                              |
| 1.3.18.0.2.32.99  | SHA-2 and Salted SHA-2 hashing                               | Indicates that this server supports SHA-2 and Salted SHA-2 hashing.                                                                                                                           |
| 1.3.18.0.2.32.105 | Replication of security attributes                           | Indicates that the server supports replication of security attributes between master and read-only replica so that password policy for account lockout is enforced in replication topologies. |

## Root DSE search with subtree scope (Null-based subtree search)

A root DSE search with subtree scope returns all the entries that match the search filter in the LDBM, TDBM, and CDBM backends that are configured in the LDAP server. This search is commonly referred to as a null-based subtree search. Note that the search does not include the root DSE itself, the LDAP server schema entry, SDBM entries, and GDBM entries (change log records). Alias entries are not dereferenced during the search, they are processed like normal entries and returned if they match the search filter. Referral entries in LDBM, TDBM, and CDBM return referrals to the client. Any filter can be specified for the subtree search. A sorted root DSE search with subtree scope sorts the entire result set after all entries have been retrieved from the backends.

A null-based subtree is implemented as a series of searches to each LDBM, TDBM, and CDBM suffix. These individual searches are each limited by the time limit and size limit options that are specified in the LDAP server configuration file or in the requester's group search limits. If a time limit or size limit is specified on the root DSE search request, then the individual searches are also limited by the amount of time remaining and the number of entries that are left to return when that individual search is started. See the descriptions of the `sizeLimit` and `timeLimit` options in Chapter 8, “Customizing the LDAP server configuration,” on page 83 for more information. See “Managing group search limits” on page 416 for more information about group search limits. Each individual LDBM, TDBM, and CDBM search is subject to the normal LDBM, TDBM, and CDBM access control checking.

The following example uses the **ldapsearch** utility to request a subtree search of the root DSE for entries that have a cn value that begins with ken and shows sample output for the search.

```
ldapsearch -h ldaphost -p ldapport -D binddn -w passwd -s sub -b "" "cn=ken*"
cn=ken,o=ldb
```



```
objectclass=person
objectclass=top
cn=ken
sn=smith

cn=kenx,o=tdbm
objectclass=person
objectclass=top
cn=kenx
sn=jones
```

## Monitor support

---

You can retrieve statistics from the server by issuing a search request with a search base of `cn=monitor` and a filter of (**objectclass=\***). For details, see [“Monitoring performance with cn=monitor”](#) on page 585.

## UTF-8 data over the LDAP Version 2 protocol

---

The LDAP Version 3 Protocol allows UTF-8 attribute values outside of the IA5 character set to be stored in the directory. This information must be able to be returned in some format to LDAP Version 2 clients. An additional LDAP server configuration file option, `sendV3stringsoverV2as`, which has the possible values `ISO8859-1` or `UTF-8`, can be used to indicate which format to use when sending this information over the Version 2 protocol.

**Note:** Different clients treat non-IA5 data differently over the Version 2 protocol. See the documentation for the client APIs you are using for more information.

## Attribute types stored and returned in lowercase

---

The LDAP server stores and returns attribute types in lowercase (normalized). For example, the attribute type `"productName"` is returned as `"productname"`.

## Abandon behavior

---

The LDAP server reads additional operations as they arrive if the connection is not a secure connection and the previous operation is not bind, unbind, or extended operation. This allows the LDAP server to process abandon operations as they are received and affect previously submitted operations.



---

# Chapter 31. Performance tuning

## Overview

---

Several server configuration options and facilities significantly affect the performance of the server. In addition, specific LDAP server backends operate with other products that might require tuning to accommodate the LDAP server. For example, the TDBM and Db2-based GDBM backends use Db2, that provides a large set of tuning options. The SDBM backend provides access to the RACF database, that has its own product-specific tuning options. This topic describes some of the things to consider when configuring your server for optimal performance.

## General LDAP server performance considerations

---

### Threads

The `commThreads` configuration option specifies the number of communication threads that handle requests from clients to the LDAP server. However, the primary role of each of these threads is to serve as a worker thread for processing client requests to the directory.

Each communication thread is shared among client connections and is used to process requests as they occur. Therefore, this option does not need to be set nearly as large as the expected number of concurrently connected clients.

Each communication thread requires some resources of its own, including storage, a connection to Db2 (when TDBM or Db2-based GDBM is configured), and other system resources associated with threads. Therefore, you might want to avoid making this option larger than is needed.

Set the `commThreads` to approximately two times the number of processors that are running in your LPAR. However, this is a general rule depending upon the activity that your LDAP server experiences.

If most requests are search requests retrieved from storage in TDBM caches or Db2 buffer pools, then additional `commThreads` might not provide much benefit. However, if most requests to the directory require I/O wait time, then additional `commThreads` might allow more client requests to run concurrently.

### Debug settings

Activating the LDAP server debug trace facility affects performance. If optimal performance is what you want, active debug only when necessary to capture diagnostic information.

### Storage in the LDAP address space

The LDAP server generally requires a minimum of 32 MB to run in 31-bit mode, and 96 MB in 64-bit mode even with a minimal directory. This storage is required for maintaining server-wide information and for processing client requests.

**Note:** These are estimates only, and the need for storage can increase depending on the size of any LDBM directories configured, and the size of the caches.

### LDAP server cache tuning

The LDAP server implements many caches to help reduce processing time and to avoid access to the database. These caches are beneficial when most accesses to the directory are read operations. Tuning these caches involves monitoring their effectiveness and adjusting their size to increase the percent hit rate.

Increasing cache sizes might increase the amount of storage that is required by the server.

Some caches are invalidated by update activities. If the invalidation is a frequent occurrence, increasing the cache size might be of little or no benefit. If the cache hit rate is never any higher than zero for a particular cache, the cache can be disabled by setting its size to 0. However, because caches with seemingly low cache hit rates might provide some benefit, you should generally avoid disabling them unless close monitoring is done to ensure that they are not beneficial.

Most caches in the LDAP server are enabled by default, and the default sizes generally provide some benefit to most installations. However, many installations might benefit from additional tuning. The following approach can be used to evaluate the cache sizes:

- Monitor the cache performance during typical workloads: You can use either the `cn=monitor` search or the operator console `MODIFY` command to retrieve current cache statistics.

The monitor search must be used with a scope of subtree or one-level to retrieve the cache statistics because the caches are backend specific.

- Examine the cache hit rate, the current number of entries, and the maximum allowed entries (configured size). Also, note the number of cache refreshes and the average size of the cache at refresh.
- If the cache hit rate is well under 100% and the cache is frequently fully populated, consider increasing the cache size. Because this is a configuration option, you must change the server configuration file and restart the server to affect the change.

The following caches are implemented in the LDAP server:

#### **ACL source cache**

This cache holds information about ACL definitions for the `aclEntry` and `aclPropagate` attributes within the database. Retrieval of information from this cache avoids database read operations when access permissions are resolved. This cache is implemented in the TDBM and Db2-based GDBM backends.

#### **DN cache**

This cache holds information that is related to the mapping of distinguished names between their raw form and their canonical form. Retrieval of information from this cache reduces processing required to locate entries in the database. This is a server-wide cache, and is implemented in the internal schema backend. To alter its setting from the default, adjust the `dnCacheSize` configuration option in the global section of the LDAP server configuration file.

#### **DN to eid cache**

This cache holds information related to the mapping of distinguished names in their canonical form and their entry identifier within the database. Retrieval of information from this cache avoids database read operations when locating entries within the database. This cache is implemented in the TDBM and Db2-based GDBM backends.

#### **entry cache**

This cache holds information contained within individual entries in the database. Retrieval of information from this cache avoids database read operations when processing entries within the database. This cache is implemented in the TDBM and Db2-based GDBM backends.

#### **entry owner cache**

This cache holds information regarding ACL definitions for the `entryOwner` and `ownerPropagate` attributes within the database. Retrieval of information from this cache avoids database read operations when resolving access permissions. This cache is implemented in the TDBM and Db2-based GDBM backends.

#### **filter cache**

This cache holds information related to the mapping of search request inputs and the result set. This cache is implemented in the TDBM, LDBM, CDBM, and GDBM backends. For TDBM and Db2-based GDBM, retrieval of information from this cache avoids database read operations when processing search requests. For LDBM, CDBM, and file-based GDBM, this cache helps reduce processing time for searches with complex filtering. Note that the GDBM filter cache is disabled, by default.

## Operations monitor

If the operations monitor is enabled, the LDAP server monitors search statistics for the types of search patterns that are configured and stores search statistics for each search pattern. The operations monitor supports two types of search patterns, **searchStats** and **searchIPStats**. A **searchStats** pattern consists of the search parameters (search base, scope, filter, and attributes to be returned) and status (success or failure). The **searchStats** pattern is useful for evaluating the performance of search patterns. A **searchIPStats** pattern consists of the same elements as **searchStats** pattern does, but also includes the client IP address. The **searchIPStats** pattern is useful in determining if there are any specific clients spamming the LDAP server. The **operationsMonitor** configuration option determines which types of search patterns are monitored. See [“Monitoring performance with cn=monitor” on page 585](#) for more information about the operations monitor.

A new search pattern is added to the operations monitor whenever the search pattern of an incoming search does not match one of the existing operations monitor search patterns. When the number of search patterns exceeds the value of the **operationsMonitorSize** configuration option (the **cachesize** attribute in the `cn=operations,cn=monitor` entry), the least recently used search patterns are trimmed. The total number of trimmed search patterns is stored in the **numtrimmed** attribute of the `cn=operations,cn=monitor` entry. Typically, trimmed search patterns are not a cause for concern because they are infrequently executed search patterns. If there is a high volume of trimmed data, you should consider increasing the value of the **operationsMonitorSize** configuration option or possibly monitoring only **searchStats** patterns. Note that **searchIPStats** search patterns produce more search patterns than **searchStats** patterns because **searchIPStats** creates a new search pattern for each unique client IP address even if the rest of the search pattern is the same. See [Table 89 on page 589](#) for more information about the `cn=operations,cn=monitor` entry and its attributes.

## Workload Management (WLM)

The z/OS LDAP server supports Workload Management (WLM) to allow an installation to set performance goals for work within the LDAP server when compared against other work that is running on the system. The LDAP subsystem type is reserved in WLM to allow the system administrator to set performance goals for z/OS LDAP server operations. The performance goals can be set based on the IP address of the client, distinguished name (DN) of the bound user, both the IP address and DN associated with the request, or a request matching a search pattern in the operations monitor.

The z/OS LDAP WLM support is always active and cannot be deactivated. A default service class must be configured in the WLM ISPF panels for the LDAP subsystem type before running the z/OS LDAP server. If a default service class is not configured in WLM, all LDAP server operations run under the discretionary or SYSOTHER profile and receive a low priority, which impacts LDAP server performance and response times. For more information about WLM, see *z/OS MVS Planning: Workload Management*. See [“Verifying the service class for the LDAP server” on page 577](#) for information about determining the service class for the LDAP servers that are running on your system.

The LDAP server uses the WLM health service to indicate a health value to WLM. The WLM health value is used by the TCP/IP sysplex distributor to help route incoming client requests to servers within the sysplex. After the LDAP server initialization, the WLM health value is set to 100%. The WLM health value is calculated by the number of failures during the past 5000 operations if one minute has passed since the value was last calculated. If the percentage of failures changes by 25% or more, the z/OS LDAP server increases or decreases the WLM health value. An LDAP server operation is considered a failure when it has one of the following return codes:

- LDAP\_OPERATIONS\_ERROR (1)
- LDAP\_TIMELIMIT\_EXCEEDED (3)
- LDAP\_ADMIN\_LIMIT\_EXCEEDED (11)
- LDAP\_BUSY (51)
- LDAP\_UNAVAILABLE (52)
- LDAP\_UNWILLING\_TO\_PERFORM (53)
- LDAP\_OTHER (80)

The wlmExcept configuration option can be used to specify the IP address of the client, the distinguished name (DN) of the bound user, or both to route those requests to any configured WLM transaction name (TN). The wlmExcept configuration option can be specified multiple times within the LDAP server configuration file to allow multiple client IP addresses or bound users' DN's to be associated with the same or different WLM transaction name. The order that the wlmExcept configuration options are specified in the LDAP server configuration file determines the order the LDAP server uses to match incoming client requests and route them to the WLM transaction name. See [“wlmExcept name \[IP\\_address\] \[dn\]” on page 136](#) for more information about the wlmExcept configuration option.

The WLMEXCEPT operator modify command can be used to change the routing of incoming client requests to new or different WLM transaction names while the server is running. If the operations monitor is configured, the cn=operations, cn=monitor entry has searchStats and searchIPStats attribute values with an ID parameter that indicates the operations monitor ID (OPID). See [“Monitoring performance with cn=monitor” on page 585](#) for details about the searchStats and searchIPStats attribute value format. The WLMEXCEPT operator modify command uses the OPID to associate a search pattern to a WLM transaction name. If the transaction name specified on the WLMEXCEPT operator modify command does not exist in WLM, a new WLM enclave is created; otherwise an existing enclave is used. Each time the WLMEXCEPT operator modify command is issued, the new mappings are added before any of the configured wlmExcept configuration options or previously issued WLMEXCEPT operator modify commands. See [“LDAP server operator commands” on page 200](#) for more information about the WLMEXCEPT operator modify command.

The WLMEXCEPT operator modify commands last for the life of the LDAP server, however, the RESET WLMEXCEPT can be issued to remove all previously issued WLMEXCEPT operator modify commands and default to using the initial LDAP server configuration. If the operations monitor ID (OPID) is specified on the RESET WLMEXCEPT operator modify command, then just that specific WLM routing for that search is removed. See [“LDAP server operator commands” on page 200](#) for more information about the RESET WLMEXCEPT operator modify command.

If the operations monitor is enabled, the searchStats and searchIPStats attributes in the cn=operations, cn=monitor entry can be used to identify spamming client applications or certain search requests that should have a higher priority within the LDAP server. This type of information is very valuable when configuring LDAP to use WLM transaction names and assigning service or report classes to those transaction names. For a spamming client application, a WLM transaction name with a low priority service or report class ought to be used. For important search requests, a WLM transaction name with a high priority service or report class ought to be used.

## Configuring LDAP with WLM examples

Assume that WLM has been configured to contain the following transaction names and service classes for LDAP.

```
Subsystem-Type Xref Notes Options Help

Command ==> Modify Rules for the Subsystem Type Row 1 to 3 of 3
 Scroll ==> PAGE

Subsystem Type . : LDAP Fold qualifier names? Y (Y or N)
Description . . . Use Modify to enter YOUR rules

Action codes: A=After C=Copy M=Move I=Insert rule
 B=Before D=Delete row R=Repeat IS=Insert Sub-rule
 More ==>

Action -----Qualifier-----
Type Name Start

---- 1 TN GENERAL ---
---- 1 TN EXCEPT1 ---
---- 1 TN EXCEPT2 ---
***** BOTTOM OF DATA *****

F1=Help F2=Split F3=Exit F4=Return F7=Up F8=Down F9=Swap
F10=Left F11=Right F12=Cancel
```

Figure 60. WLM ISPF rules classification panel

### Example 1:

After analyzing the **searchStats** and **searchIPStats** attributes returned on a `cn=operations,cn=monitor` search, it has been determined there is a spamming LDAP client application on IP address 1.2.3.4 that has been affecting performance of the LDAP server. Also, requests from bound user `cn=importantguy,o=ibm` should have a higher priority within the LDAP server.

An LDAP administrator can add the following **wlmExcept** configuration options to route these requests to the appropriate WLM transaction name in [Figure 60 on page 576](#):

```
wlmExcept EXCEPT1 1.2.3.4
wlmExcept EXCEPT2 cn=importantguy,o=ibm
```

After the LDAP server is restarted, LDAP client requests originating from IP address 1.2.3.4 are routed to WLM transaction name EXCEPT1 with a service class of SPAMREQ. The server routes requests from bound user `cn=importantguy,o=ibm` to WLM transaction name EXCEPT2 with a service class of CRITREQ. If there are requests from any other client IP addresses or bound users, the server routes them to the GENERAL WLM transaction name that has a service class of NORMREQ.

If the transaction name specified on the **wlmExcept** configuration option or on the WLMEXCEPT operator modify command does not exist in WLM (such as EXCEPT3 does not exist in [Figure 60 on page 576](#)), any client requests associated with that transaction name would use the default service class HIGHREQ.

### Example 2:

After analyzing the **searchStats** and **searchIPStats** attribute values returned on a `cn=operations,cn=monitor` search, it has been determined that the search identified by a specific **searchIPStats** value should be mapped to WLM transaction name EXCEPT2 because it is an important LDAP search.

```
cn: cn=monitor,cn=operations
searchIPStats: ldap://fe00::f4f7:0:0:7442:750f/OU=_v,O=_v??sub?(|(&(sn=_v)(cn=_v*))
(description=*_v*))?success,numOps=42,avg=246,rate=5,maxRate=37,maxRate
eTimeStamp=20130524132626.545031Z,createTimeStamp=20130524132615.953823Z,
ID=2741
```

The following WLMEXCEPT operator modify command is used to route the search pattern in the **searchIPStats** attribute to the EXCEPT2 WLM transaction name:

```
F LDAPSRV,WLMEXCEPT EXCEPT2,2741
```

**Note:** The operations monitor ID (OPID) value is 2741 for the search on the **searchIPStats** attribute value.

If it is determined later that the client search requests identified by OPID 2741 no longer need to be routed to WLM transaction name EXCEPT2, the following RESET WLMEXCEPT operator modify command is used to remove just the specific WLM routing for that search:

```
F LDAPSRV,RESET WLMEXCEPT,2741
```

See [“LDAP server operator commands” on page 200](#) for more information about the RESET WLMEXCEPT operator modify command.

## Verifying the service class for the LDAP server

If you are having performance problems with the LDAP server, verify that the LDAP server is running with the correct service class in WLM. If a default service class is not configured in WLM, all LDAP server operations that are run under the discretionary or SYSOTHER profile and receive a low priority, which impacts LDAP server performance and response times.

Use the ISPF SDSF menu and specify ENC (enclaves) to verify the LDAP server service class. [Figure 61 on page 578](#) depicts the LDAP server is running under the SYSOTHER service class, which results in LDAP operations receiving a low priority.

```

SDSF ENCLAVE DISPLAY DCEIMGVD ALL LINE 1-6 (6)
COMMAND INPUT ==> SCROLL ==> PAGE
NP NAME SStype Status SrvClass Per PGN RptClass ResGroup CPU-
3400000008 LDAP ACTIVE SYSOTHER 1
2400000002 STC INACTIVE SYSSTC 1
2800000003 STC INACTIVE SYSSTC 1
3000000005 STC INACTIVE SYSSTC 1
2000000001 STC INACTIVE SYSTEM 1
2C00000004 TCP INACTIVE SYSOTHER 1

```

Figure 61. SDSF enclave display example

## Password policy considerations

If password policy is enabled, additional cost is incurred during authentication to enforce the policy and to update operational attributes within the user entry. Generally, authentications do not incur much additional overhead with password policy enabled unless updates to the user entry occur.

Failed authentications require updates to the user entry to record the failed attempt, and to conditionally lock the account. Most successful authentications do not cause updates. However, the first expiration warning for a given user entry requires an update to record the event. Also, the first successful authentication which follows a failed authentication for the given user entry requires an update to clear operational attributes related to preceding failed attempts.

The operational attributes that might be updated during authentication are:

- **pwdAccountLockedTime**
- **pwdExpirationWarned**
- **pwdFailureTime**
- **pwdGraceUseTime**
- **ibm-pwdAccountLocked**

See [“Password policy operational attributes” on page 376](#) for more details about these attributes.

Use of multiple policies might cause additional cost during authentication and during password change by the user because of group membership determination. In both cases, the effective password policy must be evaluated to apply password policy rules.

To evaluate the effective password policy of a user, the LDAP server considers all the password policies associated with a user. This means that the LDAP server evaluates the individual, group, and global password policies to determine a user’s effective password policy. If you have defined individual and group password policies, the group membership of the user must be resolved to properly apply group password policies.

## LDBM performance considerations

The LDAP server LDBM backend uses the z/OS UNIX System Services file system for its persistent storage of the directory entry data. When the LDAP server is executing, the entire directory contents are held in its address space, including index structures for quick access.

This provides extremely fast access to the directory data. LDAP operations that read directory data involve no DASD I/O during the operation. LDAP operations that update the directory generally perform DASD I/O only to write the changed information to the LDBM checkpoint file. The index updates only occur within the LDAP server address space, and are not stored on DASD. Compared to TDBM, LDBM operations generally run much faster and use much less processor resources.

However, LDBM has inherent scalability limitations. The following resources are affected by the size of the directory, and are generally proportional to the LDBM directory size:

- The storage required within the LDAP server address space.
- The LDAP server initialization time, both elapsed time and processor time.



- The time required to commit the directory.
- The DASD space required for the directory, including space for commit processing.

## Storage in the LDAP address space for LDBM data

Since the entire LDBM directory is kept in storage in the LDAP address space, you must plan accordingly. The amount of storage required can be estimated from the size of the LDIF data that is used to load the directory. For 31-bit mode, the storage that is needed to contain the data is about 7 to 10 times the size of the LDIF file. If you are running in 64-bit mode, storage requirements increase to as much as 10 to 15 times the size of the LDIF file.

These are estimates that pertain only to the extra storage required to hold the LDBM directory representation.

**Note:** When running in multi-server mode, each of the LDAP servers sharing the LDBM directory in the sysplex (known as sysplex replicas for this backend) also keeps the entire LDBM directory in its address space. Therefore, each sysplex replica requires about the same amount of storage for the LDBM directory as the LDAP server that owns the data in the sysplex (known as the sysplex master for this backend).

For large LDBM directories, it might be necessary to run in 64-bit mode. Also, you might want to consider optimizing storage use for the z/OS LDAP server. See [“Tuning Language Environment heap and heap pools” on page 598](#) for more information.

For systems that are constrained on storage, or for very large directories, you might need to use TDBM instead of LDBM.

## LDAP server initialization time with LDBM

Whenever the LDAP server is restarted, it reads the entire LDBM directory into storage and builds the necessary index structures for efficient search processing. This can take several minutes depending on the speed of the processor, the speed of the DASD that holds the data, and the competition for resources because of other workloads. Generally, the initialization elapsed time and the consumed processor time during initialization are proportional to the size of the directory.

When running in multi-server mode, each of the sysplex replicas receives a copy of the directory from the sysplex master using sysplex services. The amount of processor time consumed by a sysplex replica during initialization is about the same as that used by the sysplex master when it reads the directory into storage. However, the elapsed time required to initialize the sysplex replica tends to be longer than that required to initialize the sysplex master server. Initialization of a sysplex replica also consumes processor time on the sysplex master as it sends the data to the sysplex replica. The processor time consumed on the sysplex master is about one-third the processor time consumed on the sysplex replica during sysplex replica initialization.

## Database commit processing

The LDBM directory contents are kept on DASD in the database files and the checkpoint file. There is one checkpoint file for the backend, and a separate database file for each suffix defined in the backend. The database files contain the overall contents of each entry in the database at the last database commit point. The checkpoint file contains individual entry updates that occurred since the last database commit point, recorded as sequential changes beyond the contents of the database file.

To avoid unbounded growth of the checkpoint file, the database is periodically committed. Commit processing writes new copies of the database and checkpoint files such that the new database files contain the up-to-date contents of each entry in the directory, and the checkpoint file contains no individual file update information. Database commits occur at the following times:

- When the number of checkpoint entries exceeds the value of the **commitCheckpointEntries** option in the LDAP server configuration file.
- When the time of day reaches the **commitCheckpointTOD** option in the LDAP server configuration option.

- When the LDAP server COMMIT operator command is invoked.
- When the LDAP server is shut down normally.
- When the LDAP server is restarted and uncommitted updates exist in the checkpoint file after an abnormal termination of the LDAP server.

Commit processing requires both processor and DASD resources, and the resources needed increase as the size of the directory increases. For large directories, commit processing might take a minute or more depending on competition for resources.

When commit processing occurs, a new copy of each directory file is created in its entirety before deleting the old copy and before deleting the previous checkpoint file. Therefore, you should plan enough DASD space to accommodate two copies of each directory file plus the maximum size of your checkpoint file. The amount of DASD space needed for the checkpoint file is highly dependent on the nature of the updates performed, and is best determined by experimentation.

During commit processing, no update requests are processed. Therefore, you should consider avoiding unplanned commits caused by the configuration option **commitCheckpointEntries**. Instead, consider using **commitCheckpointTOD**, automated methods of using the LDAP server COMMIT operator command, or planned shutdowns of the LDAP server to control when commit processing occurs.

## DASD space for LDBM data

The amount of space needed to store an LDBM backend in a z/OS UNIX System Services file system is approximately four to six times the size of the expected input LDIF data. Generally, the space required to hold the LDBM backend data is two to three times the size of the expected input LDIF data. However, during the LDBM commit process each of the LDBM database files is copied, therefore, resulting in occasionally needing twice the amount of file system space.

## Sample LDBM benchmark data

The following data was gathered from benchmarks using an LDBM database on z/OS UNIX System Services using ESS800 model 2105 DASD, and running on a z9® model 2094 processor with no competing applications running.

| <i>Table 85. LDBM benchmark data</i>                             |                       |
|------------------------------------------------------------------|-----------------------|
| <b>LDBM</b>                                                      | <b>Benchmark data</b> |
| Database size                                                    | 500,000 entries       |
| LDIF file size                                                   | 590 megabytes         |
| LDAP server storage                                              | 5464 megabytes        |
| Sysplex master initialization elapsed time                       | 121 seconds           |
| Sysplex master initialization processor time                     | 98 seconds            |
| Sysplex replica initialization elapsed time                      | 180 seconds           |
| Sysplex replica initialization processor time                    | 103 seconds           |
| Sysplex master processor time consumed by replica initialization | 34 seconds            |
| LDAP server database commit elapsed time                         | 50 seconds            |
| LDAP server database commit processor time                       | 43 seconds            |

## CDBM performance considerations

---

If the CDBM backend is only used to store configuration entries, then no tuning is necessary. However, if the CDBM backend is used to store user-defined entries, see [“LDBM performance considerations”](#) on page 578 for CDBM tuning information.

## TDBM performance considerations

---

The TDBM backend for the z/OS LDAP server uses IBM Database 2 (Db2), a powerful and scalable database product, for its data storage facility. In the most optimal LDAP environments, directory data is fairly static and the access for TDBM cached data is repetitive. In other environments, where directory data is updated frequently and the access for noncached data is random, the power and scale of Db2 is used to enhance performance.

The following is included:

- Db2 tuning to improve database access
- TDBM tuning that affects Db2 usage

Db2 tuning is important to ensure that TDBM requests that access the database in Db2 operate efficiently, and that response times do not increase as the database grows in size. Many general Db2 tuning guidelines are applicable to TDBM databases.

Choices also exist in both the initial setup of the TDBM database and in the TDBM backend section of the LDAP server configuration file that influence performance within Db2.

TDBM caches provide a significant benefit to performance, which allows the server to bypass read operations to the database. Optimizing the cache size is important to ensure a high percentage hit rate without requiring excessive storage. For more information about TDBM caches, see [“LDAP server cache tuning”](#) on page 573.

Custom Db2 indexes that are written by the Db2 administrator might improve performance. However, if the custom indexes are done incorrectly and are not carefully tested, performance might be degraded. Performance of indexes can behave differently under a full workload compared to internal testing if the test database is smaller. To pick up a new index, run the Db2 RUNSTATS and REORG utilities followed by an LDAP server REFRESH DB2RUNSTATS operator modify command. For more information, see [“LDAP server operator commands”](#) on page 200.

**Tip:** Taking advantage of partition-by-range table spaces and partition-by-growth table spaces for large TDBM backends might be beneficial. These Db2 features can help reduce processing on some queries. They can also help with concurrency when utilities and SQL are running on the table spaces at the same time. This process can be done at any time by unloading and reloading the TDBM backend with the **ds2ldif** and **ldif2ds** utilities. Because TDBM will be unavailable during the migration, implement them during migration or another period of prolonged planned downtime.

- For more information about partition-by-range table spaces, see [“Partition-by-range Db2 table spaces for TDBM”](#) on page 59.
- For more information about partition-by-growth table spaces, see [“Partition-by-growth Db2 table spaces for TDBM or GDBM”](#) on page 60.

## Db2 tuning

The following tasks for Db2 tuning are crucial to maintaining good performance. These tasks are typically performed by database administrators on most production Db2 data:

- Periodically reorganizing the TDBM database by using the Db2 REORG utility
- Periodically maintaining the database statistics by using the Db2 RUNSTATS utility
- Allocating Db2 buffer pools large enough to minimize I/O to the TDBM database

The TDBM table spaces and indexes should be reorganized periodically by using the Db2 REORG utility. This action helps to improve database access performance and to reclaim fragmented space.

DB2 Managing Performance ([publibfp.dhe.ibm.com/epubs/pdf/dsnpgm0e.pdf](http://publibfp.dhe.ibm.com/epubs/pdf/dsnpgm0e.pdf)) contains the Db2 real-time statistics stored procedure (DSNACCOX) that is a sample stored procedure that makes recommendations to help you maintain your Db2 databases. DSNACCOX uses data from catalog tables, including real-time statistics tables, to make its recommendations.

The need to reorganize the data is based on the amount of update activity that occurs. If a date/time based REORG strategy is chosen rather than using the real-time statistics capability of Db2, then weekly REORGs can be scheduled. Another regularly scheduled maintenance interval that best fits the customer environment and typical volume of updates can also be chosen. Schedule REORGs frequently enough to maintain good organization of the data as determined by the recommendations. More frequent REORGs can be beneficial if large percentage changes in inserts/updates/deletes occur. For example, if you are preparing for new workloads and populating the database with large amounts of data, or if you are introducing new types of LDAP data with new entry attributes and object classes, it can be beneficial to schedule a REORG after the new data is populated.

Use the REORG utility to collect and store statistics. Either run the RUNSTATS utility immediately after the REORG utility, or include the STATISTICS option directly on the REORG TABLESPACE and REORG INDEX utility control statements when you are reorganizing the data. Collecting and storing current, accurate statistics in the Db2 catalog for the TDBM database, table spaces, tables, indexes, and partitions allow Db2 to select efficient access paths to the TDBM database. The parameters that you want to specify with the RUNSTATS utility are shown as follows:

```
//SYSIN DD *
 RUNSTATS TABLESPACE GLDDB.SEARCHTS REPORT YES
 TABLE (LDAPTBI.DIR_SEARCH)
 INDEX (GLDSRV.DIR_SEARCHX1 KEYCARD
 FREQVAL NUMCOLS 1 COUNT 100
 FREQVAL NUMCOLS 2 COUNT 100,
 GLDSRV.DIR_SEARCHX2 KEYCARD
 FREQVAL NUMCOLS 1 COUNT 100
 FREQVAL NUMCOLS 2 COUNT 100
 COLGROUP (VALUE) FREQVAL COUNT 100
 SHRLEVEL CHANGE UPDATE ALL SORTDEVT SYSDA
 RUNSTATS TABLESPACE GLDDB.ENTRYTS REPORT YES
 TABLE (ALL)
 INDEX (GLDSRV.DIR_ENTRYX1 KEYCARD
 FREQVAL NUMCOLS 1 COUNT 100)
 RUNSTATS TABLESPACE GLDDB.DESCTS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.LENTRYTS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.LATTRTS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC0TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP0TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC0TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP0TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC1TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP1TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC2TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP2TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC3TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP3TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC4TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP4TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.MISC5TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
 RUNSTATS TABLESPACE GLDDB.REP5TS REPORT YES
 TABLE ALL INDEX ALL KEYCARD
/*
```

**Note:**

1. In the example shown, GLDDB is the TDBM database name and GLDSRV is the user ID used to create the TDBM tables and indexes. GLDSRV is the same value that is used in the LDAP server configuration file for `dbuserid`.
2. In the example shown:
  - GLDSRV.DIR\_SEARCHX1 is the index on columns ATTR\_ID, VALUE, EID of table GLDSRV.DIR\_SEARCH.
  - GLDSRV.DIR\_SEARCHX2 is the index on columns EID, ATTR\_ID of table GLDSRV.DIR\_SEARCH.
  - GLDSRV.DIR\_ENTRYX1 is the index on columns PEID, EID of table GLDSRV.DIR\_ENTRY.
3. In the example shown, the values that are specified for COUNT are intended as guidelines and needs to be updated depending on the data in the LDAP TDBM database. These numbers represent a minimum frequency. If there is a large amount of data in a TDBM database and potentially many frequent values, these numbers must be increased until the optimum frequency is found.
4. When the LDAP server is started, it caches the statistics that are recorded by the RUNSTATS utility in the Db2 catalog. These statistics influence some of the SQL queries that are generated by the LDAP server in regard to the use of literal values versus parameter markers. Doing so provides frequent values to the Db2 optimizer. At the same time, you are avoiding the flooding of the prepared statement cache with highly varying literal values, such as userIDs. Additionally, informational messages are issued to the server output file detailing the column statistics and messages that are issued if any statistics appear to be insufficient. See the LDAP database definitions in your SPUFI files to correlate the table space and index names in the RUNSTATS input with the table and column names that appear in these messages. If you run the Db2 RUNSTATS utility after the LDAP server has completed initialization, you can use the LDAP server REFRESH DB2RUNSTATS operator modify command to refresh the cache and reexamine the statistics. The cached statistics also get refreshed each time the TDS-Db2 health check runs for the backend.

Many installations populate the z/OS LDAP directory with a large amount of initial data and then gradually grow the directory over time with routine updates and additions. In such cases, it is suggested that the REORG and RUNSTATS utilities be run immediately after the directory is populated with this initial data before rollout to production. If the initial population of data is done by using an application (as opposed to the **ldif2ds** load utility provided with the z/OS LDAP server), you might have to run REORG and RUNSTATS one or more times during the process of initially populating the directory. This action ensures that Db2 uses efficient access paths based on the statistics that are gathered from the database once it contains a representative amount of information. Without this information, poor access paths might be chosen that cause an increase in increasing response times as the size of the database increases, and gradual slowing of the process of populating the directory.

To determine the need of running REORG and RUNSTATS utilities, the LDAP administrator can enable the TDS-Db2 health check support on a TDBM or Db2-based GDBM backend, and customize the specific DSNACCOX parameters in the LDAP server configuration file. The Db2 DSNACCOX stored procedure uses the customized parameters as the criteria to generate REORG and RUNSTATS recommendations for the backend related table spaces and indexes. Some of the criteria parameters can be changed to the actual value by DSNACCOX and written to debug INFO output if either REORG or RUNSTATS is required. The returned values are beneficial for tuning the DSNACCOX criteria parameters. The LDAP administrator can also utilize the DSNACCOX exception table to exclude some table space or index from the health check report. For more information, refer to the DSNACCOX stored procedure information in Appendix A in [DB2 Managing Performance \(publibfp.dhe.ibm.com/epubs/pdf/dsnpgm0e.pdf\)](https://publibfp.dhe.ibm.com/epubs/pdf/dsnpgm0e.pdf).

Db2 buffer pool allocations should also be examined to ensure that they are sufficient for the LDAP TDBM database. It is often useful to isolate specific TDBM table spaces and indexes to their own buffer pools. In particular, separating the indexes from the table spaces can help ensure that the index buffers remain in the buffer pools. This technique can also help evaluate overall behavior of the LDAP database with regards to its buffer pool usage when specific tables and indexes correlate to specific buffer pools.

See “Partition-by-range Db2 table spaces for TDBM” on page 59 for more information about increasing TDBM performance for Db2 partitioning, if you have a large directory and do many update operations on the directory.

## TDBM database tuning

Several choices might ultimately affect the performance of TDBM when accessing its data in Db2:

- The LOCKSIZE chosen on the TDBM table spaces can be important if you perform many database updates. The default LOCKSIZE of ANY is generally preferred, and is typically sufficient if you perform mostly query activity and low volumes of updates to the database. This usually results in PAGE locking, that causes locking of rows for directory entries other than the one being updated. However, if you have high volumes of update activity, you might experience Db2 deadlocks in the TDBM database with PAGE locking. If a deadlock occurs, you might want to set LOCKSIZE ROW on the TDBM table spaces that contains the DIR\_ENTRY and the DIR\_SEARCH table.
- The size of the DN\_TRUNC column of the DIR\_ENTRY table specified at database creation time.

The DN\_TRUNC column is used to index data in the DIR\_ENTRY table to speed up retrieval of directory entries by way of their distinguished name (DN). This column holds the leading portion of each DN, and should be defined long enough to make most values unique.

Some applications generate directory entries where the leading portion of the DN is identical. For example, Tivoli Access Manager (TAM) generates entries under each user entry in the namespace where the DN starts with "cn=secPolicyData,secAuthority=Default, ". To provide uniqueness, it is suggested that installations that use TAM with the z/OS LDAP server, define the DN\_TRUNC column to be 64 bytes in length.

Define this column at its correct length during initial setup of the directory. Changing the size requires the DIR\_ENTRY table to be redefined, and the directory must be unloaded and reloaded to implement the change.

- The size of the VALUE column of the DIR\_SEARCH table specified at database creation time.

The VALUE column is used to index data in the DIR\_SEARCH table to speed up retrieval of directory entries for search requests by using the search filter values. This column holds the leading portion of textual attribute values, and should be defined long enough to accommodate most values specified in search filters. However, this column should not be made significantly larger than needed, since it might cause the DIR\_SEARCH table and its index to substantially increase in size.

Define this column at its correct length during initial setup of the directory. Changing the size requires the DIR\_SEARCH table to be redefined, and the directory must be unloaded and reloaded to implement the change.

- The attrOverflowSize value specified in the TDBM section of the LDAP server configuration file.

This configuration option specifies the threshold size of attribute values that are stored separately from the DIR\_ENTRY data and are instead stored in the DIR\_LONGATTR overflow table.

This option can avoid unnecessarily reading this overflow data for searches that do not request the attribute. For example, if your directory entries contain JPEG data, but many searches ask for specific attributes and omit the large JPEG attribute from those requested, this option can help avoid reading unnecessary data from the database.

Specify the option value large enough so that data that is typically retrieved with the entry remains in the DIR\_ENTRY data. Because entries with overflow data are not eligible for the entry cache, making this option value too small might affect search performance.

**Note:** The LDAP server does not automatically reorganize the database when the attrOverflowSize value changes. Because the updated overflow size applies only to new attribute values, previously overflowed attribute values will stay in the DIR\_LONGATTR table even if they are no longer overflowed. To make sure that the new attrOverflowSize value is applied to the entire backend, follow these steps:

1. Unload the backend data with the **ds2ldif** utility.
2. Shut down the LDAP server and update the attrOverflowSize value in the server configuration file.
3. Drop the Db2 database of the backend and rerun the SPUFI script to create a new one.

- 4. Start the LDAP server and reload the backend data with the **ldif2ds** utility.
- The `fetchSize` value specified in the TDBM section of the LDAP server configuration file.

This configuration option specifies the maximum buffer size, in bytes, that is used to hold the result set returned by ODBC. The fetch size determines the number of rows in the row set, if multi-row fetch is applicable. An appropriate fetch size is beneficial regarding performance, as a single retrieval of several rows is more cost efficient than multiple retrievals of fewer rows. In addition, raising the fetch size also increases the storage that is used by the LDAP server.

The default value is 65536 (64 KB).

## Monitoring performance with `cn=monitor`

You can retrieve statistics from the server by issuing a search request with a search base of `cn=monitor` and a filter of `(objectclass=*)`. These are the only values accepted for search base and filter on the monitor search. However, any of the possible scope values are accepted.

The z/OS LDAP server presents monitor data in multiple entries:

- Server-wide statistics are contained in an entry whose distinguished name is `cn=monitor`.
- Each configured backend has statistics contained in its own entry named `cn=backendXXXX,cn=monitor`, where `XXXX` is the backend name specified on the database configuration option in the LDAP server configuration file. If no backend name is specified on the database configuration option, the LDAP server generates a name. The naming contexts pertaining to the specific backend are also included in the entry to identify which server backend is being reported.
- Several entries contain statistics for backends that are created by the LDAP server:
  - `cn=backendMonitor,cn=monitor` - Statistics for the backend handling `cn=monitor` searches
  - `cn=backendSchema,cn=monitor` - Statistics for the backend managing the schema
  - `cn=backendRootDSE,cn=monitor` - Statistics for the backend handling root DSE searches
- If the operations monitor is on (the `operationsMonitorSize` configuration option is not set to zero), the `cn=operations,cn=monitor` entry contains statistics on search patterns.

For a scope of:

### **base**

Only the `cn=monitor` entry is returned containing server-wide statistics.

### **one (one-level search)**

All backend-specific entries are returned and the operations monitor entry is returned (if configured).

### **sub (subtree search)**

All entries are returned, including the operations monitor entry (if configured).

The statistics reported on the `cn=monitor` subtree search can also be displayed by using the LDAP server `DISPLAY` operator modify command. Operations monitor statistics cannot be displayed by using the `DISPLAY` operator command. The command is:

```
f dssrv,display monitor
```

See the description of the `DISPLAY MONITOR` output in [“Displaying performance information and server settings”](#) on page 179 for details.

Statistics generally reflect data that is gathered since the LDAP server was started. However, many of the counters can be reset by using the LDAP server `RESET` operator modify command. The command is:

```
f dssrv,reset monitor
```

In this case, the values reflect data that is gathered since the last reset.

The monitor search returns the following attributes:



Table 86. Server statistics

| Attribute             | Description                                                                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| currentconnections    | Current number of client connections.                                                                                                                                                                               |
| currenttime           | Current date and time on the server.                                                                                                                                                                                |
| livethreads           | Configured number of communication threads (commThreads).                                                                                                                                                           |
| maxconnections        | Configured maximum number of concurrent client connections (maxConnections).                                                                                                                                        |
| maxreachedconnections | High water mark for concurrent client connections.                                                                                                                                                                  |
| pagedentriescached    | Number of entries currently cached for paged search requests.                                                                                                                                                       |
| pagedsearches         | Number of paged search requests completed. This value is incremented only after the last page of a paged search request is returned.                                                                                |
| resets                | Number of times statistics were reset.                                                                                                                                                                              |
| resettime             | Date and time statistics were last reset.                                                                                                                                                                           |
| searchpagesent        | Number of pages sent for paged search requests. This value is incremented after each page of a paged search request is returned.                                                                                    |
| sortedsearches        | Number of sorted search requests completed. If a paged search request was specified along with a sorted search request, this value is incremented only after the last page of the paged search request is returned. |
| starttime             | Date and time the server was started.                                                                                                                                                                               |
| sysmaxconnections     | System-defined maximum number of connections.                                                                                                                                                                       |
| timedoutconnections   | Number of idle client connections closed based on the idleConnectionTimeout setting.                                                                                                                                |
| timedoutpagesets      | Number of paged search result sets abandoned based on the idleConnectionTimeout setting.                                                                                                                            |
| totalconnections      | Number of client connections that have been made to the server.                                                                                                                                                     |
| version               | Version of the LDAP server.                                                                                                                                                                                         |

The statistics reported for the maxconnections, sysmaxconnections, totalconnections, currentconnections, and maxreachedconnections attribute values only contain information for network connections. PC connection statistics are not included in these attribute values.

The sysmaxconnections value might be lower than the maxconnections value because of system limits. If the value for the maxConnections configuration option is not valid, the maxconnections attribute value on cn=monitor search reflects the system maximum connection limit. For information about how the maximum number of client connections is set in the LDAP server, see the maxConnections configuration option at [“maxConnections num-connections”](#) on page 114.

When statistics are reset, resettime is set to the value of currenttime, resets is incremented, maxreachedconnections is set to the value of currentconnections, and timedoutconnections, timedoutpagesets, pagedsearches, searchpagesent, and sortedsearches are set to 0. None of the other server statistics that were previously listed are affected by a reset.



*Table 87. Server and backend-specific statistics*

| <b>Statistics</b>    | <b>Description</b>                                                                                                                                                              |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| abandonsrequested    | Number of abandon operations requested.                                                                                                                                         |
| abandonscompleted    | Number of abandon operations completed.                                                                                                                                         |
| addsrequested        | Number of add operations requested.                                                                                                                                             |
| addscompleted        | Number of add operations completed.                                                                                                                                             |
| bindsrequested       | Number of bind operations requested.                                                                                                                                            |
| bindscompleted       | Number of bind operations completed.                                                                                                                                            |
| bytessent            | Number of bytes of data sent,                                                                                                                                                   |
| comparesrequested    | Number of compare operations requested.                                                                                                                                         |
| comparescompleted    | Number of compare operations completed.                                                                                                                                         |
| deletesrequested     | Number of delete operations requested.                                                                                                                                          |
| deletescompleted     | Number of delete operations completed.                                                                                                                                          |
| entriessent          | Number of search entries sent.                                                                                                                                                  |
| extopsrequested      | Number of extended operations requested.                                                                                                                                        |
| extopscompleted      | Number of extended operations completed.                                                                                                                                        |
| groupgatheringevents | Number of group gathering events completed.                                                                                                                                     |
| modifiesrequested    | Number of modify operations requested.                                                                                                                                          |
| modifiescompleted    | Number of modify operations completed.                                                                                                                                          |
| modifydnsrequested   | Number of modifyDn operations requested.                                                                                                                                        |
| modifydnscompleted   | Number of modifyDn operations completed.                                                                                                                                        |
| opscompleted         | Number of operations completed.                                                                                                                                                 |
| opsinitiated         | Number of operations initiated.                                                                                                                                                 |
| searchreferencessent | Number of search references sent.                                                                                                                                               |
| searchesrequested    | Number of search operations requested. If a paged search request was specified, this value is incremented only when the initial paged search request is received.               |
| searchescompleted    | Number of search operations completed. If a paged search request was specified, this value is incremented only after the last page of a paged search request has been returned. |
| unbindsrequested     | Number of unbind operations requested.                                                                                                                                          |
| unbindscompleted     | Number of unbind operations completed.                                                                                                                                          |
| unknownopsrequested  | Number of unrecognized operations completed.                                                                                                                                    |
| unknownopscompleted  | Number of unrecognized operations completed.                                                                                                                                    |

When statistics are reset, all of the server and backend-specific statistics that were previously listed are set to zero.

*Table 88. Backend-specific statistics*

| <b>Statistics</b>              | <b>Description</b>                                                                   |
|--------------------------------|--------------------------------------------------------------------------------------|
| acl_source_cache_size          | Configured maximum size (in entries) of the ACL Source cache (aclSourceCacheSize).   |
| acl_source_cache_current       | Current size (in entries) of the ACL Source cache.                                   |
| acl_source_cache_hit           | Number of lookups that have hit the ACL Source cache.                                |
| acl_source_cache_miss          | Number of lookups that have missed the ACL Source cache.                             |
| acl_source_cache_percent_hit   | Percent of lookups that have hit the ACL Source cache.                               |
| acl_source_cache_refresh       | Number of times the ACL Source cache was invalidated.                                |
| acl_source_cache_refresh_avgsz | Average number of entries in the ACL Source cache at invalidation.                   |
| dn_cache_size                  | Configured maximum size (in entries) of the DN cache (dnCacheSize).                  |
| dn_cache_current               | Current size (in entries) of the DN cache.                                           |
| dn_cache_hit                   | Number of lookups that have hit the DN cache.                                        |
| dn_cache_miss                  | Number of lookups that have missed the DN cache.                                     |
| dn_cache_percent_hit           | Percent of lookups that have hit the DN cache.                                       |
| dn_cache_refresh               | Number of times the DN cache was invalidated.                                        |
| dn_cache_refresh_avgsz         | Average number of entries in the DN cache at invalidation.                           |
| dn_to_eid_cache_size           | Configured maximum size (in entries) of the DN to Entry ID cache (dnToEidCacheSize). |
| dn_to_eid_cache_current        | Current size (in entries) of the DN to Entry ID cache.                               |
| dn_to_eid_cache_hit            | Number of lookups that have hit the DN to Entry ID cache.                            |
| dn_to_eid_cache_miss           | Number of lookups that have missed the DN to Entry ID cache.                         |
| dn_to_eid_cache_percent_hit    | Percent of lookups that have hit the DN to Entry ID cache.                           |
| dn_to_eid_cache_refresh        | Number of times the DN to Entry ID cache was invalidated.                            |
| dn_to_eid_cache_refresh_avgsz  | Average number of entries in the DN to Entry ID cache at invalidation.               |
| entry_cache_size               | Configured maximum size (in entries) of the Entry cache (entryCacheSize)             |
| entry_cache_current            | Current size (in entries) of the Entry cache.                                        |
| entry_cache_hit                | Number of lookups that have hit the Entry cache.                                     |
| entry_cache_miss               | Number of lookups that have missed the Entry cache.                                  |
| entry_cache_percent_hit        | Percent of lookups that have hit the Entry cache.                                    |
| entry_cache_refresh            | Number of times the Entry cache was invalidated.                                     |
| entry_cache_refresh_avgsz      | Average number of entries in the Entry cache at invalidation.                        |

| <i>Table 88. Backend-specific statistics (continued)</i> |                                                                                      |
|----------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Statistics</b>                                        | <b>Description</b>                                                                   |
| entry_owner_cache_size                                   | Configured maximum size (in entries) of the Entry Owner cache (entryOwnerCacheSize). |
| entry_owner_cache_current                                | Current size (in entries) of the Entry Owner cache.                                  |
| entry_owner_cache_hit                                    | Number of lookups that have hit the Entry Owner cache.                               |
| entry_owner_cache_miss                                   | Number of lookups that have missed the Entry Owner cache.                            |
| entry_owner_cache_percent_hit                            | Percent of lookups that have hit the Entry Owner cache.                              |
| entry_owner_cache_refresh                                | Number of times the Entry Owner cache was invalidated.                               |
| entry_owner_cache_refresh_avgsize                        | Average number of entries in the Entry Owner cache at invalidation.                  |
| filter_cache_size                                        | Configured maximum size (in entries) of the Filter cache (filterCacheSize).          |
| filter_cache_current                                     | Current size (in entries) of the Filter cache.                                       |
| filter_cache_hit                                         | Number of lookups that have hit the Filter cache.                                    |
| filter_cache_miss                                        | Percent of lookups that have hit the Filter cache.                                   |
| filter_cache_percent_hit                                 | Percent of lookups that have hit the Filter cache.                                   |
| filter_cache_refresh                                     | Number of times the Filter cache was invalidated.                                    |
| filter_cache_refresh_avgsize                             | Average number of entries in the Filter cache at invalidation.                       |
| filter_cache_bypass_limit                                | Configured Filter cache bypass limit (filterCacheBypassLimit).                       |
| namingcontexts                                           | Suffixes managed by this backend.                                                    |

Not all of the preceding cache statistics appear for each backend. A backend reports statistics for those caches that it supports. The schema backend reports `dn_cache` statistics. The LDBM and CDBM backends report `filter_cache` statistics. A TDBM backend reports statistics for all caches except the `dn_cache`. A Db2-based GDBM backend reports statistics for all caches except the `dn_cache`, while a file-based GDBM backend only reports `filter_cache` statistics.

When statistics are reset, the `cache_hit`, `cache_miss`, `cache_percent_hit`, `cache_refresh`, and `cache_refresh_avgsize` for each cache are reset to zero. Resetting the statistics has no effect on the `cache_size` for each cache, nor on the `filter_cache_bypass_limit`, since these are configured values. Resetting the statistics also has no effect on the `cache_current` for each cache, since the contents of the caches are not altered by a reset of statistics. Some caches may get invalidated and refreshed because of directory update operations. When this occurs, `cache_refresh` is incremented and `cache_current` is set to zero to reflect the refreshed (empty) cache. The `cache_hit`, `cache_miss`, and values `cache_percent_hit` are accumulated across cache invalidation and refresh until a RESET MONITOR command is issued or the server ends.

| <i>Table 89. Operations monitor statistics</i> |                                                                                                 |
|------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>Statistics</b>                              | <b>Description</b>                                                                              |
| cachesize                                      | Configured maximum number of search patterns in the operations monitor (operationsMonitorSize). |
| currenttimestamp                               | Current date and time in Coordinated Universal Time stamp format.                               |

| Table 89. Operations monitor statistics (continued) |                                                                                                                                                                    |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Statistics                                          | Description                                                                                                                                                        |
| entries                                             | Total number of search patterns in the operations monitor entry.                                                                                                   |
| numtrimmed                                          | Number of search patterns trimmed from the operations monitor.                                                                                                     |
| resets                                              | Number of times the operations monitor statistics were reset.                                                                                                      |
| resettimestamp                                      | Date and time in Coordinated Universal Time stamp format of last reset or server startup if the reset command was never issued.                                    |
| searchStats                                         | Search statistics for search patterns based on the search parameters. (search base, scope, filter, and attributes to be returned) and status (success or failure). |
| searchIPStats                                       | Search statistics for search patterns consisting of the same elements as the searchStats pattern, but also including the client IP address.                        |

When statistics are reset, `resettimestamp` is set to `currentTimestamp`, `resets` is incremented by one, `entries` is set to zero, `numtrimmed` is set to zero, and all search patterns are deleted.

The Coordinated Universal Time stamp format used in the `currentTimestamp` and `resettimestamp` attribute values is:

```
yyyymmddhhiiss.uuuuuuZ
```

Where,

*yyyy* is year, *mm* is month, *dd* is day, *hh* is hour, *ii* is minutes, *ss* is seconds, *uuuuuu* is microseconds, *Z* is a character constant meaning that this time is based on Coordinated Universal Time, also known as GMT.

The `searchIPStats` and `searchStats` attribute values contain search rates and other search activity that are being monitored. Depending upon the LDAP server configuration, there can be `searchIPStats` and `searchStats` attribute values returned in the `cn=operations,cn=monitor` entry for each search executed against the LDAP server. The `searchStats` attribute values contain the total of all data collected for all searches matching this search pattern no matter the IP address of the client.

The format of the `searchIPStats` and `searchStats` attribute values is:

```
ldap://clientIP/baseDN?attributes?scope?filter-string?status,numOps=numOps,avg=avg,rate=rate,maxRate=maxRate,maxRateTimeStamp=maxRateTimeStamp,createTimeStamp=createTimeStamp,ID=opid
```

The following describes the LDAP search pattern parts:

**attributes**

List of attributes to be returned.

**avg**

Average elapsed time for each occurrence of search pattern in microseconds.

**baseDN**

Distinguished name of the base of the search, with `_v` substituted for attribute values.

**clientIP**

Client IP address (omitted for `searchStats` search patterns).

**createTimeStamp**

Date and time this search pattern was first added, in Coordinated Universal Time stamp format.

**filter-string**

Search filter with substitutions for literal attribute values. Excluding the `*` character, all strings in values are substituted with `_v`. For example: `(cn=*bob*bah*)` would be `(cn=_v*_v*)`. There is no substitution on `objectclass` equality values when the **objectclass** is defined in the schema.

**maxRate**

The highest rate on this entry.

**maxRateTimeStamp**

Date and time maxRate was last set, in Coordinated Universal Time stamp format.

**numOps**

Total number of times this search pattern has occurred.

**opid**

A unique integer value that distinguishes each operations monitor search pattern.

**rate**

Number of search operations processed in the previous one minute interval. Starting with server startup or the last reset command, rate is recalculated for each search pattern every 60 seconds.

**scope**

base for base object searches, one for one-level searches, and sub for subtree searches.

**status**

success for any search operation that results in return code LDAP\_SUCCESS, LDAP\_PARTIAL\_results, or LDAP\_REFERRAL. Any other return codes result in status being set to failure.

See [Table 89](#) on page 589 for the time stamp format.

In addition to the preceding syntax, the following character escaping is performed:

Comma = %2C

Percent = %25

Question mark = %3F

Space = %20

The comma, percent, and question mark characters are not escaped when they are used as metacharacters in the search pattern.

For information about monitoring performance with the LDAP server DISPLAY MONITOR operator command, see [“Displaying performance information and server settings”](#) on page 179.

DISPLAY MONITOR output does not display cn=operations,cn=monitor data.

## Monitor search examples

Following is an example of a monitor search using scope=base. This returns only statistics related to the entire server:

```
ldapsearch -h ldaphost -p ldapport -b cn=monitor -s base objectclass=*
```

```
cn=monitor
version=z/OS Version 2 Release 2 IBM Tivoli Directory Server LDAP Server
livethreads=10
maxconnections=24982
sysmaxconnections=25000
totalconnections=20709
currentconnections=1
maxreachedconnections=15
timedoutconnections=12
timedoutpagesets=0
pagedentriescached=0
pagedsearches=5
sortedsearches=2
opsinitiated=62126
opscompleted=62125
abandonsrequested=0
abandonscompleted=0
addsrequested=2318
addscompleted=2318
bindsrequested=20709
bindscompleted=20709
comparesrequested=0
comparescompleted=0
```

```

deletesrequested=2228
deletescompleted=2228
extopsrequested=0
extopscompleted=0
modifiesrequested=11501
modifiescompleted=11501
modifydnsrequested=440
modifydnscompleted=440
searchesrequested=4222
searchescompleted=4221
unbindsrequested=20708
unbindscompleted=20708
unknownopsrequested=0
unknownopscompleted=0
groupgatheringevents=20641
entriessent=4221
bytessent=1564656734
searchreferencessent=0
searchpagessent=18
currenttime=Thu May 23 16:33:00.187846 2013
starttime=Thu May 23 15:52:21.693392 2013
resettime=Thu May 23 15:52:21.693392 2013
resets=0

```

Following is an example of output of a monitor search with scope=one for a server configured with TDBM and LDBM backends. This returns backend specific statistics and operations monitor statistics. The cache statistics shown would only be included for TDBM, LDBM, GDBM, CDBM, and schema backends, since the other backend types do not implement caches. Operations monitor statistics are included for all backends.

Note that not all operational statistics for each backend are shown in the example below. They have been omitted from the example only, and appear in full for a cn=monitor search.

```
ldapsearch -L -h ldaphost -p ldapport -b cn=monitor -s one objectclass=*
```

```

dn: cn=backendMyTDBM,cn=monitor
namingcontexts: C=CA
namingcontexts: C=TDBM
namingcontexts: CN=MOVER
namingcontexts: CN=MOVING
opsinitiated: 3013
opscompleted: 3013
abandonsrequested: 0
abandonscompleted: 0
addsrequested: 380
addscompleted: 380
bindsrequested: 0
bindscompleted: 0
comparesrequested: 0
comparescompleted: 0
deletesrequested: 365
deletescompleted: 365
extopsrequested: 0
extopscompleted: 0
modifiesrequested: 1645
modifiescompleted: 1645
modifydnsrequested: 63
modifydnscompleted: 63
searchesrequested: 560
searchescompleted: 560
unbindsrequested: 0
unbindscompleted: 0
unknownopsrequested: 0
groupgatheringevents: 3580
unknownopscompleted: 0
entriessent: 560
bytessent: 105692
searchreferencessent: 0
acl_source_cache_size: 100
acl_source_cache_current: 1
acl_source_cache_hit: 3012
acl_source_cache_miss: 1
acl_source_cache_percent_hit: 99.97%
acl_source_cache_refresh: 0
acl_source_cache_refresh_avgsz: 0
dn_to_eid_cache_size: 1000
dn_to_eid_cache_current: 555

```

```

dn_to_eid_cache_hit: 195263
dn_to_eid_cache_miss: 4035
dn_to_eid_cache_percent_hit: 97.98%
dn_to_eid_cache_refresh: 0
dn_to_eid_cache_refresh_avgsz: 0
entry_cache_size: 5000
entry_cache_current: 562
entry_cache_hit: 381420
entry_cache_miss: 1259
entry_cache_percent_hit: 99.67%
entry_cache_refresh: 0
entry_cache_refresh_avgsz: 0
entry_owner_cache_size: 100
entry_owner_cache_current: 1
entry_owner_cache_hit: 3012
entry_owner_cache_miss: 1
entry_owner_cache_percent_hit: 99.97%
entry_owner_cache_refresh: 0
entry_owner_cache_refresh_avgsz: 0
filter_cache_size: 5000
filter_cache_current: 0
filter_cache_hit: 0
filter_cache_miss: 0
filter_cache_percent_hit: 0.00%
filter_cache_refresh: 2446
filter_cache_refresh_avgsz: 0
filter_cache_bypass_limit: 100

dn: cn=backendLDBM,cn=monitor
namingcontexts: C=AU
namingcontexts: C=LDBM
...
searchreferencecount: 0
filter_cache_size: 5000
filter_cache_current: 0
filter_cache_hit: 0
filter_cache_miss: 0
filter_cache_percent_hit: 0.00%
filter_cache_refresh: 16487
filter_cache_refresh_avgsz: 0
filter_cache_bypass_limit: 100

dn: cn=backendMonitor,cn=monitor
namingcontexts: CN=MONITOR
...

dn: cn=backendSchema,cn=monitor
namingcontexts: CN=SCHEMA
...
searchreferencecount: 0
dn_cache_size: 1000
dn_cache_current: 1000
dn_cache_hit: 123743
dn_cache_miss: 22017
dn_cache_percent_hit: 84.90%
dn_cache_refresh: 0
dn_cache_refresh_avgsz: 0

dn: cn=backendRootDSE,cn=monitor
...

dn: cn=operations,cn=monitor
searchStats: ldap:///OU=_v,0=_v,C=_v?telephoneNumber,postalAddress,mail,uid?one?(objectclass=inetOrgPerson)?failure,numOps=51,avg=230,rate=32,maxRate=32,maxRateTimeStamp=20130524132741.415477Z,createTimeStamp=20130524132628.361618Z,ID=2737
searchStats: ldap:///OU=_v,0=_v??sub?(&(&(sn=_v)(cn=_v*))(&(description=*_v*)))?success,numOps=42,avg=246,rate=5,maxRate=37,maxRateTimeStamp=20130524132626.545031Z,createTimeStamp=20130524132615.953823Z,ID=2738
searchStats: ldap:///RACFGROUPID=_v,RACFUSERID=_v,PROFILETYPE=_v,CN=_v?racfconnectowner,racfconnectgroupauthority,racfconnectgroupuacc?base?(objectclass=*)?success,numOps=4,avg=240,rate=0,maxRate=4,maxRateTimeStamp=20130524132628.047031Z,createTimeStamp=20130524132626.878552Z,ID=2739
searchIPStats: ldap://9.12.47.208/OU=_v,0=_v,C=_v?telephoneNumber,postalAddress,mail,uid?one?(objectclass=inetOrgPerson)?failure,numOps=51,avg=230,rate=32,maxRate=32,maxRateTimeStamp=20130524132741.415477Z,createTimeStamp=20130524132628.361618Z,ID=2740
searchIPStats: ldap://fe00::f4f7:0:0:7442:750f/OU=_v,0=_v??sub?(&(&(sn=_v)(cn=_v*))(&(description=*_v*)))?success,numOps=42,avg=246,rate=5,maxRate=37,maxRateTimeStamp=20130524132626.545031Z,createTimeStamp=20130524132615.953823Z,ID=2741

```

```
searchIPStats: ldap://127.0.0.1/RACFGROUPID=_v+RACFUSERID=_v,PROFILETYPE=_v,C
N=_v?racfconnectowner,racfconnectgroupauthority,racfconnectgroupuacc?base?(o
bjectClass=*)?success,numOps=4,avg=240,rate=0,maxRate=4,maxRateTimeStamp=2013
0524132628.047031Z,createTimeStamp=20130524132626.878552Z,ID=2742
currenttimestamp: 20130524132836.785259Z
resettimestamp: 20130524132615.369362Z
resets: 0
numtrimmed: 0
entries: 6
cachesize: 1000
```

## User groups considerations in large directories

The LDAP server supports group definitions, allowing a collection of Distinguished Names (DNs) of user entries to be associated with the group for either access control or for application-specific uses. Three types of group definitions are supported: static, dynamic, and nested groups. Static groups define each member of the group explicitly in the group entry by populating the **member** attribute (or **uniqueMember** attribute) with the user entry DN, one DN per attribute value. Dynamic groups define one or more search patterns using the multi-valued **memberURL** attribute, such that any entry matching the **memberURL** is a member of the group. Nested groups define group relationships and hierarchies, such that a parent group contains all the members of its nested child groups. In addition, a group can be defined as a combination of these types. See [Chapter 23, “Static, dynamic, and nested groups,” on page 413](#) for more information.

As directories grow to include large user populations, the number and size of these user groups tend to grow as well. As a result of these increases, certain types of operations that are related to querying group membership, collecting the groups that are associated with a user, or managing the membership of groups might grow in cost depending on the type of group that is used, and the type of operation.

General performance guidelines:

- The cost of determining a user's groups increases roughly in proportion to the number of groups containing the user. This applies regardless of whether the groups are static, dynamic, or nested.
- Defining many static groups throughout the directory unrelated to the user does not generally affect the cost of determining the groups for a single user.
- Defining too many dynamic groups in the directory can adversely affect the cost of determining a user's groups, even if the user is only in a few of these groups. More precisely, this depends on the number of dynamic group **memberURL** filters that cannot be indexed. If most of the **memberURLs** can be indexed, the existence of many dynamic groups and **memberURLs** in the directory remains efficient. See [“Dynamic groups memberURL filter indexing considerations” on page 596](#) for more information about indexing of dynamic groups.
- Complex filters in **memberURLs** require more processing than simple URLs when determining a user's group membership. Try to keep memberURL filter expressions simple:

```
(&(jobRole=sales)(division=423)) ... appropriate.
```

- Enumerating individual members of a group in a filter is not an appropriate use of a dynamic group. Static groups are more appropriate when you want to enumerate individual group members. For example:

```
(|(userID=000123)(userID=000147)...(userID=(094863)) ... not appropriate.
```

- Try to be consistent and efficient in your **memberURL** filter definitions. For example, if you choose to create equivalent filters, make them identical. Avoid differences such as:

```
(&(division=123)(objectclass=person)) in one memberURL
(&(objectclass=person)(division=123)) in a second memberURL
(&(objectclass=person)(division=123)(objectclass=person)) in a third memberURL.
```



The first and second differ in order. The third filter has a redundant filter part that is unnecessary compared to the second filter.

- Extremely large static groups can be difficult to administer, and costly for performance. Typical activities like gathering a user's groups, deleting a member from a large static group, or adding a member to a large static group are efficient. Administrative tasks such as deleting a large static group from the directory, adding it to the directory, or retrieving all its members can require substantial processing cost and storage, and the cost increases roughly in proportion to the size of the group. See [“Large static groups considerations”](#) on page 595.
- Avoid redundant definitions. For example, if you have many static groups with mostly the same user list and a few exceptions, consider placing the common set of users in a single child nested group to reduce the overall list of users in each parent group, with only the exceptions that are enumerated in the parent group.

## Large static groups considerations

Enterprises with large static groups in z/OS LDAP might experience performance problems and increased storage usage in the LDAP server as the static groups grow in size. Directories that hold large numbers of users and groups for products such as Tivoli Access Manager (TAM) and WebSphere users are susceptible to this, but any product that manages user groups in the LDAP directory by using large static groups might experience the symptoms that are outlined below.

Enterprises using these products sometimes create static groups in LDAP containing many members with every user in the registry defined in one large static group. The performance impacts might worsen as the registry grows, with any of the following symptoms:

- Increased response time in the application
- Increased processor utilization in the LDAP server
- Increased storage requirements in the LDAP server
- Increased resource consumption in Db2 (logging, I/O, processor usage, buffer pool demands)

Some scenarios that require substantial amounts of processing and storage within the z/OS LDAP server, are:

- A search operation that returns all the members of a large static group. This includes either a search that returns the many values with the **member** or **uniqueMember** attribute, or a search that returns the many values in the **ibm-allMembers** operational attribute.
- A search operation that requests all the members of a large static group, but the members are not returned because ACL read permissions prevent the requester from seeing the data.
- Update requests that touch a large static group entry when **persistentSearch on** is configured for a TDBM or LDBM backend that contains the large entry.

These scenarios are also susceptible to the effects of Language Environment HEAPPOOL usage as described in this section.

The addressability limits of the z/OS LDAP server might become a factor when there are hundreds of thousands or millions of members in a single static group.

In this case, consider the following corrective actions:

- If you run the LDAP server in 31 bit addressability mode, increase the region size, if possible.
- Run the LDAP server in 64 bit addressability mode, and set the MEMLIMIT parameter sufficiently large.
- Limit the number of members that are placed within a single static group and partition the users into separate static groups. The number of members for each static group that can be managed successfully depends on many factors, such as the size of the member values, the amount of virtual storage that is defined for the z/OS LDAP server, and the level of concurrent activity within the server.
- If possible, avoid configuring **persistentSearch on** for a TDBM or LDBM backend that contains large entries. Some applications that use persistent search must use the changelog, and only need **persistentSearch on** configured for the GDBM backend.

## Dynamic groups memberURL filter indexing considerations

The LDAP server constructs a partial index for dynamic group **memberURL** filters to improve efficiency to determine a user's groups. All URLs that are ineligible for filter indexing must be evaluated against the user entry even if the user entry is only in a few groups. The following details pertain to the capability of indexing filters:

- Simple filters that use an equality match are eligible for indexing. For example:

```
(department=123)
```

- Present filters are eligible for indexing. For example:

```
(accountID=*)
```

- Filters that use substring match are not eligible for indexing. For example:

```
(department=HQ*)
```

- Filters that use greater or equal match are not eligible for indexing. For example:

```
(department>=800)
```

- Filters that use less than or equal match are not eligible for indexing. For example:

```
(department<=199)
```

- "AND" filters are eligible for indexing if at least one subfilter is eligible. For example:

```
(&(jobTitle=sales)(department>=800)) ...
```

Is eligible because (jobTitle=sales) is eligible.

```
(&(department=HQ*)(department>=800)) ...
```

Is not eligible because both filter parts are not eligible.

- "OR" filters are eligible for indexing only if all subfilters are eligible.

```
(|(department=HQManagement)(department=HQAccounting)) ...
```

Is eligible as both subfilters are eligible.

- "NOT" filters are not eligible for indexing.

```
(!(department=123))
```

The eligibility of filters for the index does not mean that the filter is indexed. The indexing is done based on primitive subfilters within the more complex filters of type "AND" or "OR". The goal of the indexing is to avoid the need to evaluate many URLs. Therefore, if a subfilter part within the index is referenced too often, it is excluded from the indexing. For example, consider the following use of filters in the entire set of dynamic group URLs in the directory:

```
(&(department=000001)(objectclass=person)) ... memberURL filter in group for all users in department
000001
(&(department=000002)(objectclass=person)) ... memberURL filter in group for all users in department
000002
... etc.
(&(department=100000)(objectclass=person)) ... memberURL filter in group for all users in department 100000
(objectclass=person) ... memberURL filter in the "everyone" group
(&(objectclass=person)(division>=900)) ... memberURL filter for high numbered division (>=900)
employees
```

Roughly half of the potentially indexable filter parts are (objectclass=person). This is not a low frequency usage. If it is used from the index, it does not help disqualify dynamic group **memberURLs** from the need to be evaluated, as they all include this filter part. Because of its high frequency, it is not retained in the index. However, each of the 100,000 department matches is retained in the index. Therefore, all

but the last two **memberURLs** are indexed. The threshold for retaining a filter part in the index is about one-eighth of the total number of unique, matchable **memberURLs**.

Consider the effects of your dynamic group **memberURL** filter definitions. If you need to define more than a few hundred dynamic groups and the filters are not eligible for indexing, consider alternatives if the performance cost becomes too great. Options include:

1. Use an alternative filter expression that is indexable.

Consider the following filter, which is not indexable because it uses a substring filter to match multiple departments:

```
(department=98*)
```

If just a few departments match, the following alternative might be preferable, enumerating the departments. This is indexable because each of the equality filters within the OR filter is indexable:

```
(|(department=98J)(department=98S)(department=98T))
```

2. Use special attributes within the user entries to specifically enumerate and match the dynamic groups. IBM provides the **ibm-dynamicMember** objectclass and the **ibm-group** attribute for this purpose. Both are found in the schema.user.ldif file. Steps are shown to use this method.

In a dynamic group referred to as **group1**, use the following filter within its **memberURL** attribute:

```
(ibm-group=group1)
```

The actual group entry might look like this:

```
dn: cn=group1,ou=groups,o=ABCcompany
objectclass: groupOfUrls
memberurl: ldap:///o=ABCcompany??sub?(ibm-group=group1)
```

Then, for any user you want to include in this group, add the **ibm-group** attribute with value **group1**. You also need to add the objectclass **ibm-dynamicMember** to the user entry to allow the **ibm-group** attribute. The user entry might look like:

```
dn: cn=user1,ou=users,o=ABCcompany
objectclass: person
objectclass: ibm-dynamicMember
ibm-group: group1
... other user attributes
```

If you define your own user objectclass and attributes within the schema, this approach can be simplified to avoid the need for an extra objectclass in the user entries. For example, if you include attribute **ibm-group** as a **MAY** attribute in objectclass **ABCperson**, the **ibm-dynamicMember** objectclass is not needed in the user entry:

```
dn: cn=user1,ou=users,o=ABCcompany
objectclass: ABCperson
ibm-group: group1
... other user attributes
```

3. Use static groups instead of dynamic groups for some of the dynamic groups that cannot be indexed.

## Warning regarding Db2 logging of large static group updates

Db2 logging capacity might become a factor for updates to large static groups within TDBM. Each update to a large group is done in a single unit of work in Db2. A request to delete a large static group, or to delete many members from it, or to replace all of its members with a new list of members requires substantial Db2 logging space for the deleted rows associated with the data. For deletion of millions of members, this can potentially use thousands of cylinders of logging space in a single work unit. This can be problematic if a failure occurs during the update, especially if the beginning of the work unit extends back through many log data sets or beyond the oldest archived log data set. Large-scale deletion should

be done piecemeal, modifying the group to delete members in blocks of a more manageable size (a few thousand at a time) until the entry is small enough to be deleted.

## Language Environment heap pools considerations

By default, the z/OS LDAP server uses Language Environment heap pools to improve performance. This facility reduces the processor consumption and allows better parallelism of concurrent requests within the z/OS LDAP server. However, overall storage consumption is typically larger with the use of Language Environment heap pools as compared to running without the facility enabled. Also, when storage is allocated to a given Language Environment heap pool, it remains allocated to that heap pool and can only be used for future storage requests that are eligible (based on size) for the given heap pool. For example, when the z/OS LDAP server must process a large access group entry in storage, the following might occur:

- While the request is processing, the z/OS LDAP server might use all available storage in its address space, causing a failure of the request, a failure of other concurrent requests, or a failure and abnormal termination of the server.
- Because of the sudden, large demand for storage to process the large group, most or all of the storage available to the z/OS LDAP server might be allocated and reserved to specific heap pools. Although the z/OS LDAP server might appear to be available and able to process various requests, many subsequent requests might fail because of insufficient storage, particularly those for entries with large or numerous attributes. In the absence of any failures, this large increase in storage use by the z/OS LDAP server might be detectable by system resource monitoring products, such as the Resource Measurement Facility (RMF).

If these problems occur, consider the following alternatives:

- Increase the z/OS LDAP server REGION (for 31-bit mode) or MEMLIMIT (for 64-bit mode).
- If running in 31-bit mode and REGION is already maximized, run in 64-bit mode with more storage.
- Tune the heap pool sizes to match your storage usage.
- Disable heap pools. Note that this alternative reduces the total heap storage requirements of the LDAP server, but significantly increases processor consumption.

## Tuning Language Environment heap and heap pools

By default, the z/OS LDAP server uses modest heap segment sizes so that typical installations are not forced to make adjustments. However, if you have large LDBM databases, it might be beneficial to increase the size of the primary and secondary heap segments to reduce the number of segments allocated. This can improve performance, and in some cases, reduce storage fragmentation.

The heap segment sizes are controlled by the Language Environment runtime option 'HEAP' in 31-bit mode, or 'HEAP64' in 64-bit mode.

In 64-bit mode, the LDAP server uses most of its heap storage above the 2G bar. This is where LDBM data exists, and where tuning might help. A small amount of storage is also used above the 16M line and below the 2G bar, as required by some system services. The 31-bit addressable heap segments generally do not require tuning in 64-bit mode.

The z/OS LDAP server also uses heap pools to improve performance. The default settings are of modest size so that typical installations are not forced to make adjustments. However, the size and number of requests for heap storage varies by installation, according to the data placed in the directory databases. In particular, the data within large LDBM directories dominates the storage usage. Tuning the heap pools so that the cell sizes closely match the data might provide reduced storage consumption. Benefit can also be achieved by increasing the heap pool extent sizes to reduce the total number of heap pool extents allocated.

Overriding the heap pool settings for the LDAP server can be done by specifying the Language Environment runtime option 'HEAPPOOLS' when running in 31-bit mode, or 'HEAPPOOLS64' in 64-bit mode. The HEAPPOOLS option is also available in 64-bit mode for heap pool usage above the 16M line and below the 2G bar. However, the default setting for 31-bit addressable HEAPPOOLS in 64-bit mode usually does not need adjustment.

For information about tuning the heap and heap pool settings, see [Stack and heap storage in z/OS Language Environment Programming Guide](#). The procedure for tuning these settings requires a controlled environment with representative workloads. Also, it is suggested that the storage reports needed for the tuning procedure are gathered in a non-production environment because tracking the storage statistics significantly affects performance.

Overrides for the Language Environment runtime options can be specified in the PARM field on the EXEC statement or within a data set specified on a CEEOPTS DD statement in the LDAP server JCL.

## General usage considerations

---

One method to reduce CPU usage is to bind with your user one time and issue several operations, such as searches and then unbind, as compared to binding for each operation. This method reduces the CPU overhead because the LDAP server does not have to process a bind each time an operation is issued. This will only work if calling the LDAP API because the LDAP utilities automatically issues an unbind after completing the requested operation. To estimate the impact that this change can have on your server, you can either collect SMF type 83 subtype 3 records during typical usage and add up the LDAP\_REQ\_TIMESTP starting at column 3018 for each bind and unbind issued from a specific user, or turn on activity logging and compute the time cost for bind and unbind operations. Refer to the example of issuing multiple operations with a single bind in [Performing an operation](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

Another method to reduce CPU usage is to ensure that LDAP searches use the most narrow set of parameters as possible in order to find an entry. Using the image in the **How is information arranged** section to find Tim Jones, the least optimized search would be to set the base (-b) of the search to be "root" and then have a filter of "cn=Tim Jones." This method will force the server to search through every entry in the tree. The most optimized method is to set the base of the search to "cn=Tim Jones, o=IBM, c=US". This method provides a direct path to the entry and prevents the server from doing unnecessary work.

## Paged search considerations

---

Paged searches allow an LDAP client to control the rate at which search entries are returned by requesting a page of entries at a time (the number of entries in a page is controlled by the client request). The LDAP client proceeds through the search result set by issuing successive requests for the next page of entries.

The LDAP server manages paged search requests in storage, caching the returned entries for the result set until they are retrieved by the client. Pervasive use of this capability by client applications increases the storage requirements of the LDAP server to hold these result sets. In particular, very large result sets use large amounts of storage for a paged search. If paged searches are enabled in the LDAP server, consider increasing the storage allowed in the LDAP server. If necessary, consider running the LDAP server in 64-bit addressing mode.

The following configuration options contribute in controlling the resources that might be used for paged search requests:

### **ibm-slapdPagedResAllowNonAdmin**

This is a configuration attribute in the cn=configuration entry in the CDBM backend. Setting this attribute value to "false" restricts paged search requests to administrators. This avoids widespread use of the facility and its associated resources on behalf of general users.

### **ibm-slapdPagedResLmt**

This is a configuration attribute in the cn=configuration entry in the CDBM backend. This limits the number of concurrent paged search requests on a given connection. For cases where LDAP client applications issue multiple active requests per connection, limiting this to a small number can help limit the overall number of paged search result sets that are cached in the LDAP server. Setting this to "0" disables paged searches.

### sizeLimit

This is a configuration option in the LDAP server configuration file that limits the number of entries returned on a given search request. This is also managed with group search limits. See [“Managing group search limits”](#) on page 416 for more information about group search limits. Search size limits inherently limit the size of the paged search result sets cached by the LDAP server.

See [“cn=configuration”](#) on page 138 for more information about the **ibm-slapdPagedResLmt** and **ibm-slapdPagedResAllowNonAdmin** attributes in the cn=configuration entry. Also, see [“pagedresults”](#) on page 658 for more information about the **pagedresults** server control.

## Sorted search considerations

---

Server-side sort allows an LDAP client to specify the order of returned search entries based on the values of attributes within the entries. Sorting the search results requires additional processor time in the LDAP server, and might also increase the storage used by the LDAP server. Generally, sorted searches use less than 5% of additional processor time compared to searches without sorting.

In many cases, sorting of results might be done in storage within the LDAP server. This might increase the overall storage requirements of the LDAP server. In particular, very large result sets use large amounts of storage for a sorted search. If sorted searches are enabled in the LDAP server, consider increasing the storage allowed in the LDAP server. If necessary, consider running the LDAP server in 64-bit addressing mode.

When possible, sorting might be done in Db2 for searches confined to the TDBM or Db2-based GDBM backends. Db2 sorting is done on the indexed VALUE column in the DIR\_SEARCH table. In some cases, Db2 sorting might be attempted, but ultimately additional sorting might be required in storage depending on the data returned on the search.

Db2 sorting is not used when:

- the search results are found in the TDBM filter cache
- performing null-based subtree searches that search multiple backends
- alias dereferencing is requested and aliases exist within the TDBM backend
- reverse ordering is specified
- a sort key is an attribute whose syntax is `octetString`
- a sort key is an attribute eligible for encryption or hashing in the backend
- a sort key is an attribute whose syntax is `distinguishedName`, including **ibm-slapdDN**
- a sort key is an attribute whose syntax is `generalizedTime` or `UTCTime` and customization was done on the DIR\_SEARCH table to shorten the VALUE column length to 20 bytes or less
- a sort key is an operational attribute not used within the searchable data of the entry. These are attributes that cannot be specified on search filters, such as **ibm-allGroups** or **entryOwner**.

Db2 sorting is used, but additional sorting is performed in storage when:

- read permission is denied on one or more of the sort key attributes for a returned entry
- a value for one of the sort key attributes is longer than the DIR\_VALUE column in the DIR\_SEARCH table (in this case, the Db2 ordering is not precise)

The following configuration options contribute in controlling the resources that might be used for sorted search requests:

### ibm-slapdSortSrchAllowNonAdmin

This is a configuration attribute in the cn=configuration entry in the CDBM backend. Setting the attribute value to "false" restricts sorted search requests to administrators. This avoids widespread use of the facility and its associated resources on behalf of general users.

### ibm-slapdSortKeyLimit

This is a configuration attribute in the cn=configuration entry in the CDBM backend. Setting the value of the attribute to "0" disables server-side sorting. This specifies the maximum number of sort keys that can be included on a single sorted search request.

See “[cn=configuration](#)” on page 138 for more information about the **ibm-slapdSortKeyLimit** and **ibm-slapdSortSrchAllowNonAdmin** attributes in the `cn=configuration` entry. Also, see “[SortKeyRequest](#)” on page 667 for more information about the **SortKeyRequest** server control.

## GDBM (Changelog) performance considerations

---

The GDBM database is used only for the changelog function. By its very nature, this function tends to have a high intensity of update activity compared to read activity. Since update activity is generally more costly than read activity, this function should only be enabled when its use is needed.

GDBM can be configured to store its entries in Db2 (such as TDBM) or in files (such as LDBM). Most of the performance considerations for GDBM are identical to those of TDBM or LDBM, depending on which configuration you select. For example, if you select a Db2-based GDBM, Db2 tuning and cache tuning are important. If you select a file-based GDBM, storage, DASD space, initialization elapsed time, and database commit settings are important, especially if you allow the changelog to contain many entries. However, the following GDBM-specific differences should be noted as compared to TDBM or LDBM:

- The distinguished names (DNs) of entries and the searchable attributes within entries in GDBM tend to be well bounded in size and content. Therefore, when you configure GDBM to be Db2-based, the default sizes for the **DN\_TRUNC** column in the **DIR\_ENTRY** table and the **VALUE** column in the **DIR\_SEARCH** table do not require adjustment.
- Since most GDBM requests are update operations, the search filter cache is disabled by default. You may enable the cache, if that is what you want, but if this is done, it is suggested that the cache is monitored to ensure that it is providing a benefit. Note that the entry cache is not implemented in file-based backends.
- When the **changeLogMaxAge** or **changeLogMaxEntries** option is specified in the GDBM section of the LDAP server configuration file, the change log is periodically trimmed, based on the limits set in the configuration file. For more information about these configuration options, see “[Configuration file options](#)” on page 90.
- Since GDBM generally experiences high volumes of update activity, if you are using Db2-based GDBM, consider setting LOCKSIZE ROW on the table spaces that contain the **DIR\_ENTRY** and the **DIR\_SEARCH** table to help avoid Db2 deadlocks.

## SDBM performance considerations

---

The z/OS LDAP server SDBM backend allows access to the RACF database. Most tuning that affects performance in this area is within the RACF product

Also, see “[SDBM operational behavior](#)” on page 333 for details about different types of LDAP requests supported, and the RACF operations issued by these requests. This information can also be helpful when you are assessing RACF tuning considerations.

When writing applications that only require authentication to the SDBM backend by using LDAP bind requests, performance can be improved by specifying the **authenticateOnly** control on the bind request within the application. See “[authenticateOnly](#)” on page 653 for more information.

Because the RACF search interface provides limited result filtering support, only a few search filters can be processed by RACF. Most SDBM search filters are processed by the LDAP server, and the filter evaluation requires reading the complete profile from RACF. For performance considerations, the full search filter support is restricted to advanced extended search, and the traditional search and basic extended search only support search filters that can be processed by RACF. The advanced extended search provides the enhanced search capabilities but also impacts the performance. The optimized search filter and the proper search mode is important to the SDBM search performance. For more information, see “[SDBM search capabilities](#)” on page 343.





## Appendix A. Initial LDAP server schema

This topic shows the initial schema established when the LDAP server is first started. The initial schema is always part of the LDAP server schema and the elements in the initial schema cannot be deleted. With several exceptions, the initial schema cannot be modified. For more information, see [“Updating the schema”](#) on page 291.

```
cn=schema
objectclass=ibmSubschema
objectclass=subentry
objectclass=subschema
objectclass=top
subtreespecification=NULL
ldapsyntaxes=(1.3.18.0.2.8.1 DESC 'IBM attribute type description')
ldapsyntaxes=(1.3.18.0.2.8.3 DESC 'IBM entry UUID')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.10 DESC 'Certificate pair')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.11 DESC 'Country string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.12 DESC 'Distinguished name')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.14 DESC 'Delivery method')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.15 DESC 'Directory string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.16 DESC 'DIT content rule description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.17 DESC 'DIT structure rule description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.21 DESC 'Enhanced guide')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.22 DESC 'Facsimile telephone number')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.23 DESC 'Fax')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.24 DESC 'Generalized time')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.25 DESC 'Guide')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.26 DESC 'IA5 string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.27 DESC 'Integer')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.28 DESC 'JPEG')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.3 DESC 'Attribute type description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.30 DESC 'Matching rule description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.31 DESC 'Matching rule use description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.33 DESC 'MHS OR address')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.34 DESC 'Name and optional UID')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.35 DESC 'Name form description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.36 DESC 'Numeric string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.37 DESC 'Object class description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.38 DESC 'Object identifier')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.39 DESC 'Other mailbox')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.40 DESC 'Octet string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.41 DESC 'Postal address')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.42 DESC 'Protocol information')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.43 DESC 'Presentation address')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.44 DESC 'Printable string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.49 DESC 'Supported algorithm')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.5 DESC 'Binary')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.50 DESC 'Telephone number')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.51 DESC 'Teletex terminal identifier')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.52 DESC 'Telex number')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.53 DESC 'UTC time')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.54 DESC 'LDAP syntax description')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.58 DESC 'Substring assertion')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.6 DESC 'Bit string')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.7 DESC 'Boolean')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.8 DESC 'Certificate')
ldapsyntaxes=(1.3.6.1.4.1.1466.115.121.1.9 DESC 'Certificate list')
matchingrules=(1.3.18.0.2.22.2 NAME ('ibm-entryUuidMatch') SYNTAX 1.3.18.0.2.8.3)
matchingrules=(1.3.18.0.2.4.405 NAME ('distinguishedNameOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.12)
matchingrules=(1.3.6.1.4.1.1466.109.114.1 NAME ('caseExactIA5Match') SYNTAX 1.3.6.1.4.1.1466.115.121.1.26)
matchingrules=(1.3.6.1.4.1.1466.109.114.2 NAME ('caseIgnoreIA5Match') SYNTAX 1.3.6.1.4.1.1466.115.121.1.26)
matchingrules=(1.3.6.1.4.1.1466.109.114.3 NAME ('caseIgnoreIA5SubstringsMatch') SYNTAX
1.3.6.1.4.1.1466.115.121.1.26)
matchingrules=(2.5.13.0 NAME ('objectIdentifierMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.38)
matchingrules=(2.5.13.1 NAME ('distinguishedNameMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.12)
matchingrules=(2.5.13.10 NAME ('numericStringSubstringsMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.36)
matchingrules=(2.5.13.11 NAME ('caseIgnoreListMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.41)
matchingrules=(2.5.13.12 NAME ('caseIgnoreListSubstringsMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.41)
matchingrules=(2.5.13.13 NAME ('booleanMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.7)
matchingrules=(2.5.13.14 NAME ('integerMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.27)
matchingrules=(2.5.13.15 NAME ('integerOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.27)
matchingrules=(2.5.13.16 NAME ('bitStringMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.6)
matchingrules=(2.5.13.17 NAME ('octetStringMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.40)
matchingrules=(2.5.13.18 NAME ('octetStringOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.40)
matchingrules=(2.5.13.2 NAME ('caseIgnoreMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15)
matchingrules=(2.5.13.20 NAME ('telephoneNumberMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.50)
matchingrules=(2.5.13.21 NAME ('telephoneNumberSubstringsMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.50)
matchingrules=(2.5.13.22 NAME ('presentationAddressMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.43)
matchingrules=(2.5.13.23 NAME ('uniqueMemberMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.34)
matchingrules=(2.5.13.24 NAME ('protocolInformationMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.42)
matchingrules=(2.5.13.25 NAME ('utcTimeMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.53)
matchingrules=(2.5.13.27 NAME ('generalizedTimeMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.24)
matchingrules=(2.5.13.28 NAME ('generalizedTimeOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.24)
matchingrules=(2.5.13.29 NAME ('integerFirstComponentMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.27)
```

## Initial LDAP server schema

```
matchingrules=(2.5.13.3 NAME ('caseIgnoreOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15)
matchingrules=(2.5.13.30 NAME ('objectIdentifierFirstComponentMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.38)
matchingrules=(2.5.13.34 NAME ('certificateExactMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.8)
matchingrules=(2.5.13.35 NAME ('certificateMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.8)
matchingrules=(2.5.13.4 NAME ('caseIgnoreSubstringsMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15)
matchingrules=(2.5.13.5 NAME ('caseExactMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15)
matchingrules=(2.5.13.6 NAME ('caseExactOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15)
matchingrules=(2.5.13.7 NAME ('caseExactSubstringsMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15)
matchingrules=(2.5.13.8 NAME ('numericStringMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.36)
matchingrules=(2.5.13.9 NAME ('numericStringOrderingMatch') SYNTAX 1.3.6.1.4.1.1466.115.121.1.36)
attributetypes=(0.9.2342.19200300.100.1.1 NAME ('uid') DESC 'User shortname or userid'
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(0.9.2342.19200300.100.1.23 NAME ('lastmodifiedtime')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE userApplications)
attributetypes=(0.9.2342.19200300.100.1.24 NAME ('lastmodifiedby')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.2.840.113556.1.4.656 NAME ('userPrincipalName')
 DESC 'Primary security identity in the form <principal>@<realm>' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.2.840.113556.1.4.77 NAME ('maxTicketAge')
 DESC 'Value defining the maximum lifetime of a user ticket'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.2.840.113556.1.4.867 NAME ('altSecurityIdentities')
 DESC 'Alternate security identities' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1068 NAME ('ibm-kn' 'ibm-kerberosName')
 DESC 'Access control list definition for a Kerberos identity in the format <principal>@<realm>'
 EQUALITY caseExactMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1088 NAME ('krbAliasedObjectName')
 DESC 'Contains the DN of the aliased object' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1091 NAME ('krbPrincipalName')
 DESC 'Kerberos principal name in the format <princ-name>@<realm-name>'
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1099 NAME ('racfLnNotesShortName')
 DESC 'represents the SNAME field of the RACF LNOTES segment'
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1100 NAME ('racfNDSUserName')
 DESC 'Represents the UNAME field of the RACF NDS segment' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1144 NAME ('racfConnectAttributes')
 DESC 'RACF Connect Attributes' EQUALITY caseIgnoreIA5Match SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1145 NAME ('racfConnectAuthDate') DESC 'RACF Connect Auth Date'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1146 NAME ('racfConnectCount') DESC 'RACF Connect Count'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1147 NAME ('racfConnectLastConnect') DESC 'RACF Connect Last Connect'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1148 NAME ('racfConnectOwner') DESC 'RACF Connect Owner'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1149 NAME ('racfConnectResumeDate') DESC 'RACF Connect Resume Date'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1150 NAME ('racfConnectRevokeDate') DESC 'RACF Connect Revoke Date'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1151 NAME ('racfGroupId') DESC 'RACF group ID' EQUALITY caseIgnoreIA5Match
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1152 NAME ('racfUserId') DESC 'RACF userid' EQUALITY caseIgnoreIA5Match
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1153 NAME ('racfCurKeyVersion') DESC 'Current key version'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1154 NAME ('krbHintAliases') DESC 'Entries that can be associated with this entry'
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1155 NAME ('ibm-changeInitiatorsName') DESC 'The DN of the entity that initiated the
 change'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1156 NAME ('krbPrincSubtree') DESC 'List of DNs under which principals in this realm
 reside'
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1157 NAME ('krbRealmName-V2') DESC 'Kerberos realm name' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1158 NAME ('ibm-nativeId') DESC 'Userid in the native security manager'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1162 NAME ('racfLDAPBindDN') DESC 'RACF LDAP Bind DN' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1163 NAME ('racfLDAPBindPw') DESC 'RACF LDAP Bind Password' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1164 NAME ('racfLDAPHost') DESC 'RACF LDAP Host' EQUALITY caseIgnoreMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.155 NAME ('secretKey') DESC 'Attribute is always stored in encrypted form'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1780 NAME ('ibm-EntryUUID') DESC 'Uniquely identifies an LDAP entry throughout its
 life'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.18.0.2.8.3 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.185 NAME ('sysplex') DESC 'Identifies the name of a z/OS sysplex'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.186 NAME ('profileType') DESC 'Identifies the name of a z/OS Security Server profile'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.187 NAME ('racfid') DESC 'Identifies the name of a z/OS Security Server userid or
 groupid'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.188 NAME ('racfAuthorizationDate') DESC 'Date is displayed in yy.ddd format'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
```

```

attributetypes=(1.3.18.0.2.4.189 NAME ('racfOwner')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.190 NAME ('racfInstallationData')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.191 NAME ('racfDatasetModel')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.1913 NAME ('racfGroupUniversal') DESC 'RACF universal group indicator'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.192 NAME ('racfSuperiorGroup')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.193 NAME ('racfGroupNoTermUAC')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.194 NAME ('racfSubGroupName')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.195 NAME ('racfGroupUserids')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.197 NAME ('racfAttributes')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.198 NAME ('racfPassword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.199 NAME ('racfPasswordInterval')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.200 NAME ('racfPasswordChangeDate')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2007 NAME ('racfEncryptType') DESC 'RACF encrypt type'
 EQUALITY caseIgnoreIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.201 NAME ('racfProgrammerName')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.202 NAME ('racfDefaultGroup')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.203 NAME ('racfLastAccess')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.204 NAME ('racfSecurityLevel')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.205 NAME ('racfSecurityCategoryList')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.206 NAME ('racfRevokeDate')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.207 NAME ('racfResumeDate')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.208 NAME ('racfLogonDays')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.209 NAME ('racfLogonTime')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.210 NAME ('racfClassName')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.211 NAME ('racfConnectGroupName')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.212 NAME ('racfConnectGroupAuthority')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.213 NAME ('racfConnectGroupUACC')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.214 NAME ('racfSecurityLabel')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.215 NAME ('SAFDfpDataApplication')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.216 NAME ('SAFDfpDataClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.217 NAME ('SAFDfpManagementClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.218 NAME ('SAFDfpStorageClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.219 NAME ('racfOmvsGroupId')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.220 NAME ('racfOvmGroupId')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.221 NAME ('SAFAccountNumber')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.222 NAME ('SAFDDefaultCommand')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.223 NAME ('SAFDestination')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2239 NAME ('racfLDAPProf')
 DESC 'RACF LDAP Profile Name' EQUALITY caseIgnoreMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.224 NAME ('SAFHoldClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2240 NAME ('racfOmvsGroupIdKeyword')
 DESC 'RACF group OMVS keyword' EQUALITY caseIgnoreMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2241 NAME ('racfOmvsUidKeyword')
 DESC 'RACF user OMVS keyword' EQUALITY caseIgnoreMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2242 NAME ('ibm-memberGroup')
 DESC 'Identifies subgroups of a parent group' EQUALITY distinguishedNameMatch
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2243 NAME ('ibm-allMembers')
 DESC 'Lists all members of a group' NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2244 NAME ('ibm-allGroups')
 DESC 'Lists all groups containing an entry' NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)

```

## Initial LDAP server schema

```
attributetypes=(1.3.18.0.2.4.225 NAME ('SAFJobClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.226 NAME ('SAFMessageClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.227 NAME ('SAFDefaultLoginProc')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.228 NAME ('SAFLogonSize')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.229 NAME ('SAFMaximumRegionSize')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.230 NAME ('SAFDefaultSysoutClass')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.231 NAME ('SAFUserData')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.232 NAME ('SAFDefaultUnit')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2325 NAME ('ibm-entryChecksum')
 DESC 'A checksum of the user attributes for the entry containing this attribute.'
 EQUALITY caseExactIA5Match SINGLE-VALUE NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2326 NAME ('ibm-entryChecksumOp')
 DESC 'A checksum of the replicated operational attributes for the entry containing this attribute.'
 EQUALITY caseExactIA5Match SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2327 NAME ('ibm-supportedReplicationModels')
 DESC 'Advertises in the Root DSE the OIDs of replication models supported by the server'
 EQUALITY caseExactIA5Match NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.2328 NAME ('ibm-serverId')
 DESC 'Advertises in the Root DSE the ibm-slapdServerId configuration setting'
 EQUALITY caseExactIA5Match SINGLE-VALUE NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.2329 NAME ('ibm-replicationServerIsMaster')
 DESC 'Indicates that a server assumes the role of a master for a given subtree'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.233 NAME ('SAFTsoSecurityLabel')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2330 NAME ('ibm-replicationChangeLDIF')
 DESC 'Provides LDIF representation of the last failing operation'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2331 NAME ('ibm-effectiveReplicationModel')
 DESC 'Advertises in the Root DSE the OID of the replication model in use by the server'
 EQUALITY caseExactIA5Match SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2332 NAME ('ibm-replicationLastresultAdditional')
 DESC 'Provides any additional error information returned by the consuming server in the message
 component of the LDAP result' EQUALITY caseIgnoreMatch NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2333 NAME ('ibm-replicationPendingChangeCount')
 DESC 'Indicates the total number of pending unreplicated changes for this replication agreement'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2334 NAME ('ibm-replicationLastChangeId')
 DESC 'Indicates last change id successfully replicated for a replication agreement'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2335 NAME ('ibm-replicationLastFinishTime')
 DESC 'Indicates the last time the replication thread completed sending all of the pending entries.'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2336 NAME ('ibm-replicationState')
 DESC 'Indicates the state of the replication thread: active,ready,waiting,suspended, or full;
 if full, the value will indicate the amount of progress' EQUALITY caseExactIA5Match
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2337 NAME ('ibm-replicationPendingChanges')
 DESC 'Unreplicated change in the form <change id> <operation> <dn> where operation
 is ADD, DELETE, MODIFY, MODIFYDN' EQUALITY caseIgnoreMatch NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2338 NAME ('ibm-replicationLastActivationTime')
 DESC 'Indicates the last time the replication thread was activated'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2339 NAME ('ibm-replicationNextTime')
 DESC 'Indicates next scheduled time for replication' SINGLE-VALUE NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.234 NAME ('racfPrimaryLanguage')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2340 NAME ('ibm-replicationLastresult')
 DESC 'result of last attempted replication in the form: <time> <change-id> <result code>
 <operation> <entry-dn>' EQUALITY caseIgnoreMatch SINGLE-VALUE NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2341 NAME ('ibm-replicationBatchStart')
 DESC 'Time to replicate accumulated changes in the form of Thhmmss where hh is
 hours, mm is minutes and ss is seconds, using a 24 hour clock' EQUALITY caseExactIA5Match
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2342 NAME ('ibm-replicaKeyfile')
 DESC 'Name of key database file on the supplying server with the certificate of the
 consuming server and the supplier' EQUALITY caseIgnoreMatch SINGLE-VALUE
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2343 NAME ('ibm-replicaKeylabel')
 DESC 'Label for certificate containing private key for supplying server'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2344 NAME ('ibm-scheduleTuesday')
 DESC 'DN of the entry defining the replication schedule for Tuesday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2345 NAME ('ibm-replicationTimesUTC')
 DESC 'Scheduled times are GMT if TRUE or local time zone if FALSE'
```

```

SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2346 NAME ('ibm-scheduleFriday')
 DESC 'DN of the entry defining the replication schedule for Friday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2347 NAME ('ibm-scheduleSaturday')
 DESC 'DN of the entry defining the replication schedule for Saturday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2348 NAME ('ibm-scheduleWednesday')
 DESC 'DN of the entry defining the replication schedule for Wednesday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2349 NAME ('ibm-replicationOnHold')
 DESC 'Indicates replication is suspended when TRUE'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.235 NAME ('racfSecondaryLanguage')
 DESC 'Secondary language' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2350 NAME ('ibm-scheduleSunday')
 DESC 'DN of the entry defining the replication schedule for Sunday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2351 NAME ('ibm-replicaCredentialsDN')
 DESC 'DN of the entry containing the credentials for the replication agreement'
 EQUALITY distinguishedNameMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2352 NAME ('ibm-replicationImmediateStart')
 DESC 'Time to start replicating changes as they occur and ended by next ibm-replicationBatchStart
 time in the form of Thhmss where hh is hours, mm is minutes and ss is seconds,
 using a 24 hour clock' EQUALITY caseExactIA5Match SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2353 NAME ('ibm-scheduleMonday')
 DESC 'DN of the entry defining the replication schedule for Monday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2354 NAME ('ibm-replicaKeypwd')
 DESC 'Password for file named by ibm-replicaKeyfile' SINGLE-VALUE
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2355 NAME ('ibm-replicaScheduleDN')
 DESC 'DN of the entry containing the schedule for the replication agreement'
 EQUALITY distinguishedNameMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2356 NAME ('ibm-scheduleThursday')
 DESC 'DN of the entry defining the replication schedule for Thursday'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2357 NAME ('ibm-replicaConsumerId')
 DESC 'Specifies the server ID of the server that is supplied by a replication agreement'
 EQUALITY caseExactIA5Match SUBSTR caseExactSubstringsMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2358 NAME ('ibm-replicaReferralURL')
 DESC 'Ordered list of LDAP URLs with server name and optional port numbers, e.g.,
 ldap://host:port separated by spaces' EQUALITY caseIgnoreMatch SUBSTR
 caseIgnoreSubstringsMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2359 NAME ('ibm-replicaServerId')
 DESC 'Identifies the server acting as supplier for a set of replicas'
 EQUALITY caseExactIA5Match SUBSTR caseExactSubstringsMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.236 NAME ('racfOperatorIdentification')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2360 NAME ('ibm-replicaURL')
 DESC 'Specifies the LDAP URL that should be used to contact the consumer
 server during replication, e.g., ldap[s]://host[:port]' EQUALITY caseIgnoreMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2361 NAME ('ibm-replicaGroup')
 DESC 'Indicates the name of the entry containing the collection of servers
 participating in replication' SUP name SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2367 NAME ('ibm-slpadReplicaSubtree')
 DESC 'A DN identifying the top of a replicated subtree.'
 EQUALITY distinguishedNameMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.237 NAME ('racfOperatorClass')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2376 NAME ('ibm-slpadPagedResAllowNonAdmin')
 DESC 'Whether or not the server should allow non-Administrators to request paged search results.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2377 NAME ('ibm-slpadSortSrchAllowNonAdmin')
 DESC 'Whether or not the server should allow non-Administrators to request sorted search results.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.238 NAME ('racfOperatorPriority')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2380 NAME ('ibm-slpadPagedResLmt')
 DESC 'Maximum number of outstanding paged search requests allowed simultaneously.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2381 NAME ('ibm-slpadSortKeyLimit')
 DESC 'Maximum number of sort keys that can be specified on a single sorted search request.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.239 NAME ('racfOperatorReSignon')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.240 NAME ('racfTerminalTimeout')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2401 NAME ('ibm-slpadMasterReferral')
 DESC 'URL of master replica server (e.g.: ldaps://master.us.ibm.com:636)'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2409 NAME ('ibm-slpadMasterDN')
 DESC 'Bind DN used by a replication supplier server. The value has to match
 the replicaBindDN in the credentials object associated with the replication agreement.
 When kerberos is used to authenticate to the replica, ibm-slpadMasterDN must specify the
 DN representation of the kerberos ID (e.g. ibm-kn=freddy@realm1). When kerberos is used,
 MasterServerPW is ignored.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)

```

## Initial LDAP server schema

```
attributetypes=(1.3.18.0.2.4.241 NAME ('racfStorageKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2411 NAME ('ibm-slapdMasterPW')
 DESC 'Bind password used by replication supplier server. The value has to
 match the replicaBindPW in the credentials object associated with the
 replication agreement. When kerberos is used, MasterServerPW is ignored.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.242 NAME ('racfAuthKeyword')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2420 NAME ('ibm-slapdKrbAdminDN')
 DESC 'Specifies the kerberos ID of the LDAP administrator (e.g. ibm-kn=name@realm).
 Used when kerberos authentication is used to authenticate the administrator when
 logged onto the Web Admin interface. This is specified instead of adminDN and adminPW.'
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2425 NAME ('ibm-slapdAdminPW') DESC 'Bind
 password for ibmslapd administrator.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.5
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.2428 NAME ('ibm-slapdAdminDN')
 DESC 'Bind DN for ibmslapd administrator, e.g.: cn=root' EQUALITY distinguishedNameMatch
 ORDERING distinguishedNameOrderingMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.243 NAME ('racfMformKeyword')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2430 NAME ('ibm-slapdInvalidLine')
 DESC 'This attribute will be prepended to the beginning of any configuration attribute
 for which the value is invalid. This allows invalid configuration settings to be
 identified with a simple search for ibm-slapdInvalidLine=*' EQUALITY caseIgnoreMatch
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2433 NAME ('ibm-slapdServerId')
 DESC 'Identifies the server for use in replication'
 EQUALITY caseExactIA5Match SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.244 NAME ('racfLevelKeyword')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2449 NAME ('ibm-slapdDN')
 DESC 'This attribute is used to sort search results by the entry DN'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.245 NAME ('racfMonitorKeyword')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.246 NAME ('racfRouteCodeKeyword')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.247 NAME ('racfLogCommandResponseKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.248 NAME ('racfMGIDKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2481 NAME ('ibm-supportedCapabilities')
 DESC 'Capabilities supported by this server' NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.2482 NAME ('ibm-enabledCapabilities')
 DESC 'Capabilities that are enabled for use on this server' NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.2484 NAME ('ibm-replicationExcludedCapability')
 DESC 'The values are OIDs associated with server capabilities. Objects and
 attributes related to the specified capabilities will not be replicated under
 the agreement containing this attribute.' EQUALITY caseIgnoreMatch
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2486 NAME ('ibm-slapdMaxPendingChangesDisplayed')
 DESC 'Maximum number of pending replication updates to be displayed for any given
 replication agreement on a supplier server.' SYNTAX 1.3.6.1.4.1.1466.115.121.1.27
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.249 NAME ('racfDOMKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2493 NAME ('ibm-pwdPolicy')
 DESC 'Specifies with a value of TRUE that Password Policy is turned on.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2494 NAME ('ibm-replDailySchedName')
 DESC 'Naming attribute and descriptive name for an ibm-replicaDailySchedule object.'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2495 NAME ('ibm-replicationThisServerIsMaster')
 DESC 'Indicates whether the server returning this attribute is a master server
 for the subtree containing this entry.' SINGLE-VALUE NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.2496 NAME ('ibm-replCredName')
 DESC 'Naming attribute and descriptive name for an ibm-replicaCredentials object.'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2497 NAME ('ibm-replWeeklySchedName')
 DESC 'Naming attribute and descriptive name for an ibm-replicaWeeklySchedule object.'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2498 NAME ('ibm-replicationIsQuiesced')
 DESC 'Indicates whether the replicated subtree containing this attribute is quiesced on this server.'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.250 NAME ('racfKEYKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.2500 NAME ('ibm-slapdMigrationInfo')
 DESC 'Information used to control migration of a component.'
 EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.251 NAME ('racfCMDSYSKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.252 NAME ('racfUDKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.253 NAME ('racfMscopeSystems')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
```

```

attributetypes=(1.3.18.0.2.4.254 NAME ('racfAltGroupKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.255 NAME ('racfAutoKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.256 NAME ('racfWorkAttrUsername')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.257 NAME ('racfBuilding')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.258 NAME ('racfDepartment')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.259 NAME ('racfRoom')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.260 NAME ('racfWorkAttrAccountNumber')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.261 NAME ('racfAddressLine1')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.262 NAME ('racfAddressLine2')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.263 NAME ('racfAddressLine3')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.264 NAME ('racfAddressLine4')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.265 NAME ('racfOmvsUid')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.266 NAME ('racfOmvsHome')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.267 NAME ('racfOmvsInitialProgram')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.268 NAME ('racfNetviewInitialCommand')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.269 NAME ('racfDefaultConsoleName')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.270 NAME ('racfCTLKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.271 NAME ('racfMSGRCVRKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.272 NAME ('racfNetviewOperatorClass')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.273 NAME ('racfDomains')
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.274 NAME ('racfNGMFADMKeyword')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.275 NAME ('racfDCEUUID')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.276 NAME ('racfDCEPrincipal')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.277 NAME ('racfDCEHomeCell')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.278 NAME ('racfDCEHomeCellUUID')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.279 NAME ('racfDCEAutoLogin')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.280 NAME ('racfOvmUid')
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.281 NAME ('racfOvmHome')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.282 NAME ('racfOvmInitialProgram')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.283 NAME ('racfOvmFilesystemRoot')
 EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.285 NAME ('aclEntry')
 DESC 'Defines an access list entry' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.286 NAME ('aclPropagate')
 DESC 'Defines access list subtree propagation'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.287 NAME ('aclSource')
 DESC 'Source of the access list for an entry'
 SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.288 NAME ('entryOwner')
 DESC 'Defines an entry owner' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.289 NAME ('ownerPropagate')
 DESC 'Defines entry owner subtree propagation'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.290 NAME ('ownerSource')
 DESC 'Source of the owner for an entry' SINGLE-VALUE NO-USER-MODIFICATION
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.298 NAME ('replicaHost')
 DESC 'Specifies the replica host name' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.299 NAME ('replicaBindDN')
 DESC 'Specifies the replica bind DN' SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.300 NAME ('replicaCredentials' 'replicaBindCredentials')
 DESC 'Specifies the replica bind credentials' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.5
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.301 NAME ('replicaPort') DESC 'Specifies the replica bind port'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3013 NAME ('ibm-slapdAdminGroupEnabled')
 DESC 'Must be one of { TRUE | FALSE }. Specifies whether the Administrative Group is currently enabled.
 Defaults to FALSE if unspecified. If set to TRUE, the server will allow users in the administrative
 group to login.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.302 NAME ('replicaBindMethod')
 DESC 'Specifies the replica bind method' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.303 NAME ('replicaUseSSL')

```

## Initial LDAP server schema

```
DESC 'Specifies SSL usage when binding to replica' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3032 NAME ('ibm-slapdDigestAdminUser')
DESC 'Specifies the Digest MD5 User Name of the LDAP administrator or administrative group member.
Used when MD5 Digest authentication is used to authenticate an administrator.' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.304 NAME ('replicaUpdateTimeInterval')
DESC 'Specifies replication update interval' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3072 NAME ('ibm-searchSizeLimit') DESC 'Maximum number of entries
to return from search requests for a member in a special search limit group. 0 = unlimited. -1 =
ignored.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3073 NAME ('ibm-searchTimeLimit') DESC 'Maximum number of seconds
to spend on search requests for a member in a special search limit group. 0 = unlimited. -1 = ignored.'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3081 NAME ('ibm-saslDigestRealmName')
DESC 'DIGEST-MD5 realm names for this server' NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.3089 NAME ('racfOmvsSharedMemoryMaximum')
DESC 'Represents the SHMEMMAX(shared-memory-size) field of the RACF user OMVS segment'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3090 NAME ('racfOmvsMemoryLimit')
DESC 'Represents the MEMLIMIT(non-shared-memory-size) field of the RACF user OMVS segment'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3091 NAME ('racfPasswordEnvelope') DESC 'Envelope containing
user password information' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3094 NAME ('firstChangeNumber')
DESC 'Change number for the earliest entry in the server change log' EQUALITY integerMatch
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.3095 NAME ('lastChangeNumber')
DESC 'Change number for the latest entry in the server change log' EQUALITY integerMatch
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.3097 NAME ('ldapServiceName')
DESC 'LDAP service name for this server as host@realm' SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.3098 NAME ('ibmDirectoryVersion')
DESC 'Version of this directory server' SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.18.0.2.4.3128 NAME ('ibm-slapdLog') DESC 'Log path and file name.
On Windows, forward slashes are allowed, and a leading slash not preceded by a drive letter
is assumed to be rooted at the install directory (i.e.: /tmp/bulkload.errors = D:\Program
Files\IBM\ldap\tmp\bulkload.errors).' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3129 NAME ('ibm-slapdLogMaxArchives')
DESC 'The maximum number of archived logs where 0 means no archive file will be kept and -1
means an unlimited number of archive files will be kept.' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3130 NAME ('ibm-slapdLogOptions')
DESC 'Any log options that the log uses, for example, log level or mask.' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3131 NAME ('ibm-slapdLogSizeThreshold')
DESC 'When this size threshold, in MB, is exceeded the file will be archived where 0
means no threshold and thus no archiving.' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3134 NAME ('ibm-slapdLogArchivePath')
DESC 'Path for archived files. On Windows, forward slashes are allowed, and a
leading slash not preceded by a drive letter is assumed to be rooted at the install
directory (i.e.: /tmp = D:\Program Files\IBM\ldap\tmp).' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3138 NAME ('ibm-replicationFailedChangeCount')
DESC 'Indicates the number of changes logged as failures for this replication agreement.'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3139 NAME ('ibm-replicationFailedChanges')
DESC 'Unreplicated change for a specific replication agreement in the form <change id>
<operation> <dn> <LDAP result code> <timestamp> <failed attempts> where operation is ADD,
DELETE, MODIFY or MODIFYDN.' EQUALITY caseIgnoreMatch NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3141 NAME ('ibm-pwdAccountLocked')
DESC 'The indication that the users account has been locked'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3142 NAME ('ibm-slapdReplConflictMaxEntrySize')
DESC 'Maximum number of bytes that an entry can contain and still be resent to a
target server as a result of replication conflict resolution. This value is dynamic.'
EQUALITY integerMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3150 NAME ('ibm-replicaMethod') DESC 'Method used
by a server to replicate 1=single thread, 2=multiple threads and connections.
The value is not dynamic.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3151 NAME ('ibm-replicaConsumerConnections')
DESC 'Specifies the number of LDAP connections to the consumer server during replication'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3152 NAME ('ibm-slapdReplMaxErrors') DESC 'Limit to
allowed errors per replication agreement, -1=unlimited, 0=stop on error. The value is dynamic.'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3153 NAME ('ibm-slapdReplContextCacheSize')
DESC 'Maximum number of updates to retain in replication context cache. The value is dynamic.'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3215 NAME ('racfTslKey')
DESC 'Represents the TSLKEY(transaction-security-level-key) field of the RACF user CICS segment.'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3216 NAME ('racfRslKey')
DESC 'Represents the RSLKEY(resource-security-level-key) field of the RACF user CICS segment.'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
```



```

attributetypes=(1.3.18.0.2.4.3223 NAME ('ibm-replicationperformance')
 DESC 'Values for the following metrics: connection,operations queued,dependent operations
 queued,operations sent, dependent operations sent, operations received, errors'
 EQUALITY caseIgnoreMatch NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3238 NAME ('ibm-pwdPolicyStartTime')
 DESC 'Specifies the time Password Policy was last turned on' ORDERING generalizedTimeOrderingMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3239 NAME ('racfHcKeyword') DESC 'Represents the HC field of
 the RACF user OPERPARM segment' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3240 NAME ('racfNGMFVSPNKeyword') DESC 'Represents the
 NGMFVSPN field of the RACF user NETVIEW segment' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3241 NAME ('racfIntidsKeyword') DESC 'Represents the INTIDS
 field of the RACF user OPERPARM segment' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3242 NAME ('racfPassPhrase') DESC 'Represents the passphrase
 field of the RACF user base segment' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3243 NAME ('racfUnknidsKeyword')
 DESC 'Represents the UNKNIDS field of the RACF user OPERPARM segment'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3244 NAME ('racfHavePasswordEnvelope')
 DESC 'Represents the password-enveloped field of the RACF user base segment'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3245 NAME ('racfPassPhraseChangeDate')
 DESC 'Represents the last change date of the passphrase field of the RACF user base segment'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3261 NAME ('ibm-slapdLogCARSOOptions')
 DESC 'Any log options that the event formatted data sent to CARs uses, for example,
 log level or mask.' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3263 NAME ('ibm-slapdLogCARSPort')
 DESC 'The CARs servers port where the event formatted data will be sent.' EQUALITY integerMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3264 NAME ('ibm-slapdLogEventFileOptions')
 DESC 'Any log options that the event formatted log uses, for example, log level or mask.'
 EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3265 NAME ('ibm-slapdLogCARSServer') DESC 'The CARs servers
 hostname where the event formatted data will be sent.' EQUALITY caseIgnoreMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3266 NAME ('ibm-slapdLogEventFileSizeThreshold')
 DESC 'When this size threshold, in MB, is exceeded the event formatted file will be
 archived where 0 means no threshold and thus no archiving.' EQUALITY integerMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3267 NAME ('ibm-slapdLogEventFileMaxArchives')
 DESC 'The maximum number of archived logs where 0 means no archive file will be
 kept and -1 means an unlimited number of archive files will be kept.' EQUALITY integerMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3268 NAME ('ibm-slapdLogEventFileArchivePath')
 DESC 'Path for archived event formatted files. On Windows, forward slashes are allowed,
 and a leading slash not preceded by a drive letter is assumed to be rooted at the install
 directory (i.e.: /tmp = D:\Program Files\IBM\ldap\V6.1\tmp).' EQUALITY caseExactMatch
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3269 NAME ('ibm-slapdLogCARSEnabled') DESC 'Must be one
 of [TRUE|FALSE]. Specifies whether the log data will be written to a CARs Server.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3270 NAME ('ibm-slapdLogEventFileEnabled')
 DESC 'Must be one of [TRUE|FALSE]. Specifies whether the log data will be written to
 event formatted log files.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3288 NAME ('ibm-replicaPKCS11Enabled')
 DESC 'Must be one of { TRUE | FALSE }. Specify whether PKCS11 interface is
 enable to do cryptographic operation and key database file lookup from installed
 crypto device.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3294 NAME ('ibm-replicationCreateMissingEntries')
 DESC 'Indicates whether missing parent entries are to be created on consumer'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3295 NAME ('ibm-replicationFilterDN')
 DESC 'A DN identifying the filter entry' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3296 NAME ('ibm-replicationFilterAttr')
 DESC 'This attribute is used to hold the actual filter' EQUALITY caseIgnoreMatch
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3299 NAME ('ibm-slapdAdminRole')
 DESC 'Administrative role(s) associated with a Local Administrative Group Member.
 Valid values are AuditAdmin, DirDataAdmin, NoAdmin, PasswordAdmin, ReplicationAdmin,
 SchemaAdmin, ServerConfigGroupMember, ServerStartStopAdmin. Additional values supported
 by z/OS are RootAdmin and OperationalAdmin.' EQUALITY caseIgnoreMatch SUBSTR caseIgnoreSubstringsMatch
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3302 NAME ('ibm-pwdIndividualPolicyDN')
 DESC 'DN of an entry containing pasword policy information. This entry can be used
 in a user entry to associate a password policy with the entry.'
 SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3303 NAME ('ibm-pwdGroupPolicyDN') DESC 'DN of an entry
 containing password policy information. This entry can be used in a group entry to
 associate a password policy with the entry.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3320 NAME ('ibm-slapdReplRestrictedAccess')
 DESC 'Used to control access to the replication topology entry. If it is set to true,
 then only the root admin, local admin group members and the master DN have access to the
 replication topology entry, otherwise, any user with proper ACL may have access to the

```

## Initial LDAP server schema

```
replication topology entry.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7
USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3321 NAME ('ibm-slapdNoReplConflictResolution')
DESC 'Specifies whether or not directory server will handle replication conflict
resolution. If it is set to true, then the server does not try to compare timestamps
for replicated entries in an attempt to resolve conflicts between the entries.
However, conflict resolution does not apply to entry cn=schema which is always
replaced by a replicated cn=schema.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7
USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3329 NAME ('ibm-pwdGroupAndIndividualEnabled')
DESC 'A value of TRUE indicates that global, group and individual password policies are
to be considered when evaluating password policy. A value of FALSE indicates that only
the global password policy is used.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3330 NAME ('ibm-slapdLogMgmtStartTime') DESC 'specifies
the start date and time for the log management activity. The format is YYYYMMDDHHMM'
EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3331 NAME ('ibm-slapdLogEventFilePrefix')
DESC 'File name prefix for the CBE formatted log will be placed. The suffix of the CBE
formatted log file will always be "_audit0.log" and cannot be changed. Hence if the
prefix for the file name if specified as xyz, then the CBE formatted file name will be
xyz_audit0.log.' EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3332 NAME ('ibm-slapdLogEventFormat')
DESC 'specifies in which event format the users want the ITDS log records' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3333 NAME ('ibm-slapdLogEventFilePath') DESC 'Log path
for an event formatted log. On Windows, forward slashes are allowed, and a leading
slash not preceded by a drive letter is assumed to be rooted at the install directory
(i.e.: /tmp/ = D:\Program Files\IBM\ldap\V6.1\tmp\).' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3334 NAME ('ibm-slapdLogMgmtFrequency')
DESC 'Specifies the time interval between two cycles of the log management activity'
EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3335 NAME ('ibm-slapdAuditOperation')
DESC 'The audit operation for which the audit records will be converted to
the specified event format. For example, if the attribute is set to BIND,
then audit records related only to the bind operation will be converted to
specified event format.' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3342 NAME ('racfHavePassPhraseEnvelope')
DESC 'Represents the password phrase-enveloped field of the RACF user base segment'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3343 NAME ('racfPassPhraseEnvelope')
DESC 'Envelope containing user password phrase information'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3344 NAME ('racfKerbKeyFrom')
DESC 'Represents the KEYFROM field of the RACF user KERB segment'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3373 NAME ('ibm-slapdLogCachePath')
DESC 'Path where the cache files for the log management tool will be created.
On Windows, forward slashes are allowed, and a leading slash not preceded by a
drive letter is assumed to be rooted at the install directory (i.e.: /tmp/ =
D:\Program Files\IBM\ldap\V6.1\tmp\).' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3396 NAME ('passwordMaxConsecutiveRepeatedChars')
DESC 'Attribute used to impose the maximum number of consecutive repeated characters
in the password field.' SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3416 NAME ('ibm-slapdEnableConflictResolutionForGroups')
DESC 'An attribute which determines whether replication conflict resolution will be
performed from group entries or not.' EQUALITY booleanMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3417 NAME ('racfCfdefMaxValue')
DESC 'Maximum numeric value the field can contain' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3418 NAME ('racfUacc')
DESC 'Universal access authority associated with the resource profile'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3419 NAME ('racfStddataTrace')
DESC 'Whether a message is issued when this resource profile is used to assign
an ID to the started task' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3420 NAME ('racfCfdefFirst')
DESC 'Character type restriction for the first character of the field'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3421 NAME ('racfStddataUser')
DESC 'User ID associated with this started task' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3422 NAME ('racfStatistics')
DESC 'Name of class for which RACF records statistical information'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3423 NAME ('racfCfdefListHead')
DESC 'Heading for the field displayed by the LISTUSER or LISTGRP command'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3424 NAME ('racfControlAccessCount')
DESC 'Number of times that the resource profile has been referenced for control access'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3425 NAME ('racfGenCmd')
```

```

DESC 'Name of class for which RACF performs generic profile command processing'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3426 NAME ('racfCfdefMixed')
DESC 'Whether mixed-case characters are allowed in the field' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3427 NAME ('racfGenList') DESC 'Name of class
for which RACF shares in-storage generic profiles' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3428 NAME ('racfCfdefOther')
DESC 'Character type restriction for the characters after the first one in the field'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3429 NAME ('racfAccessControl')
DESC 'Information for controlling access to a resource, in RACF PERMIT format'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3430 NAME ('racfApplData')
DESC 'Text string associated with the resource profile' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3431 NAME ('racfCdtinfoKeyQualifiers')
DESC 'Number of matching qualifiers to use when loading generic resource profile names'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3432 NAME ('racfCdtinfoFirst')
DESC 'Character type restriction for the first character of the resource profile name'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3433 NAME ('racfCdtinfoOther')
DESC 'Character type restriction for the characters after the first one in a
resource profile name' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3434 NAME ('racfAutomatic')
DESC 'Represents the AUTOMATIC field in the RACF TAPEVOL class' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3435 NAME ('racfStddataTrusted')
DESC 'Whether this started task runs with the RACF TRUSTED attribute' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3436 NAME ('racfUpdateAccessCount')
DESC 'Number of times that the resource profile has been referenced for update access'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3437 NAME ('racfVolumeList') DESC 'Tape volume serial
numbers represented by the resource profile' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3438 NAME ('racfTimeZone') DESC 'Time zone in which a terminal resides'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3439 NAME ('racfStddataGroup') DESC 'Group name associated with this started task'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3440 NAME ('racfStddataPrivileged') DESC 'Whether this started task runs
with the RACF PRIVILEGED attribute' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3441 NAME ('racfSsignonKeyEncrypted') DESC 'Encrypt the key value'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3442 NAME ('racfSsignonKeyMasked') DESC 'Mask the key value'
EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3443 NAME ('racfSessionLock') DESC 'Mark the resource profile as locked'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3444 NAME ('racfSetroptsAttributes') DESC 'Additional RACF SETROPTS keywords'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3445 NAME ('racfSigverFailLoad') DESC 'Conditions under which module load fails
when digital signature verification fails' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3446 NAME ('racfSigverSigAudit') DESC 'Digital signature verification
events to be audited' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3447 NAME ('racfSigverSigRequired') DESC 'Whether the program object
needs a digital signature' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3448 NAME ('racfSessionSessKey') DESC 'Session key for this
resource profile' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3449 NAME ('racfResourceAttributes') DESC 'Additional resource
profile keywords' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3450 NAME ('racfResourceAudit') DESC 'The types of access
to the resource profile that are logged to SMF' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3451 NAME ('racfResourceGlobalAudit')
DESC 'The types of access to the resource profile that are logged to SMF as set
by a user with AUDITOR attribute' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3452 NAME ('racfReadAccessCount')
DESC 'Number of times that the resource profile has been referenced for read access'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3453 NAME ('racfSessionConvSec')
DESC 'Level of security checking when conversations are established with the protected LU'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3454 NAME ('racfSessionInterval')
DESC 'Maximum number of days the session key is valid' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3455 NAME ('racfLogOptionsSuccesses')
DESC 'Name of class for which RACF audits successful access attempts to resources'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3456 NAME ('racfMemberList') DESC 'Name of member that

```

## Initial LDAP server schema

```
RACF is to add to the resource profile' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3457 NAME ('racfNotify') DESC 'User ID to notify
whenever the resource profile is used to deny access' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3458 NAME ('racfLogOptionsNever') DESC 'Name of
class for which RACF audits no access attempts to resources' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3459 NAME ('racfRaclist') DESC 'Name of class for
which RACF shares in-storage generic and discrete profiles' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3460 NAME ('racfLogOptionsFailures')
DESC 'Name of class for which RACF audits failed access attempts to resources'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3461 NAME ('racfLastReferenceDate')
DESC 'Date when the resource profile was last referenced' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3462 NAME ('racfLastChangeDate')
DESC 'Date when the resource profile was last changed' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3463 NAME ('racfLevel') DESC 'Level number assigned
by the installation' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3464 NAME ('racfLogOptionsAlways')
DESC 'Name of class for which RACF audits all access attempts to resources'
EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3465 NAME ('racfLogOptionsDefault')
DESC 'Name of class for which RACF auditing is controlled by the profile
protecting the resource' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3466 NAME ('racfKerbPassword')
DESC 'Value of the Kerberos password for the realm' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3467 NAME ('racfIctxDomMap')
DESC 'Whether ICTX caching uses EIM mapping services' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3468 NAME ('racfIctxMapRequired')
DESC 'Whether the ICTX identity cache requires identity mapping' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3469 NAME ('racfIctxUseMap')
DESC 'Whether the ICTX identity cache stores a valid identity mapping' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3470 NAME ('racfKerbDefaultTicketLife')
DESC 'Default ticket lifetime for the local Network Authentication Services'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3471 NAME ('racfKerbMinTicketLife')
DESC 'Minimum ticket lifetime for the local Network Authentication Services'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3472 NAME ('racfIctxMappingTimeOut')
DESC 'How long the ICTX identity cache stores an identity mapping' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3473 NAME ('racfGlobal')
DESC 'Name of class for which RACF performs global access checking' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3474 NAME ('racfGeneric') DESC 'Name of class
for which RACF performs generic profile checking' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3475 NAME ('racfEimX509Registry')
DESC 'Name of the X.509 registry in the EIM domain' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3476 NAME ('racfEimOptions') DESC 'Options
that control EIM configuration' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3477 NAME ('racfDlfdDataJobNames')
DESC 'List of job names which can access the DLF objects protected by this
resource profile' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3478 NAME ('racfDlfdDataRetain')
DESC 'Whether the DLF object can be retained after use' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3479 NAME ('racfEimDomainDn')
DESC 'Distinguished name of the EIM domain' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3480 NAME ('racfEimKerbRegistry')
DESC 'Name of the Kerberos registry in the EIM domain' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3481 NAME ('racfEimLocalRegistry')
DESC 'Name of the local RACF registry in the EIM domain' EQUALITY caseExactMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3482 NAME ('racfCopyProfileFrom')
DESC 'The FCLASS, FGENERIC, FROM, and FVOLUME specifications for copying the
values from a profile' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3483 NAME ('racfCfdefType')
DESC 'Data type of the field' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3484 NAME ('racfClassAct')
DESC 'Name of class for which RACF protection is in effect' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3485 NAME ('racfCfdefMinValue')
```

```

DESC 'Minimum numeric value the field can contain' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3486 NAME ('racfCdfHelp')
DESC 'Help text for the field' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3487 NAME ('racfCdfMaxLength')
DESC 'Maximum number of characters the field can contain' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3488 NAME ('racfCdtinfoSignal')
DESC 'Whether a signal is sent when RACLISTed resource profiles are changed'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3489 NAME ('racfCdtinfoRaclList')
DESC 'Whether SETROPTS RACLIST is allowed for this class' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3490 NAME ('racfCdtinfoPosit')
DESC 'POSIT number associated with this class' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3491 NAME ('racfCdtinfoProfilesAllowed')
DESC 'Whether resource profiles can be defined for this class' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3492 NAME ('racfCdtinfoOperations')
DESC 'Whether to consider the OPERATIONS attribute when performing authorization
checking' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3493 NAME ('racfCdtinfoSecLabelsRequired')
DESC 'Whether a SECLABEL is required for resource profiles' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3494 NAME ('racfCdtinfoMacProcessing')
DESC 'Type of mandatory access control processing required for the class'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3495 NAME ('racfCdtinfoMaxLength')
DESC 'Maximum length of resource and resource profile names when MAXLENX is
not specified' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3496 NAME ('racfCdtinfoMaxLengthX')
DESC 'Maximum length of resource and resource profile names when invoking
RACROUTE ENTITXX or when using a RACF command processor' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3497 NAME ('racfCdtinfoMember')
DESC 'Name of class grouped by the resources within this class' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3498 NAME ('racfCdtinfoGroup')
DESC 'Name of class that groups the resources within this class'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3499 NAME ('racfCdtinfoDefaultRc')
DESC 'Return code that RACF provides if a resource profile is not found'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3500 NAME ('racfCdtinfoCase')
DESC 'Whether mixed-case resource profile names are allowed for this class'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3501 NAME ('racfCdtinfoDefaultUacc')
DESC 'Minimum access allowed if the access level is not set in a resource profile'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3502 NAME ('racfCdtinfoGeneric') DESC 'Whether SETROPTS GENERIC
and GENCMD are allowed for the class' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3503 NAME ('racfCdtinfoGenList') DESC 'Whether SETROPTS GENLIST
is allowed for the class' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3504 NAME ('racfAudit') DESC 'Name of class for which RACF
performs auditing' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3505 NAME ('racfAlterAccessCount') DESC 'Number of times
that the resource profile has been referenced for alter access' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3506 NAME ('profileName') DESC 'Name of RACF resource profile'
EQUALITY caseExactMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3508 NAME ('ibm-replicationWaitOnDependency') DESC 'Indicates
whether the server will await the completion of the replication of dependencies prior to sending a
replication update to a consumer.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3509 NAME ('ibm-slapdReplVersion') DESC 'This attribute
defines the current version of the advanced replication feature.' EQUALITY caseIgnoreMatch
ORDERING caseIgnoreOrderingMatch SUBSTR caseIgnoreSubstringsMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.3511 NAME ('racfIcsfAsymUsage') DESC 'Allowable usage of
an asymmetric ICSF key' EQUALITY caseIgnoreMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3513 NAME ('racfIcsfSymExportable') DESC 'How symmetric
keys covered by this profile can be exported' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3514 NAME ('racfIcsfSymExportCerts') DESC 'Digital certificate
labels to use to export symmetric keys covered by this profile' EQUALITY caseExactMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3515 NAME ('racfIcsfSymExportKeys') DESC 'Key token labels
for public keys to use to export symmetric keys covered by this profile' EQUALITY caseIgnoreMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3523 NAME ('ibm-filterBindMechanism') DESC 'Bind mechanism to
use in a filter' EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE userApplications)

```

## Initial LDAP server schema

```
attributetypes=(1.3.18.0.2.4.3524 NAME ('ibm-filterConnectionEncrypted') DESC 'Connection
encrypted flag to use in a filter' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3526 NAME ('ibm-filterDayOfWeek') DESC 'Directory entry
access day of week to use in a filter. The value is an integer mapping the days of the week
as follows: Sunday = 0, Monday = 1, Tuesday = 2, Wednesday = 3, Thursday = 4, Friday = 5,
Saturday = 6.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3527 NAME ('ibm-filterIP') DESC 'IPv4 or IPv6 IP address of
a client connection to use in a filter' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3528 NAME ('ibm-filterSubject') DESC 'Distinguished name to
use in a filter' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3529 NAME ('ibm-filterTimeOfDay') DESC 'Directory entry
access time of day to use in a filter. The value is the hh:mm format of 24 hour time, with hh
ranging from 00 to 23 and mm ranging from 00 to 59.' EQUALITY caseIgnoreMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3559 NAME ('ibm-slafdSAPSecurityDomain') DESC 'The high level
component of the profile names used to define LDAP-related information in the z/OS Security Manager.'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3560 NAME ('racfKerbCheckAddr') DESC 'Whether the Kerberos server
is to take addresses in the tickets into account when it performs ticket operations'
EQUALITY caseIgnoreMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3699 NAME ('racfMFAFactor') DESC 'Name of IBM Multi-Factor Authentication
factor' SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3700 NAME ('racfMFAFactorStatus') DESC 'Whether the user is required
to authenticate to IBM Multi-Factor Authentication with the specified factor'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3701 NAME ('racfMFAFactorTags') DESC 'The tag-name and tag-value pairs
for the specified factor' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3702 NAME ('racfMFAPolicy') DESC 'Names of IBM Multi-Factor Authentication
policy' SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3703 NAME ('racfMFAFWFallback') DESC 'Whether the user can logon
to the system using any existing RACF authentications when IBM Multi-Factor Authentication
is unavailable or is unable to determine the validity of an ACTIVE factor'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3704 NAME ('racfMfepolicyFactors') DESC 'List of factors that are
required that are required to satisfy the specified IBM Multi-Factor Authentication policy'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3705 NAME ('racfMfepolicyReuse') DESC 'Whether the authentication tokens
for this policy are reusable' SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3706 NAME ('racfMfepolicyTokenTimeout') DESC 'IBM Multi-Factor
Authentication token timeout seconds for this policy' SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3707 NAME ('racfIcsfSymCpacfRet') DESC 'Whether the encrypted symmetric
keys that are controlled by this profile and are rewrapped by CP Assist for Cryptographic Function are
eligible to be returned to an authorized caller' SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3708 NAME ('racfIcsfSymCpacfWrap') DESC 'Whether the encrypted symmetric
keys that are controlled by this profile are eligible to be rewrapped by CP Assist for Cryptographic Function'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3710 NAME ('racfEmail') DESC 'Name of IBM RACF Email' EQUALITY caseExactMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3711 NAME ('racfSsignonkeylabel') DESC 'Label of an application key or a
secured signon key to protect the key value in RACF' EQUALITY caseExactIA5Match
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3712 NAME ('racfIdtSigtoken') DESC 'ICSF PKCS#11 token name for the
generation and validation of Identity Token signatures associated with the profile'
EQUALITY caseIgnoreIA5Match SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3713 NAME ('racfIdtSigseqnum') DESC 'ICSF PKCS#11 sequence number of the
key for the generation and validation of Identity Token signatures associated with the profile'
EQUALITY caseIgnoreIA5Match SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3714 NAME ('racfIdtSigcat') DESC 'ICSF PKCS#11 category of the key for
the generation and validation of Identity Token signatures associated with the profile'
EQUALITY caseIgnoreIA5Match SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3715 NAME ('racfIdtSigalg') DESC 'Signature algorithm for the generation
of Identity Token signatures associated with the profile' EQUALITY caseIgnoreIA5Match
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3716 NAME ('racfIdtAnyappl') DESC 'Whether the Identity Token can be used
for any application name or only for the application name that performed authentication'
EQUALITY caseIgnoreIA5Match SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3717 NAME ('racfIdtTimeout') DESC 'Number of minutes that the Identity
Token associated with the profile is active' EQUALITY caseIgnoreIA5Match
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 SINGLE-VALUE USAGE userApplications)
attributetypes=(1.3.18.0.2.4.3656 NAME ('ibm-slafdServerCompatibilityLevel') DESC 'The server
compatibility level used to determine functional capability.'
EQUALITY integerMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 SINGLE-VALUE USAGE dSAOperation
attributetypes=(1.3.18.0.2.4.454 NAME ('passwordMaxRepeatedChars') DESC ' '
SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.469 NAME ('passwordMinOtherChars') DESC ' '
SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.470 NAME ('ibmAttributeTypes') DESC 'IBM attribute types'
SYNTAX 1.3.18.0.2.8.1 USAGE directoryOperation)
attributetypes=(1.3.18.0.2.4.473 NAME ('passwordMinAlphaChars') DESC 'Specifies the minimum
number of characters required for a users password.' SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.499 NAME ('passwordMinDiffChars') DESC 'Specifies the minimum
number of different (unique) characters required for a users password.'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.826 NAME ('racfOmvsMaximumAddressSpaceSize') DESC 'Represents
the ASSIZEMAX(address-space-size) field of the OMVS RACF SEGMENT'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE userApplications)
attributetypes=(1.3.18.0.2.4.827 NAME ('racfOmvsMaximumCPUtime') DESC 'Represents the
CPUTIMEMAX(cpu-time) field of the RACF OMVS SEGMENT' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.828 NAME ('racfOmvsMaximumFilesPerProcess') DESC 'Represents the
```

```

FILEPROCMAX(files-per-process) field of the RACF OMVS SEGMENT' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.829 NAME ('racfOmvsMaximumMemoryMapArea') DESC 'Represents the
MMAPAREAMAX(memory-map-size) field of the RACF OMVS SEGMENT' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.830 NAME ('racfOmvsMaximumProcessesPerUID') DESC 'Represents the
PROCUSERMAX(processes-per-UID) field of the RACF OMVS SEGMENT' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.18.0.2.4.831 NAME ('racfOmvsMaximumThreadsPerProcess') DESC 'Represents the
THREADSMAX(threads-per-process) field of the RACF OMVS SEGMENT' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.26
USAGE userApplications)
attributetypes=(1.3.6.1.1.4 NAME ('vendorName') DESC 'Name of the company that implemented the LDAP server'
EQUALITY caseExactMatch SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.6.1.1.5 NAME ('vendorVersion') DESC 'Version of the LDAP Server implementation'
EQUALITY caseExactMatch SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.13 NAME ('supportedControl') DESC 'Controls supported by this server'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.38 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.14 NAME ('supportedSASLMechanisms') DESC 'SASL mechanisms
supported by this server' SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.15 NAME ('supportedLDAPVersion') DESC 'LDAP protocol versions
supported by this server' SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.16 NAME ('ldapSyntaxes') DESC 'LDAP syntaxes'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.54 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.5 NAME ('namingContexts') DESC 'LDAP server naming contexts'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.6 NAME ('altServer') DESC 'Alternate LDAP server'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.26 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.1466.101.120.7 NAME ('supportedExtension') DESC 'Extensions supported
by this server' SYNTAX 1.3.6.1.4.1.1466.115.121.1.38 USAGE dSAOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.1 NAME ('pwdAttribute') DESC 'Specifies the name of the
attribute to which the password policy is applied, ie userPassword' EQUALITY objectIdentifierMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.38 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.10 NAME ('pwdLockoutDuration') DESC 'Specifies the number of
seconds that the password cannot be used to authenticate due to too many failed bind attempts.'
EQUALITY integerMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.11 NAME ('pwdMaxFailure') DESC 'Specifies the number of
consecutive failed bind attempts after which the password may not be used to authenticate.'
EQUALITY integerMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.12 NAME ('pwdFailureCountInterval') DESC 'Specifies the
number of seconds after which the password failures are purged from the failure counter, even though
no successful authentication occurred.' EQUALITY integerMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27
USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.13 NAME ('pwdMustChange') DESC 'Specifies with a value of
TRUE that users must change their passwords when they first bind to the directory after a password
is set or reset by the administrator.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.14 NAME ('pwdAllowUserChange') DESC 'Indicates whether users
can change their own passwords.' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.15 NAME ('pwdSafeModify') DESC 'Specifies whether or not the
existing password must be sent when changing a password' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7
USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.16 NAME ('pwdChangedTime') DESC 'Specifies the last time the
entrys password was changed' EQUALITY generalizedTimeMatch ORDERING generalizedTimeOrderingMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.17 NAME ('pwdAccountLockedTime') DESC 'Specifies the time
that the users account was locked' EQUALITY generalizedTimeMatch ORDERING generalizedTimeOrderingMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.18 NAME ('pwdExpirationWarned') DESC 'The time the user was
first warned about the coming expiration of the password' EQUALITY generalizedTimeMatch ORDERING
generalizedTimeOrderingMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.19 NAME ('pwdFailureTime') DESC 'The timestamps of the last
consecutive authentication failures' EQUALITY generalizedTimeMatch ORDERING generalizedTimeOrderingMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.2 NAME ('pwdMinAge') DESC 'Specifies in seconds, the period of
time a password must be in effect before a user can change it.' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.20 NAME ('pwdHistory') DESC 'The history of users passwords'
EQUALITY caseExactMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.21 NAME ('pwdGraceUseTime') DESC 'The timestamps of the
grace login once the password has expired' EQUALITY generalizedTimeMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.24
USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.22 NAME ('pwdReset') DESC 'Indicates that the password has been reset.'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE directoryOperation)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.3 NAME ('pwdMaxAge') DESC 'Specifies in seconds, the period of
time password can be used before they expire.' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.4 NAME ('pwdInHistory') DESC 'Specifies the number of passwords
which are stored in the pwdHistory attribute.' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.5 NAME ('pwdCheckSyntax') DESC 'Indicates how the password
syntax will be checked while being modified or added' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.6 NAME ('pwdMinLength') DESC 'Holds the minimum number of
characters that must be used in a password' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.7 NAME ('pwdExpireWarning') DESC 'Specifies the maximum
number of seconds before a password is due to expire that expiration warning messages will be returned
to an authenticating user.' EQUALITY integerMatch SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27
USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.8 NAME ('pwdGraceLoginLimit') DESC 'Specifies the number
of times an expired password can be used to authenticate' EQUALITY integerMatch
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(1.3.6.1.4.1.42.2.27.8.1.9 NAME ('pwdLockout') DESC 'Indicates, when its value is TRUE,
that the password may not be used to authenticate after a specified number of consecutive failed bind

```

## Initial LDAP server schema

```
attempts' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.10 NAME ('deleteOldRdn') DESC 'A flag which indicates if the
old RDN should be retained as an entry attribute' SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.7 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.11 NAME ('newSuperior') DESC 'Specifies the name of the new
superior of the existing entry' EQUALITY distinguishedNameMatch SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.198 NAME ('memberURL') DESC 'Specifies a URL associated with
each member of a group' EQUALITY caseExactMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.34 NAME ('ref') DESC 'Specifies the URI to continue the
LDAP operation' EQUALITY caseExactMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.35 NAME ('changeLog') DESC 'Distinguished name of the server
change log' EQUALITY distinguishedNameMatch NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
USAGE dSAOperation)
attributetypes=(2.16.840.1.113730.3.1.5 NAME ('changeNumber') DESC 'Contains the assigned change
number for the modification' EQUALITY integerMatch SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.27 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.6 NAME ('targetDN') DESC 'Defines the distinguished name of
an entry that was modified' EQUALITY distinguishedNameMatch SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.7 NAME ('changeType') DESC 'Describes the type of change
performed on an entry (add, modify, delete, modrdn)' EQUALITY caseIgnoreMatch SINGLE-VALUE NO-USER-MODIFICATION
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.77 NAME ('changeTime') DESC 'Time last changed'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.8 NAME ('changes') DESC 'Defines changes made to a directory
server (LDIF format)' SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.5 USAGE userApplications)
attributetypes=(2.16.840.1.113730.3.1.9 NAME ('newRdn') DESC 'The new RDN of an entry'
EQUALITY distinguishedNameMatch SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
USAGE userApplications)
attributetypes=(2.5.18.1 NAME ('createTimestamp') DESC 'Entry creation time'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(2.5.18.10 NAME ('subschemaSubentry') DESC 'Schema associated with an entry'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(2.5.18.2 NAME ('modifyTimestamp') DESC 'Time of last entry modification'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.24 USAGE directoryOperation)
attributetypes=(2.5.18.3 NAME ('creatorsName') DESC 'Name of entry creator'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(2.5.18.4 NAME ('modifiersName') DESC 'Name of last entry modifier'
SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE directoryOperation)
attributetypes=(2.5.18.6 NAME ('subtreeSpecification') DESC 'Subtree specification'
SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE directoryOperation)
attributetypes=(2.5.18.9 NAME ('hasSubordinates') DESC 'Indicates whether any subordinate entries
exist below the entry holding this attribute.' SINGLE-VALUE NO-USER-MODIFICATION SYNTAX 1.3.6.1.4.1.1466.115.121.1.7
USAGE directoryOperation)
attributetypes=(2.5.21.1 NAME ('ditStructureRules') DESC 'Directory structure rules'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.17 USAGE directoryOperation)
attributetypes=(2.5.21.2 NAME ('ditContentRules') DESC 'Directory content rules'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.16 USAGE directoryOperation)
attributetypes=(2.5.21.4 NAME ('matchingRules') DESC 'LDAP matching rules'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.30 USAGE directoryOperation)
attributetypes=(2.5.21.5 NAME ('attributeTypes') DESC 'LDAP attribute types'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.3 USAGE directoryOperation)
attributetypes=(2.5.21.6 NAME ('objectClasses') DESC 'LDAP object classes'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.37 USAGE directoryOperation)
attributetypes=(2.5.21.7 NAME ('nameForms') DESC 'Directory name forms'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.35 USAGE directoryOperation)
attributetypes=(2.5.21.8 NAME ('matchingRuleUse') DESC 'LDAP matching rule uses'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.31 USAGE directoryOperation)
attributetypes=(2.5.4.0 NAME ('objectClass') SYNTAX 1.3.6.1.4.1.1466.115.121.1.38
USAGE userApplications)
attributetypes=(2.5.4.1 NAME ('aliasedObjectName' 'aliasedEntryName') DESC 'True name for an
alias entry' SINGLE-VALUE SYNTAX 1.3.6.1.4.1.1466.115.121.1.12 USAGE userApplications)
attributetypes=(2.5.4.10 NAME ('o' 'organizationName' 'organization') DESC 'The name of an
organization' SUP name USAGE userApplications)
attributetypes=(2.5.4.11 NAME ('ou' 'organizationalUnit' 'organizationalUnitName') DESC 'The name
of an organizational unit' SUP name USAGE userApplications)
attributetypes=(2.5.4.13 NAME ('description') DESC 'Provides a description of a directory entry'
EQUALITY caseIgnoreMatch SUBSTR caseIgnoreSubstringsMatch SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(2.5.4.15 NAME ('businessCategory') DESC 'Describes the kind of business performed
by an organization' EQUALITY caseIgnoreMatch SUBSTR caseIgnoreSubstringsMatch
SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(2.5.4.3 NAME ('cn' 'commonName') SUP name USAGE userApplications)
attributetypes=(2.5.4.31 NAME ('member') DESC 'Defines a member of a set' SUP dn USAGE userApplications)
attributetypes=(2.5.4.32 NAME ('owner') DESC 'Specifies the DN of the person responsible
for the entry' SUP dn USAGE userApplications)
attributetypes=(2.5.4.34 NAME ('seeAlso') DESC 'Identifies another entry that may contain
information related this entry' SUP dn USAGE userApplications)
attributetypes=(2.5.4.35 NAME ('userPassword') DESC 'Defines the user password'
SYNTAX 1.3.6.1.4.1.1466.115.121.1.40 USAGE userApplications)
attributetypes=(2.5.4.41 NAME ('name') SYNTAX 1.3.6.1.4.1.1466.115.121.1.15 USAGE userApplications)
attributetypes=(2.5.4.49 NAME ('dn' 'distinguishedName') SYNTAX 1.3.6.1.4.1.1466.115.121.1.12
USAGE userApplications)
attributetypes=(2.5.4.50 NAME ('uniqueMember') DESC 'Defines a member of a set' SUP dn
USAGE userApplications)
attributetypes=(2.5.4.6 NAME ('c' 'countryName') DESC 'A two-letter ISO 3166 country code' SUP name
SINGLE-VALUE USAGE userApplications)
attributetypes=(2.5.4.7 NAME ('l' 'localityName') DESC 'The name of a locality, such as a city,
county or other geographic region' SUP name USAGE userApplications)
attributetypes=(2.5.4.8 NAME ('st' 'stateOrProvince' 'stateOrProvinceName')
DESC 'The full name of a state or province' SUP name USAGE userApplications)
ibmattributetypes=(0.9.2342.19200300.100.1.1 ACCESS-CLASS normal)
ibmattributetypes=(0.9.2342.19200300.100.1.23 ACCESS-CLASS system)
```



[illegible]

## Initial LDAP server schema

```
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.233 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2330 DBNAME('replicationChange' 'replicationChange')
ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.2331 DBNAME('effectiveReplicat' 'effectiveReplicat')
ACCESS-CLASS system LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.2332 DBNAME('replicationLastAd' 'replicationLastAd')
ACCESS-CLASS system LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.2333 DBNAME('replicationPendin' 'replicationPendin')
ACCESS-CLASS system LENGTH 12)
ibmattributetypes=(1.3.18.0.2.4.2334 DBNAME('replicationLastCh' 'replicationLastCh')
ACCESS-CLASS system LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.2335 DBNAME('replicationLastFi' 'replicationLastFi')
ACCESS-CLASS system LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.2336 DBNAME('replicationState' 'replicationState')
ACCESS-CLASS system LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.2337 DBNAME('replicationPendch' 'replicationPendch')
ACCESS-CLASS system LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2338 DBNAME('replicationLastAc' 'replicationLastAc')
ACCESS-CLASS system LENGTH 32)
ibmattributetypes=(1.3.18.0.2.4.2339 DBNAME('replicationNextTi' 'replicationNextTi')
ACCESS-CLASS system LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.234 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2340 DBNAME('replicationLastRe' 'replicationLastRe')
ACCESS-CLASS system LENGTH 2048)
ibmattributetypes=(1.3.18.0.2.4.2341 DBNAME('replicationBatchS' 'replicationBatchS')
ACCESS-CLASS normal LENGTH 7)
ibmattributetypes=(1.3.18.0.2.4.2342 DBNAME('replicaKeyFile' 'replicaKeyFile')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2343 DBNAME('replicaKeylabel' 'replicaKeylabel')
ACCESS-CLASS normal LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.2344 DBNAME('scheduleTuesday' 'scheduleTuesday')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2345 DBNAME('replicationTimesU' 'replicationTimesU')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.2346 DBNAME('scheduleFriday' 'scheduleFriday')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2347 DBNAME('scheduleSaturday' 'scheduleSaturday')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2348 DBNAME('scheduleWeds' 'scheduleWeds')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2349 DBNAME('replicationOnHold' 'replicationOnHold')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.235 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2350 DBNAME('scheduleSunday' 'scheduleSunday')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2351 DBNAME('replicaCredsDN' 'replicaCredsDN')
ACCESS-CLASS normal LENGTH 1000 EQUALITY)
ibmattributetypes=(1.3.18.0.2.4.2352 DBNAME('replicationImmed' 'replicationImmed')
ACCESS-CLASS normal LENGTH 7)
ibmattributetypes=(1.3.18.0.2.4.2353 DBNAME('scheduleMonday' 'scheduleMonday')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2354 DBNAME('replicaKeypwd' 'replicaKeypwd')
ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.2355 DBNAME('replicaScheduleDN' 'replicaScheduledDN')
ACCESS-CLASS normal LENGTH 1000 EQUALITY)
ibmattributetypes=(1.3.18.0.2.4.2356 DBNAME('scheduleThursday' 'scheduleThursday')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.2357 DBNAME('replicaConsumerID' 'replicaConsumerID')
ACCESS-CLASS normal LENGTH 128)
ibmattributetypes=(1.3.18.0.2.4.2358 DBNAME('replicaReferralUR' 'replicaReferralUR')
ACCESS-CLASS normal LENGTH 2048)
ibmattributetypes=(1.3.18.0.2.4.2359 DBNAME('replicaID' 'replicaID')
ACCESS-CLASS normal LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.236 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2360 DBNAME('replicaURL' 'replicaURL')
ACCESS-CLASS normal LENGTH 128)
ibmattributetypes=(1.3.18.0.2.4.2361 DBNAME('replicaGroup' 'replicaGroup')
ACCESS-CLASS normal LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.2367 DBNAME('slapdReplicaSubtr' 'slapdReplicaSubtr')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.237 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2376 DBNAME('slapdPageNonAdmn' 'slapdPageNonAdmn')
ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.2377 DBNAME('slapdSortNonAdmin' 'slapdSortNonAdmin')
ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.238 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2380 DBNAME('slapdPageResLmt' 'slapdPageResLmt')
ACCESS-CLASS critical LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.2381 DBNAME('slapdSortKeyLimit' 'slapdSortKeyLimit')
ACCESS-CLASS critical LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.239 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.240 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2401 DBNAME('MasterReferral' 'MasterReferral')
ACCESS-CLASS critical LENGTH 256)
ibmattributetypes=(1.3.18.0.2.4.2409 DBNAME('MasterDN' 'MasterDN')
ACCESS-CLASS critical LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.241 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2411 DBNAME('MasterPW' 'MasterPW')
ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.242 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2420 DBNAME('slapdKrbAdminDN' 'slapdKrbAdminDN')
ACCESS-CLASS critical LENGTH 512)
```

```

ibmattributetypes=(1.3.18.0.2.4.2425 DBNAME ('slapdAdminPW' 'slapdAdminPW')
 ACCESS-CLASS critical LENGTH 128)
ibmattributetypes=(1.3.18.0.2.4.2428 DBNAME ('slapdAdminDN' 'slapdAdminDN')
 ACCESS-CLASS critical LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.243 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2430 DBNAME ('slapdInvalidLine' 'slapdInvalidLine')
 ACCESS-CLASS normal LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.2433 DBNAME ('slapdServerId' 'slapdServerId')
 ACCESS-CLASS normal LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.244 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2449 ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.245 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.246 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.247 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.248 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2481 ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.2482 ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.2484 DBNAME ('ibmreplexclcap' 'ibmreplexclcap')
 ACCESS-CLASS normal LENGTH 100)
ibmattributetypes=(1.3.18.0.2.4.2486 DBNAME ('slapdMaxPendingCh' 'slapdMaxPendingCh')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.249 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2493 DBNAME ('pwdPolicy' 'pwdPolicy')
 ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.2494 DBNAME ('replDailySchedNam' 'replDailySchedNam')
 ACCESS-CLASS normal LENGTH 200)
ibmattributetypes=(1.3.18.0.2.4.2495 DBNAME ('replThisSvrMast' 'replThisSvrMast')
 ACCESS-CLASS system LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.2496 DBNAME ('replCredName' 'replCredName')
 ACCESS-CLASS normal LENGTH 200)
ibmattributetypes=(1.3.18.0.2.4.2497 DBNAME ('replWeeklySchedNa' 'replWeeklySchedNa')
 ACCESS-CLASS normal LENGTH 200)
ibmattributetypes=(1.3.18.0.2.4.2498 DBNAME ('replIsQuiesced' 'replIsQuiesced')
 ACCESS-CLASS system LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.250 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.2500 DBNAME ('slapdMigrationInf' 'slapdMigrationInf')
 ACCESS-CLASS critical LENGTH 2048)
ibmattributetypes=(1.3.18.0.2.4.251 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.252 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.253 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.254 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.255 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.256 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.257 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.258 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.259 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.260 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.261 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.262 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.263 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.264 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.265 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.266 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.267 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.268 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.269 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.270 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.271 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.272 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.273 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.274 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.275 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.276 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.277 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.278 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.279 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.280 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.281 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.282 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.283 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.285 ACCESS-CLASS restricted)
ibmattributetypes=(1.3.18.0.2.4.286 ACCESS-CLASS restricted)
ibmattributetypes=(1.3.18.0.2.4.287 ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.288 ACCESS-CLASS restricted)
ibmattributetypes=(1.3.18.0.2.4.289 ACCESS-CLASS restricted)
ibmattributetypes=(1.3.18.0.2.4.290 ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.298 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.299 ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.300 ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.301 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3013 DBNAME ('AdmGroupEnabled' 'AdmGroupEnabled')
 ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.302 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.303 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3032 DBNAME ('DigestAdminUser' 'DigestAdminUser')
 ACCESS-CLASS critical LENGTH 512)
ibmattributetypes=(1.3.18.0.2.4.304 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3072 DBNAME ('SearchSizeLimit' 'SearchSizeLimit')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3073 DBNAME ('SearchTimeLimit' 'SearchTimeLimit')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3081 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3089 ACCESS-CLASS sensitive)

```

## Initial LDAP server schema

```
ibmattributetypes=(1.3.18.0.2.4.3090 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3091 ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.3094 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3095 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3097 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3098 ACCESS-CLASS normal)
ibmattributetypes=(1.3.18.0.2.4.3128 DBNAME('ibmlog' 'ibmlog')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3129 DBNAME('logMaxArchives' 'logMaxArchives')
 ACCESS-CLASS critical LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3130 DBNAME('logOptions' 'logOptions')
 ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.3131 DBNAME('logSizeThreshold' 'logSizeThreshold')
 ACCESS-CLASS critical LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3134 DBNAME('logArchivePath' 'logArchivePath')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3138 DBNAME('replFailures' 'replFailures')
 ACCESS-CLASS normal LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3139 DBNAME('replicationFailed' 'replicationFailed')
 ACCESS-CLASS normal LENGTH 1100)
ibmattributetypes=(1.3.18.0.2.4.3141 DBNAME('pwdAccountLocked' 'pwdAccountLocked')
 ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3142 DBNAME('slapdReplConflict' 'slapdReplConflict')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3150 DBNAME('replmeth' 'replicaMeth')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3151 DBNAME('replicacon' 'replicaCon')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3152 DBNAME('slapdReplMaxError' 'slapdReplMaxError')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3153 DBNAME('slapdReplContextC' 'slapdReplContextC')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3215 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3216 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3223 DBNAME('replperf' 'replperf')
 ACCESS-CLASS normal LENGTH 500)
ibmattributetypes=(1.3.18.0.2.4.3238 DBNAME('pwdPolicyStartTim' 'pwdPolicyStartTim')
 ACCESS-CLASS normal LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.3239 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3240 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3241 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3242 ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.3243 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3244 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3245 ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.3261 DBNAME('logCARSOOptions' 'logCARSOOptions')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3263 DBNAME('logCARSPort' 'logCARSPort')
 ACCESS-CLASS critical LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3264 DBNAME('eventFileOptions' 'eventFileOptions')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3265 DBNAME('logCARSServer' 'logCARSServer')
 ACCESS-CLASS critical LENGTH 128)
ibmattributetypes=(1.3.18.0.2.4.3266 DBNAME('eventFileSizThres' 'eventFileSizThres')
 ACCESS-CLASS critical LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3267 DBNAME('eventMaxArchives' 'eventMaxArchives')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3268 DBNAME('eventArchivePath' 'eventArchivePath')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3269 DBNAME('logCARSEnabled' 'logCARSEnabled')
 ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3270 DBNAME('eventFileEnabled' 'eventFileEnabled')
 ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3288 DBNAME('replicaPKCS11' 'replicaPKCS11')
 ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3294 DBNAME('replCreatMissEntr' 'replCreatMissEntr')
 ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3295 DBNAME('replFilterDN' 'replFilterDN')
 ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.3296 DBNAME('replicationFilter' 'replicationFilter')
 ACCESS-CLASS normal LENGTH 1024 EQUALITY)
ibmattributetypes=(1.3.18.0.2.4.3299 DBNAME('slapdAdminRole' 'slapdAdminRole')
 ACCESS-CLASS critical LENGTH 100)
ibmattributetypes=(1.3.18.0.2.4.3302 DBNAME('pwdIndividualPol' 'pwdIndividualPol')
 ACCESS-CLASS critical LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.3303 DBNAME('pwdGroupPolicyDN' 'pwdGroupPolicyDN')
 ACCESS-CLASS critical LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.3320 DBNAME('ReplAccess' 'ReplAccess')
 ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3321 DBNAME('NoReplConflict' 'NoReplConflict')
 ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3329 DBNAME('pwdGroupAndIndiv' 'pwdGroupAndIndiv')
 ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3330 DBNAME('logMgmtStartTime' 'logMgmtStartTime')
 ACCESS-CLASS critical LENGTH 12)
ibmattributetypes=(1.3.18.0.2.4.3331 DBNAME('eventFilePrefix' 'eventFilePrefix')
 ACCESS-CLASS critical LENGTH 1017)
ibmattributetypes=(1.3.18.0.2.4.3332 DBNAME('logEventFormat' 'logEventFormat')
 ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.3333 DBNAME('logEventFilePath' 'logEventFilePath')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3334 DBNAME('logMgmtFrequency' 'logMgmtFrequency')
 ACCESS-CLASS critical LENGTH 10)
```

```

ibmattributetypes=(1.3.18.0.2.4.3335 DBNAME('auditOperation' 'auditOperation')
 ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.3342 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3343 ACCESS-CLASS critical)
ibmattributetypes=(1.3.18.0.2.4.3344 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3373 DBNAME('logCachePath' 'logCachePath')
 ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.18.0.2.4.3396 DBNAME ('pwMaxConRepChars' 'pwMaxConRepChars')
 ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3416 DBNAME('slapdEnableConfli' 'slapdEnableConfli')
 ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3417 DBNAME('racfCfdefMaxValue' 'racfCfdefMaxValue')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3418 DBNAME('racfUacc' 'racfUacc')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3419 DBNAME('racfStddataTrace' 'racfStddataTrace')
 ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3420 DBNAME('racfCfdefFirst' 'racfCfdefFirst')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3421 DBNAME('racfStddataUser' 'racfStddataUser')
 ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3422 DBNAME('racfStatistics' 'racfStatistics')
 ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3423 DBNAME('racfCfdefListHead' 'racfCfdefListHead')
 ACCESS-CLASS sensitive LENGTH 40)
ibmattributetypes=(1.3.18.0.2.4.3424 DBNAME('racfControlAccess' 'racfControlAccess')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3425 DBNAME('racfGenCmd' 'racfGenCmd')
 ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3426 DBNAME('racfCfdefMixed' 'racfCfdefMixed')
 ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3427 DBNAME('racfGenList' 'racfGenList')
 ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3428 DBNAME('racfCfdefOther' 'racfCfdefOther')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3429 DBNAME('racfAccessControl' 'racfAccessControl')
 ACCESS-CLASS sensitive LENGTH 4096)
ibmattributetypes=(1.3.18.0.2.4.3430 DBNAME('racfApplData' 'racfApplData')
 ACCESS-CLASS sensitive LENGTH 255)
ibmattributetypes=(1.3.18.0.2.4.3431 DBNAME('racfCdtinfoKeyQua' 'racfCdtinfoKeyQua')
 ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3432 DBNAME('racfCdtinfoFirst' 'racfCdtinfoFirst')
 ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3433 DBNAME('racfCdtinfoOther' 'racfCdtinfoOther')
 ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3434 DBNAME('racfAutomatic' 'racfAutomatic')
 ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3435 DBNAME('racfStddataTrusted' 'racfStddataTrusted')
 ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3436 DBNAME('racfUpdateAccessC' 'racfUpdateAccessC')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3437 DBNAME('racfVolumeList' 'racfVolumeList')
 ACCESS-CLASS sensitive LENGTH 50)
ibmattributetypes=(1.3.18.0.2.4.3438 DBNAME('racfTimeZone' 'racfTimeZone')
 ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3439 DBNAME('racfStddataGroup' 'racfStddataGroup')
 ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3440 DBNAME('racfStddataPrivile' 'racfStddataPrivile')
 ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3441 DBNAME('racfSsignonKeyEnc' 'racfSsignonKeyEnc')
 ACCESS-CLASS critical LENGTH 16)
ibmattributetypes=(1.3.18.0.2.4.3442 DBNAME('racfSsignonKeyMas' 'racfSsignonKeyMas')
 ACCESS-CLASS critical LENGTH 16)
ibmattributetypes=(1.3.18.0.2.4.3443 DBNAME('racfSessionLock' 'racfSessionLock')
 ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3444 DBNAME('racfSetroptsAttri' 'racfSetroptsAttri')
 ACCESS-CLASS sensitive LENGTH 25)
ibmattributetypes=(1.3.18.0.2.4.3445 DBNAME('racfSigverFailLoa' 'racfSigverFailLoa')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3446 DBNAME('racfSigverSigAudi' 'racfSigverSigAudi')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3447 DBNAME('racfSigverSigRequ' 'racfSigverSigRequ')
 ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3448 DBNAME('racfSessionSessKe' 'racfSessionSessKe')
 ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3449 DBNAME('racfResourceAttri' 'racfResourceAttri')
 ACCESS-CLASS sensitive LENGTH 25)
ibmattributetypes=(1.3.18.0.2.4.3450 DBNAME('racfResourceAudit' 'racfResourceAudit')
 ACCESS-CLASS sensitive LENGTH 50)
ibmattributetypes=(1.3.18.0.2.4.3451 DBNAME('racfResourceGloba' 'racfResourceGloba')
 ACCESS-CLASS sensitive LENGTH 50)
ibmattributetypes=(1.3.18.0.2.4.3452 DBNAME('racfReadAccessCou' 'racfReadAccessCou')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3453 DBNAME('racfSessionConvSe' 'racfSessionConvSe')
 ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3454 DBNAME('racfSessionInterv' 'racfSessionInterv')
 ACCESS-CLASS sensitive LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3455 DBNAME('racfLogOptionsSuc' 'racfLogOptionsSuc')
 ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3456 DBNAME('racfMemberList' 'racfMemberList')
 ACCESS-CLASS sensitive LENGTH 512)
ibmattributetypes=(1.3.18.0.2.4.3457 DBNAME('racfNotify' 'racfNotify')
 ACCESS-CLASS sensitive LENGTH 8)

```

## Initial LDAP server schema

```
ibmattributetypes=(1.3.18.0.2.4.3458 DBNAME('racfLogOptionsNev' 'racfLogOptionsNev')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3459 DBNAME('racfRacList' 'racfRacList')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3460 DBNAME('racfLogOptionsFai' 'racfLogOptionsFai')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3461 DBNAME('racfLastReference' 'racfLastReference')
ACCESS-CLASS sensitive LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.3462 DBNAME('racfLastChangeDat' 'racfLastChangeDat')
ACCESS-CLASS sensitive LENGTH 30)
ibmattributetypes=(1.3.18.0.2.4.3463 DBNAME('racfLevel' 'racfLevel')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3464 DBNAME('racfLogOptionsAlw' 'racfLogOptionsAlw')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3465 DBNAME('racfLogOptionsDef' 'racfLogOptionsDef')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3466 DBNAME('racfKerbPassword' 'racfKerbPassword')
ACCESS-CLASS critical LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3467 DBNAME('racfIctxDoMap' 'racfIctxDoMap')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3468 DBNAME('racfIctxMapRequir' 'racfIctxMapRequir')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3469 DBNAME('racfIctxUseMap' 'racfIctxUseMap')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3470 DBNAME('racfKerbDefaultTi' 'racfKerbDefaultTi')
ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3471 DBNAME('racfKerbMinTicket' 'racfKerbMinTicket')
ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3472 DBNAME('racfIctxMappingTi' 'racfIctxMappingTi')
ACCESS-CLASS sensitive LENGTH 4)
ibmattributetypes=(1.3.18.0.2.4.3473 DBNAME('racfGlobal' 'racfGlobal')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3474 DBNAME('racfGeneric' 'racfGeneric')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3475 DBNAME('racfEimX509Regist' 'racfEimX509Regist')
ACCESS-CLASS sensitive LENGTH 255)
ibmattributetypes=(1.3.18.0.2.4.3476 DBNAME('racfEimOptions' 'racfEimOptions')
ACCESS-CLASS sensitive LENGTH 15)
ibmattributetypes=(1.3.18.0.2.4.3477 DBNAME('racfDlfddataJobNam' 'racfDlfddataJobNam')
ACCESS-CLASS sensitive LENGTH 50)
ibmattributetypes=(1.3.18.0.2.4.3478 DBNAME('racfDlfddataRetain' 'racfDlfddataRetain')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3479 DBNAME('racfEimDomainDn' 'racfEimDomainDn')
ACCESS-CLASS sensitive LENGTH 1023)
ibmattributetypes=(1.3.18.0.2.4.3480 DBNAME('racfEimKerbRegist' 'racfEimKerbRegist')
ACCESS-CLASS sensitive LENGTH 255)
ibmattributetypes=(1.3.18.0.2.4.3481 DBNAME('racfEimLocalRegis' 'racfEimLocalRegis')
ACCESS-CLASS sensitive LENGTH 255)
ibmattributetypes=(1.3.18.0.2.4.3482 DBNAME('racfCopyProfileFr' 'racfCopyProfileFr')
ACCESS-CLASS sensitive LENGTH 512)
ibmattributetypes=(1.3.18.0.2.4.3483 DBNAME('racfCfdefType' 'racfCfdefType')
ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3484 DBNAME('racfClassAct' 'racfClassAct')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3485 DBNAME('racfCfdefMinValue' 'racfCfdefMinValue')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3486 DBNAME('racfCfdefHelp' 'racfCfdefHelp')
ACCESS-CLASS sensitive LENGTH 256)
ibmattributetypes=(1.3.18.0.2.4.3487 DBNAME('racfCfdefMaxLengt' 'racfCfdefMaxLengt')
ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3488 DBNAME('racfCdtinfoSignal' 'racfCdtinfoSignal')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3489 DBNAME('racfCdtinfoRacLis' 'racfCdtinfoRacLis')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3490 DBNAME('racfCdtinfoPosit' 'racfCdtinfoPosit')
ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3491 DBNAME('racfCdtinfoProfil' 'racfCdtinfoProfil')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3492 DBNAME('racfCdtinfoOperat' 'racfCdtinfoOperat')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3493 DBNAME('racfCdtinfoSecLab' 'racfCdtinfoSecLab')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3494 DBNAME('racfCdtinfoMacPro' 'racfCdtinfoMacPro')
ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3495 DBNAME('racfCdtinfoMaxLnx' 'racfCdtinfoMaxLnx')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3496 DBNAME('racfCdtinfoMaxLen' 'racfCdtinfoMaxLen')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3497 DBNAME('racfCdtinfoMember' 'racfCdtinfoMember')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3498 DBNAME('racfCdtinfoGroup' 'racfCdtinfoGroup')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3499 DBNAME('racfCdtinfoDfltrc' 'racfCdtinfoDfltrc')
ACCESS-CLASS sensitive LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3500 DBNAME('racfCdtinfoCase' 'racfCdtinfoCase')
ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3501 DBNAME('racfCdtinfoDefaul' 'racfCdtinfoDefaul')
ACCESS-CLASS sensitive LENGTH 10)
ibmattributetypes=(1.3.18.0.2.4.3502 DBNAME('racfCdtinfoGeneri' 'racfCdtinfoGeneri')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3503 DBNAME('racfCdtinfoGenLis' 'racfCdtinfoGenLis')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3504 DBNAME('racfAudit' 'racfAudit')
```

```

ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3505 DBNAME('racfAlterAccessCo' 'racfAlterAccessCo')
ACCESS-CLASS sensitive LENGTH 16)
ibmattributetypes=(1.3.18.0.2.4.3506 DBNAME('profileName' 'profileName')
ACCESS-CLASS sensitive LENGTH 246 EQUALITY)
ibmattributetypes=(1.3.18.0.2.4.3508 DBNAME('replicationWaitOn' 'replicationWaitOn')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3509 DBNAME('slapdReplVersion' 'slapdReplVersion')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3511 DBNAME('racfIcsfAsymUsage' 'racfIcsfAsymUsage')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3513 DBNAME('racfIcsfSymExport' 'racfIcsfSymExport')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3514 DBNAME('racfIcsfSymExpCer' 'racfIcsfSymExpCer')
ACCESS-CLASS sensitive LENGTH 100)
ibmattributetypes=(1.3.18.0.2.4.3515 DBNAME('racfIcsfSymExpKey' 'racfIcsfSymExpKey')
ACCESS-CLASS sensitive LENGTH 64)
ibmattributetypes=(1.3.18.0.2.4.3523 DBNAME('filterBindMechani' 'filterBindMechani')
ACCESS-CLASS normal LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3524 DBNAME('filterConnectionE' 'filterConnectionE')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3526 DBNAME('filterDayOfWeek' 'filterDayOfWeek')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3527 DBNAME('filterIP' 'filterIP')
ACCESS-CLASS normal LENGTH 240)
ibmattributetypes=(1.3.18.0.2.4.3528 DBNAME('filterSubject' 'filterSubject')
ACCESS-CLASS normal LENGTH 1000)
ibmattributetypes=(1.3.18.0.2.4.3529 DBNAME('filterTimeOfDay' 'filterTimeOfDay')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.3559 DBNAME('SAFSecurityDomain' 'SAFSecurityDomain')
ACCESS-CLASS critical LENGTH 246)
ibmattributetypes=(1.3.18.0.2.4.3560 DBNAME('racfKerbCheckAddr' 'racfKerbCheckAddr')
ACCESS-CLASS sensitive LENGTH 3)

ibmattributetypes=(1.3.18.0.2.4.3699 DBNAME('racfMFAFactor' 'racfMFAFactor')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3700 DBNAME('racfMFAFactorStat' 'racfMFAFactorStat')
ACCESS-CLASS sensitive LENGTH 29)
ibmattributetypes=(1.3.18.0.2.4.3701 DBNAME('racfMFAFactorTags' 'racfMFAFactorTags')
ACCESS-CLASS sensitive LENGTH 1068)
ibmattributetypes=(1.3.18.0.2.4.3702 DBNAME('racfMFAPolicy' 'racfMFAPolicy')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3703 DBNAME('racfMFAPWFallback' 'racfMFAPWFallback')
ACCESS-CLASS sensitive LENGTH 12)
ibmattributetypes=(1.3.18.0.2.4.3704 DBNAME('racfMfpolicyFacto' 'racfMfpolicyFacto')
ACCESS-CLASS sensitive LENGTH 20)
ibmattributetypes=(1.3.18.0.2.4.3705 DBNAME('racfMfpolicyReuse' 'racfMfpolicyReuse')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3706 DBNAME('racfMfpolicyToken' 'racfMfpolicyToken')
ACCESS-CLASS sensitive LENGTH 5)
ibmattributetypes=(1.3.18.0.2.4.3707 DBNAME('racfIcsfSymCpacfR' 'racfIcsfSymCpacfR')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3708 DBNAME('racfIcsfSymCpacfW' 'racfIcsfSymCpacfW')
ACCESS-CLASS sensitive LENGTH 3)
ibmattributetypes=(1.3.18.0.2.4.3710 DBNAME('racfEmail' 'racfEmail')
ACCESS-CLASS sensitive LENGTH 246)
ibmattributetypes=(1.3.18.0.2.4.3711 DBNAME('racfSsignonkeylabel' 'racfSsignonkeylabel')
ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3712 DBNAME('racfIdtSigtoken' 'racfIdtSigtoken')
ACCESS-CLASS sensitive LENGTH 32)
ibmattributetypes=(1.3.18.0.2.4.3713 DBNAME('racfIdtSigseqnum' 'racfIdtSigseqnum')
ACCESS-CLASS sensitive LENGTH 8)
ibmattributetypes=(1.3.18.0.2.4.3714 DBNAME('racfIdtSigcat' 'racfIdtSigcat')
ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3715 DBNAME('racfIdtSigalg' 'racfIdtSigalg')
ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3716 DBNAME('racfIdtAnyappl' 'racfIdtAnyappl')
ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3717 DBNAME('racfIdtTimeout' 'racfIdtTimeout')
ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.3656 DBNAME('ibm-slapdServerCompatibilityLevel'
'ibm-slapdServerCompatibilityLevel')
ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.454 DBNAME('pwMaxRepChars' 'pwMaxRepChars')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.469 DBNAME('pwMinOtherChars' 'pwMinOtherChars')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.470 ACCESS-CLASS system)
ibmattributetypes=(1.3.18.0.2.4.473 DBNAME('pwMinAlphaChars' 'pwMinAlphaChars')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.499 DBNAME('pwMinDiffChars' 'pwMinDiffChars')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.18.0.2.4.826 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.827 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.828 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.829 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.830 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.18.0.2.4.831 ACCESS-CLASS sensitive)
ibmattributetypes=(1.3.6.1.1.4 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.1.5 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.13 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.14 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.15 ACCESS-CLASS normal)

```

## Initial LDAP server schema

```
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.16 ACCESS-CLASS system)
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.5 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.6 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.4.1.1466.101.120.7 ACCESS-CLASS normal)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.1 DBNAME ('pwdAttribute' 'pwdAttribute')
ACCESS-CLASS normal LENGTH 64)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.10 DBNAME ('pwdLockoutDuratio' 'pwdLockoutDuratio')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.11 DBNAME ('pwdMaxFailure' 'pwdMaxFailure')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.12 DBNAME ('pwdFailCntInt' 'pwdFailCntInt')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.13 DBNAME ('pwdMustChange' 'pwdMustChange')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.14 DBNAME ('pwdAllowChange' 'pwdAllowChange')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.15 DBNAME ('pwdSafeModify' 'pwdSafeModify')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.16 DBNAME ('pwdChangedTime' 'pwdChangedTime')
ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.17 DBNAME ('pwdAccLockTime' 'pwdAccLockTime')
ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.18 DBNAME ('pwdExpireWarned' 'pwdExpireWarned')
ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.19 DBNAME ('pwdFailureTime' 'pwdFailureTime')
ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.2 DBNAME ('pwdMinAge' 'pwdMinAge')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.20 DBNAME ('pwdHistory' 'pwdHistory')
ACCESS-CLASS critical LENGTH 1024)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.21 DBNAME ('pwdGraceUseTime' 'pwdGraceUseTime')
ACCESS-CLASS critical LENGTH 30)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.22 DBNAME ('pwdReset' 'pwdReset')
ACCESS-CLASS critical LENGTH 5)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.3 DBNAME ('pwdMaxAge' 'pwdMaxAge')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.4 DBNAME ('pwdInHistory' 'pwdInHistory')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.5 DBNAME ('pwdCheckSyntax' 'pwdCheckSyntax')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.6 DBNAME ('pwdMinLength' 'pwdMinLength')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.7 DBNAME ('pwdExpireWarning' 'pwdExpireWarning')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.8 DBNAME ('pwdGraceLoginLimi' 'pwdGraceLoginLimi')
ACCESS-CLASS normal LENGTH 11)
ibmattributetypes=(1.3.6.1.4.1.42.2.27.8.1.9 DBNAME ('pwdLockout' 'pwdLockout')
ACCESS-CLASS normal LENGTH 5)
ibmattributetypes=(2.16.840.1.113730.3.1.10 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.11 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.198 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.34 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.35 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.5 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.6 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.7 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.77 ACCESS-CLASS normal)
ibmattributetypes=(2.16.840.1.113730.3.1.8 ACCESS-CLASS sensitive)
ibmattributetypes=(2.16.840.1.113730.3.1.9 ACCESS-CLASS normal)
ibmattributetypes=(2.5.18.1 ACCESS-CLASS system)
ibmattributetypes=(2.5.18.10 ACCESS-CLASS system)
ibmattributetypes=(2.5.18.2 ACCESS-CLASS system)
ibmattributetypes=(2.5.18.3 ACCESS-CLASS system)
ibmattributetypes=(2.5.18.4 ACCESS-CLASS system)
ibmattributetypes=(2.5.18.6 ACCESS-CLASS system)
ibmattributetypes=(2.5.18.9 DBNAME('hasSubordinates' 'hasSubordinates')
ACCESS-CLASS system LENGTH 5)
ibmattributetypes=(2.5.21.1 ACCESS-CLASS system)
ibmattributetypes=(2.5.21.2 ACCESS-CLASS system)
ibmattributetypes=(2.5.21.4 ACCESS-CLASS system)
ibmattributetypes=(2.5.21.5 ACCESS-CLASS system)
ibmattributetypes=(2.5.21.6 ACCESS-CLASS system)
ibmattributetypes=(2.5.21.7 ACCESS-CLASS system)
ibmattributetypes=(2.5.21.8 ACCESS-CLASS system)
ibmattributetypes=(2.5.4.0 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.1 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.10 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.11 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.13 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.15 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.3 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.31 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.32 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.34 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.35 ACCESS-CLASS critical)
ibmattributetypes=(2.5.4.41 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.49 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.50 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.6 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.7 ACCESS-CLASS normal)
ibmattributetypes=(2.5.4.8 ACCESS-CLASS normal)
objectclasses=(1.3.18.0.2.6.174 NAME ('ibmSubschema') AUXILIARY SUP (subschema)
MAY (ibmAttributeTypes))
```



```

objectclasses=(1.3.18.0.2.6.241 NAME ('ibm-securityIdentities') DESC 'Defines the security
identities of a user' AUXILIARY SUP (top) MAY (altSecurityIdentities $ userPrincipalName))
objectclasses=(1.3.18.0.2.6.248 NAME ('racfLnNotesSegment') DESC 'Represents the z/OS
LNOTES segment information in a RACF USER profile' AUXILIARY SUP (top) MAY (racfLnNotesShortName))
objectclasses=(1.3.18.0.2.6.249 NAME ('racfNDSsegment') DESC 'Represents the z/OS
NDS segment information in a RACF USER profile' AUXILIARY SUP (top) MAY (racfNDSUserName))
objectclasses=(1.3.18.0.2.6.259 NAME ('racfConnect') DESC 'RACF Connect'
STRUCTURAL SUP (top) MUST (racfGroupId $ racfUserId) MAY (racfConnectAttributes
$ racfConnectAuthDate $ racfConnectCount $ racfConnectGroupAuthority $ racfConnectGroupUACC
$ racfConnectLastConnect $ racfConnectOwner $ racfConnectResumeDate $ racfConnectRevokeDate))
objectclasses=(1.3.18.0.2.6.260 NAME ('racfKerberosInfo') DESC 'Kerberos information
for RACF' AUXILIARY SUP (top) MAY (krbPrincipalName $ maxTicketAge $ racfCurKeyVersion
$ racfEncryptType $ racfKerbKeyFrom))
objectclasses=(1.3.18.0.2.6.261 NAME ('krbAlias') DESC 'Kerberos aliases' AUXILIARY SUP (top)
MAY (krbAliasedObjectName $ krbHintAliases))
objectclasses=(1.3.18.0.2.6.262 NAME ('ibm-changeLog') DESC 'IBM extension to changeLogEntry
object class' AUXILIARY SUP (top) MAY (ibm-changeInitiatorsName))
objectclasses=(1.3.18.0.2.6.263 NAME ('krbRealm-V2') DESC 'Represents a Kerberos realm'
STRUCTURAL SUP (top) MUST (krbPrincSubtree $ krbRealmName-V2))
objectclasses=(1.3.18.0.2.6.264 NAME ('ibm-nativeAuthentication') DESC 'Use native
security manager for authentication' AUXILIARY SUP (top) MUST (ibm-nativeId))
objectclasses=(1.3.18.0.2.6.267 NAME ('racfProxySegment') DESC 'RACF Proxy segment'
AUXILIARY SUP (top) MAY (racfLDAPBindDN $ racfLDAPBindPW $ racfLDAPHost))
objectclasses=(1.3.18.0.2.6.28 NAME ('container') DESC 'An object that can contain
other objects' STRUCTURAL SUP (top) MUST (cn))
objectclasses=(1.3.18.0.2.6.447 NAME ('racfEIMSegment') DESC 'RACF EIM segment'
AUXILIARY SUP (top) MAY (racfLDAPProf))
objectclasses=(1.3.18.0.2.6.448 NAME ('ibm-nestedGroup') DESC 'Allow subgroups to be
nested within parent group' AUXILIARY SUP (top) MAY (ibm-memberGroup))
objectclasses=(1.3.18.0.2.6.449 NAME ('ibm-dynamicGroup') DESC 'Used to create a
hybrid group with both static and dynamic members' AUXILIARY SUP (top) MAY (memberURL))
objectclasses=(1.3.18.0.2.6.451 NAME ('ibm-staticGroup') DESC 'Used to create a
hybrid group with both static and dynamic members' AUXILIARY SUP (top) MAY (member))
objectclasses=(1.3.18.0.2.6.476 NAME ('ibm-replicaGroup') DESC 'Represents a
collection of servers participating in replication' STRUCTURAL SUP (top) MUST (ibm-replicaGroup)
MAY (description))
objectclasses=(1.3.18.0.2.6.477 NAME ('ibm-replicaSubentry') DESC 'Represents a single
server participating in replication within a given subtree' STRUCTURAL SUP (top) MUST (cn
$ ibm-replicaServerId $ ibm-replicationServerIsMaster) MAY (description))
objectclasses=(1.3.18.0.2.6.478 NAME ('ibm-replicationCredentialsExternal')
DESC 'SSL/TLS EXTERNAL credential information' STRUCTURAL SUP (ibm-replicationCredentials)
MAY (ibm-replicaKeyfile $ ibm-replicaKeylabel $ ibm-replicaKeypwd $ ibm-replicaPKCS11Enabled))
objectclasses=(1.3.18.0.2.6.479 NAME ('ibm-replicationCredentialsKerberos')
DESC 'Kerberos credential information' STRUCTURAL SUP (ibm-replicationCredentials)
MAY (replicaBindDN $ replicaCredentials))
objectclasses=(1.3.18.0.2.6.480 NAME ('ibm-replicationDailySchedule')
DESC 'Defines single day schedule for replication' STRUCTURAL SUP (top)
MAY (cn $ description $ ibm-replDailySchedName $ ibm-replicationBatchStart
$ ibm-replicationImmediateStart $ ibm-replicationTimesUTC))
objectclasses=(1.3.18.0.2.6.481 NAME ('ibm-replicationCredentialsSimple')
DESC 'Simple bind credential information' STRUCTURAL SUP (ibm-replicationCredentials)
MUST (replicaBindDN $ replicaCredentials))
objectclasses=(1.3.18.0.2.6.482 NAME ('ibm-replicationWeeklySchedule')
DESC 'Defines weekly schedule for replication' STRUCTURAL SUP (top) MAY (cn
$ description $ ibm-replWeeklySchedName $ ibm-scheduleFriday $ ibm-scheduleMonday
$ ibm-scheduleSaturday $ ibm-scheduleSunday $ ibm-scheduleThursday
$ ibm-scheduleTuesday $ ibm-scheduleWednesday))
objectclasses=(1.3.18.0.2.6.483 NAME ('ibm-replicationAgreement')
DESC 'Represents replication of a given subtree from a server to the consumer
identified in this object' STRUCTURAL SUP (top) MUST (cn $ ibm-replicaConsumerId
$ ibm-replicaCredentialsDN $ ibm-replicaURL) MAY (description $ ibm-replicaConsumerConnections
$ ibm-replicaMethod $ ibm-replicaScheduleDN $ ibm-replicationCreateMissingEntries
$ ibm-replicationExcludedCapability $ ibm-replicationFilterDN $ ibm-replicationOnHold
$ ibm-replicationWaitOnDependency))
objectclasses=(1.3.18.0.2.6.484 NAME ('ibm-replicationContext') DESC 'Indicates
that this entry is the root of a replicated subtree' AUXILIARY SUP (top)
MAY (ibm-replicaReferralURL))
objectclasses=(1.3.18.0.2.6.486 NAME ('ibm-slapdConfigEntry') DESC 'ibm slapd
config entry' ABSTRACT SUP (top) MUST (cn) MAY (ibm-slapdInvalidLine
$ ibm-slapdMigrationInfo))
objectclasses=(1.3.18.0.2.6.488 NAME ('ibm-slapdSupplier') DESC 'Contains
bind credentials used by a replication supplier server to update the specified
subtree on this consumer server. Use of this object class overrides the default
bind credentials specified in an ibm-slapdReplication object.' STRUCTURAL SUP
(ibm-slapdConfigEntry $ top) MUST (cn $ ibm-slapdMasterDN
$ ibm-slapdReplicaSubtree) MAY (ibm-slapdMasterPW))
objectclasses=(1.3.18.0.2.6.496 NAME ('ibm-slapdReplication')
DESC 'Contains the default bind credentials and master server referral URL.
This is used when the server contains one or more replication contexts that
are replicated to it by other servers. This server may be acting as one of
several masters or as a read only replica. If the MasterDN is specified
without the Master PW attribute, kerberos authentication is used.'
STRUCTURAL SUP (ibm-slapdConfigEntry $ top) MUST (cn) MAY (ibm-slapdMasterDN
$ ibm-slapdMasterPW $ ibm-slapdMasterReferral $ ibm-slapdNoReplConflictResolution))
objectclasses=(1.3.18.0.2.6.521 NAME ('ibm-replicationCredentials')
DESC 'Base class for all replication credential objects' ABSTRACT SUP (top)
MAY (cn $ description $ ibm-replCredName))
objectclasses=(1.3.18.0.2.6.524 NAME ('ibm-pwdPolicyExt') DESC 'Defines
the ibm extension for the policy for pwdPolicy object class.' AUXILIARY SUP
(pwdPolicy) MAY (ibm-pwdPolicy $ passwordMinAlphaChars $ passwordMinOtherChars
$ passwordMinDiffChars $ passwordMaxRepeatedChars $ ibm-pwdPolicyStartTime
$ passwordMaxConsecutiveRepeatedChars))
objectclasses=(1.3.18.0.2.6.55 NAME ('racfbase') DESC 'Represents the

```

## Initial LDAP server schema

```
base of the Directory Information Tree that publishes information stored by
the z/OS Security Server RACF service' STRUCTURAL SUP (top) MAY (sysplex))
objectclasses=(1.3.18.0.2.6.555 NAME ('ibm-replicaGateway')
DESC 'An auxiliary class attached to an ibm-replicaSubentry to indicate
the associated server is acting as a gateway server.' AUXILIARY SUP (top))
objectclasses=(1.3.18.0.2.6.556 NAME ('ibm-slapdAdminGroupMember')
DESC 'A User belonging to the IBM Directory Server Administration Group.'
STRUCTURAL SUP (top $ ibm-slapdConfigEntry) MUST (ibm-slapdAdminDN
$ ibm-slapdAdminRole) MAY (ibm-slapdKrbAdminDN $ ibm-slapdDigestAdminUser
$ ibm-slapdAdminPW))
objectclasses=(1.3.18.0.2.6.56 NAME ('racfProfileType')
DESC 'Represents a container below which individual RACF profile entries
will be published' STRUCTURAL SUP (top) MUST (profileType))
objectclasses=(1.3.18.0.2.6.57 NAME ('racfBaseCommon') DESC 'Represents
a common base class for all RACF profiles' ABSTRACT SUP (top) MAY (racfOwner
$ racfInstallationData $ racfDatasetModel $ racfAuthorizationDate))
objectclasses=(1.3.18.0.2.6.573 NAME ('ibm-searchLimits') DESC 'Can
be used to define a group to have special search time limit and size limit.'
AUXILIARY SUP (top) MUST (cn $ ibm-searchTimeLimit $ ibm-searchSizeLimit))
objectclasses=(1.3.18.0.2.6.58 NAME ('racfUser') DESC 'Represents a
RACFUSER Profile entry' STRUCTURAL SUP (racfBaseCommon) MUST (racfid)
MAY (racfAuthorizationDate $ racfAttributes $ racfPassword $ racfPasswordChangeDate
$ racfPasswordEnvelope $ racfPasswordInterval $ racfProgrammerName $ racfDefaultGroup
$ racfLastAccess $ racfSecurityLabel $ racfSecurityCategoryList $ racfRevokeDate
$ racfResumeDate $ racfLogonDays $ racfLogonTime $ racfClassName $ racfConnectGroupName
$ racfConnectGroupAuthority $ racfConnectGroupUACC $ racfSecurityLevel
$ racfPassPhrase $ racfPassPhraseChangeDate $ racfHavePasswordEnvelope $ racfPassPhraseEnvelope
$ racfHavePassPhraseEnvelope $ racfMFAFactor $ racfMFAFactorStatus
$ racfMFAFactorTags $ racfMFAPolicy $ racfMFAPWFallback))
objectclasses=(1.3.18.0.2.6.588 NAME ('ibm-slapdLogConfig') DESC 'Log management
configuration.' AUXILIARY SUP (top $ ibm-slapdConfigEntry) MAY (ibm-slapdLogMaxArchives
$ ibm-slapdLogOptions $ ibm-slapdLogSizeThreshold $ ibm-slapdLogArchivePath
$ ibm-slapdLog $ ibm-slapdLogMgmtStartTime $ ibm-slapdLogMgmtFrequency
$ ibm-slapdLogEventFileEnabled $ ibm-slapdLogEventFilePath $ ibm-slapdLogEventFilePrefix
$ ibm-slapdLogEventFileSizeThreshold $ ibm-slapdLogEventFileArchivePath
$ ibm-slapdLogEventFileMaxArchives $ ibm-slapdLogEventFileOptions
$ ibm-slapdLogCARSEnabled $ ibm-slapdLogCARSServer $ ibm-slapdLogCARSPort
$ ibm-slapdLogCARSOOptions $ ibm-slapdLogEventFormat $ ibm-slapdLogCachePath
$ ibm-slapdAuditOperation))
objectclasses=(1.3.18.0.2.6.59 NAME ('racfGroup') DESC 'Represents a RACF
GROUP Profile entry' STRUCTURAL SUP (racfBaseCommon) MUST (racfid)
MAY (racfSuperiorGroup $ racfGroupNoTermUAC $ racfSubGroupName $ racfGroupUserids
$ racfGroupUniversal))
objectclasses=(1.3.18.0.2.6.596 NAME ('ibm-slapdReplicationConfiguration')
DESC 'Used to configure replication for a supplier' STRUCTURAL SUP (top) MUST
(cn) MAY (description $ ibm-slapdMaxPendingChangesDisplayed $ ibm-slapdReplContextCacheSize
$ ibm-slapdReplMaxErrors $ ibm-slapdReplConflictMaxEntrySize $ ibm-replicationOnHold
$ ibm-slapdReplRestrictedAccess $ ibm-slapdEnableConflictResolutionForGroups
$ ibm-slapdReplicateSecurityAttributes))
objectclasses=(1.3.18.0.2.6.60 NAME ('SAFDfpSegment') DESC 'Represents the SAF
DFP portions of a RACF USER or GROUP profile' AUXILIARY SUP (top) MAY
(SAFDfpDataApplication $ SAFDfpDataClass $ SAFDfpManagementClass
$ SAFDfpStorageClass))
objectclasses=(1.3.18.0.2.6.61 NAME ('racfGroupOmvSegment')
DESC 'Represents the z/OS OMVS Group information portion of a RACF GROUP
profile' AUXILIARY SUP (top) MAY (racfOmvGroupId $ racfOmvGroupIdKeyword))
objectclasses=(1.3.18.0.2.6.62 NAME ('racfGroupOvmSegment')
DESC 'Represents the z/OS OVM Group information portion of a RACF GROUP
profile' AUXILIARY SUP (top) MAY (racfOvmGroupId))
objectclasses=(1.3.18.0.2.6.63 NAME ('racfUserOmvSegment')
DESC 'Represents the z/OS OMVS User information portion of a RACF USER
profile' AUXILIARY SUP (top) MAY (racfOmvUid $ racfOmvHome
$ racfOmvInitialProgram $ racfOmvMaximumAddressSpaceSize $ racfOmvMaximumCPUtime
$ racfOmvMaximumFilesPerProcess $ racfOmvMaximumMemoryMapArea
$ racfOmvMaximumProcessesPerUID $ racfOmvMaximumThreadsPerProcess
$ racfOmvMemoryLimit $ racfOmvSharedMemoryMaximum $ racfOmvUidKeyword))
objectclasses=(1.3.18.0.2.6.630 NAME ('ibm-replicationFilter')
DESC 'This objectclass is used to define filters' STRUCTURAL SUP (top)
MUST (cn $ ibm-replicationFilterAttr))
objectclasses=(1.3.18.0.2.6.636 NAME ('ibm-pwdGroupAndIndividualPolicies')
DESC 'Contains attributes related to administering group and individual password policies.'
AUXILIARY SUP (top) MUST (ibm-pwdGroupAndIndividualEnabled))
objectclasses=(1.3.18.0.2.6.64 NAME ('racfUserOvmSegment')
DESC 'Represents the z/OS OVM User information portion of a RACF USER profile'
AUXILIARY SUP (top) MAY (racfOvmUid $ racfOvmHome $ racfOvmInitialProgram
$ racfOvmFileSystemRoot))
objectclasses=(1.3.18.0.2.6.65 NAME ('SAFTsoSegment') DESC 'Represents the
z/OS TSO information in a RACF USER profile' AUXILIARY SUP (top) MAY
(SAFAccountNumber $ SAFDestination $ SAFHoldClass $ SAFJobClass $ SAFMessageClass
$ SAFDefaultLoginProc $ SAFLogonSize $ SAFMaximumRegionSize $ SAFDefaultSysoutClass
$ SAFUserdata $ SAFDefaultUnit $ SAFTsoSecurityLabel $ SAFDefaultCommand))
objectclasses=(1.3.18.0.2.6.655 NAME ('racfResource') DESC 'Provides naming
attribute for a discrete or generic RACF resource profile in a class' STRUCTURAL SUP
(top) MUST (profileName))
objectclasses=(1.3.18.0.2.6.656 NAME ('ibm-tdszTop') DESC 'Global configuration
settings for IBM Directory Server on z/OS.' STRUCTURAL SUP (top $ ibm-slapdConfigEntry)
MUST (cn) MAY (ibm-slapdServerId $ ibm-slapdMaxPendingChangesDisplayed
$ ibm-slapdAdminGroupEnabled $ ibm-slapdSAFSecurityDomain))
objectclasses=(1.3.18.0.2.6.66 NAME ('racfCicsSegment') DESC 'Represents
the z/OS CICS information in a RACF USER profile' AUXILIARY SUP (top)
MAY (racfOperatorClass $ racfOperatorIdentification $ racfOperatorPriority
$ racfOperatorReSignon $ racfRslKey $ racfTerminalTimeout $ racfTslKey))
objectclasses=(1.3.18.0.2.6.667 NAME ('ibm-slapdSAFAdminGroup'))
```

```

DESC 'A group of users with SAF native IDs belonging to the IBM Directory Server
Administration Group. The admin roles for each user are defined in the z/OS
security manager.' STRUCTURAL SUP (top $ ibm-slapdConfigEntry) MUST (cn) MAY (member))
objectclasses=(1.3.18.0.2.6.67 NAME ('racfOperparmSegment') DESC 'Represents
the z/OS Operator parameters in a RACF USER profile' AUXILIARY SUP (top)
MAY (racfStorageKeyword $ racfAuthKeyword $ racfMformKeyword $ racfLevelKeyword
$ racfMonitorKeyword $ racfRoutcodeKeyword $ racfLogCommandResponseKeyword $ racfMGIDKeyword
$ racfDOMKeyword $ racfKEYKeyword $ racfCMSYSKeyword $ racfUDKeyword $ racfMscopeSystems
$ racfAltGroupKeyword $ racfAutoKeyword $ racfHcKeyword $ racfIntidsKeyword $ racfUnknidsKeyword))
objectclasses=(1.3.18.0.2.6.68 NAME ('racfLanguageSegment') DESC 'Represents the
z/OS language information in a RACF USER profile' AUXILIARY SUP (top) MAY (racfPrimaryLanguage
$ racfSecondaryLanguage))
objectclasses=(1.3.18.0.2.6.69 NAME ('racfWorkAttrSegment') DESC 'Represents the
z/OS work attributes information in a RACF USER profile' AUXILIARY SUP (top)
MAY (racfWorkAttrUsername $ racfBuilding $ racfDepartment $ racfRoom $ racfAddressLine1
$ racfAddressLine2 $ racfAddressLine3 $ racfAddressLine4 $ racfWorkAttrAccountNumber))
objectclasses=(1.3.18.0.2.6.69 NAME ('racfWorkAttrSegment') DESC 'Represents the z/OS work attributes
information in a RACF USER profile' AUXILIARY SUP (top) MAY (racfWorkAttrUsername $ racfBuilding
$ racfDepartment $ racfRoom $ racfAddressLine1 $ racfAddressLine2 $ racfAddressLine3 $ racfAddressLine4
$ racfWorkAttrAccountNumber $ racfEmail))
objectclasses=(1.3.18.0.2.6.70 NAME ('racfNetviewSegment') DESC 'Represents the z/OS
Netview information in a RACF USER profile' AUXILIARY SUP (top) MAY (racfNetviewInitialCommand
$ racfDefaultConsoleName $ racfCTLKeyword $ racfMSGRCVRKeyword $ racfNetviewOperatorClass
$ racfDomains $ racfNGMFADMKeyword $ racfNGMFVSPNKeyword))
objectclasses=(1.3.18.0.2.6.71 NAME ('racfDCESegment') DESC 'Represents the z/OS DCE
information in a RACF USER profile' AUXILIARY SUP (top) MAY (racfDCEAutoLogin $ racfDCEHomeCell
$ racfDCEHomeCellUUID $ racfDCEPrincipal $ racfDCEUUID))
objectclasses=(1.3.18.0.2.6.72 NAME ('replicaObject') DESC 'Represents information about a
directory server replica' STRUCTURAL SUP (top) MUST (cn $ replicaBindDN $ replicaHost
$ replicaCredentials) MAY (description $ seeAlso $ replicaPort $ replicaBindMethod $ replicaUseSSL
$ replicaUpdateTimeInterval))
objectclasses=(1.3.18.0.2.6.74 NAME ('aliasObject') DESC 'Defines an alias for a directory entry'
AUXILIARY SUP (top) MUST (aliasedObjectName))
objectclasses=(1.3.18.0.2.6.75 NAME ('accessGroup') DESC 'Group used for access control'
STRUCTURAL SUP (top) MUST (cn) MAY (member $ businessCategory $ seeAlso $ owner $ ou $ o
$ description))
objectclasses=(1.3.18.0.2.6.76 NAME ('accessRole') DESC 'Role used for access control'
STRUCTURAL SUP (top) MUST (cn) MAY (member $ businessCategory $ seeAlso $ owner $ ou $ o
$ description))
objectclasses=(1.3.6.1.4.1.1466.101.120.111 NAME ('extensibleObject')
DESC 'Permits the entry to hold any attribute type defined in the schema' AUXILIARY SUP (top))
objectclasses=(1.3.6.1.4.1.42.2.27.8.2.1 NAME ('pwdPolicy') DESC 'Defines a policy for
password management' AUXILIARY SUP (top) MUST (pwdAttribute) MAY (pwdMinAge $ pwdMaxAge
$ pwdInHistory $ pwdCheckSyntax $ pwdMinLength $ pwdExpireWarning $ pwdGraceLoginLimit $ pwdLockout
$ pwdLockoutDuration $ pwdMaxFailure $ pwdFailureCountInterval $ pwdMustChange $ pwdAllowUserChange
$ pwdSafeModify))
objectclasses=(2.16.840.1.113730.3.2.1 NAME ('changeLogEntry')
DESC 'Used to represent changes made to a directory server' STRUCTURAL SUP (top) MUST (targetDN
$ changeTime $ changeNumber $ changeType) MAY (modifiersName $ changes $ newRdn $ deleteOldRdn $ newSuperior))
objectclasses=(2.16.840.1.113730.3.2.33 NAME ('groupOfURLs') DESC 'Represents a group of URLs'
STRUCTURAL SUP (top) MUST (cn) MAY (memberURL $ businessCategory $ description $ o $ ou $ owner $ seeAlso))
objectclasses=(2.16.840.1.113730.3.2.6 NAME ('referral') DESC 'Defines a pointer to another server'
STRUCTURAL SUP (top) MUST (ref))
objectclasses=(2.5.17.0 NAME ('subentry') STRUCTURAL SUP (top) MUST (cn $ subtreeSpecification))
objectclasses=(2.5.20.1 NAME ('subschema') AUXILIARY SUP (top)
MAY (ditStructureRules $ nameForms $ ditContentRules $ objectClasses $ attributeTypes $
matchingRules $ matchingRuleUse $ ldapSyntaxes))
objectclasses=(2.5.6.0 NAME ('top') ABSTRACT MUST (objectClass))
objectclasses=(2.5.6.1 NAME ('alias') DESC 'Defines an alias for a directory entry' STRUCTURAL SUP (top)
MUST (aliasedObjectName))
objectclasses=(2.5.6.17 NAME ('groupOfUniqueNames') DESC 'Defines entries for a group of unique names' STRUCTURAL
SUP (top)
MUST (cn $ uniqueMember) MAY (businessCategory $ seeAlso $ owner $ ou $ o $ description))
objectclasses=(2.5.6.9 NAME ('groupOfNames') DESC 'Defines entries for a group of names' STRUCTURAL SUP (top)
MUST (cn $ member) MAY (businessCategory $ seeAlso $ owner $ ou $ o $ description))

```



## Appendix B. SPUFI files

This topic shows the following SPUFI files:

- “The DSTDBMDB SPUFI file” on page 631
- “The TDBMMGRT SPUFI file ” on page 643

**Note:** The same SPUFI files are used to generate both a TDBM and a GDBM (when Db2-based) database.

### The DSTDBMDB SPUFI file

```
--*****
--* Licensed Materials - Property of IBM
--* 5650-ZOS
--* Copyright IBM Corp. 2006, 2013
--*****
--
-- Use the following statements to create your Directory Server DB2
-- database, tablespaces and indexes in SPUFI.
--
-- You will need to make DB2 decisions, in terms of buffer pool
-- size selection for tablespaces and column size selection, all of
-- which will be directly related to the data that will be stored in
-- the database. See the instructions below for more information.
--
-- *****
-- Database Name Information
-- *****
-- Change -DB_NAME- to the name of the LDAP database name you want to
-- create.
-- Example: GLDDDB
--
-- *****
-- DataBase Owner Information
-- *****
-- Change -DB_USERID- to the database owner id. This ID will be the
-- highlevel qualifier for the tables. Be sure this value is updated to
-- match what is defined for dbUserId in the LDAP server configuration
-- file.
-- Example: GLDSRV
--
-- *****
-- LDAP Server User ID Information
-- *****
-- Change -LDAP_USERID- to the user ID for the LDAP server to run
-- under.
-- Example: GLDSRV
--
-- *****
-- Database Plan Name Information
-- *****
-- Change -DB_PLAN- to the DB2 CLI plan name.
-- Example: DSNACLI
--
-- *****
-- Tablespace Information
-- *****
--
-- *****
-- NOTE: Refer to the DB2 manuals for a complete listing of valid
-- buffer pool names.
-- *****
--
-- Change -ENTRYTS- to the LDAP entry tablespace name you want to
-- create.
--
-- Change -ENTRYTS_BP0- to the buffer pool name for the LDAP entry
-- tablespace. The size of the buffer pool can be determined with
-- the formula:
--
-- result = 62 bytes + <dn column trunc size (from below)> +
-- <maximum full size of a DN (from below)> +
-- <size of entry data (which includes creator's DN and
```

```
-- modifiers DN)>
--
-- There is also a concept of a "spill over" table, where if the
-- entry data does not fit into the row size, it will be broken up
-- in order to fit into a row. Entry data may be spread across
-- multiple rows if needed. So in the above formula, the <size of
-- entry data> does not need to be the maximum size of the data,
-- maybe the median size of the data would be a better choice. See
-- the long entry tablespace description below.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- Change -LENTYTS- to the LDAP long entry tablespace name you want
-- to create.
--
-- Change -LENTYTS_BP0- to the buffer pool name for the LDAP long
-- entry tablespace. The long entry table space will hold "spill
-- over" rows for entry data that does not fit into the entry table
-- tablespace. To minimize the number of spill over rows, choose a
-- large buffer pool size.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- Change -LATTRTS- to the LDAP long attribute tablespace name you
-- want to create.
--
-- Change -LATTRTS_BP0- to the buffer pool name for the LDAP long
-- attribute tablespace. The long attribute table space will hold
-- "spill over" rows for attribute data that does not fit into the
-- entry table tablespace. To minimize the number of spill over
-- rows, choose a large buffer pool size.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- Change -SEARCHTS- to the LDAP search tablespace name you want to
-- create.
--
-- Change -SEARCHTS_BP0- to the buffer pool name for the LDAP search
-- tablespace. The size of the buffer pool can be determined with
-- the simple formula:
--
-- result = 16 bytes + <search column trunc size (from below)> +
-- <maximum size of attribute value you would like to
-- search for>
--
-- The result value is the maximum number of bytes a row in the
-- search table containing an attribute value will occupy. Choose
-- a buffer pool size which will accomodate this size.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- Change -MISC0TS- to the LDAP miscellaneous tablespace name you
-- want to create.
--
-- Change -MISC1TS- to the LDAP miscellaneous tablespace name you
-- want to create.
--
-- Change -MISC2TS- to the LDAP miscellaneous tablespace name you
-- want to create.
--
-- Change -MISC3TS- to the LDAP miscellaneous tablespace name you
-- want to create.
--
-- Change -MISC4TS- to the LDAP miscellaneous tablespace name you
-- want to create.
--
-- Change -MISC5TS- to the LDAP miscellaneous tablespace name you
-- want to create.
--
-- Change -MISC0TS_BP0- to the buffer pool name for the LDAP
-- miscellaneous tablespace.
--
-- Change -MISC1TS_BP0- to the buffer pool name for the LDAP
-- miscellaneous tablespace.
--
-- Change -MISC2TS_BP0- to the buffer pool name for the LDAP
-- miscellaneous tablespace.
```

```

-- Change -MISC3TS_BP0- to the buffer pool name for the LDAP
-- miscellaneous tablespace.
--
-- Change -MISC4TS_BP0- to the buffer pool name for the LDAP
-- miscellaneous tablespace.
--
-- Change -MISC5TS_BP0- to the buffer pool name for the LDAP
-- miscellaneous tablespace.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- Change -DESCCTS- to the LDAP descendants tablespace name you want
-- to create.
--
-- Change -DESCCTS_BP0- to the buffer pool name for the LDAP
-- descendants tablespace.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- Change -REP0TS- to the LDAP replica tablespace name you want to
-- create.
--
-- Change -REP1TS- to the LDAP replica tablespace name you want to
-- create.
--
-- Change -REP2TS- to the LDAP replica tablespace name you want to
-- create.
--
-- Change -REP3TS- to the LDAP replica tablespace name you want to
-- create.
--
-- Change -REP4TS- to the LDAP replica tablespace name you want to
-- create.
--
-- Change -REP5TS- to the LDAP replica tablespace name you want to
-- create.
--
-- Change -REP0TS_BP0- to the buffer pool name for the LDAP replica
-- tablespace.
--
-- Change -REP1TS_BP0- to the buffer pool name for the LDAP replica
-- tablespace.
--
-- Change -REP2TS_BP0- to the buffer pool name for the LDAP replica
-- tablespace.
--
-- Change -REP3TS_BP0- to the buffer pool name for the LDAP replica
-- tablespace.
--
-- Change -REP4TS_BP0- to the buffer pool name for the LDAP replica
-- tablespace.
--
-- Change -REP5TS_BP0- to the buffer pool name for the LDAP replica
-- tablespace.
--
-- The suggested buffer pool name is BP0, which represents a buffer
-- pool size of 4K.
--
-- *****
-- Column Size Selection Information
-- *****
-- All searchable attributes of a given entry will be stored in two
-- forms. The first will be a truncated version, which will be used as
-- part of a DB2 index. The second version will be the entire attribute
-- value, potentially truncated by the buffer pool size you choose. The
-- reason two versions are stored is so that LDAP/DB2 can use indexes to
-- increase search performance. The reason we do not index the entire
-- searchable attribute value is because the cost (in terms of DASD)
-- associated with having indexes on a large column where there is a
-- large amount of data.
--
-- The choice of the search column trunc size should take into account
-- system limits you may have (as described in the above), and should
-- account for the typical size of the attribute values that are stored
-- in LDAP. For example, if most of your data is only 20 bytes long,
-- choosing 20 for this trunc size would be wise.
--
-- Change -SEARCH_TRUNC_SIZE- to the search column trunc size you
-- determine best fits your attribute data.
--

```

```

-- The suggested size is 32.
-- The minimum size is 8
--
-- Another search performance enhancement is related to the DN
-- attribute. The DN attribute value is stored separately from the
-- entry data to allow a fast path lookup. It is also stored in two
-- versions as well. The reasons are similar to those mentioned above
-- for the attribute column. Since the DN data is stored in it's own
-- column, you need to define the maximum DN attribute value size here.
-- You also need to choose a dn column trunc size that best fits your
-- data.
--
-- Change -ENTRY_DN_TRUNC_SIZE- to the dn trunc size you determine best
-- fits your dn data.
--
-- The suggested size for a TDBM backend is 64.
-- The suggested size for a DB2 based GDBM backend is 32.
-- The minimum size is 8
--
-- Note: If you are going to use DB2 utilities to copy an existing TDBM
-- or GDBM database to the DB2 database created by this SPUFI script,
-- then you must use the dn trunc size of the DB2 database you are
-- copying. Otherwise the DB2 copy utility will produce unreliable
-- results.
--
-- Change -ENTRY_DN_SIZE- to the maximum size of a DN. This value
-- includes the null terminator, so the actual maximum length of a DN
-- will be one less than this value.
--
-- The suggested size is 512.
--
-- Note: The -ENTRY_DN_SIZE- value must be less than or equal to
-- the maximum size of the change DN column (CHNGDN) in the
-- replication table (DIR_REPENTRY). -ENTRY_DN_SIZE- will be
-- used to define both column sizes.
--
-- *****
-- Storage Group Information
-- *****
-- Change -SYSDEFLT- to the storage group you want to contain the
-- LDAP DB2 tablespaces. Use SYSDEFLT to choose the default storage
-- group.
-- NOTE: The values provided below for PRIQTY and SECQTY probably need
-- to be modified depending on the projected size of the
-- Directory information to be stored.
--
-- *****
-- Use the following statements if you need to delete your LDAP Server
-- DB2 database and tablespaces in SPUFI.
--
-- NOTE: You need to remove the '--' from each line before you can run
-- these statements.
--
-- Change -DB_NAME- to the LDAP database name you want to delete.
--
-- Change the following names to the LDAP tablespace names you want to
-- delete:
-- -ENTRYTS-
-- -LENTRYTS-
-- -LATRTS-
-- -SEARCHTS-
-- -MISC0TS-
-- -MISC1TS-
-- -MISC2TS-
-- -MISC3TS-
-- -MISC4TS-
-- -MISC5TS-
-- -DESCTS-
-- -REP0TS-
-- -REP1TS-
-- -REP2TS-
-- -REP3TS-
-- -REP4TS-
-- -REP5TS-
-- *****
-- DROP TABLESPACE -DB_NAME--ENTRYTS-;
-- DROP TABLESPACE -DB_NAME--LENTRYTS-;
-- DROP TABLESPACE -DB_NAME--LATRTS-;
-- DROP TABLESPACE -DB_NAME--SEARCHTS-;
-- DROP TABLESPACE -DB_NAME--MISC0TS-;
-- DROP TABLESPACE -DB_NAME--MISC1TS-;
-- DROP TABLESPACE -DB_NAME--MISC2TS-;

```



```

--DROP TABLESPACE -DB_NAME-.MISC3TS-;
--DROP TABLESPACE -DB_NAME-.MISC4TS-;
--DROP TABLESPACE -DB_NAME-.MISC5TS-;
--DROP TABLESPACE -DB_NAME-.REP0TS-;
--DROP TABLESPACE -DB_NAME-.REP1TS-;
--DROP TABLESPACE -DB_NAME-.REP2TS-;
--DROP TABLESPACE -DB_NAME-.REP3TS-;
--DROP TABLESPACE -DB_NAME-.REP4TS-;
--DROP TABLESPACE -DB_NAME-.REP5TS-;
--DROP TABLESPACE -DB_NAME-.DESCTS-;
--DROP DATABASE -DB_NAME-;
--COMMIT;

-- *****
-- Create the LDAP database
-- *****
CREATE DATABASE -DB_NAME- STOGROUP -SYSDEFLT- CCSID EBCDIC;

-- *****
-- Create the LDAP entry tablespace
-- *****
CREATE TABLESPACE -ENTRYTS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 14400
 SECQTY 7200
 BUFFERPOOL -ENTRYTS_BP0-;

-- *****
-- Create the LDAP long entry tablespace
-- *****
CREATE TABLESPACE -LENTYTS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 14400
 SECQTY 7200
 BUFFERPOOL -LENTYTS_BP0-;

-- *****
-- Create the LDAP long attr tablespace
-- *****
CREATE TABLESPACE -LATRTS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 14400
 SECQTY 7200
 BUFFERPOOL -LATRTS_BP0-;

-- *****
-- Create the LDAP search tablespace
-- *****
CREATE TABLESPACE -SEARCHTS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 14400
 SECQTY 7200
 BUFFERPOOL -SEARCHTS_BP0-;

-- *****
-- Create the LDAP misc tablespace
-- *****
CREATE TABLESPACE -MISC0TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 LOCKSIZE ROW
 BUFFERPOOL -MISC0TS_BP0-;

CREATE TABLESPACE -MISC1TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 LOCKSIZE ROW
 BUFFERPOOL -MISC1TS_BP0-;

CREATE TABLESPACE -MISC2TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 LOCKSIZE ROW
 BUFFERPOOL -MISC2TS_BP0-;

CREATE TABLESPACE -MISC3TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15

```

```

 LOCKSIZE ROW
 BUFFERPOOL -MISC3TS_BP0-;

CREATE TABLESPACE -MISC4TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 LOCKSIZE ROW
 BUFFERPOOL -MISC4TS_BP0-;

CREATE TABLESPACE -MISC5TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 LOCKSIZE ROW
 BUFFERPOOL -MISC5TS_BP0-;

-- *****
-- Create the LDAP descendants tablespace
-- *****
CREATE TABLESPACE -DESCTS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 14400
 SECQTY 7200
 BUFFERPOOL -DESCTS_BP0-;

-- *****
-- Create the LDAP replica tablespace
-- *****
CREATE TABLESPACE -REP0TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 BUFFERPOOL -REP0TS_BP0-;

CREATE TABLESPACE -REP1TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 BUFFERPOOL -REP1TS_BP0-;

CREATE TABLESPACE -REP2TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 BUFFERPOOL -REP2TS_BP0-;

CREATE TABLESPACE -REP3TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 BUFFERPOOL -REP3TS_BP0-;

CREATE TABLESPACE -REP4TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 BUFFERPOOL -REP4TS_BP0-;

CREATE TABLESPACE -REP5TS- IN -DB_NAME-
 USING STOGROUP -SYSDEFLT-
 PRIQTY 125
 SECQTY 15
 BUFFERPOOL -REP5TS_BP0-;

-- *****
-- Create the DB2 tables
-- *****

-- *****
-- Create the DIR_ENTRY table
-- *****
CREATE TABLE -DB_USERID-.DIR_ENTRY (
 EID DECIMAL(15 , 0) NOT NULL,
 PEID DECIMAL(15 , 0),
 ENTRY_SIZE INTEGER,
 LEVEL INTEGER,
 ACLSRC DECIMAL(15 , 0),
 ACLPROP CHAR(1),
 OWNSRC DECIMAL(15 , 0),
 OWNPROP CHAR(1),
 CREATE_TIMESTAMP TIMESTAMP,

```

```

 MODIFY_TIMESTAMP TIMESTAMP,
 DN_TRUNC CHAR(-ENTRY_DN_TRUNC_SIZE-) FOR BIT DATA,
 DN VARCHAR(-ENTRY_DN_SIZE-) FOR BIT DATA,
 ENTRYDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(EID))
IN -DB_NAME-.-ENTRYTS-;

-- *****
-- Create the DIR_LONGENTRY table
-- *****
CREATE TABLE -DB_USERID-.DIR_LONGENTRY (
 EID DECIMAL(15 , 0) NOT NULL,
 SEQ INTEGER NOT NULL,
 ENTRYDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(EID, SEQ))
IN -DB_NAME-.-LENTRYTS-;

-- *****
-- Create the DIR_LONGATTR table
-- *****
CREATE TABLE -DB_USERID-.DIR_LONGATTR (
 EID DECIMAL(15 , 0) NOT NULL,
 ATTR_ID INTEGER NOT NULL,
 VALUENUM INTEGER NOT NULL,
 SEQ INTEGER NOT NULL,
 ATTRDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(EID, ATTR_ID, VALUENUM, SEQ))
IN -DB_NAME-.-LATTRTS-;

-- *****
-- Create the DIR_MISC table
-- *****
CREATE TABLE -DB_USERID-.DIR_MISC (
 NEXT_EID DECIMAL(15 , 0),
 NEXT_ATTR_ID INTEGER,
 DB_VERSION CHAR(10),
 DB_CREATE_VERSION CHAR(10),
 SCHEMA_TIMESTAMP TIMESTAMP,
 PARTITIONED_EID CHAR(1))
IN -DB_NAME-.-MISC0TS-;

-- *****
-- Create the DIR_CACHE table
-- *****
CREATE TABLE -DB_USERID-.DIR_CACHE (
 CACHE_NAME CHAR(25) NOT NULL,
 MODIFY_TIMESTAMP TIMESTAMP NOT NULL,
 PRIMARY KEY(CACHE_NAME, MODIFY_TIMESTAMP))
IN -DB_NAME-.-MISC1TS-;

-- *****
-- Create the DIR_ATTRID table
-- *****
CREATE TABLE -DB_USERID-.DIR_ATTRID (
 ATTR_ID INTEGER,
 ATTR_NOID VARCHAR(200) NOT NULL,
 PRIMARY KEY(ATTR_NOID))
IN -DB_NAME-.-MISC2TS-;

-- *****
-- Create the DIR_DESC table
-- *****
CREATE TABLE -DB_USERID-.DIR_DESC (
 DEID DECIMAL(15 , 0) NOT NULL,
 AEID DECIMAL(15 , 0) NOT NULL,
 PRIMARY KEY(DEID, AEID))
IN -DB_NAME-.-DESCTS-;

-- *****
-- Create the DIR_SEARCH table
-- *****
CREATE TABLE -DB_USERID-.DIR_SEARCH (
 EID DECIMAL(15 , 0) NOT NULL,
 ATTR_ID INTEGER NOT NULL,
 VALUE CHAR(-SEARCH_TRUNC_SIZE-) FOR BIT DATA,
 LVALUE LONG VARCHAR FOR BIT DATA)
IN -DB_NAME-.-SEARCHTS-;

-- *****
-- Create the DIR_REPLICA table
-- *****
CREATE TABLE -DB_USERID-.DIR_REPLICA (

```

```

 REPID DECIMAL(15 , 0) NOT NULL,
 CHNGID DECIMAL(15 , 0) NOT NULL,
 REPCAPS INTEGER NOT NULL,
 PRIMARY KEY(REPID))
IN -DB_NAME--MISC3TS-;

-- *****
-- Create the DIR_REPENTRY table
-- *****
CREATE TABLE -DB_USERID-.DIR_REPENTRY (
 CHNGID DECIMAL(15 , 0) NOT NULL,
 CHNGFLAGS INTEGER NOT NULL,
 CHNGSIZE INTEGER NOT NULL,
 CHNGDN VARCHAR(-ENTRY_DN_SIZE-) FOR BIT DATA,
 CHNGDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(CHNGID))
IN -DB_NAME--REPOTS-;

-- *****
-- Create the DIR_LONGREPENTRY table
-- *****
CREATE TABLE -DB_USERID-.DIR_LONGREPENTRY (
 CHNGID DECIMAL(15 , 0) NOT NULL,
 CHNGSEQ INTEGER NOT NULL,
 CHNGDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(CHNGID, CHNGSEQ))
IN -DB_NAME--REP1TS-;

-- *****
-- Create the DIR_EID table
-- *****
CREATE TABLE -DB_USERID-.DIR_EID (
 PARTID DECIMAL(15 , 0) NOT NULL,
 NEXT_EID DECIMAL(15 , 0) NOT NULL,
 MODIFY_TIMESTAMP TIMESTAMP NOT NULL,
 PRIMARY KEY(PARTID))
IN -DB_NAME--MISC4TS-;

-- *****
-- Create the DIR_REPLSTATUS table
-- *****
CREATE TABLE -DB_USERID-.DIR_REPLSTATUS (
 AGREEMENTEID DECIMAL(15 , 0) NOT NULL,
 CHANGEID INTEGER NOT NULL,
 REPLICACAPS CHAR(64) FOR BIT DATA,
 PRIMARY KEY(AGREEMENTEID))
IN -DB_NAME--MISC5TS-;

-- *****
-- Create the DIR_REPLCHANGE table
-- *****
CREATE TABLE -DB_USERID-.DIR_REPLCHANGE (
 CHANGEID INTEGER NOT NULL,
 CONTEXTEID DECIMAL(15 , 0) NOT NULL,
 CHANGESIZE INTEGER NOT NULL,
 CHANGEDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(CHANGEID, CONTEXTEID))
IN -DB_NAME--REP2TS-;

-- *****
-- Create the DIR_LONGREPLCHANGE table
-- *****
CREATE TABLE -DB_USERID-.DIR_LONGREPLCHANGE (
 CHANGEID INTEGER NOT NULL,
 CONTEXTEID DECIMAL(15 , 0) NOT NULL,
 CHANGESEQ INTEGER NOT NULL,
 CHANGEDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(CHANGEID, CONTEXTEID, CHANGESEQ))
IN -DB_NAME--REP3TS-;

-- *****
-- Create the DIR_REPLERROR table
-- *****
CREATE TABLE -DB_USERID-.DIR_REPLERROR (
 ERRORID INTEGER NOT NULL,
 AGREEMENTEID DECIMAL(15 , 0) NOT NULL,
 ERRORSIZE INTEGER NOT NULL,
 ERRORDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(ERRORID))
IN -DB_NAME--REP4TS-;

-- *****

```

```

-- Create the DIR_LONGREPERERROR table
-- *****
CREATE TABLE -DB_USERID-.DIR_LONGREPLERROR (
 ERRORID INTEGER NOT NULL,
 AGREEMENTEID DECIMAL(15 , 0) NOT NULL,
 ERRORSEQ INTEGER NOT NULL,
 ERRORDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(ERRORID, ERRORSEQ))
IN -DB_NAME-.REP5TS-;

-- *****
-- Miscellaneous Information
-- *****
-- All indexes have been defined DEFER YES, which means they need to be
-- recovered at some point. It is suggested to do the recovery after
-- the database has been populated for databases with large amounts of
-- data. Use of this option is strictly optional though.
--
-- To NOT use the DEFER YES option, simply remove DEFER YES globally.
--
-- *****
-- Create the DIR_ENTRY indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_ENTRYX0
 ON -DB_USERID-.DIR_ENTRY(EID)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 720
 SECQTY 720
 CLUSTER
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_ENTRYX1
 ON -DB_USERID-.DIR_ENTRY(PEID, EID)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 720
 SECQTY 720
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_ENTRYX2
 ON -DB_USERID-.DIR_ENTRY(EID, DN_TRUNC)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 7200
 SECQTY 3600
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_ENTRYX3
 ON -DB_USERID-.DIR_ENTRY(DN_TRUNC, EID)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 7200
 SECQTY 3600
 DEFER YES;

-- *****
-- Create the DIR_LONGENTRY indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_LONGENTRYX1
 ON -DB_USERID-.DIR_LONGENTRY(EID, SEQ)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 720
 SECQTY 720
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_LONGATTR indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_LONGATTRX1
 ON -DB_USERID-.DIR_LONGATTR(EID, ATTR_ID, VALUENUM, SEQ)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 720
 SECQTY 720
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_CACHE indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_CACHEX1
 ON -DB_USERID-.DIR_CACHE(CACHE_NAME, MODIFY_TIMESTAMP)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

```

```

-- *****
-- Create the DIR_ATTRID indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_ATTRIDX1
 ON -DB_USERID-.DIR_ATTRID(ATTR_NOID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_DESC indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_DESCX1
 ON -DB_USERID-.DIR_DESC(DEID, AEID)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 7200
 SECQTY 3600
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_SEARCH indexes
-- *****
CREATE INDEX -DB_USERID-.DIR_SEARCHX1
 ON -DB_USERID-.DIR_SEARCH(ATTR_ID, VALUE, EID)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 14400
 SECQTY 7200
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_SEARCHX2
 ON -DB_USERID-.DIR_SEARCH(EID, ATTR_ID)
 USING STOGROUP -SYSDEFLT-
 PRIQTY 7200
 SECQTY 3600
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_REPLICA indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_REPLICAX1
 ON -DB_USERID-.DIR_REPLICA(REPID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_REPENTRY indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_REPENTRYX1
 ON -DB_USERID-.DIR_REPENTRY(CHNGID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_LONGREPENTRY indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_LONGREPX1
 ON -DB_USERID-.DIR_LONGREPENTRY(CHNGID , CHNGSEQ)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_EID indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_EIDX1
 ON -DB_USERID-.DIR_EID(PARTID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_REPLSTATUS Index
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_REPLSTATUSX1
 ON -DB_USERID-.DIR_REPLSTATUS(AGREEMENTEID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER

```

```

DEFER YES;

-- *****
-- Create the DIR_REPLCHANGE Indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_REPLCHANGEX1
 ON -DB_USERID-.DIR_REPLCHANGE(CHANGEID, CONTEXTEID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_REPLCHANGEX2
 ON -DB_USERID-.DIR_REPLCHANGE(CONTEXTEID)
 USING STOGROUP -SYSDEFLT-
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_REPLCHANGEX3
 ON -DB_USERID-.DIR_REPLCHANGE(CHANGEID)
 USING STOGROUP -SYSDEFLT-
 DEFER YES;

-- *****
-- Create the DIR_LONGREPLCHANGE Index
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_LONGREPLCHANGEX1
 ON -DB_USERID-.DIR_LONGREPLCHANGE(CHANGEID, CONTEXTEID,
 CHANGESEQ)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

-- *****
-- Create the DIR_REPLERROR Indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_REPLERRORX1
 ON -DB_USERID-.DIR_REPLERROR(ERRORID)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_REPLERRORX2
 ON -DB_USERID-.DIR_REPLERROR(AGREEMENTEID)
 USING STOGROUP -SYSDEFLT-
 DEFER YES;

-- *****
-- Create the DIR_LONGREPLERROR Indexes
-- *****
CREATE UNIQUE INDEX -DB_USERID-.DIR_LONGREPLERRORX1
 ON -DB_USERID-.DIR_LONGREPLERROR(ERRORID, ERRORSEQ)
 USING STOGROUP -SYSDEFLT-
 CLUSTER
 DEFER YES;

CREATE INDEX -DB_USERID-.DIR_LONGREPLERRORX2
 ON -DB_USERID-.DIR_LONGREPLERROR(AGREEMENTEID)
 USING STOGROUP -SYSDEFLT-
 DEFER YES;

-- *****
-- Commit all the above SQL statements
-- *****
COMMIT;

-- *****
-- Use the following statement if you need to grant EXECUTE privilege
-- on the DB2 CLI plan to the user running the LDAP server.
--
-- NOTE: You need to remove the '--' from each line before you can run
-- these statements.
--
-- Change -DB_PLAN- to the DB2 CLI plan name.
-- Change -LDAP_USERID- to the user ID running the LDAP server.
-- *****
--GRANT EXECUTE ON PLAN -DB_PLAN- TO -LDAP_USERID-;
--COMMIT;

-- *****
-- Use the following statements if you need to grant SQL SELECT
-- privileges on DB2 catalog tables to the user running the LDAP server.
--
-- NOTE: You need to remove the '--' from each line before you can run

```

```

-- these statements.
--
-- Change -LDAP_USERID- to the user ID running the LDAP server.
-- *****
--GRANT SELECT ON SYSIBM.SYSCOLUMNS TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSCOLDIST TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLES TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLEPART TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSKEYS TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLESPACE TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSINDEXPART TO -LDAP_USERID-;
--COMMIT;

-- *****
-- Use the following statement if you need to grant DBADM privilege
-- on the DB2 database to the user running the LDAP server.
--
-- NOTE: You need to remove the '--' from each line before you can run
-- these statements.
--
-- Change -DB_NAME- to the LDAP database name.
-- Change -LDAP_USERID- to the user ID running the LDAP server.
-- *****
--GRANT DBADM ON DATABASE -DB_NAME- TO -LDAP_USERID-;
--COMMIT;

```



## The TDBMMGRT SPUFI file

```
-- *****
-- *
-- * Licensed Materials - Property of IBM
-- * 5650-ZOS
-- * Copyright IBM Corp. 2006, 2013
-- *
-- *****
--
-- Use the SPUFI function to execute these SQL statements.
--
-- Database, table, tablespace and storage class values must be
-- retrieved from your z/OS LDAP Server DB2 configuration. Use
-- the following DB2 command to query the information:
--
-- '-DISPLAY DATABASE(GLDDB)'
--
-- NOTE: GLDDB is the default database name, your database name may
-- differ.
--
-- *****
-- Database Name Information
-- *****
-- Change any instance of -DB2_NAME- to the name of the LDAP
-- database name you want to migrate. Be sure this name matches what
-- was defined for the database name in the z/OS LDAP Server
-- configuration file.
--
-- The default configuration sets this value to GLDDB. But this
-- value should be verified.
--
-- *****
-- DataBase Owner Information
-- *****
-- Change any instance of -DB2_USERID- to the database owner id
-- defined as the owner id for the z/OS LDAP Server DB2
-- configuration. This id is the highlevel qualifier for the tables.
--
-- The default configuration sets this value to GLDSRV. But this
-- value should be verified.
--
-- *****
-- LDAP Server User ID Information
-- *****
-- Change any instance of -LDAP_USERID- to the user ID for the LDAP
-- server to run under.
--
-- The default configuration sets this value to GLDSRV. But this
-- value should be verified.
--
-- *****
-- Tablespace Information
-- *****
-- Change any instance of -MISC_TABLESPACE- to the LDAP miscellaneous
-- tablespace as defined in the z/OS LDAP Server DB2 configuration.
--
-- The default configuration sets this value to MISCTS. But this
-- value should be verified.
--
-- Change any instance of -REPLICA_TABLESPACE- to the LDAP replica
-- tablespace as defined in the z/OS LDAP Server DB2 configuration.
--
-- The default configuration sets this value to REPTS. But this
-- value should be verified.
--
-- *****
-- Storage Group Information
-- *****
-- Change any instance of -STORAGEGROUP- to the storage group as
-- defined in the z/OS LDAP Server DB2 configuration.
--
-- The default configuration sets this value to SYSDEFLT. But this
-- value should be verified.
--
-- *****
```

```
-- TABLE OF CONTENTS
-- *****
-- SECTION TITLE
--
-- -----
-- 01 SQL statements for migrating from z/OS Integrated
-- Security Services LDAP server to the latest version of
-- IBM Tivoli Directory Server for z/OS LDAP server.
-- -----
-- 02 SQL for using the partitioned entry identifier assignment
-- algorithm. This is generally needed for users migrating
-- from IBM Tivoli Directory Server for z/OS V1R8 to IBM
-- Tivoli Directory Server for z/OS V1R10.
-- -----
-- 03 SQL for using advanced replication support.
-- This is generally needed for users migrating
-- from IBM Tivoli Directory Server for z/OS V1R10 to IBM
-- Tivoli Directory Server for z/OS V1R11.
-- -----
--
--
-- *****
-- *** SECTION 01: ***
-- *** ***
-- *** SQL statements for migrating from z/OS Integrated ***
-- *** Security Services LDAP server to the latest version of ***
-- *** IBM Tivoli Directory Server for z/OS LDAP server. ***
-- *****
-- The following SQL statements, created for the z/OS Integrated
-- Security Services LDAP server, will alter your DB2 database tables
-- such that they will be supported by the latest version of IBM
-- Tivoli Directory Server for z/OS LDAP server.
--
-- *****
-- ***** SPECIAL NOTICE ***** ***** SPECIAL NOTICE *****
-- *****
-- The DIR_CHANGE table used for replication must be empty before the
-- backend is started on the IBM Tivoli Directory Server for z/OS
-- LDAP server. The SQL statements in this file will empty the table
-- if it is not empty, but this will result in one or more replicas
-- that are no longer synchronized with this master server.
--
-- To verify that the DIR_CHANGE table is empty, from a separate
-- file, execute the following SQL statement using SPUFI:
--
-- SELECT * FROM -DB2_USERID-.DIR_CHANGE;
--
-- where -DB2_USERID- is changed to the database owner id, as
-- previously described above.
--
-- After execution, if the row count returns 0, then all replicaton
-- changes have been made and the table is ready to be dropped.
--
-- Otherwise, refer to the z/OS Integrated Security Services LDAP
-- Server Administration and Use documentation to ensure all
-- replication changes have been made and then verify that the table
-- is empty.
--
-- If replication does not take place and the table does not become
-- empty, then all the replication tables will be emptied by the
-- SQL commands below. In this case replication updates to one or
-- more replicas will have been lost and it will be necessary to
-- synchronize these replicas with the master server. Refer to the
-- IBM Tivoli Directory Server Administration and Use for z/OS
-- publication for information about replica synchronization.
--
-- *****
-- Empty the replication tables
-- *****
DELETE FROM -DB2_USERID-.DIR_REGISTER;
DELETE FROM -DB2_USERID-.DIR_PROGRESS;
DELETE FROM -DB2_USERID-.DIR_CHANGE;
DELETE FROM -DB2_USERID-.DIR_LONGCHANGE;
--
-- *****
-- Drop the replication tables
--
-- NOTE: these SQL statements are commented out. The IBM Tivoli
-- Directory Server for z/OS LDAP server will ignore these tables.
-- Keeping these tables allows you to roll-back DB2 data to the z/OS
-- Integrated Security Services LDAP server database. It also allows
```

```

-- sharing the database between the two servers. Remove the '--'
-- characters from the following SQL statements if you want to drop
-- the replication tables.
--
-- NOTE: New replica tables and indexes will be created below.
-- *****
-- DROP TABLE -DB2_USERID-.DIR_REGISTER;
-- DROP TABLE -DB2_USERID-.DIR_PROGRESS;
-- DROP TABLE -DB2_USERID-.DIR_CHANGE;
-- DROP TABLE -DB2_USERID-.DIR_LONGCHANGE;
-- COMMIT;

-- *****
-- Alter the misc tablespace to set locksize row
-- *****
ALTER TABLESPACE -DB2_NAME-.MISC_TABLESPACE-
 LOCKSIZE ROW;

-- *****
-- Alter the misc table to add the schema timestamp column
--
-- NOTE: This SQL statement is commented out. The IBM Tivoli
-- Directory Server for z/OS LDAP server will automatically alter the
-- DIR_MISC table to add the new schema timestamp column if it is not
-- already there. As an alternative, you can create the new column
-- here by removing the '--' characters from the following SQL
-- statement.
-- *****
-- ALTER TABLE -DB2_USERID-.DIR_MISC
-- ADD SCHEMA_TIMESTAMP TIMESTAMP
-- WITH DEFAULT NULL;

-- *****
-- Alter the misc table to add the partitioned eid column
--
-- NOTE: This SQL statement is commented out. The IBM Tivoli
-- Directory Server for z/OS LDAP server will automatically alter the
-- DIR_MISC table to add the new partitioned eid column if it is not
-- already there. As an alternative, you can create the new column
-- here by removing the '--' characters from the following SQL
-- statement.
-- *****
-- ALTER TABLE -DB2_USERID-.DIR_MISC
-- ADD PARTITIONED_EID CHAR(1)
-- WITH DEFAULT NULL;

-- *****
-- Create the new replica table
-- *****
CREATE TABLE -DB2_USERID-.DIR_REPLICA (
 REPID DECIMAL(15 , 0) NOT NULL,
 CHNGID DECIMAL(15 , 0) NOT NULL,
 REPCAPS INTEGER NOT NULL,
 PRIMARY KEY(REPID))
IN -DB2_NAME-.MISC_TABLESPACE-;

-- *****
-- Create the new replica entry table
--
-- Note: The maximum size of the change DN column (CHNGDN) in the
-- replication table (DIR_REPENTRY) must be greater than
-- or equal to the maximum size of the DN column in the entry
-- table (DIR_ENTRY). The default maximum size of 512 is set
-- here.
-- *****
CREATE TABLE -DB2_USERID-.DIR_REPENTRY (
 CHNGID DECIMAL(15 , 0) NOT NULL,
 CHNGFLAGS INTEGER NOT NULL,
 CHNGSIZE INTEGER NOT NULL,
 CHNGDN VARCHAR(512) FOR BIT DATA,
 CHNGDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(CHNGID))
IN -DB2_NAME-.REPLICA_TABLESPACE-;

-- *****
-- Create the new long replica entry table
-- *****
CREATE TABLE -DB2_USERID-.DIR_LONGREENTRY (
 CHNGID DECIMAL(15 , 0) NOT NULL,
 CHNGSEQ INTEGER NOT NULL,
 CHNGDATA LONG VARCHAR FOR BIT DATA,
 PRIMARY KEY(CHNGID , CHNGSEQ))

```

```

IN -DB2_NAME-.-REPLICA_TABLESPACE-;

-- *****
-- Create the entry identifier table
-- *****
CREATE TABLE -DB2_USERID-.DIR_EID (
 PARTID DECIMAL(15 , 0) NOT NULL,
 NEXT_EID DECIMAL(15 , 0) NOT NULL,
 MODIFY_TIMESTAMP TIMESTAMP NOT NULL,
 PRIMARY KEY(PARTID))
IN -DB2_NAME-.-MISC_TABLESPACE-;

-- *****
-- Create the new replica index
-- *****
CREATE UNIQUE INDEX -DB2_USERID-.DIR_REPLICAX1
 ON -DB2_USERID-.DIR_REPLICA(REPID)
 USING STOGROUP -STORAGEGROUP-
 CLUSTER
 DEFER YES;

-- *****
-- Create the new replica entry index
-- *****
CREATE UNIQUE INDEX -DB2_USERID-.DIR_REPENTRYX1
 ON -DB2_USERID-.DIR_REPENTRY(CHNGID)
 USING STOGROUP -STORAGEGROUP-
 CLUSTER
 DEFER YES;

-- *****
-- Create the new long replica entry index
-- *****
CREATE UNIQUE INDEX -DB2_USERID-.DIR_LONGREPX1
 ON -DB2_USERID-.DIR_LONGREPENTRY(CHNGID , CHNGSEQ)
 USING STOGROUP -STORAGEGROUP-
 CLUSTER
 DEFER YES;

-- *****
-- Create the entry identifier index
-- *****
CREATE UNIQUE INDEX -DB2_USERID-.DIR_EIDX1
 ON -DB2_USERID-.DIR_EID(PARTID)
 USING STOGROUP -STORAGEGROUP-
 CLUSTER
 DEFER YES;

-- *****
-- Update the DB_VERSION value to 4.0 in the DIR_MISC table.
--
-- NOTE: This SQL statement is commented out. The DB_VERSION value
-- indicates the level of the TDBM database. Updating the
-- DB_VERSION value to 4.0 enables the backend to use the enhanced
-- sysplex and replication support in the IBM Tivoli Directory Server
-- for z/OS LDAP server. However, it will prevent the backend
-- database from being shared with a z/OS Integrated Security
-- Services LDAP server. If you do not plan to share the database,
-- you can update the DB_VERSION value here by removing the '--'
-- characters from the following SQL statement.
-- *****
-- UPDATE -DB2_USERID-.DIR_MISC
-- SET DB_VERSION='4.0';

-- *****
-- Commit the changes made in this section
-- *****
COMMIT;

-- *****
-- Grant SQL SELECT privileges on DB2 catalog tables to the user
-- running the LDAP server.
--
-- NOTE: You need to remove the '--' from each line before you can run
-- these statements.
--
-- Change -LDAP_USERID- to the user ID running the LDAP server.
-- *****
--GRANT SELECT ON SYSIBM.SYSCOLUMNS TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSCOLDIST TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLES TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLEPART TO -LDAP_USERID-;

```

```

--GRANT SELECT ON SYSIBM.SYSKEYS TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLESPACE TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSINDEXPART TO -LDAP_USERID-;
--COMMIT;

--
--
-- *****
-- *** SECTION 02: ***
-- ***
-- *** SQL for using the partitioned entry identifier assignment ***
-- *** algorithm. This is generally needed for users migrating ***
-- *** from IBM Tivoli Directory Server for z/OS V1R8 to IBM ***
-- *** Tivoli Directory Server for z/OS V1R10. ***
-- *****
-- The following SQL statements, created for the IBM Tivoli Directory
-- Server for z/OS V1R8, will alter your DB2 database tables such
-- that they will support the partitioned entry identifier assignment
-- algorithm.
--
-- You SHOULD NOT run the following SQL statements if your DB2
-- database tables were built to support IBM Tivoli Directory Server
-- for z/OS V1R10 or if your DB2 database tables already support the
-- partitioned entry identifier assignment algorithm.
--
-- If you are unsure whether you need to run the SQL statements in
-- this section, from a separate file, execute the following SQL
-- statement using SPUFI:
--
-- SELECT * FROM SYSIBM.SYSTABLES WHERE
-- CREATOR='-DB2_USERID-' AND NAME='DIR_EID';
--
-- where -DB2_USERID- is changed to the database owner id, as
-- previously described above.
--
-- After execution, if the row count returns 0, then your DB2
-- database tables DO NOT support the partitioned entry identifier
-- assignment algorithm. If you want to use the partitioned entry
-- identifier assignment algorithm, or if you want to run IBM Tivoli
-- Directory Server for z/OS V1R10, you need to execute the
-- following SQL statements.
--
-- To ensure a successful update of your DB2 database tables, you
-- must comment out all SQL statements in other sections of this file
-- prior to running the following SQL statements.
--
-- *****
-- Alter the misc tablespace to set locksize row
--
-- NOTE: This SQL statement is commented out. To set the misc
-- tablespace to locksize row, remove the '--' characters from the
-- following SQL statement.
-- *****
-- ALTER TABLESPACE -DB2_NAME-.MISC_TABLESPACE-
-- LOCKSIZE ROW;
--
-- *****
-- Alter the misc table to add the partitioned eid column
--
-- NOTE: This SQL statement is commented out. The IBM Tivoli
-- Directory Server for z/OS LDAP server will automatically alter the
-- DIR_MISC table to add the new partitioned eid column if it is not
-- already there. As an alternative, you can create the new column
-- here by removing the '--' characters from the following SQL
-- statement.
-- *****
-- ALTER TABLE -DB2_USERID-.DIR_MISC
-- ADD PARTITIONED_EID CHAR(1)
-- WITH DEFAULT NULL;
--
-- *****
-- Create the entry identifier table
--
-- NOTE: This SQL statement is commented out. To create the entry
-- identifier table, remove the '--' characters from the following
-- SQL statement.
-- *****
-- CREATE TABLE -DB2_USERID-.DIR_EID (
-- PARTID DECIMAL(15 , 0) NOT NULL,
-- NEXT_EID DECIMAL(15 , 0) NOT NULL,
-- MODIFY_TIMESTAMP NOT NULL,
-- PRIMARY KEY(PARTID))

```

```
-- IN -DB2_NAME-.MISC_TABLESPACE-;

-- *****
-- Create the entry identifier index
--
-- NOTE: This SQL statement is commented out. To create the entry
-- identifier index, remove the '--' characters from the following
-- SQL statement.
-- *****
-- CREATE UNIQUE INDEX -DB2_USERID-.DIR_EIDX1
-- ON -DB2_USERID-.DIR_EID(PARTID)
-- USING STOGROUP -STORAGEGROUP-
-- CLUSTER
-- DEFER YES;

-- *****
-- Commit the changes made in this section
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
-- COMMIT;

-- *****
-- Grant SQL SELECT privileges on DB2 catalog tables to the user
-- running the LDAP server.
--
-- NOTE: You need to remove the '--' from each line before you can run
-- these statements.
--
-- Change -LDAP_USERID- to the user ID running the LDAP server.
-- *****
--GRANT SELECT ON SYSIBM.SYSCOLUMNS TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSCOLDIST TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLES TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLEPART TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSKEYS TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSTABLESPACE TO -LDAP_USERID-;
--GRANT SELECT ON SYSIBM.SYSINDEXPART TO -LDAP_USERID-;
--COMMIT;

--
--
-- *****
-- *** SECTION 03: ***
-- *** ***
-- *** SQL for using the advanced replication support. ***
-- *** This is generally needed for users migrating ***
-- *** from IBM Tivoli Directory Server for z/OS V1R10 to IBM ***
-- *** Tivoli Directory Server for z/OS V1R11. ***
-- *****
-- The following SQL statements, created for the IBM Tivoli Directory
-- Server for z/OS V1R10, will alter your DB2 database tables such
-- that they will support advanced replication.
--
-- You SHOULD NOT run the following SQL statements if your DB2
-- database tables were built to support IBM Tivoli Directory Server
-- for z/OS V1R11 or if your DB2 database tables already support
-- advanced replication.
--
-- If you are unsure whether you need to run the SQL statements in
-- this section, from a separate file, execute the following SQL
-- statement using SPUFI:
--
-- SELECT * FROM SYSIBM.SYSTABLES WHERE
-- CREATOR='-DB2_USERID-' AND NAME='DIR_REPLSTATUS';
--
-- where -DB2_USERID- is changed to the database owner id, as
-- previously described above.
--
-- After execution, if the row count returns 0, then your DB2
-- database tables DO NOT support advanced replication.
-- If you want to use advanced replication, you need to execute
-- the following SQL statements.
--
-- To ensure a successful update of your DB2 database tables, you
-- must comment out all SQL statements in other sections of this file
-- prior to running the following SQL statements.
--
-- *****
-- Create the DIR_REPLSTATUS table
```

```

--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE TABLE -DB2_USERID-.DIR_REPLSTATUS (
-- AGREEMENTEID DECIMAL(15 , 0) NOT NULL,
-- CHANGEID INTEGER NOT NULL,
-- REPLICACAPS CHAR(64) FOR BIT DATA,
-- PRIMARY KEY(AGREEMENTEID))
--IN -DB2_NAME-.MISC_TABLESPACE-;

-- *****
-- Create the DIR_REPLCHANGE table
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE TABLE -DB2_USERID-.DIR_REPLCHANGE (
-- CHANGEID INTEGER NOT NULL,
-- CONTEXTEID DECIMAL(15 , 0) NOT NULL,
-- CHANGESIZE INTEGER NOT NULL,
-- CHANGEDATA LONG VARCHAR FOR BIT DATA,
-- PRIMARY KEY(CHANGEID, CONTEXTEID))
--IN -DB2_NAME-.REPLICA_TABLESPACE-;

-- *****
-- Create the DIR_LONGREPLCHANGE table
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE TABLE -DB2_USERID-.DIR_LONGREPLCHANGE (
-- CHANGEID INTEGER NOT NULL,
-- CONTEXTEID DECIMAL(15 , 0) NOT NULL,
-- CHANGESEQ INTEGER NOT NULL,
-- CHANGEDATA LONG VARCHAR FOR BIT DATA,
-- PRIMARY KEY(CHANGEID, CONTEXTEID, CHANGESEQ))
--IN -DB2_NAME-.REPLICA_TABLESPACE-;

-- *****
-- Create the DIR_REPLERROR table
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE TABLE -DB2_USERID-.DIR_REPLERROR (
-- ERRORID INTEGER NOT NULL,
-- AGREEMENTEID DECIMAL(15 , 0) NOT NULL,
-- ERRORSIZE INTEGER NOT NULL,
-- ERRORDATA LONG VARCHAR FOR BIT DATA,
-- PRIMARY KEY(ERRORID))
--IN -DB2_NAME-.REPLICA_TABLESPACE-;

-- *****
-- Create the DIR_LONGREPERERROR table
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE TABLE -DB2_USERID-.DIR_LONGREPLERROR (
-- ERRORID INTEGER NOT NULL,
-- AGREEMENTEID DECIMAL(15 , 0) NOT NULL,
-- ERRORSEQ INTEGER NOT NULL,
-- ERRORDATA LONG VARCHAR FOR BIT DATA,
-- PRIMARY KEY(ERRORID, ERRORSEQ))
--IN -DB2_NAME-.REPLICA_TABLESPACE-;

-- *****
-- Create the DIR_REPLSTATUS Index
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE UNIQUE INDEX -DB2_USERID-.DIR_REPLSTATUSX1
-- ON -DB2_USERID-.DIR_REPLSTATUS(AGREEMENTEID)
-- USING STOGROUP -STORAGEGROUP-

```

```

-- CLUSTER
-- DEFER YES;

-- *****
-- Create the DIR_REPLCHANGE Indexes
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statements to commit the changes
-- made in this section.
-- *****
--CREATE UNIQUE INDEX -DB2_USERID-.DIR_REPLCHANGEX1
-- ON -DB2_USERID-.DIR_REPLCHANGE(CHANGEID, CONTEXTEID)
-- USING STOGROUP -STORAGEGROUP-
-- CLUSTER
-- DEFER YES;

--CREATE INDEX -DB2_USERID-.DIR_REPLCHANGEX2
-- ON -DB2_USERID-.DIR_REPLCHANGE(CONTEXTEID)
-- USING STOGROUP -STORAGEGROUP-
-- DEFER YES;

--CREATE INDEX -DB2_USERID-.DIR_REPLCHANGEX3
-- ON -DB2_USERID-.DIR_REPLCHANGE(CHANGEID)
-- USING STOGROUP -STORAGEGROUP-
-- DEFER YES;

-- *****
-- Create the DIR_LONGREPLCHANGE Index
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.
-- *****
--CREATE UNIQUE INDEX -DB2_USERID-.DIR_LONGREPLCHANGEX1
-- ON -DB2_USERID-.DIR_LONGREPLCHANGE(CHANGEID, CONTEXTEID,
-- CHANGESEQ)
-- USING STOGROUP -STORAGEGROUP-
-- CLUSTER
-- DEFER YES;

-- *****
-- Create the DIR_REPERROR Indexes
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statements to commit the changes
-- made in this section.
-- *****
--CREATE UNIQUE INDEX -DB2_USERID-.DIR_REPLERRORX1
-- ON -DB2_USERID-.DIR_REPLERROR(ERRORID)
-- USING STOGROUP -STORAGEGROUP-
-- CLUSTER
-- DEFER YES;

--CREATE INDEX -DB2_USERID-.DIR_REPLERRORX2
-- ON -DB2_USERID-.DIR_REPLERROR(AGREEMENTEID)
-- USING STOGROUP -STORAGEGROUP-
-- DEFER YES;

-- *****
-- Create the DIR_LONGREPLERROR Indexes
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statements to commit the changes
-- made in this section.
-- *****
--CREATE UNIQUE INDEX -DB2_USERID-.DIR_LONGREPLERRORX1
-- ON -DB2_USERID-.DIR_LONGREPLERROR(ERRORID, ERRORSEQ)
-- USING STOGROUP -STORAGEGROUP-
-- CLUSTER
-- DEFER YES;

--CREATE INDEX -DB2_USERID-.DIR_LONGREPLERRORX2
-- ON -DB2_USERID-.DIR_LONGREPLERROR(AGREEMENTEID)
-- USING STOGROUP -STORAGEGROUP-
-- DEFER YES;

-- *****
-- Commit the changes made in this section
--
-- NOTE: This SQL statement is commented out. Remove the '--'
-- characters from the following SQL statement to commit the changes
-- made in this section.

```



```
-- *****
-- COMMIT;
```



---

## Appendix C. Supported server controls

The sections that follow describe the supported server controls. For information about ASN.1 (Abstract Syntax Notation One) and BER (Basic Encoding Rules), see [A Layman's Guide to a Subset of ASN.1, BER, and DER \(luca.ntop.org/Teaching/Appunti/asn1.html\)](http://luca.ntop.org/Teaching/Appunti/asn1.html).

### authenticateOnly

---

| Information                | Notes                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>authenticateOnly</b>                                                                                                                                          |
| Description                | Used on an LDAP bind operation to indicate to the LDAP server that it should not attempt to find any group membership information for the bind DN of the client. |
| Assigned object identifier | 1.3.18.0.2.10.2                                                                                                                                                  |
| Target of control          | Server                                                                                                                                                           |
| Control criticality        | Critical at client's option                                                                                                                                      |

This control is valid when it is sent on a bind request from an LDAP client to the LDAP server. The presence of this control on the bind request overrides alternate DN look-ups, extended group searching, and default group membership gathering. It also causes the LDAP server to only authenticate the bind DN of the client and not gather group information at all. This control is intended for a client who does not care about group memberships and subsequent complete authorization checking using groups, but is using the bind only for authentication to the LDAP server and fast bind processing.

### Do Not Replicate

---

**Name**

**Do Not Replicate**

**Description**

Used by a client to indicate that an add, delete, modify, or modify DN request is not to be replicated to a consumer or forwarding server in an advanced replication environment.

**Assigned object identifier**

1.3.18.0.2.10.23

**Target of control**

Server

**Control criticality**

Never

**Values**

There is no value; the **controlValue** field is absent.

The **ldapadd**, **ldapmodify**, **ldapmodrdn**, and **ldapdelete** utilities have an -L option to add this control to LDAP server requests. For more information about the **ldapadd**, **ldapmodify**, **ldapmodrdn**, and **ldapdelete** utilities, see *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

### IBMLdapProxyControl

---

| Information | Notes                      |
|-------------|----------------------------|
| Name        | <b>IBMLdapProxyControl</b> |

| Information                | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                | Used to provide bind and connection information about extended operation requests that result in LDAP requests to another LDAP server. It is required on <b>GetDnForUserid</b> and <b>GetPrivileges</b> extended operation requests. The <b>IBMLdapProxyControl</b> server control and the <b>GetDnForUserid</b> and <b>GetPrivileges</b> extended operation requests are deprecated.                                                                                                                                                                                                                                                                                                                                                                            |
| Assigned object identifier | 1.3.18.0.2.10.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Target of control          | EXOP backend of server                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Control criticality        | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Values                     | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value.</p> <pre> ControlValue ::= SEQUENCE {     BindInformation          [0]    BindInfo OPTIONAL,     ConnectInformation       [1]    ConnectInfo OPTIONAL }  Where,     ConnectInfo ::= LDAPURL      BindInfo ::= SEQUENCE {         Bind DN              LDAPDN,         Auth                 AuthenticationChoice     }      AuthenticationChoice ::= CHOICE {         Simple                [0]    OCTET STRING,         Sasl                  [3]    SaslCredentials     }      SaslCredentials ::= SEQUENCE {         Mechanism              LDAPString,         Credentials            OCTET STRING OPTIONAL     } </pre> |

- This control provides information about extended operation requests that result in the use of the LDAP client to make LDAP requests to another LDAP server. The EXOP backend uses the connection information and the bind information specified in the control to establish an LDAP connection. Then, using the established connection, it issues additional LDAP directory requests to the server.

If the **ConnectInformation** is not specified, the EXOP backend attempts to open a connection to its local host using a default port of 389. Otherwise, it uses the LDAP URL specified to open a connection. The specified URL must have the following form:

```
ldap[s]://host[:port]
```

where:

- *host* is a DNS-style hostname.
- *port* is an optional port number.
- **ldaps** causes the EXOP backend to open a secure LDAP directory connection. The LDAP server must be set up to use SSL and it cannot use the `sslKeyRingPWStashFile` option. See [“Setting up for SSL/TLS” on page 68](#) for more information about SSL configuration.

If the **BindInfo** is not specified, the EXOP backend makes all of its LDAP requests anonymously. Otherwise, it uses the Bind DN and the **AuthenticationChoice** to bind to the LDAP server specified in the **ConnectInformation**. The EXOP backend does not support the SASL authentication choice which is described in the ASN.1.

If the control is specified more than once in a request, the server returns `LDAP_PROTOCOL_ERROR`.

## IBMModifyDNRealignDNAttributesControl

| Information                | Notes                                                                                                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>IBMModifyDNRealignDNAttributesControl</b>                                                                                                                                                                                                                                                         |
| Description                | Used by a client to request that a Modify DN operation be extended to realign attribute values for attributes with Distinguished Name syntax, and other specified attribute types known to contain distinguished names, with the new DN values established by the Modify DN operation for those DNs. |
| Assigned object identifier | 1.3.18.0.2.10.11                                                                                                                                                                                                                                                                                     |
| Target of control          | Server                                                                                                                                                                                                                                                                                               |
| Control criticality        | Critical at client's option                                                                                                                                                                                                                                                                          |
| Values                     | There is no value; the <b>controlValue</b> field is absent.                                                                                                                                                                                                                                          |

This control is valid when sent on a client's Modify DN request. Distinguished names which are renamed might be embedded in DN-syntax attributes throughout the directory contents. You might want to replace the embedded values with their renamed counterparts (realignment). The presence of this control on the Modify DN request causes the server to realign matching attribute values in all attribute types whose syntax is Distinguished Name (OID 1.3.6.1.4.1.1466.115.121.1.12), and in the attribute types of `ac1Entry` and `entryOwner`, which are known to contain distinguished names. The server evaluates whether the bound user has permission to modify the candidate attribute values, as determined by the appropriate access controls and the permissions granted by those access controls to the bound DN. If the permissions granted to the bound DN are sufficient to modify the candidate attribute values, those values are realigned to match their respective new DN values. If any single access check fails, the entire Modify DN operation fails, and all changes to the directory associated with the current Modify DN operation are undone. The scope for realignment is the backend containing the base DN for the Modify DN request. DN references in other backends or other LDAP servers are not updated. If there are `ac1Filter` or `ownerFilter` components in `ac1Entry` or `entryOwner` attribute values, the DN references in those filters are not updated.

## IBMModifyDNTimeLimitControl

| Information                | Notes                                                                                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>IBMModifyDNTimeLimitControl</b>                                                                                                                                                                       |
| Description                | Used by a client to request that a Modify DN operation be abandoned if the specified time limit for that operation has been exceeded.                                                                    |
| Assigned object identifier | 1.3.18.0.2.10.10                                                                                                                                                                                         |
| Target of control          | Server                                                                                                                                                                                                   |
| Control criticality        | Critical at client's option                                                                                                                                                                              |
| Values                     | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value.</p> <pre>ControlValue ::= SEQUENCE {     Time Limit INTEGER }</pre> |

This control is valid when sent on a client's Modify DN request. Modify DN operations might be long-running operations if they affect many entries in the directory. For example, if they rename an entry with a subtree containing many subordinate entries), you might want to limit the duration of the operation. The presence of this control on the Modify DN request causes the operation to be abandoned by the server if the number of seconds specified in the control value is exceeded. When the operation is abandoned, all

changes to the directory associated with the Modify DN operation are undone. A time limit of zero causes the control to be ignored. The last time limit value is used if this control is specified more than once.

## IBMSchemaReplaceByValueControl

| Information                | Notes                                                                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>IBMSchemaReplaceByValueControl</b>                                                                                                                                                                                                                                       |
| Description                | Used on a schema modify request to tell the LDAP server that a replace operation replaces all schema values or just matching values.                                                                                                                                        |
| Assigned object identifier | 1.3.18.0.2.10.20                                                                                                                                                                                                                                                            |
| Target of control          | Server                                                                                                                                                                                                                                                                      |
| Control criticality        | Never                                                                                                                                                                                                                                                                       |
| Values                     | <p>Critical at client's option.</p> <p>The following ASN.1 (Abstract Syntax Notation One) statements describe the BER (Basic Encoding Rules) for encoding the control value using implicit tagging:</p> <pre>ControlValue ::= SEQUENCE {     replaceByValue BOOLEAN }</pre> |

This control is valid when sent on a client's modify request and has meaning only when performing a modify replace operation of an attribute in the LDAP server schema. If the control value is set to TRUE, then each replace value in the modify operation either replaces the existing value (if there is one with the same object identifier) or is added to the schema (if there is no existing value with the same object identifier). All other values in the schema remain as they are. If the control is set to FALSE, all the values for that attribute in the schema are replaced by the ones specified in the modify operation. See [“Updating the schema” on page 291](#) for more information about how LDAP processes a schema modify with replace operation. In all cases, the values of the attributes that are in the initial LDAP server schema cannot be deleted and can be modified only in very limited ways. See [“Updating the schema” on page 291](#) for more information.

**IBMSchemaReplaceByValueControl** overrides the **schemaReplaceByValue** server configuration option for the current modify request. The last value is used if this control is specified more than once.

## IBMSdbmExtendedSearchControl

| Description                | Notes                                                                          |
|----------------------------|--------------------------------------------------------------------------------|
| Name                       | <b>IBMSdbmExtendedSearchControl</b>                                            |
| Description                | Used by an SDBM search request to control the LDAP server search capabilities. |
| Assigned object identifier | 1.3.18.0.2.10.35                                                               |
| Target of control          | Server                                                                         |
| Control criticality        | Never                                                                          |

| Description | Notes                                                                                                                                                                                                                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Values      | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value:</p> <pre> ControlValue ::= SEQUENCE {     level          ExtendedLevel } Where, ExtendedLevel ::= ENUMERATED {     off            (0),     basic          (1),     advanced       (2) </pre> |

This control is valid when sent on a client's search request for the SDBM backend. The extended level value overwrites the server-side extended search configuration for the current request.

- If the control value is set to **off**, the search request is processed without SDBM extended search.
- If the control value is set to **basic**, the search request is processed with basic SDBM extended search.
- If the control value is set to **advanced**, the search request is processed with advanced SDBM extended search.

For more information about the SDBM extended search, see [“SDBM search capabilities” on page 343](#).

## manageDsaIT

### Name

**manageDsaIT**

### Description

Used on a request to suppress referral processing, which allows the client to manipulate referral objects.

### Assigned object identifier

2.16.840.1.113730.3.4.2

### Target of control

Server

### Control criticality

Critical

### Values

There is no value; the **controlValue** field is absent.

This control is valid when sent on a search, compare, add, delete, modify, or modify DN request from a client. The presence of the control indicates that the server should not return referrals or search continuation references to the client. This allows the client to read or modify referral objects. The LDAP server does not return a referral even if the requested object is not included in any suffix within the LDAP server and a global referral is defined using the **referral** option in the LDAP server configuration file.

## No Replication Conflict Resolution

| Information                | Notes                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>No Replication Conflict Resolution</b>                                                                                                                                                                        |
| Description                | Used on an update request from a supplier server to a consumer server in an advanced replication environment to indicate that the consumer server should not resolve any replication conflicts that might occur. |
| Assigned object identifier | 1.3.18.0.2.10.27                                                                                                                                                                                                 |
| Target of control          | Server                                                                                                                                                                                                           |

| Information         | Notes                                                       |
|---------------------|-------------------------------------------------------------|
| Control criticality | Never critical                                              |
| Values              | There is no value; the <b>controlValue</b> field is absent. |

This control is valid when sent by a supplier server to a consumer server on an add, delete, modify, or modify DN request in an advanced replication environment. The presence of the control indicates that the consumer server does not attempt to resolve any replication conflicts that might occur, such as rejecting an add request because it has an older `createtimestamp` value. In this scenario, the consumer server always accepts the replicated updates and attempts to apply them to the targeted backend.

## pagedresults

| Information                | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>pagedresults</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description                | Used on a <b>SearchRequest</b> and <b>SearchresultDone</b> message to control the rate at which the server returns search results.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Assigned object identifier | 1.2.840.113556.1.4.319                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Target of control          | Server                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Control criticality        | Critical at client's option                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Request values             | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the request control values:</p> <pre>RequestControlValue ::= SEQUENCE {     size      INTEGER,     cookie    OCTET STRING }</pre> <p>where,</p> <ul style="list-style-type: none"> <li>• <code>size</code> specifies the requested page size, the number of entries to return. A page size of zero ends the sequence of paged search requests.</li> <li>• <code>cookie</code> specifies an empty string to obtain the initial page of search results, or specifies the cookie that was returned in the previous paged search response to obtain the next page of search results.</li> </ul> |
| Response values            | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the response control values:</p> <pre>ResponseControlValue ::= SEQUENCE {     size      INTEGER,     cookie    OCTET STRING }</pre> <p>where,</p> <ul style="list-style-type: none"> <li>• <code>size</code> specifies the estimated number of entries in the entire result set.</li> <li>• <code>cookie</code> specifies the cookie that is required to retrieve the next page of search results, or specifies an empty string if there are no more entries to return.</li> </ul>                                                                                                          |



| Information     | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Server behavior | <p>By default, the <code>ibm-slapdPagedResLmt</code> dynamic configuration attribute in the <b>cn=configuration</b> entry is set to 0, which indicates that paged searches are not allowed. Therefore, the <code>ibm-slapdPagedResLmt</code> attribute must be set to a nonzero value to allow paged searches.</p> <p>The <code>ibm-slapdPagedResAllowNonAdmin</code> and <code>ibm-slapdPagedResLmt</code> dynamic configuration attributes in the <b>cn=configuration</b> entry and the <code>idleConnectionTimeout</code> configuration option can be used to limit server resources used by paged searches. The <b>PersistentSearch</b> and <b>pagedresults</b> server controls cannot both be specified on a search request. See <a href="#">“cn=configuration” on page 138</a> for more information about the dynamic configuration attributes in the <b>cn=configuration</b> entry. The server ignores the paged search request control if the page is greater than or equal to the size limit value specified in the search request. A paged search response control is not returned by the server in this case.</p> |

Paged search results provide paging capabilities for LDAP client applications that want to receive just a subset of search results instead of the entire result set. The next page of entries is returned to the client application for each subsequent paged search request submitted by the client until the operation is canceled or the last page of results is returned.

This control is valid when sent on a client's **SearchRequest** message and when sent back to the client on a **SearchresultDone** message. Support is provided in the z/OS LDAP client to create and parse the control. See the `ldap_create_page_control()` and `ldap_parse_page_control()` APIs and the **ldapsearch** client utility in *z/OS IBM Tivoli Directory Server Client Programming for z/OS* for more information.

See [RFC 2696 \(tools.ietf.org/html/rfc2696\)](https://tools.ietf.org/html/rfc2696) for more information about the paged search results control.

## PasswordPolicy

| Information                | Notes                                                                                                                                                   |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>PasswordPolicy</b>                                                                                                                                   |
| Description                | Used by client applications on add, bind, compare, and modify requests to obtain additional warning or error information about a user's password value. |
| Assigned object identifier | 1.3.6.1.4.1.42.2.27.8.5.1                                                                                                                               |
| Target of control          | Server                                                                                                                                                  |
| Control criticality        | Never critical                                                                                                                                          |
| Request values             | There is no value; the <b>controlValue</b> field is absent.                                                                                             |

| Information     | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response values | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value.</p> <pre> ControlValue ::= SEQUENCE {     warning [0] CHOICE OPTIONAL {         timeBeforeExpiration [0] INTEGER (0 .. maxInt),         graceLoginsRemaining [1] INTEGER (0 .. maxInt) }     error [1] ENUMERATED OPTIONAL {         passwordExpired (0),         accountLocked (1),         changeAfterReset (2),         passwordModNotAllowed (3),         mustSupplyOldPassword (4),         insufficientPasswordQuality (5),         passwordTooShort (6),         passwordTooYoung (7),         passwordInHistory (8) } } </pre> <p>Where</p> <ul style="list-style-type: none"> <li>• <b>warning</b> is an optional field that indicates the password policy warning code. If <b>timeBeforeExpiration</b> is set, the integer indicates the number of seconds before the bound user's password expires. If <b>graceLoginsRemaining</b> is specified, it indicates the remaining number of log ins the bound user has before the password expires.</li> <li>• <b>error</b> is an optional field that indicates the error code of the password policy.</li> </ul> |

This control is valid when sent on an LDAP client's add, bind, compare, or modify request to the LDAP server. The LDAP server returns the **PasswordPolicy** response control to the client that contains additional warning and error information about a user's password value. For example, on bind and compare requests, the LDAP server may send a **PasswordPolicy** response control to the client that indicates that the bound user's password is about to expire, has expired, or must be changed after being reset by an LDAP administrator. While on add and modify requests of password values, the LDAP server may send a **PasswordPolicy** response control that indicates the password is too short, does not meet password policy quality standards, or the password value exists in the password history of the entry being modified. This information is sent to the client on the add, bind, compare, or modify response.

**Note:**

1. The LDAP server does not send a **PasswordPolicy** response control when a Kerberos (GSSAPI) or EXTERNAL bind is done.
2. The LDAP client utilities automatically send the **PasswordPolicy** control as a noncritical control on add, bind, compare, and modify requests to the targeted LDAP server.

## PersistentSearch

| Information                | Notes                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>PersistentSearch</b>                                                                                                                                                                  |
| Description                | Used on a search request to request not only the current contents of the directory that match the search request but also any entries that match the search specification in the future. |
| Assigned object identifier | 2.16.840.1.113730.3.4.3                                                                                                                                                                  |
| Target of control          | Server                                                                                                                                                                                   |
| Control criticality        | Critical at client's option                                                                                                                                                              |

| Information | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Values      | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value.</p> <pre> ControlValue ::= SEQUENCE {     changeTypes      INTEGER,     changesOnly      BOOLEAN,     returnECs        BOOLEAN }  EntryChangeNotification ::= SEQUENCE {     changeType ENUMERATED {         add (1),         delete (2),         modify (4),         moddn (8) },     previousDN LDAPDN OPTIONAL,     changeNumber INTEGER OPTIONAL } </pre> <p>Where</p> <ul style="list-style-type: none"> <li>• <code>changeTypes</code> is a bit field that specifies one or more types of changes the client is interested in: 0x01 for add changes, 0x02 for delete changes, 0x04 for modify changes, and 0x08 for modify DN changes.</li> <li>• <code>changesOnly</code> is a flag that, if TRUE, only changed entries that match the search are returned. If set to FALSE, existing entries matching the search are returned, in addition to changed entries that match the search.</li> <li>• <code>returnECs</code> is a flag that, if TRUE, an <b>entryChangeNotification</b> control is included when returning a changed entry that matches the search. If set to FALSE, the control is not included.</li> <li>• <code>changeType</code> indicates the type of change made to the entry.</li> <li>• <code>previousDN</code> - For a moddn <code>changeType</code>, the DN of the entry before it was renamed.</li> <li>• <code>changeNumber</code> is the changeNumber of the change log entry, if any, that was created for this change.</li> </ul> |

The control is valid when sent on a client's search request. Support is provided in the z/OS client to create this control and parse the resultant entries. For more information about the **ldap\_create\_persistentsearch\_control()** and **ldap\_parse\_entrychange\_control()** API functions, see [ldap\\_parse\\_entrychange\\_control\(\)](#) and [ldap\\_parse\\_entrychange\\_control\(\)](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

A *persistent search* consists of two phases. The first phase is optional (it is done if `changesOnly` is FALSE), and consists of searching the directory for entries matching the search specification. The second phase consists of executing the search specification against any modifications that occur in the directory and, if found matching, then sending the search results to the waiting client.

- Persistent search is supported in the TDBM, CDBM, LDBM, and GDBM backends. In addition, the schema entry (cn=schema) and the rootDSE (zero-length DN) support persistent searches. The `persistentSearch` configuration option can be used in the backend section of the configuration file to enable or disable persistent search for that backend. See [Chapter 8, "Customizing the LDAP server configuration,"](#) on page 83 for more information about the `persistentSearch` configuration option.

## Server behavior

- The server behaves as described in the specification found at [Persistent Search: A Simple LDAP Change Notification Mechanism \(tools.ietf.org/html/draft-ietf-ldapext-psearch-03\)](http://tools.ietf.org/html/draft-ietf-ldapext-psearch-03), with the following exceptions:

1. An error is returned if an error occurs during processing of the persistent search request. Section 4.b of the specification indicates that **SearchresultsDone** message is not returned if a persistent search is requested. This is not recognized in the case of an error.
2. If more than one **PersistentSearchControl** is received per search request, LDAP\_PROTOCOL\_ERROR is returned.
3. If the requesting client is not bound as adminDN, LDAP\_UNWILLING\_TO\_PERFORM is returned.
4. If persistent search is requested and the dereference option was set to something other than LDAP\_DEREF\_NEVER or LDAP\_DEREF\_FINDING, LDAP\_PROTOCOL\_ERROR is returned. If LDAP\_DEREF\_FINDING is specified, alias dereferencing is performed when the persistent search is issued to determine the real base entry. The dereferenced base entry is then used to determine if modified entries are within the scope of the persistent search request.
5. If a persistent search request is specified for a suffix that does not exist in the LDAP server configuration file, LDAP\_NO\_SUCH\_OBJECT is returned.
6. If a persistent search request is specified for a suffix that is configured but for a search base that does not exist, no search results are returned until the object is added.
7. The search filter and scope are matched before a delete is done, all other operations are matched afterward. No search results are returned for entries moved out of the search filter or scope because of modification or rename.
8. For a persistent search of the root DSE, the search scope must be LDAP\_SCOPE\_SUBTREE. Backends that do not support persistent search or do not have persistent search enabled is skipped if a null-based subtree search is used and the persistent search control is marked as critical, otherwise a typical search is performed for those backends.
9. If a **PersistentSearch** control is included in a search request for a TDBM, CDBM, LDBM, or GDBM backend that has not enabled persistent search, the search request is rejected with LDAP\_UNAVAILABLE\_CRITICAL\_EXTENSION (0x35) if the control is critical. If the control is not critical, a 'typical' search is performed (even if changesOnly is TRUE).
10. Change log entries trimmed by the LDAP server because of the changeLogMaxAge or changeLogMaxEntries configuration options are not returned to a persistent search of the change log directory.
11. If the **manageDsaIT** control is not specified with the **PersistentSearch** control and phase one of the search finds a referral, the referral is returned to the client. If the base of the search is equal to or below a referral, the referral is returned and the persistent search second phase does not occur. During the second phase of persistent search, referral entries are always processed such as typical entries, even if the **manageDsaIT** control is not specified on the persistent search.
12. A connection with an active persistent search is not dropped by enforcement of **idleConnectionTimeout**.
13. The sizeLimit and timeLimit parameters and configuration options and group search limits are respected only during the first phase of persistent search, when existing entries are searched. An error is returned if either limit is exceeded and the persistent search ends. During the second phase, when changed entries are searched, sizeLimit, timeLimit, and groups search limits are ignored.
14. Only the entry specified in a modify DN request (the target of the rename operation) can be returned during the second phase of the persistent search. Subentries or entries modified as part of the realignment process are not returned.
15. In a sysplex environment, only one persistent search request must be made to one of the LDAP servers in the sysplex. The sysplex support results in all the LDAP servers participating in the persistent search. The exception to this is if the target of the search is a TDBM backend where the server compatibility level is less than 4. In this case, an identical persistent search request must be issued to each LDAP server in the sysplex. See the description of the `serverCompatLevel` configuration option in “`serverCompatLevel {3 | 4 | 5 | 6 | 7 | 8}`” on [page 125](#) for more information about the server compatibility level.

Persistent search against a TDBM backend in a sysplex environment with large groups can result in performance problems. See “Large static groups considerations” on page 595 for more information.

16. The SDBM backend does not support persistent search. To be notified of changes to a RACF user (including password changes), group, user-group connection, or general resource profile, request a persistent search of the change log directory. If configured, RACF creates a change log entry when a modification is made to a RACF user, group, connection, or resource profile.
17. Operational attributes are returned on persistent searches except the following: **aclSource**, **hasSubordinates**, **ibm-allGroups**, **ibm-allMembers**, **ibm-entryChecksum**, **ibm-entryChecksumOp**, **ibm-replicationChangeLdif**, **ibm-replicationFailedChangeCount**, **ibm-replicationFailedChanges**, **ibm-replicationIsQuiesced**, **ibm-replicationLastActivationTime**, **ibm-replicationLastChangeId**, **ibm-replicationLastFinishTime**, **ibm-replicationLastresult**, **ibm-replicationLastresultAdditional**, **ibm-replicationNextTime**, **ibm-replicationPendingChangeCount**, **ibm-replicationPendingChanges**, **ibm-replicationPerformance**, **ibm-replicationState**, **ibm-replicationThisServerIsMaster**, **ownerSource**, and **pwdChangedTime**. The **aclEntry**, **aclPropagate**, **entryOwner**, and **ownerPropagate** attributes are returned only if they are defined for the entry and are not inherited from a superior entry.

## Refresh Entry

| Information                | Notes                                                                                                                                                          |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>Refresh Entry</b>                                                                                                                                           |
| Description                | Used by a consumer server in an advanced replication environment to notify a supplier server that a replication conflict has occurred during a modify request. |
| Assigned object identifier | 1.3.18.0.2.10.24                                                                                                                                               |
| Target of control          | Server                                                                                                                                                         |
| Control criticality        | Never critical                                                                                                                                                 |
| Values                     | There is no value; the <b>controlValue</b> field is absent.                                                                                                    |

This control is valid when sent on an LDAP modify response from a consumer to a supplier in an advanced replication environment when a replication conflict is detected in an entry on a consumer server. When the supplier server receives this control along with an LDAP\_OTHER return code from the consumer server, the supplier sends its copy of the modified entry to the consumer with the intention of bringing the consumer server back in sync.

## replicateOperationalAttributes

| Information                | Notes                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>replicateOperationalAttributes</b>                                                                                                 |
| Description                | Used to pass the values of operational attributes that are typically set by the server during an add, modify, or modify DN operation. |
| Assigned object identifier | 1.3.18.0.2.10.19                                                                                                                      |
| Target of control          | Server                                                                                                                                |
| Control criticality        | Critical at client's option                                                                                                           |

| Information     | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Values          | <ul style="list-style-type: none"> <li>The values in this control identify the operational attributes and values to be set. The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value.</li> </ul> <pre> ControlValue ::= SEQUENCE OF SEQUENCE {   operation      ENUMERATED {     add      (0),     delete   (1),     replace   (2) },   modification   AttributeTypeAndValues }  AttributeTypeAndValues ::= SEQUENCE {   type OCTET STRING,   vals SET OF OCTET STRING } </pre> <p>where:</p> <ul style="list-style-type: none"> <li>operation indicates whether the operational attribute value should be added to the entry, should be deleted from the entry, or should replace the current value in the entry.</li> <li>type specifies the name of the operational attribute.</li> <li>vals specifies the values of the operational attribute.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Server behavior | <ol style="list-style-type: none"> <li>The control is only supported on an add, modify, or modify DN request on a basic replication peer or read-only replica server or an advanced replication consumer server. If the control is specified on another request and the control is critical, the server returns LDAP_UNAVAILABLE_CRITICAL_EXTENSION.</li> <li>If using basic replication, the requester must be bound as the master server DN or peer server DN for the backend processing the request, as specified by the masterServerDN or peerServerDN configuration option in the backend section of the LDAP server configuration file. If using advanced replication, the requester must be bound as the DN specified as the ibm-replicaCredentialsDN attribute value in the replication agreement. If the requester is not bound in any of these manners and the control is critical, the server returns LDAP_UNAVAILABLE_CRITICAL_EXTENSION.</li> <li>For an add request and for a modify DN request of a TDBM entry, the operation specified in the control value cannot be delete. If delete is specified, the server returns LDAP_UNWILLING_TO_PERFORM. delete is supported for a modify request and for a modify DN request of an LDBM or CDBM entry.</li> <li>Each attribute type that is specified in the control must be defined in the LDAP server schema. If it is not, the server returns LDAP_UNDEFINED_TYPE if the control is critical, otherwise it ignores the attribute.</li> <li>There is no ACL checking performed for the changes to the entry resulting from the control. The server does perform schema checking to assure the attributes are allowed in the entry.</li> <li>If more than one <b>replicateOperationalAttributes</b> control is specified in a request, the server returns LDAP_PROTOCOL_ERROR.</li> </ol> |

This control is intended to be used to pass values to the server for operational attributes that are typically set by the server, not by the client. For example, a master server might use this control to pass

the **modifiersName** and **modifyTimestamp** values on a replication request because the entry on the replica has the same values as on the master.

## Replication bind failure time stamp control

| Information                | Notes                                                                                                                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>Replication bind failure time stamp control</b>                                                                                                                                                                                                                                                            |
| Description                | Used to propagate bind failure time stamp values for user entry password policy attributes between a master server and read-only replica server consistently.                                                                                                                                                 |
| Assigned object identifier | 1.3.18.0.2.10.34                                                                                                                                                                                                                                                                                              |
| Target of control          | Server                                                                                                                                                                                                                                                                                                        |
| Control criticality        | Never                                                                                                                                                                                                                                                                                                         |
| Values                     | Time stamp of the bind operation in string format.<br><br>The value is absent on the request control. The value is a time stamp in string format for the response control. This is the time stamp of the bind operation that is used in updating password policy operational attributes on the master server. |

This control is valid on a bind request that uses simple authentication. The control is used in an advanced replication environment to manage **pwdFailureTime**, **pwdGraceUseTime**, and **pwdExpirationWarned** consistently between a read-only replica server and a master server. Any authentication request to a read-only replica that updates password policy operational attributes in the user entry includes this control on a chained bind request to the master server. This triggers a similar update on the master during the chained bind. The bind response includes this control, and when appropriate, a time stamp value is returned representing the time stamp used on the master server in any of the appropriate operational attributes. The read-only replica server then uses the returned time stamp to ensure that the attributes are managed consistently during the operation and subsequent replication of attributes from the master server to the replica server. Use of this control requires that the replication of bind failure on the read-only replica feature is enabled on all servers in the advanced replication topology.

## Replication Supplier ID Bind

| Information                | Notes                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------------|
| Name                       | <b>Replication Supplier ID Bind</b>                                                                        |
| Description                | Used by supplier gateway server when it binds to a consumer server in an advanced replication environment. |
| Assigned object identifier | 1.3.18.0.2.10.18                                                                                           |
| Target of control          | Server                                                                                                     |
| Control criticality        | Never critical                                                                                             |

| Information     | Notes                                                                                                                                                                                                                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Values          | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value.</p> <pre>ControlValue ::= SEQUENCE {     SupplierServerId OCTET STRING }</pre> <p>where</p> <p>SupplierServerId is a string that contains the server ID of the advanced replication supplier.</p> |
| Server behavior | <p>This control is only sent by a gateway server in an advanced replication environment when bound as the master server distinguished name specified in the replication agreement entry. If this control is sent by a user who does not have access, an LDAP_UNWILLING_TO_PERFORM error is returned.</p>                               |

This control is used by a gateway server to determine which servers to replicate to. Gateway servers only replicate updates that are received from other gateway servers to their own local servers (servers that exist in the same site as the gateway server, including peer and forwarding servers). When a gateway server binds to its consumer servers, this control is sent with its own server ID as the control value. When a gateway server receives such a control in a bind request, it knows that a gateway server is bound as a supplier and that only local servers should receive replicated updates.

## Server Administration

| Information                | Notes                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>Server Administration</b>                                                                                                                                                                                                                                                                                                                                          |
| Description                | Used by an LDAP administrator on an add, delete, modify, or modify DN operation under conditions where the operation is typically refused. Administrative role permissions are still enforced.                                                                                                                                                                        |
| Assigned object identifier | 1.3.18.0.2.10.15                                                                                                                                                                                                                                                                                                                                                      |
| Target of control          | Server                                                                                                                                                                                                                                                                                                                                                                |
| Control criticality        | Critical at client's option                                                                                                                                                                                                                                                                                                                                           |
| Values                     | There is no value; the <b>controlValue</b> field is absent.                                                                                                                                                                                                                                                                                                           |
| Server behavior            | <p>This control can only be specified by a user bound as an LDAP administrator. If user is not bound as an LDAP administrator, the server returns an LDAP_UNWILLING_TO_PERFORM error. If the server is a supplier or consumer server and is quiesced in an advanced replication environment, the control must be specified in order to allow the update to occur.</p> |

In an advanced replication environment, this control allows an add, delete, modify, or modify DN operation sent by an LDAP administrator to be processed by a server that typically refuses the operation, such as a quiesced forwarding server or a read-only replica server. The processed operation is then replicated as any other update. This control is used by the **ldapdiff** utility to enable updates to occur on consumer servers that are no longer synchronized with the supplier server.

This control must be used with discretion because entry updates are allowed under unusual circumstances. Therefore, it is the user's responsibility to ensure the server being updated ends up in a state consistent with the other servers in an advanced replication environment. For example, in an advanced replication environment, the entry's **modifyTimestamp** attribute value, which is used as the



base for conflict resolution, might be different on different servers if the entry gets updated individually on those servers with this control.

The **ldapadd**, **ldapmodify**, **ldapmodrdn**, and **ldapdelete** utilities have a -k option to add this control to LDAP server requests. For more information, see [ldapmodify and ldapadd utilities](#) in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*.

## SortKeyRequest

| Information                | Notes                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | <b>SortKeyRequest</b>                                                                                                                  |
| Description                | Used on a <b>SearchRequest</b> message to specify the criteria that a server should use to sort the results of an LDAP search request. |
| Assigned object identifier | 1.2.840.113556.1.4.473                                                                                                                 |
| Target of control          | Server                                                                                                                                 |
| Control criticality        | Critical at client's option                                                                                                            |

## SortKeyResponse

| Information                | Notes                                                                              |
|----------------------------|------------------------------------------------------------------------------------|
| Name                       | <b>SortKeyResponse</b>                                                             |
| Description                | Used on a <b>SearchresultDone</b> message to return the result of a sorted search. |
| Assigned object identifier | 1.2.840.113556.1.4.474                                                             |
| Target of control          | Client                                                                             |
| Control criticality        | Never critical                                                                     |

| Information     | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Values          | <p>The following ASN.1 (Abstract Syntax Notation One) syntax describes the BER (Basic Encoding Rules) encoding of the control value:</p> <pre> ControlValue ::= SEQUENCE {     sortresult ENUMERATED {         success (0), -- results are         sorted         operationsError (1), -- server internal         failure         timeLimitExceeded (3), -- timelimit         reached         before sorting was         completed         adminLimitExceeded (11), -- too many         matching entries         for the server to sort         noSuchAttribute (16), -- unrecognized         attribute type         in sort key         inappropriateMatching (18), -- unrecognized or         inappropriate         matching rule in sort key         insufficientAccessRights (50), -- refused to         return sorted results         to this client         busy (51), -- too busy to         process         unwillingToPerform (53), -- unable to sort         other (80)     },     attributeType[0] AttributeDescription } OPTIONAL </pre> <p>where</p> <ul style="list-style-type: none"> <li>• <code>sortresult</code> specifies the sort result return code.</li> <li>• <code>attributeType</code> is an optional field that specifies the returned attribute name that is associated with a sort error.</li> </ul> |
| Server behavior | See the server behavior for “SortKeyRequest” on page 667.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

This response control allows a client to determine the result of a sorted search request. The control is included in the server's **SearchresultDone** message. Support is provided in the z/OS LDAP client to parse this control. For more information, see:

- “SortKeyRequest” on page 667
- `ldap_parse_sort_control()` in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*
- `ldapsearch` utility in *z/OS IBM Tivoli Directory Server Client Programming for z/OS*

See [RFC 2891 \(tools.ietf.org/html/rfc2891\)](https://tools.ietf.org/html/rfc2891) for more information about the sorted search controls.

# Appendix D. Supported extended operations

The sections that follow describe the supported extended operations. For information about ASN.1 (Abstract Syntax Notation One) and BER (Basic Encoding Rules), see [A Layman's Guide to a Subset of ASN.1, BER, and DER \(luca.ntop.org/Teaching/Appunti/asn1.html\)](http://luca.ntop.org/Teaching/Appunti/asn1.html).

## Account status

- **Name: Account status**
- **Description:** Used to query the status of a user entry that contains a **userPassword** value. The status returned is whether the user's account is opened, locked by an administrator, or the password is expired.
- **Assigned object identifier:** 1.3.18.0.2.12.58
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 userDN LDAPDN
}
```

where,

userDN - A distinguished name (DN) containing the entry whose account status is being queried.

- **Detailed description:** The **Account status** extended operation is only allowed when bound as an LDAP root or directory administrator, or as a user querying their own account status.
- **Response object identifier:** 1.3.18.0.2.12.59
- **Response description:** This response is used to return whether the specified user is able to authenticate to the server (open), the password is expired, or the account is locked.
- **Response values:** The following describes the response value.

```
ResponseValue ::= SEQUENCE {
 status ENUMERATED {
 open (0),
 locked (1),
 expired (2) }
}
```

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Account status** response returned for such scenarios.

| Error scenario                                               | Account status response                         |
|--------------------------------------------------------------|-------------------------------------------------|
| An unauthorized user tries to perform the extended operation | Returns an LDAP_INSUFFICIENT_ACCESS return code |
| Syntax of DN specified is not correct                        | Returns an LDAP_INVALID_DN_SYNTAX return code   |
| No results returned                                          | Returns an LDAP_NO_results_RETURNED return code |
| userDN does not exist                                        | Returns an LDAP_NO_SUCH_OBJECT return code      |
| Internal server error                                        | Returns an LDAP_OPERATIONS_ERROR return code    |
| LDAP server is unable to decode the request                  | Returns an LDAP_PROTOCOL_ERROR return code      |

| Error scenario                                                                                                                    | Account status response           |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Returned for errors not covered by previously documented return codes. Check the corresponding error message for further details. | Returns an LDAP_OTHER return code |

## Cascading control replication

- **Name:** Cascading control replication
- **Description:** Performs the requested action to the specified server and passes it along to all replicas of the given replication context. If any of these are forwarding replicas or gateway servers, they pass the extended operation along to their replicas. The operation cascades over the entire advanced replication topology. This extended operation should be targeted against a master server.
- **Assigned object identifier:** 1.3.18.0.2.12.15
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 action INTEGER {
 quiesce (0),
 unquiesce (1),
 replicateNow (2),
 wait (3) },
 contextDN LDAPDN,
 timeout INTEGER
}
```

where,

**action** - An integer value indicating the operation to be performed on the specified server.

- If set to **quiesce**, updates under the replication context `contextDN` are restricted to LDAP administrators with the appropriate authority, if using the Server Administration control (OID 1.3.18.0.2.10.15), and any replication master server DN's with authority under this context. Advanced replication continues for a quiesced context. If the server is restarted, all replication contexts are then unquiesced.
- If set to **unquiesce**, updates under the replication context `contextDN` are allowed and normal operation resumes.
- If set to **replicateNow**, all queued updates for each replication agreement under `contextDN` are immediately replicated, regardless of schedule. After queued replication updates have been replicated, each replication agreement follows its normal schedule. If there are any suspended replication agreements, they are skipped and any queued updates remain queued for those replication agreements. Unlike **wait**, this extended operation is propagated to the consumer server of each replication agreement without waiting for all queued updates to be applied.
- If set to **wait**, all queued updates for each replication agreement under `contextDN` are immediately replicated, regardless of schedule. After queued replication updates have been replicated, each replication agreement follows its normal schedule. If there are any suspended replication agreements, they are skipped and any queued updates remain queued for those replication agreements. Unlike **replicateNow**, this extended operation is not propagated to the consumer server of each replication agreement until that agreement is finished replicating.

**contextDN** - A distinguished name (DN) containing the replication context that this operation affects.

**timeout** - An integer value indicating the number of seconds that the extended operation must successfully complete. If not present, or 0, the operation has an indefinite amount of time to complete.

- **Detailed description:** The **Cascading control replication** extended operation returns when one of the following conditions occurs:
  - The request is complete on all servers.
  - A failure has occurred on one of the servers in the replication topology.

- The timeout value is exceeded.

The **Cascading control replication** extended operation is allowed only when the bound user has update authority to all replication agreements in the specified contextDN or is authenticated as a master server for the specified contextDN.

- **Response object identifier:** 1.3.18.0.2.12.15
- **Response description:** This extended operation response is used to return error information when a problem is encountered with performing the **Cascading control replication** extended operation.
- **Response values:** The following describes the response value.

```
ResponseValue ::= SEQUENCE {
 resultCode INTEGER,
 msg OCTET STRING,
 supplier OCTET STRING,
 consumer OCTET STRING,
 additionalresultCode[1] INTEGER OPTIONAL {
 LDAP_REPLICATION_SUCCESS (0),
 LDAP_REPLICATION_RETRYING (2) },
 agreementDN[2] LDAPDN OPTIONAL
}
```

where,

**resultCode** is an integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

**msg** is a string containing a reason code message. In most cases, it is an error message indicating why the extended operation failed. In some cases, it can be an informational or warning message.

**supplier** is a string containing the shortened hostname and advanced replication server ID of the supplier server targeted by the extended operation. The format is '*shortenedHostName:serverID*'. If the shortened hostname cannot be determined, the format is '*server ID:serverID*'.

**consumer** is a string containing the *host:port* of the consumer server that is reporting an error. This is only returned when the consumer has a problem performing the requested operation.

**additionalresultCode** is an integer value that is returned when the **resultCode** is set to LDAP\_TIMEOUT.

**agreementDN** is a distinguished name (DN) containing the replication agreement that is in error.

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Cascading control replication response** returned for such scenarios.

| Error scenario                                           | Cascading control replication response           |
|----------------------------------------------------------|--------------------------------------------------|
| contextDN does not exist or is not a replication context | Returns an LDAP_NO_SUCH_OBJECT return code       |
| Backend does not support advanced replication            | Returns an LDAP_UNWILLING_TO_PERFORM return code |
| Not authorized to perform operation                      | Returns an LDAP_INSUFFICIENT_ACCESS return code  |
| Operation did not complete within the specified time     | Returns an LDAP_TIMEOUT return code              |
| Syntax of DN specified is not correct                    | Returns an LDAP_INVALID_DN_SYNTAX return code    |
| Value for the input option is not valid                  | Returns an LDAP_PROTOCOL_ERROR return code       |

| Error scenario                              | Cascading control replication response     |
|---------------------------------------------|--------------------------------------------|
| LDAP server is unable to decode the request | Returns an LDAP_DECODING_ERROR return code |

When a **Cascading control replication response** returns an LDAP\_TIMEOUT return code, the **additionalresultCode** field in the **Cascading control replication response** is set to either 0 or LDAP\_REPLICATION\_RETRYING to indicate the replication update is being retried. The LDAP\_REPLICATION\_RETRYING error is only returned when action is set to wait.

## changeLogAddEntry

- **Name:** changeLogAddEntry
- **Description:** Causes the LDAP server to create a change log entry in the change log by using information passed to the extended operation. All input values must be in UTF8.
- **Assigned object identifier:** 1.3.18.0.2.12.48
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 version INTEGER,
 applicationID INTEGER,
 userid OCTET STRING,
 group OCTET STRING,
 class OCTET STRING,
 resource OCTET STRING,
 changeType INTEGER {
 add (0),
 delete (1),
 modify (2),
 rename (3) },
 changeTime OCTET STRING,
 initiator OCTET STRING,
 changes SEQUENCE OF changeAttributeList OPTIONAL}

```

Where,

**version** - Identifies which version of the interface is being used. Currently the only value supported is 2. If the interface is extended in the future then other values are supported.

**applicationID** - 1 for RACF. Other applications have different identifiers. The identifier informs the LDAP server which (if any) translations of the data should be done.

**userid** - A string containing the user ID that is created, modified, deleted, or renamed. This string is used to form the value of the **targetDN** attribute in the change log entry.

**group** - For the RACF application, a string containing the group that is created, modified, deleted, or renamed. The RACF application can specify a value for both user ID and group to indicate that the change is to the connection of that user to that group. This string is used to form the value of the **targetDN** attribute in the change log entry.

**class** - A string containing the class of the resource profile that is created, modified, deleted, or renamed. This string is used along with the resource string to form a resource profile DN as the value of the **targetDN** attribute in the change log entry.

**resource** - A string containing the resource profile that is created, modified, deleted, or renamed. This string is used along with the class string to form a resource profile DN as the value of the **targetDN** attribute in the change log entry.

**changeType** - An integer value indicating the type of change. This is used to form the value of the changeType attribute in the change log entry.

**changeTime** - A string of decimal numbers, used to form the changeTime attribute in the change log entry. The format of the string is: *yyyymmddhhiiss.uuuuuuZ*

Where,

yyyy is year, mm is month, dd is day, hh is hour, ii is minutes, ss is seconds, uuuuuu is micro seconds, Z is a character constant meaning that this time is based on Coordinated Universal Time.

initiator - A string containing the user ID that made the change. This string is used to form the value of the **ibm-changeInitiatorsName** attribute in the change log entry.

```
changeAttributeList ::= SEQUENCE {
 field attributeDescription,
 vals SEQUENCE OF AttributeValue,
 action ENUMERATED {
 add (0),
 replace (1),
 delete (2) },
 requestValue Boolean }
```

Where,

**field** - The name of the attribute that has been changed. For RACF, this consists of the segment name followed by a period followed by the field name. LDAP maps the RACF segment and field name to an LDAP attribute name.

**vals** - A ber representation (length and data) of the new attribute value.

**action** - Describes what has happened to the attribute (value add, replace, or delete). To indicate that an entire attribute is deleted, specify an action of delete with no value in the vals field.

**requestValue** - A flag that, if TRUE, indicates that the attribute value in the vals field is not present and should be requested from the application.

The changeAttributeList values are used to form the **changes** attribute in the change log entry. If changeAttributeList is not specified, a change log entry is created without a **changes** attribute. This acts as a notification to the user of the change log that it should read the entire entry out of the directory tree.

- **Detailed description:** Class and resource cannot be specified with user ID or group. Both class and resource must be specified if either one is specified. In this case, SDBM must be configured to support RACF resources, by specifying **enableResources on** in the SDBM section of the LDAP server configuration file.
- **Response object identifier:** 1.3.18.0.2.12.49
- **Response description:** This response is used to return error information if an incorrect **changeLogAddEntryRequest** is passed to the LDAP server. If no errors are encountered, then an indication of success is returned to the caller. All output is in UTF8.
- **Response values:** The following describes the response value.

```
ResponseValue ::= SEQUENCE {
 changeLogresultCode ENUMERATED {
 success (0),
 loggingFailed (1),
 invalidCredentials (2),
 remoteNotSupported (3),
 notConfigured (4),
 notActive (5),
 decodeFailed (6),
 valueOutOfRange (7),
 dnConvertFailed (8)
 },
 msg OCTET STRING }
```

- **Response detailed description:**

The following table summarizes some different error scenarios and the **changeLogAddEntryRequest** response returned for such scenarios.

| Error scenario                                                   | changeLogAddEntryRequests response  |
|------------------------------------------------------------------|-------------------------------------|
| An internal error prevents the logging operation from completing | Returns a loggingFailed return code |

| Error scenario                                                | changeLogAddEntryRequests response        |
|---------------------------------------------------------------|-------------------------------------------|
| The caller is not in supervisor state                         | Returns an invalidCredentials return code |
| Change log is not configured                                  | Returns a notConfigured return code       |
| Change log is not active                                      | Returns a notActive return code           |
| LDAP server is unable to parse the request                    | Returns a decodeFailed return code        |
| Value is outside the range of allowable values                | Returns a valueOutOfRange return code     |
| LDAP server is unable to convert a RACF user ID to an LDAP DN | Returns a dnConvertFailed return code     |

## Control replication

- **Name: Control replication**
- **Description:** Used to suspend replication, resume replication, or force immediate replication by a supplier server in an advanced replication environment. When a replication agreement is suspended, updates under the context are allowed but the agreement queues the updates to its replica server until advanced replication is resumed for the agreement. This extended operation should be targeted against a master server.
- **Assigned object identifier:** 1.3.18.0.2.12.16
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 action INTEGER {
 suspend (0),
 resume (1),
 replicateNow (2) },
 scope INTEGER {
 singleAgreement (0),
 allAgreements (1) },
 entryDN LDAPDN
}
```

Where,

**action** - An integer value indicating the operation to be performed on the supplier server. If set to **suspend**, the replication agreement queues the updates to its replica server until advanced replication is resumed for the agreement. If set to **resume**, advanced replication for the replication agreement continues. If set to **replicateNow** and the replication agreement is waiting for scheduled replication to occur, any outstanding updates are immediately replicated. **replicateNow** has no effect on a suspended replication agreement.

**scope** - An integer value indicating the extent of the action that is to be performed. If set to **singleAgreement**, the request applies to a single replication agreement. If set to **allAgreements**, the request applies to all replication agreements within a replication context. This parameter indicates whether the entryDN is a replication agreement or context entry.

**entryDN** - A distinguished name (DN) containing the replication context or agreement that this operation affects. If scope is set to **singleAgreement**, this specifies the distinguished name of the replication agreement that this extended operation is acting on. If scope is set to **allAgreements**, this specifies the distinguished name of the replication context and indicates that all agreements within the context are to be acted on.

- **Response object identifier:** 1.3.18.0.2.12.16
- **Response description:** This extended operation response is used to return error information when a problem is encountered with performing the **Control replication** extended operation.



- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 resultCode INTEGER,
 msg OCTET STRING,
 consumer OCTET STRING
}
```

Where,

**resultCode** - An integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

**msg** - A string containing a reason code message. In most cases, it is an error message indicating why the extended operation failed. In some cases, it can be an informational or warning message.

**consumer** - A string containing the *host:port* of the consumer server that is reporting an error. This is returned when the consumer has certain problems performing the requested operation.

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Control replication response** returned for such scenarios.

| Error scenario                                                      | Control replication response                            |
|---------------------------------------------------------------------|---------------------------------------------------------|
| entryDN does not exist or is not a replication context or agreement | Returns an <b>LDAP_NO_SUCH_OBJECT</b> return code       |
| Backend does not support advanced replication                       | Returns an <b>LDAP_UNWILLING_TO_PERFORM</b> return code |
| Not authorized to perform operation                                 | Returns an <b>LDAP_INSUFFICIENT_ACCESS</b> return code  |
| Syntax of DN specified is not correct                               | Returns an <b>LDAP_INVALID_DN_SYNTAX</b> return code    |
| Value for the input option is not valid                             | Returns an <b>LDAP_PROTOCOL_ERROR</b> return code       |
| LDAP server is unable to decode the request                         | Returns an <b>LDAP_DECODING_ERROR</b> return code       |

## Control replication error log

- **Name:** Control replication error log
- **Description:** Used to display advanced replication errors in the error log and correct any advanced replication problems that occur.
- **Assigned object identifier:** 1.3.18.0.2.12.56
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 errorOption INTEGER {
 retry (1),
 display (2),
 delete (3) },
 failureId OCTET STRING,
 agreementDN LDAPDN
}
```

Where,

**errorOption** - An integer value indicating the operation to be performed on the advanced replication error log. If set to **retry**, tries to reprocess one or all failed replication updates. If set to **delete**,

deletes one or all failed replication updates. If set to **show**, shows the failed update specified by the `failureId`. The `failureId` cannot be set to **0** when `errorOption` is set to **show**.

`failureId` - A string indicating the target of the operation. If set to **0**, then all advanced replication errors in the error log are either retried or deleted based on the `errorOption` setting. Otherwise, this value specifies the failure ID in the advanced replication error log that is to be retried, displayed, or deleted based on the `errorOption` setting. The failure ID can be determined by searching the `agreementDN` for the **ibm-replicationFailedChanges** operational attribute. The failure ID must be in the range 1 - 4294967295.

`agreementDN` - A distinguished name (DN) containing the replication agreement that this operation affects.

- **Response object identifier:** 1.3.18.0.2.12.57
- **Response description:** This extended operation response is used to return error information when a problem is encountered with performing the **Control replication error log** extended operation.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 resultCode INTEGER,
 countEffectcd OCTET STRING,
 msg OCTET STRING
}
```

Where,

`resultCode` - An integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

`countEffectcd` - A string containing the number of error log failures retried, deleted, or displayed.

`msg` - A string containing a reason code message. In most cases, it is an error message indicating why the extended operation failed. In some cases, it can be an informational or warning message.

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Control replication error log** response returned for such scenarios.

| Error scenario                                                            | Control replication error log response                  |
|---------------------------------------------------------------------------|---------------------------------------------------------|
| <code>agreementDN</code> does not exist or is not a replication agreement | Returns an <b>LDAP_NO_SUCH_OBJECT</b> return code       |
| <code>failureId</code> does not exist for any agreement in this backend   | Returns an <b>LDAP_NO_SUCH_OBJECT</b> return code       |
| Backend does not support advanced replication                             | Returns an <b>LDAP_UNWILLING_TO_PERFORM</b> return code |
| <code>failureId</code> is not logged to this <code>agreementDN</code>     | Returns an <b>LDAP_UNWILLING_TO_PERFORM</b> return code |
| Not authorized to perform operation                                       | Returns an <b>LDAP_INSUFFICIENT_ACCESS</b> return code  |
| Syntax of DN specified is not correct                                     | Returns an <b>LDAP_INVALID_DN_SYNTAX</b> return code    |
| Value for the input option is not valid                                   | Returns an <b>LDAP_PROTOCOL_ERROR</b> return code       |
| LDAP server is unable to decode the request                               | Returns an <b>LDAP_DECODING_ERROR</b> return code       |

## Control replication queue

- **Name:** Control replication queue
- **Description:** Used to indicate which pending changes in the advanced replication queue for a replication agreement ought to be skipped (deleted) and not replicated to the consumer server.
- **Assigned object identifier:** 1.3.18.0.2.12.17
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
requestValue ::= SEQUENCE {
 action INTEGER {
 skipAll (0),
 skipSingle (1) },
 agreementDN LDAPDN,
 changeId OCTET STRING
}
```

Where,

**action** - An integer value indicating the operation that is to be performed on the advanced replication queue. If set to **skipAll**, the server skips (deletes) all updates that have not yet been replicated from the replication agreement. If set to **skipSingle**, the server skips (deletes) the specified changeId. Only the next change to be replicated can be skipped in this manner. If the changeId that is specified is not the first one in the list of pending changes, the extended operation fails. This ensures that the operation only affects the entry that is preventing advanced replication from occurring.

**agreementDN** - A distinguished name (DN) containing the replication agreement that this operation affects.

**changeID** - A string that identifies the change ID of a pending operation in the replication agreement that is to be skipped (deleted). The changeId that is specified must be in the range 1 - 4294967295. Change IDs can be determined by searching the agreementDN for the **ibm-replicationPendingChanges** operational attribute. The changeId is required when action is set to **skipSingle** and ignored when action is set to **skipAll**.

- **Response object identifier:** 1.3.18.0.2.12.17
- **Response description:** This extended operation response is used to return error information when a problem is encountered with performing the **Control replication queue** extended operation. If action is set to **skipAll** and there are no pending updates in the advanced replication queue, the extended operation is considered successful.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 resultCode INTEGER,
 msg OCTET STRING,
 changesSkipped INTEGER
}
```

Where,

**resultCode** - An integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

**msg** - A string containing a reason code message. In most cases, it is an error message indicating why the extended operation failed. In some cases, it can be an informational or warning message.

**changesSkipped** - An integer value indicating the number of pending updates in the advanced replication queue that have been skipped (deleted).

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Control replication queue response** returned for such scenarios.

| Error scenario                                                 | Control replication queue response                      |
|----------------------------------------------------------------|---------------------------------------------------------|
| agreementDN does not exist or is not a replication agreement   | Returns an <b>LDAP_NO_SUCH_OBJECT</b> return code       |
| Backend does not support advanced replication                  | Returns an <b>LDAP_UNWILLING_TO_PERFORM</b> return code |
| The specified changeId is not the next change to be replicated | Returns an <b>LDAP_UNWILLING_TO_PERFORM</b> return code |
| Not authorized to perform the requested operation              | Returns an <b>LDAP_INSUFFICIENT_ACCESS</b> return code  |
| Syntax of DN specified is not correct                          | Returns an <b>LDAP_INVALID_DN_SYNTAX</b> return code    |
| Value for the input option is not valid                        | Returns an <b>LDAP_PROTOCOL_ERROR</b> return code       |
| LDAP server is unable to decode the request                    | Returns an <b>LDAP_DECODING_ERROR</b> return code       |

## Effective password policy

- **Name: Effective password policy**
- **Description:** Used to query the effective password policy for a user or group entry and lists the policies used in determining its effective password policy.
- **Assigned object identifier:** 1.3.18.0.2.12.75
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 entryDN LDAPDN
}
```

where,

entryDN - A distinguished name (DN) containing the entry whose effective password policies and password policy attribute values are being queried.

- **Detailed description:** The **Effective password policy** extended operation is only allowed when bound as an LDAP root or directory data administrator, or as a user querying its own effective password policy. An LDAP root or directory data administrator is allowed to query the effective password policy of other users and groups in the directory. When a user entry is queried, this extended operation shows the effective password policy entries and values that are used to control the user's authentication and password modifications. When a group entry is queried, this extended operation provides the effective password policy that is a combination of the group's password policy attributes and the global password policy entry, cn=pwdpolicy, cn=ibmpolicies.
- **Response object identifier:** 1.3.18.0.2.12.77
- **Response description:** When a user entry is queried, this extended response shows the effective password entries and values used to control the user's authentication and password modifications. When a group entry is queried, this extended operation provides the effective password policy that is a combination of the group's password policy attributes and the global password policy entry, cn=pwdpolicy, cn=ibmpolicies. If a user is querying their own effective password policy, the objectNames are not returned.
- **Response values:** The following describes the response value.

```
ResponseValue ::= SEQUENCE {
 attributes SEQUENCE OF SEQUENCE {
 attributeType AttributeDescription,
```

```

values SET OF AttributeValue
 {
 objectNames [0] SEQUENCE {
objectName LDAPDN OPTIONAL
 }
}

```

Where,

**attributes** - The password policy attribute types and values that are contained in the user's or group's effective password policy.

**objectName** - The distinguished names of all password policy entries from where the effective password policy attribute values are derived. The **objectName** field is only returned in the extended operation response when bound as an LDAP root or directory data administrator. It is not returned when bound as a normal user.

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Effective password policy** response returned for such scenarios.

| Error scenario                                                                                                                    | Effective password policy response              |
|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| An unauthorized user tries to perform the extended operation                                                                      | Returns an LDAP_INSUFFICIENT_ACCESS return code |
| Syntax of DN specified is not correct                                                                                             | Returns an LDAP_INVALID_DN_SYNTAX return code   |
| Insufficient memory to perform the operation                                                                                      | Returns an LDAP_NO_MEMORY return code           |
| entryDN does not exist                                                                                                            | Returns an LDAP_NO_SUCH_OBJECT return code      |
| Internal server error                                                                                                             | Returns an LDAP_OPERATIONS_ERROR return code    |
| LDAP server is unable to decode the request                                                                                       | Returns an LDAP_PROTOCOL_ERROR return code      |
| Returned for errors not covered by previously documented return codes. Check the corresponding error message for further details. | Returns an LDAP_OTHER return code               |

## GetDnForUserid

- **Name:** **GetDnForUserid**
- **Description:** The **GetDnForUserid** extended operation is deprecated. This extended operation causes the EXOP backend to open a connection to an LDAP server with Policy Director data to retrieve all of a user ID's distinguished names. The extended operation is rejected if the EXOP backend is not configured.
- **Assigned object identifier:** 1.3.18.0.2.12.8
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```

RequestValue ::= SEQUENCE {
 Userid OCTET STRING,
 Searchbase [0] LDAPDN OPTIONAL,
 EntryTypes [1] SEQUENCE OF Objectclass-name OPTIONAL
}

```

Where,

```

Objectclass-name ::= OCTET STRING

```

- **Detailed description:** Given a user ID and the required **IBMLdapProxyControl**, the EXOP backend opens a connection to the target LDAP server specified in the **IBMLdapProxyControl** and retrieves all of the specified user ID's distinguished names.

The search base in the request value establishes the sub-tree to search for the user ID's distinguished names. If this is not specified, the EXOP backend performs a root DSE search to determine all of the naming contexts of the target LDAP server and proceed to search each naming context for the user ID's distinguished names. In addition to the search base, the user can specify optional object classes to filter distinguished names from the result.

- **Response object identifier:** 1.3.18.0.2.12.10
- **Response description:** Returned by EXOP backend when it receives a **GetDnForUserid** extended operations request.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE OF Distinguished-name
```

where,

```
Distinguished-name LDAPDN
```

- **Response detailed description:** When the EXOP backend receives a **GetDnForUserid** extended operation request and the required **IBMLdapProxyControl**, it issues requests to the target LDAP server specified in the **IBMLdapProxyControl** to retrieve all of the specified user ID's distinguished names. The user might further filter the results by specifying a search base and object class names in the request value.

The following table summarizes some different error scenarios and the EXOP backend's response returned for such scenarios.

| Error scenario                                                                                                | EXOP backends response                                                                        |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Cannot find distinguished names                                                                               | Returns an <b>LDAP_NO_SUCH_OBJECT</b> return code                                             |
| Encounters an <b>LDAP_NO_SUCH_OBJECT</b> return code in its attempt to bind to the target LDAP server         | Returns an <b>LDAP_INAPPROPRIATE_AUTH</b> return code                                         |
| Encounters any other unsuccessful return codes in its attempt to make LDAP requests to the target LDAP server | Returns these return codes encountered and a detailed message describing the point of failure |

## GetEffectiveACL

- **Name:** GetEffectiveACL
- **Description:** Retrieves the effective ACLs for a directory entry that is based on the bind identity and directory/entry access information.
- **Assigned object identifier:** 1.3.18.0.2.12.82
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 entryDN LDAPDN,
 bindAuthentication BindAuthentication,
 bindIP [0] OCTET STRING OPTIONAL,
 timeOfDay [1] OCTET STRING OPTIONAL,
 dayOfWeek [2] OCTET STRING OPTIONAL,
 bindEncryption [3] BOOLEAN OPTIONAL
}

BindAuthentication ::= CHOICE {
 simpleCramDigestBind [0] SimpleCramDigestBind,
 gssApiBind [1] GssApiBind,
```

|                                     |     |                       |
|-------------------------------------|-----|-----------------------|
| externalBind                        | [2] | ExternalBind,         |
| anonymousBind                       | [3] | NULL                  |
| }                                   |     |                       |
| SimpleCramDigestBind ::= SEQUENCE { |     |                       |
| bindDN                              |     | LDAPDN,               |
| mechanism ENUMERATED {              |     |                       |
| simple (0),                         |     |                       |
| cramMd5 (1),                        |     |                       |
| digestMd5 (2)                       |     |                       |
| }                                   |     |                       |
| }                                   |     |                       |
| GssApiBind ::= principalRealm       |     | OCTET STRING          |
| ExternalBind ::= SEQUENCE {         |     |                       |
| subjectDN                           |     | LDAPDN,               |
| racfUserID                          | [0] | OCTET STRING OPTIONAL |
| }                                   |     |                       |

Where,

entryDN - A distinguished name (DN) of the entry that access is requested.

bindAuthentication - The bind identity and bind mechanism to calculate effective ACLs for.

bindIP - The IPv4 or IPv6 address of the client that is used to connect to the LDAP server. If bindIP is unspecified, it defaults to the unspecified IPv4 address, 0.0.0.0

timeOfDay - The time of day the directory entry is accessed. The format is *hh:mm*, where *hh* ranges from 00 to 23, and *mm* ranges from 00 to 59. If bindtimeOfDay is unspecified, it defaults to the server's current time of day.

dayOfWeek - The day of week the directory entry is accessed. Valid values range from 0 to 6, where: Sunday = 0, Monday = 1, Tuesday = 2, Wednesday = 3, Thursday = 4, Friday = 5, Saturday = 6. If binddayOfWeek is unspecified, it defaults to the current day of week of the server.

bindEncryption - Indicates whether the bind DN's client connection is using encryption. If bindEncryption is unspecified, it defaults to FALSE.

simpleCramDigestBind - The bind mechanism that is used to bind to the LDAP server is a simple, CRAM-MD5, or DIGEST-MD5 bind.

gssApiBind - The bind mechanism that is used to bind to the LDAP server is a SASL GSS API Kerberos bind.

externalBind - The bind mechanism that is used to bind to the LDAP server is a SASL external bind.

anonymousBind - The bind mechanism that is used to bind to the LDAP server is an anonymous bind.

bindDN - A distinguished name (DN) used to bind to the LDAP server for a simple, CRAM-MD5, or DIGEST-MD5 bind.

mechanism - The mechanism that is used to bind to the LDAP server for a simple, CRAM-MD5, or DIGEST-MD5 bind.

principalRealm - The SASL GSS API Kerberos bind source principal that is obtained from the GSS API client credentials, which are specified as *principal@REALM*.

subjectDN - The subject name from the client certificate.

racfUserID - The RACF user ID associated with subjectDN. If unspecified, access is only determined for subjectDN.

- **Detailed description:** With the entryDN, optional bind, and directory entry access information, the following are returned:

- The entry DN that access was requested.
- The subject (bind, alternate, and group DN) that access was calculated for.

- The applicable attribute values (aclEntry and entryOwner) used to form the effective ACLs.
- The effective object ACL.
- The effective access class ACLs.
- The effective attribute ACLs.

**Note:** Administrator permissions can be restricted by ACL filters that match the administrator DN. Additionally, the ACL permissions of users who issue this extended operation can limit the results returned.

- **Response object identifier:** 1.3.18.0.2.12.82
- **Response description:** Returned by the LDAP server when it receives a **GetEffectiveACL** extended operation request.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```

ResponseValue ::= SEQUENCE {
 resultCode INTEGER (0..MAX),
 resultMessage OCTET STRING,
 entryDN LDAPDN,
 bindDN LDAPDN,
 alternateDNs SEQUENCE of LDAPDN,
 groupDNs SEQUENCE of LDAPDN,
 aclEntriesApplied SEQUENCE OF OCTET STRING,
 entryOwnersApplied SEQUENCE OF OCTET STRING,
 effectiveObjectACL OCTET STRING,
 effectiveAccessClassACLs SEQUENCE OF OCTET STRING,
 effectiveAttributeACLs SEQUENCE OF OCTET STRING
}

```

Where,

**resultCode** - An integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

**resultMessage** - A string containing an error message. In most cases, it indicates why the extended operation failed. In some cases, it can be an informational or warning message.

**entryDN** - A distinguished name (DN) of the entry that access is requested.

**bindDN** - The bind distinguished name that effective ACLs were calculated for.

**alternateDNs** - The alternate bind distinguished names that effective ACLs were calculated for.

**groupDNs** - The group distinguished names that effective ACLs were calculated for.

**aclEntriesApplied** - aclEntry attribute values that were applied to form the effective ACLs.

**entryOwnersApplied** - entryOwner attribute values that were applied to form the effective ACLs.

**effectiveObjectACL** - The object permissions (add, delete) that represent the bind identity's access to the entry DN.

**effectiveAccessClassACLs** - The access class permissions (read, write, search, compare) that represent the bind identity's access to the entry DN.

**effectiveAttributeACLs** - The attribute permissions (read, write, search, compare) that represent the bind identity's access to the entry DN.

- **Response detailed description:**

When the LDAP server receives a **GetEffectiveACL** extended operation request, it calculates the effective access that the bind identity would have to the entry DN. Calculation of the effective access takes into account the optional bind identity and directory/entry access information. The following table summarizes some different error scenarios and the **GetEffectiveACL** returned for such scenarios.

| Error scenario                  | GetEffectiveACL response            |
|---------------------------------|-------------------------------------|
| Successfully calculated the ACL | Returns an LDAP_SUCCESS return code |



| Error scenario                                 | GetEffectiveACL response                                                          |
|------------------------------------------------|-----------------------------------------------------------------------------------|
| Cannot find the entry DN                       | Returns an LDAP_NO_SUCH_OBJECT return code                                        |
| Not authorized to perform operation            | Returns an LDAP_INSUFFICIENT_ACCESS return code                                   |
| Syntax of DN specified is not correct          | Returns an LDAP_INVALID_DN_SYNTAX return code                                     |
| Value for the input option is not valid        | Returns an LDAP_PROTOCOL_ERROR return code                                        |
| LDAP server is unable to decode the request    | Returns an LDAP_DECODING_ERROR return code                                        |
| Encounters any other unsuccessful return codes | Returns the return code encountered and a detailed message describing the failure |

## GetPrivileges

- **Name:** GetPrivileges
- **Description:** The **GetPrivileges** extended operation is deprecated. This extended operation causes the EXOP backend to open a connection to an LDAP server with Policy Director data and retrieve all of a subject's Policy Director privilege information. The extended operation is rejected if the EXOP backend is not configured.
- **Assigned object identifier:** 1.3.18.0.2.12.7
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 Subject LDAPDN,
 DomainName OCTET STRING OPTIONAL
}
```

- **Detailed description:** Given the subject and the required **IBMLdapProxyControl**, the EXOP backend opens a connection to the target LDAP server specified in the **IBMLdapProxyControl** and retrieves all of the specified subject's Policy Director data. If no domain name is specified, the EXOP backend assumes that the subject exists in the DEFAULT domain.
- **Response object identifier:** 1.3.18.0.2.12.9
- **Response description:** Returned by EXOP backend when it receives a **GetPrivileges** extended operations request.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 DomainName OCTET STRING,
 SecLoginType OCTET STRING,
 PrincipalName OCTET STRING,
 SecPwdValid BOOLEAN,
 SecAcctValid BOOLEAN,
 UserUUID SEQUENCE {
 Username LDAPDN,
 UserUUID OCTET STRING
 }
 GroupInfo SEQUENCE {
 NumberOfGroups INTEGER,
 GroupUUIDs SEQUENCE OF SEQUENCE {
 Groupname LDAPDN,
 GroupUUID OCTET STRING
 }
 }
}
```

- **Response detailed description:** When the EXOP backend receives a **GetPrivileges** extended operation request and the required **IBMLdapProxyControl**, it issues requests to the target LDAP server specified in the **IBMLdapProxyControl** to retrieve all of the subject's Policy Director data.

The following table summarizes some different error scenarios and the EXOP backend's response returned for such scenarios.

| Error scenario                                                                                                | EXOP backends response                                                                        |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Cannot find any of the fields in the response value                                                           | Returns an <b>LDAP_NO_SUCH_OBJECT</b> return code                                             |
| Retrieves more than one UserUUID or more than one GroupUUID per Groupname                                     | Returns an <b>LDAP_OTHER</b> return code                                                      |
| Encounters an <b>LDAP_NO_SUCH_OBJECT</b> return code in its attempt to bind to the target LDAP server         | Returns an <b>LDAP_INAPPROPRIATE_AUTH</b> return code                                         |
| Encounters any other unsuccessful return codes in its attempt to make LDAP requests to the target LDAP server | Returns these return codes encountered and a detailed message describing the point of failure |

## Quiesce or unquiesce context

- **Name: Quiesce or unquiesce context**
- **Description:** Used to change an advanced replication context to or from a quiesced state. In a quiesced state, the entire subtree starting from the context does not accept client updates except from an LDAP administrator with the appropriate authority, if using the Server Administration control (OID 1.3.18.0.2.10.15), and any replication master server DN's with authority under this context. Advanced replication continues for a quiesced context. If the server is restarted, all replication contexts are then unquiesced.
- **Assigned object identifier:** 1.3.18.0.2.12.19
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 quiesce BOOLEAN,
 contextDN LDAPDN
}
```

Where,

**quiesce** - A boolean indicating whether to quiesce (TRUE) or unquiesce (FALSE) an advanced replication context.

**contextDN** - A distinguished name (DN) containing the replication context that this operation affects.

- **Response object identifier:** 1.3.18.0.2.12.19
- **Response description:** This extended operation response is used to return error information when a problem is encountered with performing the **Quiesce or unquiesce context** extended operation.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 resultCode INTEGER,
 msg OCTET STRING
}
```

Where,

**resultCode** - An integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

**msg** - A string containing a reason code message. In most cases, it is an error message indicating why the extended operation failed. In some cases, it can be an informational or warning message.

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Quiesce or unquiesce context** response returned for such scenarios.

| Error scenario                                           | Quiesce or unquiesce context response            |
|----------------------------------------------------------|--------------------------------------------------|
| contextDN does not exist or is not a replication context | Returns an LDAP_NO_SUCH_OBJECT return code       |
| Backend does not support advanced replication            | Returns an LDAP_UNWILLING_TO_PERFORM return code |
| Not authorized to perform operation.                     | Returns an LDAP_INSUFFICIENT_ACCESS return code  |
| Syntax of DN specified is not correct.                   | Returns an LDAP_INVALID_DN_SYNTAX return code    |
| Unable to find the request data.                         | Returns an LDAP_PROTOCOL_ERROR return code       |
| LDAP server is unable to decode the request.             | Returns an LDAP_DECODING_ERROR return code       |

## Remote auditing

- **Name:** Remote auditing
- **Description:** Used by resource managers that do not exist on z/OS to remotely log security events in SMF.
- **Assigned object identifier:** 1.3.18.0.2.12.68
- **Values:** For more information about the **Remote auditing** extended operation request, see [Remote auditing extended operation in z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS](#).
- **Response object identifier:** 1.3.18.0.2.12.69
- **Response description:** This extended operation response is used to return information regarding the audit log request when performing the **Remote auditing** extended operation.
- **Response values:** For more information about the **Remote auditing** extended operation response, see [Remote auditing extended operation in z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS](#).

## Remote authorization

| Information                | Notes                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                       | Remote authorization                                                                                                                                                                                         |
| Description                | Used by resource managers that do not exist on z/OS to remotely check authorization in the z/OS Security Manager.                                                                                            |
| Assigned object identifier | 1.3.18.0.2.12.66                                                                                                                                                                                             |
| Target of control          | Server                                                                                                                                                                                                       |
| Control criticality        | Never                                                                                                                                                                                                        |
| Values                     | For more information about the Remote authorization extended operation request, see <a href="#">Remote authorization extended operation in z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</a> . |
| Response object identifier | 1.3.18.0.2.12.67                                                                                                                                                                                             |

| Information          | Notes                                                                                                                                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response description | This extended operation response is used to return information regarding the authorization check request when performing the Remote authorization extended operation.                                       |
| Response values      | For more information about the Remote authorization extended operation response, see <i>Remote authorization extended operation</i> in <i>z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS</i> . |

## RemoteCryptoCCA

- **Name:** RemoteCryptoCCA
- **Description:** Used by remote applications to access a subset of CCA callable services provided by ICSF, allowing remote management of centralized key material stored in persistent key data sets in z/OS.
- **Assigned object identifier:** 1.3.18.0.2.12.85
- **Values:** For more information about the **RemoteCryptoCCA** extended operation request, see *ICSF callable services supported by the RemoteCryptoCCA extended operation* in *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS*.
- **Response object identifier:** 1.3.18.0.2.12.86
- **Response description:** This extended operation response is used to return information regarding the remote crypto plug-in request when performing the **RemoteCryptoCCA** extended operation.
- **Response values:** For more information about the **RemoteCryptoCCA** extended operation response, see *ICSF callable services supported by the RemoteCryptoCCA extended operation* in *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS*.

## RemoteCryptoPKCS#11

- **Name:** RemoteCryptoPKCS#11
- **Description:** Used by applications that do not have access to a local PKCS #11 implementation and want to manage their PKCS #11 tokens and objects in z/OS.
- **Assigned object identifier:** 1.3.18.0.2.12.83
- **Values:** See ICSF callable services supported by the RemoteCryptoPKCS#11 extended operation in *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS* for more information about the **RemoteCryptoPKCS#11** extended operation request.
- **Response object identifier:** 1.3.18.0.2.12.84
- **Response description:** This extended operation response is used to return information regarding the remote crypto plug-in request when performing the **RemoteCryptoPKCS#11** extended operation.
- **Response values:** See ICSF callable services supported by the RemoteCryptoPKCS#11 extended operation in *z/OS IBM Tivoli Directory Server Plug-in Reference for z/OS* for more information about the **RemoteCryptoPKCS#11** extended operation response.

## Replication topology

- **Name:** Replication topology
- **Description:** Used to synchronize replication topology-related entries across the replication topology. A replication topology entry is an entry that contains an objectclass whose name begins with **ibm-replica**, such as **ibm-replicationContext**, **ibm-replicaGroup**, **ibm-replicaSubentry**, **ibm-replicationAgreement**, and **ibm-replicationCredentialsSimple**. This extended operation is cascaded through all forwarding and gateway servers if **agreementDN** is not specified. If **agreementDN** is specified, then the extended operation only synchronizes the replication topology entries in the consumer server defined by the replication agreement.

**Note:** Replication topology entries containing credentials are also replicated if they are located under the replication context. These entries should be located instead under the `cn=localhost` suffix.

- **Assigned object identifier:** 1.3.18.0.2.12.54
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value.

```
RequestValue ::= SEQUENCE {
 contextDN LDAPDN,
 timeout INTEGER,
 agreementDN LDAPDN OPTIONAL
}
```

Where,

`contextDN` - A distinguished name (DN) containing the replication context on the supplier server that the advanced replication topology-related entries are synchronized.

`timeout` - An integer value indicating the number of seconds that the extended operation must successfully complete. If not present, or 0, the operation has an indefinite amount of time to complete.

`agreementDN` - A distinguished name (DN) containing the replication agreement used to connect to a consumer server. If a value is specified, only the consumer server defined in the `agreementDN` is synchronized. The extended operation is not cascaded to any consumers of that server.

- **Response object identifier:** 1.3.18.0.2.12.55
- **Response description:** This extended operation response is used to return error information when a problem is encountered with performing the **Replication topology** extended operation.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 resultCode INTEGER,
 msg OCTET STRING,
 supplier OCTET STRING,
 consumer OCTET STRING
}
```

Where,

`resultCode` - An integer value indicating whether the extended operation is successful. Standard LDAP return codes are returned as values within this portion of the extended operation response.

`msg` - A string containing a reason code message. In most cases, it is an error message indicating why the extended operation failed. In some cases, it can be an informational or warning message.

`supplier` - A string containing the shortened hostname and advanced replication server ID of the supplier server targeted by the extended operation. The format is '*shortenedHostName:serverID*'. If the shortened hostname cannot be determined, the format is '*server ID:serverID*'.

`consumer` - A string containing the *host:port* of the consumer server that is reporting an error. This is returned when the consumer has certain problems performing the requested operation.

- **Response detailed description:**

The following table summarizes some different error scenarios and the **Replication topology response** returned for such scenarios.

| Error scenario                                                            | Replication topology response                    |
|---------------------------------------------------------------------------|--------------------------------------------------|
| <code>contextDN</code> does not exist or is not a replication context     | Returns an LDAP_NO_SUCH_OBJECT return code       |
| <code>agreementDN</code> does not exist or is not a replication agreement | Returns an LDAP_NO_SUCH_OBJECT return code       |
| Backend does not support advanced replication                             | Returns an LDAP_UNWILLING_TO_PERFORM return code |

| Error scenario                                 | Replication topology response                    |
|------------------------------------------------|--------------------------------------------------|
| agreementDN is not under a replication context | Returns an LDAP_UNWILLING_TO_PERFORM return code |
| Not authorized to perform operation            | Returns an LDAP_INSUFFICIENT_ACCESS return code  |
| Operation did not complete with specified time | Returns an LDAP_TIMEOUT return code              |
| Syntax of DN specified is not correct          | Returns an LDAP_INVALID_DN_SYNTAX return code    |
| Value for the input option is not valid        | Returns an LDAP_PROTOCOL_ERROR return code       |
| LDAP server is unable to decode the request    | Returns an LDAP_DECODING_ERROR return code       |

## Start TLS

- **Name:** Start TLS Extended Request
- **Description:** Causes a non-secure connection to change to a secure connection.
- **Assigned object identifier:** 1.3.6.1.4.1.1466.20037
- **Values:** None.
- **Detailed description:** The client may send the **Start TLS** extended request at any time after establishing an LDAP directory association, except in the following cases:
  - If a secure connection is already established, or
  - During a multi-stage SASL negotiation, or
  - If there are any outstanding LDAP directory operations on the connection.

The LDAP server responds with an indication of whether the change to a secure connection is allowed. If accepted, the client is expected to immediately begin the secure protocol handshake.

The secure connection might be ended and a non-secure connection resumed by having the client cause a TLS closure alert to be sent to the server. Communication after receiving the TLS closure alert is over a non-secure connection. The client is considered to be in an anonymous authentication state.

- **Response object identifier:** 1.3.6.1.4.1.1466.20037
- **Response description:** Upon receiving the **Start TLS** extended request, the server returns an extended response containing a response code indicating success or failure.
- **Response values:** For the successful response, no response value is returned. For an error response, a response message indicating the cause of the error is returned.
- **Response detailed description:**

The following table summarizes some different error scenarios and the servers response returned for such scenarios.

| Error scenario                                       | Server response                                     |
|------------------------------------------------------|-----------------------------------------------------|
| Server accepts connection and can handle the request | Returns an <b>LDAP_SUCCESS</b> return code          |
| SSL/TLS is not configured                            | Returns an <b>LDAP_UNAVAILABLE</b> return code      |
| A secure connection is already established           | Returns an <b>LDAP_OPERATIONS_ERROR</b> return code |

| Error scenario                                     | Server response                                     |
|----------------------------------------------------|-----------------------------------------------------|
| Secure connections are not supported by the server | Returns an <b>LDAP_PROTOCOL_ERROR</b> return code   |
| There are outstanding operations on the connection | Returns an <b>LDAP_OPERATIONS_ERROR</b> return code |
| A multi-stage SASL negotiation is in progress      | Returns an <b>LDAP_OPERATIONS_ERROR</b> return code |

## unloadRequest

- **Name:** `unloadRequest`
- **Description:** Causes the LDAP server to unload entries from a directory into a file in LDIF format. This extended operation is used by the **ds2ldif** utility. See [“The ds2ldif utility” on page 225](#) for more information about **ds2ldif**.
- **Assigned object identifier:** 1.3.18.0.2.12.62
- **Values:** The following ASN.1 syntax describes the BER encoding of the request value:

```
RequestValue ::= SEQUENCE {
 tagOption BOOLEAN,
 outputFileName OCTET STRING,
 subtreeDN [0] LDAPDN OPTIONAL,
 backendName [1] OCTET STRING OPTIONAL,
 genealogicalOrder [2] BOOLEAN OPTIONAL,
 filterDN [3] LDAPDN OPTIONAL,
 noControlValues [4] BOOLEAN OPTIONAL,
 unloadLocalhost [5] BOOLEAN OPTIONAL
}
```

Where,

### **tagOption**

A Boolean value that indicates whether the encryption tag of userPassword attribute values should be displayed in the clear when directory data is unloaded. This value corresponds to the `-t` option of the **ds2ldif** utility.

### **outputFileName**

A string containing the fully qualified z/OS UNIX System Services file name or data set name that the server writes the unloaded directory entries in LDIF format. This value corresponds to the `-o` option of the **ds2ldif** utility.

### **subtreeDN**

A distinguished name (DN) containing the name of the top entry to unload. This entry and all of the entries below it in the directory hierarchy are unloaded. The value must be the DN of an entry in an LDBM, TDBM, or CDBM backend or of the LDAP server schema entry, `cn=schema`. This value corresponds to the `-s` option of the **ds2ldif** utility.

### **backendName**

A string containing the name of an LDBM, TDBM, or CDBM backend. All the entries in the backend are unloaded. The value is either the optional fourth parameter of the database option in the LDAP server configuration file or the name generated for the backend by the LDAP server if the parameter is not specified in the configuration file. This value corresponds to the `-n` option of the **ds2ldif** utility.

### **genealogicalOrder**

A Boolean value that specifies how the entries are unloaded. If set to `TRUE`, entries in each subtree are unloaded together, doing a depth-first traversal of the directory. If set to `FALSE` or if not specified, there is no guaranteed order of unloaded entries, other than parent entries are always unloaded before child entries. This value corresponds to the `-g` option of the **ds2ldif** utility.

**filterDN**

A distinguished name (DN) of a replication filter entry that contains `ibm-replicationFilterAttr` attribute values. These values are filters used to skip entire entries or attributes within entries while unloading the directory. See for more information about replication filter entries. Advanced replication must be enabled in the LDAP server with the CDBM backend configured and `useAdvancedReplication` on specified in the CDBM backend section of the LDAP server configuration file. This value corresponds to the `-q` option of the **ds2ldif** utility.

**noControlValues**

A Boolean value that indicates whether the `replicateOperationalAttributes` control value is unloaded for each entry. If set to `TRUE`, the `replicateOperationalAttributes` control is not unloaded for each entry. If set to `FALSE` or if not specified and the server compatibility level is 5 or greater, the `replicateOperationalAttributes` control is unloaded for each entry. The `replicateOperationalAttributes` control value contains the `modifyTimestamp`, `createTimestamp`, `creatorsName`, and `modifiersName` attribute types and values for the entry base64 encoded. See for more information about server compatibility. This value corresponds to the `-j` option of the **ds2ldif** utility.

**unloadLocalHost**

A Boolean value that indicates whether the `cn=localhost` subtree is unloaded if it exists on the targeted LDAP server. This value can only be set to `TRUE` when `subtreeDN` is not specified. This value corresponds to the `-l` option of the **ds2ldif** utility.

- **Detailed description:** The **unloadRequest** extended operation is rejected if the requester is not bound as an LDAP root, directory data, or schema (only when unloading the schema entry) administrator. `subtreeDN` and `backendName` cannot both be specified in the request. If neither is specified and there is only one LDBM, TDBM, or CDBM backend configured, then that backend is unloaded; otherwise, an error is returned.

The **aclEntry**, **aclPropagate**, **entryOwner**, and **ownerPropagate** attributes are included in an unloaded entry if these attributes have been explicitly set for that entry. The unloaded entry also includes the **ibm-entryuuid** attribute. The **replicateOperationalAttributes** control value is written to the output LDIF file if `noControlValues` is set to `FALSE`.

The **ds2ldif** utility uses this extended operation to unload the selected directory data if it encounters a problem starting the backend that is to be unloaded or if the `-r` command-line option is specified. For additional details about the operation of the **ds2ldif** utility, see [“The ds2ldif utility” on page 225](#).

- **Response object identifier:** 1.3.18.0.2.12.63
- **Response description:** The response indicates the number of entries that were successfully unloaded by the LDAP server as a result of the **unloadRequest** extended operation.
- **Response values:** The following ASN.1 syntax describes the BER encoding of the response value.

```
ResponseValue ::= SEQUENCE {
 entryCount INTEGER
}
```

- **Response detailed description:**

The following table summarizes some different error scenarios and the **unloadRequest response** returned for such scenarios:

| Error scenario                                                                                                                           | unloadRequest response            |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Not bound as an LDAP administrator                                                                                                       | Returns an LDAP_OTHER return code |
| Multiple LDBM, TDBM, or CDBM backends are active in the server but a <code>subtreeDN</code> or <code>backendName</code> is not specified | Returns an LDAP_OTHER return code |
| A nonexistent <code>subtreeDN</code> , <code>filterDN</code> , or <code>backendName</code> is specified                                  | Returns an LDAP_OTHER return code |
| Error opening or writing the output LDIF file                                                                                            | Returns an LDAP_OTHER return code |



| Error scenario                                                                                                                                                      | unloadRequest response                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Both subtreeDN and backendName are specified                                                                                                                        | Returns an LDAP_PROTOCOL_ERROR return code       |
| A zero-length value is specified for subtreeDN, filterDN, or backendName                                                                                            | Returns an LDAP_PROTOCOL_ERROR return code       |
| LDAP server is unable to parse the request                                                                                                                          | Returns an LDAP_PROTOCOL_ERROR return code       |
| A subtreeDN is specified when unloadLocalHost is set to TRUE                                                                                                        | Returns an LDAP_PROTOCOL_ERROR return code       |
| filterDN specified when CDBM backend is not configured or useAdvancedReplication off is specified in the CDBM backend section of the LDAP server configuration file | Returns an LDAP_UNWILLING_TO_PERFORM return code |

## User type

- **Name:** User type
- **Description:** Used to query the user type and roles defined for the user performing the request.
- **Assigned object identifier:** 1.3.18.0.2.12.37
- **Values:** None
- **Detailed description:** The User type extended operation allows the requesting user to determine their user type and one or more roles. User types returned can be one of the following:
  - Root administrator. The user is the LDAP root administrator defined in the configuration file (adminDN configuration option) or is defined in the administrative group entry and assigned the root administrator role.
  - Administrative group member. The user is defined in the administrative group member entry under cn=admingroup,cn=configuration.
  - Local OS user. The user bound to the LDAP server using a user name and authenticated to the z/OS Security Manager.
  - LDAP user Type. The user's credentials are stored in the CDBM, TDBM, and LDBM backend of the LDAP server.
  - Master server DN. The user is defined as a Master Server DN for replication.
  - SAF administrative group member. The user is a member of the cn=safadmingroup,cn=configuration entry.

User roles returned can be one or more of the following:

- Directory data administrator
- No administrator
- Operational administrator
- Password administrator
- Replication administrator
- Schema administrator
- Server configuration group member
- LDAP user role. The user's access to directory data is controlled only by ACLs.

See [Chapter 9, “Administrative group and roles,”](#) on page 155 for more information about user roles.

- **Response object identifier:** 1.3.18.0.2.12.38
- **Response description:** This response is used to return the user type and one or more roles for the user issuing the request.

- **Response values:** The following example describes the response value.

```
ResponseValue ::= SEQUENCE {
 userType OCTET STRING,
 numberOfRoles INTEGER,
 roles SEQUENCE OPTIONAL {
 userRole OCTET STRING
 }
}
```

where,

userType is a string containing one of the user's type. It has one of the following values:

```
root_administrator
admin_group_member
local_os_user
ldap_user_type
master_server_dn
saf_admin_group_member
```

numberOfRoles is an integer that contains the number of user roles provided in the next sequence.

userRole is a string value that is contained in a sequence of string values that indicates the user's role or roles. Each entry in the sequence has one of the following values:

```
directory_data_administrator
no_administrator
operational_administrator
password_administrator
replication_administrator
schema_administrator
server_config_group_member
ldap_user_role
```

- **Response detailed description:**

The following list summarizes different error scenarios and the userType response returned for such scenarios.

- When the LDAP server cannot decode the request, the user type response is to return an LDAP\_PROTOCOL\_ERROR return code.
- If errors are not included in the previously documented return code, check the corresponding error message for more information.

## Appendix E. SMF records

### SMF Record Type 83, subtype 3 records

When auditing is enabled for LDAP events, SMF record type 83, subtype 3 records are recorded in the SMF data set. Each logged LDAP event has a unique event code with a corresponding event code qualifier. The event qualifier indicates whether the event succeeded or failed.

Table 90 on page 693 shows LDAP event codes and event code qualifiers:

| Table 90. LDAP event codes |                    |                 |                           |                                            |
|----------------------------|--------------------|-----------------|---------------------------|--------------------------------------------|
| Event                      | Operation          | Event qualifier | Description               | Relocate type sections                     |
| 1                          | Add                | 0               | Successful LDAP operation | Common relocates (100-114) 201-208         |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 2                          | Bind               | 0               | Successful LDAP operation | Common relocates (100-114) 201-207 209     |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 3                          | Compare            | 0               | Successful LDAP operation | Common relocates (100-114) 201-207 210     |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 4                          | Connect            | 0               | Successful LDAP operation | Common relocates (100-114)                 |
| 5                          | Delete             | 0               | Successful LDAP operation | Common relocates (100-114) 201-207         |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 6                          | Disconnect         | 0               | Successful LDAP operation | Common relocates (100-114), 223            |
| 7                          | Extended Operation | 0               | Successful LDAP operation | Common relocates (100-114) 201-207 221     |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 8                          | Modify             | 0               | Successful LDAP operation | Common relocates (100-114) 201-207 211-213 |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 9                          | Modify DN          | 0               | Successful LDAP operation | Common relocates (100-114) 201-207 214-216 |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 10                         | Search             | 0               | Successful LDAP operation | Common relocates (100-114) 201-207 218-220 |
|                            |                    | 1               | Failed LDAP operation     |                                            |
| 11                         | Unbind             | 0               | Successful LDAP operation | Common relocates (100-114)                 |
| 12                         | Abandon            | 0               | Successful LDAP operation | Common relocates (100-114) 201-207, 222    |

Table 91 on page 693 shows LDAP extended relocates:

| Table 91. LDAP extended relocates |                  |      |        |                       |             |
|-----------------------------------|------------------|------|--------|-----------------------|-------------|
| Relocate #                        | Field name       | Type | Length | Audited by event code | Description |
| 100                               | LDAP_RESERVED_01 | CHAR | 16     | N/A                   | Reserved    |

Table 91. LDAP extended relocates (continued)

| Relocate # | Field name          | Type | Length | Audited by event code             | Description                                                                                                                                                                                                                |
|------------|---------------------|------|--------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 101        | LDAP_REQ_TIMESTP    | CHAR | 16     | 1, 2, 3, 5, 7, 8, 9, 10, 11       | The elapsed time for request completion (in microseconds).                                                                                                                                                                 |
| 102        | LDAP_SERVER_URL     | CHAR | 32     | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| 103        | LDAP_CONN_ID        | CHAR | 8      | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| 104        | LDAP_MESSAGE_ID     | CHAR | 8      | 1, 2, 3, 5, 7, 8, 9, 10, 11       | The message ID from the BER encoded data from the client that is used to connect events.                                                                                                                                   |
| 105        | LDAP_BIND_DN        | CHAR | 512    | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The bind DN for the connection.                                                                                                                                                                                            |
| 106        | LDAP_CLIENT_SECL    | CHAR | 32     | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| 107        | LDAP_SRC_IP_ADDR    | CHAR | 16     | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| 108        | LDAP_AUDIT_VERSION  | CHAR | 2      | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| 109        | LDAP_EVENT_CODE     | CHAR | 2      | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The LDAP event number that is associated with this SMF audit type 83 subtype-3 record. The LDAP event numbers range from 1 to 11.                                                                                          |
| 110        | LDAP_RESERVED_04    | CHAR | 227    | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | Reserved                                                                                                                                                                                                                   |
| 111        | LDAP_MAPCERT_OPT    | CHAR | 2      | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | Represents the setting of the <b>sslMapCertificate</b> configuration option. See note "1" on page 695 for more information.                                                                                                |
| 112        | LDAP_MAPPED_SAFID   | CHAR | 8      | 1, 2, 3, 5, 7, 8, 9, 10, 11       | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                           |
| 113        | LDAP_POLICY_UPDATED | CHAR | 1      | 2                                 | <b>T</b> (true) or <b>F</b> (false) if the password policy operational attribute values in the bind DN entry are updated.                                                                                                  |
| 114        | LDAP_FLAGS          | CHAR | 10     | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| 201        | LDAP_PROTOCOL_VER   | CHAR | 2      | 1, 2, 3, 5, 7, 8, 9, 10, 11       | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| 202        | LDAP_RETURN_CODE    | INT  | 10     | 1, 2, 3, 5, 7, 8, 9, 10           | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| 203        | LDAP_ERROR_MSG      | CHAR | 256    | 1, 2, 3, 5, 7, 8, 9, 10           | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| 204        | LDAP_ENTRY_NM       | CHAR | 512    | 1, 2, 3, 5, 7, 8, 9, 10           | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| 205        | LDAP_RELOC_REQ_TS   | CHAR | 32     | 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                        |
| 206        | LDAP_ENTRY_SUFFIX   | CHAR | 64     | 1, 2, 3, 5, 7, 8, 9, 10           | The normalized DN of the backend suffix that handled the request.                                                                                                                                                          |
| 207        | LDAP_CNTRL_PRESNT   | CHAR | 512    | 1, 2, 3, 5, 7, 8, 9, 10, 11       | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID, TRUE FALSE                                            |

| Table 91. LDAP extended relocates (continued) |                        |      |                   |                       |                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------|------------------------|------|-------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Relocate #                                    | Field name             | Type | Length            | Audited by event code | Description                                                                                                                                                                                                                                                                                               |
| 208                                           | LDAP_ADD_ATTR          | CHAR | 64 (maximum 1299) | 1                     | The name of the attribute added in the add request. Each attribute type added in the add request has its own relocate and is separated by 1 space. There is a maximum length of 1299 bytes available for all attribute types added in the add request.                                                    |
| 209                                           | LDAP_BIND_MECH         | CHAR | 16                | 2                     | Indicates the authentication method using during bind. It has one of the following values: <b>SIMPLE</b> , <b>EXTERNAL</b> , <b>GSSAPI</b> , <b>DIGEST-MD5</b> , or <b>CRAM-MD5</b>                                                                                                                       |
| 210                                           | LDAP_COMPARE_ATTR      | CHAR | 64                | 3                     | The name of the attribute being compared.                                                                                                                                                                                                                                                                 |
| 211                                           | LDAP_MOD_ATTR_DEL      | CHAR | 64 (maximum 909)  | 8                     | The name of the attribute that is deleted in the modify request. Each attribute type that is deleted in the modify request has its own relocate and is separated by 1 space. There is a maximum length of 909 bytes available for all attribute types that are deleted in the modify request.             |
| 212                                           | LDAP_MOD_ATTR_ADD      | CHAR | 64 (maximum 909)  | 8                     | The name of the attribute added in the modify request. Each attribute type added in the modify request has its own relocate and is separated by 1 space. There is a maximum length of 909 bytes available for all attribute types added in the modify request.                                            |
| 213                                           | LDAP_MOD_ATTR_REPLACE  | CHAR | 64 (maximum 909)  | 8                     | The name of the attribute that is replaced in the modify request. Each attribute type that is replaced in the modify request has its own relocate and is separated by 1 space. There is a maximum length of 909 bytes available for all attribute types that are replaced in the modify request.          |
| 214                                           | LDAP_MDN_NEW_RDN       | CHAR | 32                | 9                     | The new relative distinguished name for the target entry in the <b>modifydn</b> request.                                                                                                                                                                                                                  |
| 215                                           | LDAP_MDN_DOLD_RDN      | CHAR | 1                 | 9                     | <b>T</b> (true) or <b>F</b> (false) if the old relative distinguished name (RDN) is deleted in the <b>modifydn</b> request.                                                                                                                                                                               |
| 216                                           | LDAP_MDN_NEW_SUP       | CHAR | 512               | 9                     | The new superior, if there is one, of the target entry that is specified in the <b>modifydn</b> request.                                                                                                                                                                                                  |
| 218                                           | LDAP_SEARCH_FILTER     | CHAR | 256               | 10                    | The search filter that is specified on the search request.                                                                                                                                                                                                                                                |
| 219                                           | LDAP_SEARCH_SCOPE      | CHAR | 12                | 10                    | The scope of the search request. It is set to <b>SUBTREE</b> for subtree level searches, <b>ONE</b> for one level searches, and <b>BASE</b> for base level searches.                                                                                                                                      |
| 220                                           | LDAP_SEARCH_ATTRS      | CHAR | 64 (maximum 833)  | 10                    | The name of the attribute that is requested to be returned on the search request. Each attribute type that is requested in the search request has its own relocate and is separated by 1 space. There is a maximum length of 833 bytes available for all requested attribute types in the search request. |
| 221                                           | LDAP_XOP_REQ_NAME      | CHAR | 64                | 7                     | The OID of the extended operation request.                                                                                                                                                                                                                                                                |
| 222                                           | LDAP_TARGET_MESSAGE_ID | CHAR | 8                 | 12                    | The abandon target message ID from the BER encoded data from the client that is used to match the abandon and the request that is being abandoned.                                                                                                                                                        |
| 223                                           | LDAP_DISCONNECT_CAUSE  | CHAR | 10                | 6                     | Indicates the reason of a disconnect event.                                                                                                                                                                                                                                                               |

**Note:**

1. The LDAP\_MAPCERT\_OPT value represents the value of the **sslMapCertificate** option in the LDAP server configuration file:

**00**

not an external bind request or **sslMapCertificate off ignore/fail** specified

- 01**  
**sslMapCertificate check ignore**
- 02**  
**sslMapCertificate add ignore**
- 03**  
**sslMapCertificate replace ignore**
- 11**  
**sslMapCertificate check fail**
- 12**  
**sslMapCertificate add fail**
- 13**  
**sslMapCertificate replace fail**

2. The LDAP\_FLAGS value is the character representation of the hex value for the following possible flag settings:

|                     |            |
|---------------------|------------|
| ADMIN_ROLE_NONE     | 0x00000001 |
| ADMIN_ROLE_ROOT     | 0x00000002 |
| ADMIN_ROLE_DIR      | 0x00000004 |
| ADMIN_ROLE_REPL     | 0x00000008 |
| ADMIN_ROLE_SCHEMA   | 0x00000010 |
| ADMIN_ROLE_CONFIG   | 0x00000020 |
| ADMIN_ROLE_PASSWORD | 0x00000040 |
| ADMIN_ROLE_OPER     | 0x00000080 |
| ADMIN_ROLE_SAF      | 0x00000100 |

where, the bound user has one or more of the following administrative roles,

ADMIN\_ROLE\_NONE=No administrator  
 ADMIN\_ROLE\_ROOT=Root administrator  
 ADMIN\_ROLE\_DIR=Directory data administrator  
 ADMIN\_ROLE\_REPL=Replication administrator  
 ADMIN\_ROLE\_SCHEMA=Schema administrator  
 ADMIN\_ROLE\_CONFIG=Server configuration group member  
 ADMIN\_ROLE\_PASSWORD=Password administrator  
 ADMIN\_ROLE\_OPER=Operational administrator  
 ADMIN\_ROLE\_SAF=The administrative user is a member of  
 cn=safadmingroup,cn=configuration and the roles are defined in RACF.

Example: If the user is a member of cn=safadmingroup,cn=configuration and has been permitted to all administrative roles, 0x000001FF is in this field.

3. The LDAP\_DISCONNECT\_CAUSE value is the character representation of the hex value for the following possible flag settings:

|                            |            |
|----------------------------|------------|
| DISCONNECT_TIMEOUT         | 0x00000001 |
| DISCONNECT_NIC_FAILED      | 0x00000002 |
| DISCONNECT_CLOSE_ABNORMAL  | 0x00000004 |
| DISCONNECT_CLOSE_CLIENT    | 0x00000008 |
| DISCONNECT_MESSAGE_INVALID | 0x00000010 |
| DISCONNECT_ERROR_INTERNAL  | 0x00000020 |
| DISCONNECT_ERROR_WRITE     | 0x00000040 |
| DISCONNECT_ERROR_SSL       | 0x00000080 |
| DISCONNECT_BLOCKED_TIMEOUT | 0x00000100 |

where,

DISCONNECT\_TIMEOUT=Idle connection timeout.  
 DISCONNECT\_NIC\_FAILED=Network interface failed.  
 DISCONNECT\_CLOSE\_ABNORMAL=Connection closed abnormally.  
 DISCONNECT\_CLOSE\_CLIENT=Client closed connection.  
 DISCONNECT\_MESSAGE\_INVALID=The request is not a valid LDAP message.

DISCONNECT\_ERROR\_INTERNAL=Internal error. Such as, out of storage error, unable to encode or decode LDAP message.

DISCONNECT\_ERROR\_WRITE=Failed to write LDAP message to network connection.

DISCONNECT\_ERROR\_SSL=Error occurred in System SSL.

DISCONNECT\_BLOCKED\_TIMEOUT=Blocked connection time out.

**Note:** There might be two values that are combined. For example: DISCONNECT\_TIMEOUT and DISCONNECT\_CLOSE\_CLIENT can occur simultaneously and the value is 0x00000009.

## RACF SMF unload utility output

A general description of the format of the tabular records that are created by the SMF unload utility can be found in [The format of the unloaded SMF type 80 data in z/OS Security Server RACF Macros and Interfaces](#).

The data following the header in the tabular record varies according to the LDAP event that was recorded. The LDAP event types are:

| Table 92. Event type strings                  |                                   |
|-----------------------------------------------|-----------------------------------|
| Event code from SMF type 83 subtype 3 records | Tabular output Event type strings |
| 1                                             | *ADD                              |
| 2                                             | *BIND                             |
| 3                                             | *COMPARE                          |
| 4                                             | *CONN                             |
| 5                                             | *DELETE                           |
| 6                                             | *DISCONN                          |
| 7                                             | *EXOP                             |
| 8                                             | *MODIFY                           |
| 9                                             | *MODDN                            |
| 10                                            | *SEARCH                           |
| 11                                            | *UNBIND                           |
| 12                                            | *ABANDON                          |

Event qualifiers are the same for all LDAP event codes:

| Table 93. Event qualifiers |                        |                                    |
|----------------------------|------------------------|------------------------------------|
| Event qualifier            | Event qualifier number | Event description                  |
| SUCCESS                    | 0                      | Audit of successful LDAP operation |
| FAILURE                    | 1                      | Audit of failed LDAP operation     |

| Table 94. Event specific fields for LDAP add event (Event code 1) |      |        |          |      |                                                            |
|-------------------------------------------------------------------|------|--------|----------|------|------------------------------------------------------------|
| Field name                                                        | Type | Length | Position |      | Comments                                                   |
|                                                                   |      |        | Start    | End  |                                                            |
| LDAP_RESERVED_01                                                  | CHAR | 16     | 3000     | 3015 | Reserved.                                                  |
| LDAP_REQ_TIMESTP                                                  | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds). |

Table 94. Event specific fields for LDAP add event (Event code 1) (continued)

| Field name          | Type | Length            | Position |      | Comments                                                                                                                                                                                                                                               |
|---------------------|------|-------------------|----------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |      |                   | Start    | End  |                                                                                                                                                                                                                                                        |
| LDAP_SERVER_URL     | CHAR | 32                | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                                                           |
| LDAP_CONN_ID        | CHAR | 8                 | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                                                        |
| LDAP_MESSAGE_ID     | CHAR | 8                 | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                                              |
| LDAP_BIND_DN        | CHAR | 512               | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                                                        |
| LDAP_CLIENT_SECL    | CHAR | 32                | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                                                       |
| LDAP_SRC_IP_ADDR    | CHAR | 16                | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests.                             |
| LDAP_AUDIT_VERSION  | CHAR | 2                 | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                                                          |
| LDAP_EVENT_CODE     | CHAR | 2                 | 3660     | 3661 | Event number 1 (add)                                                                                                                                                                                                                                   |
| LDAP_MAPCERT_OPT    | CHAR | 2                 | 3664     | 3665 | Value is always 00                                                                                                                                                                                                                                     |
| LDAP_MAPPED_SAFID   | CHAR | 8                 | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                                                       |
| LDAP_POLICY_UPDATED | CHAR | 1                 | 3678     | 3678 | Blank for this operation.                                                                                                                                                                                                                              |
| LDAP_FLAGS          | CHAR | 10                | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                                            |
| LDAP_RESERVED_04    | CHAR | 227               | 3693     | 3919 | Reserved                                                                                                                                                                                                                                               |
| LDAP_PROTOCOL_VER   | CHAR | 2                 | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                                                |
| LDAP_RETURN_CODE    | INT  | 10                | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                                                   |
| LDAP_ERROR_MSG      | CHAR | 256               | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                                                          |
| LDAP_ENTRY_NM       | CHAR | 512               | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                                                    |
| LDAP_RELOC_REQ_TS   | CHAR | 32                | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                                                    |
| LDAP_ENTRY_SUFFIX   | CHAR | 64                | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                                                      |
| LDAP_CNTRL_PRESNT   | CHAR | 512               | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID, TRUE FALSE                                                                        |
| LDAP_ADD_ATTR       | CHAR | 64 (maximum 1299) | 5324     | 6622 | The name of the attribute added in the add request. Each attribute type added in the add request has its own relocate and is separated by 1 space. There is a maximum length of 1299 bytes available for all attribute types added in the add request. |



Table 95. Event specific fields for LDAP bind event (Event code 2)

| Field name          | Type | Length | Position |      | Comments                                                                                                                                                                                                                   |
|---------------------|------|--------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |      |        | Start    | End  |                                                                                                                                                                                                                            |
| LDAP_RESERVED_01    | CHAR | 16     | 3000     | 3015 | Reserved                                                                                                                                                                                                                   |
| LDAP_REQ_TIMESTP    | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds).                                                                                                                                                                 |
| LDAP_SERVER_URL     | CHAR | 32     | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| LDAP_CONN_ID        | CHAR | 8      | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| LDAP_MESSAGE_ID     | CHAR | 8      | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                  |
| LDAP_BIND_DN        | CHAR | 512    | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                            |
| LDAP_CLIENT_SECL    | CHAR | 32     | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| LDAP_SRC_IP_ADDR    | CHAR | 16     | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| LDAP_AUDIT_VERSION  | CHAR | 2      | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| LDAP_EVENT_CODE     | CHAR | 2      | 3660     | 3661 | Event number 2 (bind)                                                                                                                                                                                                      |
| LDAP_MAPCERT_OPT    | CHAR | 2      | 3664     | 3665 | Represents the setting of the <b>sslMapCertificate</b> configuration option. See note "1" on page 695 for more information.                                                                                                |
| LDAP_MAPPED_SAFID   | CHAR | 8      | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                           |
| LDAP_POLICY_UPDATED | CHAR | 1      | 3678     | 3678 | <b>T</b> (true) or <b>F</b> (false) if the password policy operational attribute values in the bind DN entry are updated.                                                                                                  |
| LDAP_FLAGS          | CHAR | 10     | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| LDAP_RESERVED_04    | CHAR | 227    | 3693     | 3919 | Reserved                                                                                                                                                                                                                   |
| LDAP_PROTOCOL_VER   | CHAR | 2      | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| LDAP_RETURN_CODE    | INT  | 10     | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| LDAP_ERROR_MSG      | CHAR | 256    | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| LDAP_ENTRY_NM       | CHAR | 512    | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| LDAP_RELOC_REQ_TS   | CHAR | 32     | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                        |
| LDAP_ENTRY_SUFFIX   | CHAR | 64     | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                          |
| LDAP_CNTRL_PRESNT   | CHAR | 512    | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID, TRUE FALSE                                            |
| LDAP_BIND_MECH      | CHAR | 16     | 5324     | 5339 | Indicates the authentication method using during bind. It has one of the following values: <b>SIMPLE</b> , <b>EXTERNAL</b> , <b>GSSAPI</b> , <b>DIGEST-MD5</b> , or <b>CRAM-MD5</b>                                        |

Table 96. Event specific fields for LDAP compare event (Event code 3)

| Field name          | Type | Length | Position |      | Comments                                                                                                                                                                                                                   |
|---------------------|------|--------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |      |        | Start    | End  |                                                                                                                                                                                                                            |
| LDAP_RESERVED_01    | CHAR | 16     | 3000     | 3015 | Reserved                                                                                                                                                                                                                   |
| LDAP_REQ_TIMESTP    | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds).                                                                                                                                                                 |
| LDAP_SERVER_URL     | CHAR | 32     | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| LDAP_CONN_ID        | CHAR | 8      | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| LDAP_MESSAGE_ID     | CHAR | 8      | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                  |
| LDAP_BIND_DN        | CHAR | 512    | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                            |
| LDAP_CLIENT_SECL    | CHAR | 32     | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| LDAP_SRC_IP_ADDR    | CHAR | 16     | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| LDAP_AUDIT_VERSION  | CHAR | 2      | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| LDAP_EVENT_CODE     | CHAR | 2      | 3660     | 3661 | Event number 3 (compare)                                                                                                                                                                                                   |
| LDAP_MAPCERT_OPT    | CHAR | 2      | 3664     | 3665 | Value is always 00                                                                                                                                                                                                         |
| LDAP_MAPPED_SAFID   | CHAR | 8      | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                           |
| LDAP_POLICY_UPDATED | CHAR | 1      | 3678     | 3678 | <b>T</b> (true) or <b>F</b> (false) if the password policy operational attribute values in the bind DN entry are updated (blank if the attribute that is being compared is not <b>userPassword</b> ).                      |
| LDAP_FLAGS          | CHAR | 10     | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| LDAP_RESERVED_04    | CHAR | 227    | 3693     | 3919 | Reserved                                                                                                                                                                                                                   |
| LDAP_PROTOCOL_VER   | CHAR | 2      | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| LDAP_RETURN_CODE    | INT  | 10     | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| LDAP_ERROR_MSG      | CHAR | 256    | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| LDAP_ENTRY_NM       | CHAR | 512    | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| LDAP_RELOC_REQ_TS   | CHAR | 32     | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                        |
| LDAP_ENTRY_SUFFIX   | CHAR | 64     | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                          |
| LDAP_CNTRLs_PRESENT | CHAR | 512    | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID, TRUE   FALSE                                          |
| LDAP_COMPARE_ATTR   | CHAR | 64     | 5324     | 5387 | The name of the attribute being compared.                                                                                                                                                                                  |

| Table 97. Event specific fields for LDAP connect, delete, disconnect, and unbind events (Event code 4, 5, 6, 11) |      |        |          |      |                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------|------|--------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field name                                                                                                       | Type | Length | Position |      | Comments                                                                                                                                                                                                                   |
|                                                                                                                  |      |        | Start    | End  |                                                                                                                                                                                                                            |
| LDAP_RESERVED_01                                                                                                 | CHAR | 16     | 3000     | 3015 | Reserved                                                                                                                                                                                                                   |
| LDAP_REQ_TIMESTP                                                                                                 | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds). Not used for event codes 4 and 6.                                                                                                                               |
| LDAP_SERVER_URL                                                                                                  | CHAR | 32     | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| LDAP_CONN_ID                                                                                                     | CHAR | 8      | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| LDAP_MESSAGE_ID                                                                                                  | CHAR | 8      | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events. Not used for event codes 4 and 6.                                                                                                |
| LDAP_BIND_DN                                                                                                     | CHAR | 512    | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                            |
| LDAP_CLIENT_SECL                                                                                                 | CHAR | 32     | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| LDAP_SRC_IP_ADDR                                                                                                 | CHAR | 16     | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| LDAP_AUDIT_VERSION                                                                                               | CHAR | 2      | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| LDAP_EVENT_CODE                                                                                                  | CHAR | 2      | 3660     | 3661 | Event number 4, 5, 6, 11 (connect, delete, disconnect, unbind)                                                                                                                                                             |
| LDAP_MAPCERT_OPT                                                                                                 | CHAR | 2      | 3664     | 3665 | Value is always 00                                                                                                                                                                                                         |
| LDAP_MAPPED_SAFID                                                                                                | CHAR | 8      | 3668     | 3675 | The SAF ID, if any, associated with the bind DN. Not used for event codes 4 and 6.                                                                                                                                         |
| LDAP_POLICY_UPDATED                                                                                              | CHAR | 1      | 3678     | 3678 | Blank for this operation.                                                                                                                                                                                                  |
| LDAP_FLAGS                                                                                                       | CHAR | 10     | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| LDAP_RESERVED_04                                                                                                 | CHAR | 227    | 3693     | 3919 | Reserved                                                                                                                                                                                                                   |
| LDAP_PROTOCOL_VER                                                                                                | CHAR | 2      | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| LDAP_RETURN_CODE                                                                                                 | INT  | 10     | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| LDAP_ERROR_MSG                                                                                                   | CHAR | 256    | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| LDAP_ENTRY_NM                                                                                                    | CHAR | 512    | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| LDAP_RELOC_REQ_TS                                                                                                | CHAR | 32     | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                        |
| LDAP_ENTRY_SUFFIX                                                                                                | CHAR | 64     | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                          |
| LDAP_CNTRL_PRESNT                                                                                                | CHAR | 512    | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID,TRUE FALSE                                             |

| Table 98. Event specific fields for LDAP extended operations event (Event code 7) |      |        |          |      |          |
|-----------------------------------------------------------------------------------|------|--------|----------|------|----------|
| Field name                                                                        | Type | Length | Position |      | Comments |
|                                                                                   |      |        | Start    | End  |          |
| LDAP_RESERVED_01                                                                  | CHAR | 16     | 3000     | 3015 | Reserved |

| Table 98. Event specific fields for LDAP extended operations event (Event code 7) (continued) |      |        |          |      |                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------|------|--------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field name                                                                                    | Type | Length | Position |      | Comments                                                                                                                                                                                                                   |
|                                                                                               |      |        | Start    | End  |                                                                                                                                                                                                                            |
| LDAP_REQ_TIMESTP                                                                              | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds).                                                                                                                                                                 |
| LDAP_SERVER_URL                                                                               | CHAR | 32     | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| LDAP_CONN_ID                                                                                  | CHAR | 8      | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| LDAP_MESSAGE_ID                                                                               | CHAR | 8      | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                  |
| LDAP_BIND_DN                                                                                  | CHAR | 512    | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                            |
| LDAP_CLIENT_SECL                                                                              | CHAR | 32     | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| LDAP_SRC_IP_ADDR                                                                              | CHAR | 16     | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| LDAP_AUDIT_VERSION                                                                            | CHAR | 2      | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| LDAP_EVENT_CODE                                                                               | CHAR | 2      | 3660     | 3661 | Event number 7 (extended operations)                                                                                                                                                                                       |
| LDAP_MAPCERT_OPT                                                                              | CHAR | 2      | 3664     | 3665 | Value is always 00                                                                                                                                                                                                         |
| LDAP_MAPPED_SAFID                                                                             | CHAR | 8      | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                           |
| LDAP_POLICY_UPDATED                                                                           | CHAR | 1      | 3678     | 3678 | Blank for this operation.                                                                                                                                                                                                  |
| LDAP_FLAGS                                                                                    | CHAR | 10     | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| LDAP_RESERVED_04                                                                              | CHAR | 227    | 3693     | 3919 | Reserved                                                                                                                                                                                                                   |
| LDAP_PROTOCOL_VER                                                                             | CHAR | 2      | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| LDAP_RETURN_CODE                                                                              | INT  | 10     | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| LDAP_ERROR_MSG                                                                                | CHAR | 256    | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| LDAP_ENTRY_NM                                                                                 | CHAR | 512    | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| LDAP_RELOC_REQ_TS                                                                             | CHAR | 32     | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                        |
| LDAP_ENTRY_SUFFIX                                                                             | CHAR | 64     | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                          |
| LDAP_CNTRL_PRESNT                                                                             | CHAR | 512    | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID, TRUE FALSE                                            |
| LDAP_XOP_REQ_NAME                                                                             | CHAR | 64     | 5324     | 5387 | The OID of the extended operation request.                                                                                                                                                                                 |

| Table 99. Event specific fields for LDAP modify event (Event code 8) |      |        |          |      |                                                            |
|----------------------------------------------------------------------|------|--------|----------|------|------------------------------------------------------------|
| Field name                                                           | Type | Length | Position |      | Comments                                                   |
|                                                                      |      |        | Start    | End  |                                                            |
| LDAP_RESERVED_01                                                     | CHAR | 16     | 3000     | 3015 | Reserved                                                   |
| LDAP_REQ_TIMESTP                                                     | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds). |

Table 99. Event specific fields for LDAP modify event (Event code 8) (continued)

| Field name          | Type | Length              | Position |      | Comments                                                                                                                                                                                                                                                             |
|---------------------|------|---------------------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |      |                     | Start    | End  |                                                                                                                                                                                                                                                                      |
| LDAP_SERVER_URL     | CHAR | 32                  | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                                                                         |
| LDAP_CONN_ID        | CHAR | 8                   | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                                                                      |
| LDAP_MESSAGE_ID     | CHAR | 8                   | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                                                            |
| LDAP_BIND_DN        | CHAR | 512                 | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                                                                      |
| LDAP_CLIENT_SECL    | CHAR | 32                  | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                                                                     |
| LDAP_SRC_IP_ADDR    | CHAR | 16                  | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests.                                           |
| LDAP_AUDIT_VERSION  | CHAR | 2                   | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                                                                        |
| LDAP_EVENT_CODE     | CHAR | 2                   | 3660     | 3661 | Event number 8 (modify)                                                                                                                                                                                                                                              |
| LDAP_MAPCERT_OPT    | CHAR | 2                   | 3664     | 3665 | Value is always 00                                                                                                                                                                                                                                                   |
| LDAP_MAPPED_SAFID   | CHAR | 8                   | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                                                                     |
| LDAP_POLICY_UPDATED | CHAR | 1                   | 3678     | 3678 | Blank for this operation.                                                                                                                                                                                                                                            |
| LDAP_FLAGS          | CHAR | 10                  | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                                                          |
| LDAP_RESERVED_04    | CHAR | 227                 | 3693     | 3919 | Reserved                                                                                                                                                                                                                                                             |
| LDAP_PROTOCOL_VER   | CHAR | 2                   | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                                                              |
| LDAP_RETURN_CODE    | INT  | 10                  | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                                                                 |
| LDAP_ERROR_MSG      | CHAR | 256                 | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                                                                        |
| LDAP_ENTRY_NM       | CHAR | 512                 | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                                                                  |
| LDAP_RELOC_REQ_TS   | CHAR | 32                  | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                                                                  |
| LDAP_ENTRY_SUFFIX   | CHAR | 64                  | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                                                                    |
| LDAP_CNTRLs_PRESENT | CHAR | 512                 | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID,TRUE FALSE                                                                                       |
| LDAP_MOD_ATTR_DEL   | CHAR | 64<br>(maximum 909) | 5324     | 6233 | The name of the attribute deleted in the modify request. Each attribute type deleted in the modify request has its own relocate and is separated by 1 space. There is a maximum length of 909 bytes available for all attribute types deleted in the modify request. |
| LDAP_MOD_ATTR_ADD   | CHAR | 64<br>(maximum 909) | 6236     | 7145 | The name of the attribute added in the modify request. Each attribute type added in the modify request has its own relocate and is separated by 1 space. There is a maximum length of 909 bytes available for all attribute types added in the modify request.       |

Table 99. Event specific fields for LDAP modify event (Event code 8) (continued)

| Field name        | Type | Length              | Position |      | Comments                                                                                                                                                                                                                                                                |
|-------------------|------|---------------------|----------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   |      |                     | Start    | End  |                                                                                                                                                                                                                                                                         |
| LDAP_MOD_ATTR_REP | CHAR | 64<br>(maximum 909) | 7148     | 8057 | The name of the attribute replaced in the modify request. Each attribute type replaced in the modify request has its own relocate and is separated by 1 space. There is a maximum length of 909 bytes available for all attribute types replaced in the modify request. |

Table 100. Event specific fields for LDAP modify DN event (Event code 9)

| Field name          | Type | Length | Position |      | Comments                                                                                                                                                                                                                   |
|---------------------|------|--------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |      |        | Start    | End  |                                                                                                                                                                                                                            |
| LDAP_RESERVED_01    | CHAR | 16     | 3000     | 3015 | Reserved                                                                                                                                                                                                                   |
| LDAP_REQ_TIMESTP    | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds).                                                                                                                                                                 |
| LDAP_SERVER_URL     | CHAR | 32     | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| LDAP_CONN_ID        | CHAR | 8      | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| LDAP_MESSAGE_ID     | CHAR | 8      | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                  |
| LDAP_BIND_DN        | CHAR | 512    | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                            |
| LDAP_CLIENT_SECL    | CHAR | 32     | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| LDAP_SRC_IP_ADDR    | CHAR | 16     | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| LDAP_AUDIT_VERSION  | CHAR | 2      | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| LDAP_EVENT_CODE     | CHAR | 2      | 3660     | 3661 | Event number 9 (modify DN)                                                                                                                                                                                                 |
| LDAP_MAPCERT_OPT    | CHAR | 2      | 3664     | 3665 | Value is always 00                                                                                                                                                                                                         |
| LDAP_MAPPED_SAFID   | CHAR | 8      | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                           |
| LDAP_POLICY_UPDATED | CHAR | 1      | 3678     | 3678 | Blank for this operation.                                                                                                                                                                                                  |
| LDAP_FLAGS          | CHAR | 10     | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| LDAP_RESERVED_04    | CHAR | 227    | 3693     | 3919 | Reserved                                                                                                                                                                                                                   |
| LDAP_PROTOCOL_VER   | CHAR | 2      | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| LDAP_RETURN_CODE    | INT  | 10     | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| LDAP_ERROR_MSG      | CHAR | 256    | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| LDAP_ENTRY_NM       | CHAR | 512    | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| LDAP_RELOC_REQ_TS   | CHAR | 32     | 4710     | 4741 | The time and date the request was received in the following format:<br><div>Tue Oct 13 16:36:25 2009</div>                                                                                                                 |
| LDAP_ENTRY_SUFFIX   | CHAR | 64     | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                          |

| Table 100. Event specific fields for LDAP modify DN event (Event code 9) (continued) |      |        |          |      |                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------|------|--------|----------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field name                                                                           | Type | Length | Position |      | Comments                                                                                                                                                                        |
|                                                                                      |      |        | Start    | End  |                                                                                                                                                                                 |
| LDAP_CNTRLS_PRESENT                                                                  | CHAR | 512    | 4810     | 5321 | The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:<br><br>ControlOID, TRUE FALSE |
| LDAP_MDN_NEW_RDN                                                                     | CHAR | 32     | 5324     | 5355 | The new relative distinguished name for the target entry in the <b>modifydn</b> request.                                                                                        |
| LDAP_MDN_DOLD_RDN                                                                    | CHAR | 1      | 5358     | 5358 | <b>T</b> (true) or <b>F</b> (false) if the old relative distinguished name (RDN) is deleted in the <b>modifydn</b> request.                                                     |
| LDAP_MDN_NEW_SUP                                                                     | CHAR | 512    | 5361     | 5872 | The new superior, if there is one, of the target entry specified in the <b>modifydn</b> request.                                                                                |

| Table 101. Event specific fields for LDAP search event (Event code 10) |      |        |          |      |                                                                                                                                                                                                                            |
|------------------------------------------------------------------------|------|--------|----------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field name                                                             | Type | Length | Position |      | Comments                                                                                                                                                                                                                   |
|                                                                        |      |        | Start    | End  |                                                                                                                                                                                                                            |
| LDAP_RESERVED_01                                                       | CHAR | 16     | 3000     | 3015 | Reserved                                                                                                                                                                                                                   |
| LDAP_REQ_TIMESTP                                                       | CHAR | 16     | 3018     | 3033 | The elapsed time for request completion (in microseconds).                                                                                                                                                                 |
| LDAP_SERVER_URL                                                        | CHAR | 32     | 3036     | 3067 | The server's IPv4 or IPv6 address and port number (in LDAP URL format) that processed the client connection.                                                                                                               |
| LDAP_CONN_ID                                                           | CHAR | 8      | 3070     | 3077 | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                            |
| LDAP_MESSAGE_ID                                                        | CHAR | 8      | 3080     | 3087 | The message ID from the BER encoded data from the client which is used to connect events.                                                                                                                                  |
| LDAP_BIND_DN                                                           | CHAR | 512    | 3090     | 3601 | The bind DN for the connection.                                                                                                                                                                                            |
| LDAP_CLIENT_SECL                                                       | CHAR | 32     | 3604     | 3635 | The LDAP client security label, if there is one.                                                                                                                                                                           |
| LDAP_SRC_IP_ADDR                                                       | CHAR | 16     | 3638     | 3653 | The IP address of the client performing the request. If set to <b>PC</b> , the request came across the PC interface. It is set to <b>XCF</b> for sysplex replica requests and to <b>SLAPI</b> for internal SLAPI requests. |
| LDAP_AUDIT_VERSION                                                     | CHAR | 2      | 3656     | 3657 | The version of the LDAP audit support in use. It is always set to <b>V1</b> .                                                                                                                                              |
| LDAP_EVENT_CODE                                                        | CHAR | 2      | 3660     | 3661 | Event number 10 (search)                                                                                                                                                                                                   |
| LDAP_MAPCERT_OPT                                                       | CHAR | 2      | 3664     | 3665 | Value is always 00                                                                                                                                                                                                         |
| LDAP_MAPPED_SAFID                                                      | CHAR | 8      | 3668     | 3675 | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                           |
| LDAP_POLICY_UPDATED                                                    | CHAR | 1      | 3678     | 3678 | Blank for this operation.                                                                                                                                                                                                  |
| LDAP_FLAGS                                                             | CHAR | 10     | 3681     | 3690 | Character representation of the hex value for flag settings. See note "2" on page 696 for more information.                                                                                                                |
| LDAP_RESERVED_04                                                       | CHAR | 227    | 3693     | 3919 | Reserved                                                                                                                                                                                                                   |
| LDAP_PROTOCOL_VER                                                      | CHAR | 2      | 3922     | 3923 | The LDAP protocol version set to <b>2</b> or <b>3</b> .                                                                                                                                                                    |
| LDAP_RETURN_CODE                                                       | INT  | 10     | 3926     | 3935 | The LDAP server return code in decimal (blank if there was no return code provided).                                                                                                                                       |
| LDAP_ERROR_MSG                                                         | CHAR | 256    | 3938     | 4193 | The reason code message number and text, if there is one, sent from the server to the client.                                                                                                                              |
| LDAP_ENTRY_NM                                                          | CHAR | 512    | 4196     | 4707 | The target entry of the requested operation (bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                        |
| LDAP_RELOC_REQ_TS                                                      | CHAR | 32     | 4710     | 4741 | The time and date the request was received in the following format:<br><br>Tue Oct 13 16:36:25 2009                                                                                                                        |

Table 101. Event specific fields for LDAP search event (Event code 10) (continued)

| Field name          | Type | Length | Position |      | Comments                                                                                                                                                                                                                                                                                  |
|---------------------|------|--------|----------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |      |        | Start    | End  |                                                                                                                                                                                                                                                                                           |
| LDAP_ENTRY_SUFFIX   | CHAR | 64     | 4744     | 4807 | The normalized DN of the backend suffix that handled the request.                                                                                                                                                                                                                         |
| LDAP_CNTRLS_PRESENT | CHAR | 512    | 4810     | 5321 | <p>The control OID and the criticality of the control in the request. Each control in the request has its own relocate. It has the following format:</p> <pre>ControlOID, TRUE   FALSE</pre>                                                                                              |
| LDAP_SEARCH_FILTER  | CHAR | 256    | 5324     | 5579 | The search filter specified on the search request.                                                                                                                                                                                                                                        |
| LDAP_SEARCH_SCOPE   | CHAR | 12     | 5582     | 5593 | The scope of the search request. It is set to SUBTREE for subtree level searches, ONE for one level searches, and BASE for base level searches.                                                                                                                                           |
| LDAP_SEARCH_ATTRS   | CHAR | 64     | 5596     | 5659 | The name of the attribute requested to be returned on the search request. Each attribute type requested in the search request has its own relocate and is separated by 1 space. There is a maximum length of 833 bytes available for all requested attribute types in the search request. |



---

# Appendix F. Activity log records

This section describes the fields that are present in the activity log when it is configured to log z/OS LDAP client requests.

**Note:** The activity log is not an official interface to the LDAP server. It may change at any time.

---

## Activity log start and end field descriptions

Table 102 on page 707 describes the fields that are present in start or end activity log records. Activity log start records are logged when the GLDLOG\_TIME environment variable is set to `notime`, or `logFileRecordType` is set to `begin` in the configuration file. Activity log start and end records are logged when the GLDLOG\_TIME environment variable is set to `time` or `logFileRecordType` is set to `both` in the configuration file.

| Table 102. Start or end activity log fields |                               |                                                                                     |
|---------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------|
| Field name                                  | bind, compare                 | Description                                                                         |
| attrs                                       | search, add(V1+), modify(V1+) | The name of the attributes that are requested to be returned on the search request. |
| base                                        | search                        | The base DN for the search request.                                                 |

Table 102. Start or end activity log fields (continued)

| Field name          | bind, compare | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
|---------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------|-----------------|------------|----------------|------------|-----------------|------------|-------------------|------------|-------------------|------------|---------------------|------------|-----------------|------------|----------------|------------|
| bindFlags           | bind          | <p>The hex value for the following possible flag settings is:</p> <table><tr><td>ADMIN_ROLE_NONE</td><td>0x00000001</td></tr><tr><td>ADMIN_ROLE_ROOT</td><td>0x00000002</td></tr><tr><td>ADMIN_ROLE_DIR</td><td>0x00000004</td></tr><tr><td>ADMIN_ROLE_REPL</td><td>0x00000008</td></tr><tr><td>ADMIN_ROLE_SCHEMA</td><td>0x00000010</td></tr><tr><td>ADMIN_ROLE_CONFIG</td><td>0x00000020</td></tr><tr><td>ADMIN_ROLE_PASSWORD</td><td>0x00000040</td></tr><tr><td>ADMIN_ROLE_OPER</td><td>0x00000080</td></tr><tr><td>ADMIN_ROLE_SAF</td><td>0x00000100</td></tr></table> <p>where, the bound user has one or more of the following administrative roles,</p> <ul style="list-style-type: none"><li>• ADMIN_ROLE_NONE=No administrator</li><li>• ADMIN_ROLE_ROOT=Root administrator</li><li>• ADMIN_ROLE_DIR=Directory data administrator</li><li>• ADMIN_ROLE_REPL=Replication administrator</li><li>• ADMIN_ROLE_SCHEMA=Schema administrator</li><li>• ADMIN_ROLE_CONFIG=Server configuration group member</li><li>• ADMIN_ROLE_PASSWORD=Password administrator</li><li>• ADMIN_ROLE_OPER=Operational administrator</li><li>• ADMIN_ROLE_SAF=The administrative user is a member of cn=safadmingroup,cn=configuration and the roles are defined in RACF.</li></ul> <p>Example: If the user is a member of cn=safadmingroup,cn=configuration and has been permitted to all administrative roles, bindFlags = 1FF is in this field.</p> | ADMIN_ROLE_NONE | 0x00000001 | ADMIN_ROLE_ROOT | 0x00000002 | ADMIN_ROLE_DIR | 0x00000004 | ADMIN_ROLE_REPL | 0x00000008 | ADMIN_ROLE_SCHEMA | 0x00000010 | ADMIN_ROLE_CONFIG | 0x00000020 | ADMIN_ROLE_PASSWORD | 0x00000040 | ADMIN_ROLE_OPER | 0x00000080 | ADMIN_ROLE_SAF | 0x00000100 |
| ADMIN_ROLE_NONE     | 0x00000001    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_ROOT     | 0x00000002    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_DIR      | 0x00000004    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_REPL     | 0x00000008    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_SCHEMA   | 0x00000010    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_CONFIG   | 0x00000020    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_PASSWORD | 0x00000040    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_OPER     | 0x00000080    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_SAF      | 0x00000100    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |

Table 102. Start or end activity log fields (continued)

| Field name    | bind, compare                                                                                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>cause</b>  | disconnect(V1+)                                                                                                                   | <p>The reason code value for disconnect, the possible values, and description are:</p> <ul style="list-style-type: none"> <li>1: Idle connection time-out</li> <li>2: Network interface failed.</li> <li>4: Connection closed abnormally.</li> <li>8: Client closed connection.</li> <li>10: The request is not a valid LDAP message.</li> <li>20: Internal error. For example: out of storage error, unable to encode or decode LDAP message.</li> <li>40: Failed to write LDAP message to network connection.</li> <li>80: Error occurred in System SSL.</li> <li>100: Blocked connection timeout.</li> </ul> <p>For example, if the value is 5, it means that the disconnect cause is: (1) Idle connection time-out and (2) Connection closed abnormally.</p> |
| <b>connid</b> | add, bind, compare, delete, extendedop, modify, modrdn, search, unbind, connect(V1+), disconnect(V1+), abandon(V1+), unknown(V1+) | The internal connection ID used to indicate operations performed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>count</b>  | search                                                                                                                            | The number of entries that are returned on the search request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>DN</b>     | add, bind, delete, disconnect(V1+), modify, modrdn, unbind                                                                        | The target entry of the operation (base DN for the search, bind DN, DN to be deleted, DN to be added, and so on).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>entry</b>  | compare                                                                                                                           | The target entry of the compare operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>filter</b> | search                                                                                                                            | The search filter that is specified in the search request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>IP</b>     | add, bind, compare, delete, extendedop, modify, modrdn, search, unbind, connect(V1+), disconnect(V1+), abandon(V1+), unknown(V1+) | The IP address of the client performing the request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>listen</b> | bind, unbind, connect(V1+)                                                                                                        | The listen URL that the LDAP server is listening on that received the client connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>msgid</b>  | add(V1+), bind(V1+), compare(V1+), delete(V1+), exop(V1+), modify(V1+), search(V1+), abandon(V1+), unknown(V1+)                   | Message Identifier.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>newRdn</b> | modrdn                                                                                                                            | The new relative distinguished name for the target entry in the modrdn request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

| Table 102. Start or end activity log fields (continued) |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field name                                              | bind, compare                                                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>policyUpdated</b>                                    | bind                                                                   | <ul style="list-style-type: none"> <li>• T (true) or F (false) if the password policy operational attribute values are updated in either the bind DN entry, or in the compare target entry.</li> <li>• NA if the operation is compare and the attribute that is being compared is not <b>userPassword</b>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>pReqOID</b>                                          | extendedop                                                             | The OID of the extended operation request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>rc</b>                                               | add, bind, compare, delete, extendedop, modify, modrdn, search, unbind | The LDAP server return code for the operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>safid</b>                                            | bind                                                                   | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>scope</b>                                            | search                                                                 | The scope of the search request. It is set to 0 for subtree searches, 1 for one level searches, and 2 for subtree searches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>searchFlags</b>                                      | search                                                                 | <p>The hex value for the following possible flag settings is:</p> <pre>SEARCH_PAGE_FIRST 0x00000001 SEARCH_PAGE_NEXT 0x00000002 SEARCH_PAGE_LAST 0x00000004 SEARCH_SORT_COMPLETE 0x00000008</pre> <p>where,</p> <ul style="list-style-type: none"> <li>• SEARCH_PAGE_FIRST=First page of a paged search request</li> <li>• SEARCH_PAGE_NEXT=Ensuing page of a paged search request</li> <li>• SEARCH_PAGE_LAST=Last page of a paged search request</li> <li>• SEARCH_SORT_COMPLETE=Sorted search requested and completed successfully</li> </ul> <p>Example: If the last page of a successfully paged and sorted search request has been returned to the client application, searchFlags = 0E is set in this field in the search end activity log.</p> |
| <b>targetmsgid</b>                                      | abandon(V1+)                                                           | The target message ID of the abandon operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>type</b>                                             | unknown(V1+)                                                           | The type of the request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Note:** Fields for the logFileVersion 1 or later are indicated with (V1+).

## Activity log mergedRecord field descriptions

Table 103 on page 711 describes the fields that are present in mergedRecord activity log records. Activity log mergedRecords are logged when the GLDLOG\_TIME environment variable is set to **mergedrecord** or **logFileRecordType** is set to **mergedRecord** in the configuration file.

| Table 103. mergedRecord activity log fields |                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------|-----------------|------------|----------------|------------|-----------------|------------|-------------------|------------|-------------------|------------|---------------------|------------|-----------------|------------|----------------|------------|
| Field name                                  | bind, compare                                                                                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| attr                                        | compare                                                                                               | The name of the attribute being compared.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| attrs                                       | add(V1+), modify(V1+), search                                                                         | The name of the attributes that are requested to be returned on the request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| bind                                        | add, bind, compare, disconnect(V1+), delete, extendedop, modify, modrdn, search, unbind, unknown(V1+) | The bind DN for the connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| bindFlags                                   | bind                                                                                                  | <div>The hex value for the following possible flag settings is:</div> <table><tr><td>ADMIN_ROLE_NONE</td><td>0x00000001</td></tr><tr><td>ADMIN_ROLE_ROOT</td><td>0x00000002</td></tr><tr><td>ADMIN_ROLE_DIR</td><td>0x00000004</td></tr><tr><td>ADMIN_ROLE_REPL</td><td>0x00000008</td></tr><tr><td>ADMIN_ROLE_SCHEMA</td><td>0x00000010</td></tr><tr><td>ADMIN_ROLE_CONFIG</td><td>0x00000020</td></tr><tr><td>ADMIN_ROLE_PASSWORD</td><td>0x00000040</td></tr><tr><td>ADMIN_ROLE_OPER</td><td>0x00000080</td></tr><tr><td>ADMIN_ROLE_SAF</td><td>0x00000100</td></tr></table> <div>where,</div> <ul style="list-style-type: none"><li>• ADMIN_ROLE_NONE=No administrator</li><li>• ADMIN_ROLE_ROOT=Root administrator</li><li>• ADMIN_ROLE_DIR=Directory data administrator</li><li>• ADMIN_ROLE_REPL=Replication administrator</li><li>• ADMIN_ROLE_SCHEMA=Schema administrator</li><li>• ADMIN_ROLE_CONFIG=Server configuration group member</li><li>• ADMIN_ROLE_PASSWORD=Password administrator</li><li>• ADMIN_ROLE_OPER=Operational administrator</li><li>• ADMIN_ROLE_SAF=The administrative user is a member of cn=safadmingroup, cn=configuration and the roles are defined in RACF.</li></ul> <div>Example: If the user is a member of cn=safadmingroup, cn=configuration and has been permitted to all administrative roles, bindFlags = 1FF is in this field.</div> | ADMIN_ROLE_NONE | 0x00000001 | ADMIN_ROLE_ROOT | 0x00000002 | ADMIN_ROLE_DIR | 0x00000004 | ADMIN_ROLE_REPL | 0x00000008 | ADMIN_ROLE_SCHEMA | 0x00000010 | ADMIN_ROLE_CONFIG | 0x00000020 | ADMIN_ROLE_PASSWORD | 0x00000040 | ADMIN_ROLE_OPER | 0x00000080 | ADMIN_ROLE_SAF | 0x00000100 |
| ADMIN_ROLE_NONE                             | 0x00000001                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_ROOT                             | 0x00000002                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_DIR                              | 0x00000004                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_REPL                             | 0x00000008                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_SCHEMA                           | 0x00000010                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_CONFIG                           | 0x00000020                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_PASSWORD                         | 0x00000040                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_OPER                             | 0x00000080                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |
| ADMIN_ROLE_SAF                              | 0x00000100                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |            |                 |            |                |            |                 |            |                   |            |                   |            |                     |            |                 |            |                |            |

Table 103. mergedRecord activity log fields (continued)

| Field name    | bind, compare                                                                                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cause         | disconnect(V1+)                                                                                                                   | <p>The reason code value for disconnect, the possible values, and description are:</p> <ul style="list-style-type: none"> <li>1: Idle connection time-out</li> <li>2: Network interface failed.</li> <li>4: Connection closed abnormally.</li> <li>8: Client closed connection.</li> <li>10: The request is not a valid LDAP message.</li> <li>20: Internal error. For example: out of storage error, unable to encode or decode LDAP message.</li> <li>40: Failed to write LDAP message to network connection.</li> <li>80: Error occurred in System SSL.</li> <li>100: Blocked connection timeout.</li> </ul> <p>For example, if the value is 5, it means that the disconnect cause is: (1) Idle connection time-out and (2) Connection closed abnormally.</p> |
| clientIP      | abandon(V1+), add, bind, compare, connect(V1+), delete, disconnect(V1+), extendedop, modify, modrdn, search, unbind, unknown(V1+) | The IP address of the client performing the request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| connid        | abandon(V1+), add, bind, compare, connect(V1+), delete, disconnect(V1+), extendedop, modify, modrdn, search, unbind, unknown(V1+) | The internal connection ID used to indicate operations performed on the same client connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| controls      | add, bind, compare, delete, extendedop, modify, modrdn, search, unbind, unknown(V1+)                                              | The OID of the control on the request. If there are multiple controls on the request, they are separated by ':'.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| count         | search                                                                                                                            | The number of entries that are returned on the search request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| delete oldRdn | modrdn                                                                                                                            | <b>T</b> (true) or <b>F</b> (false) if the old relative distinguished name (RDN) is deleted in the modrdn request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| filter        | search                                                                                                                            | The search filter that is specified in the search request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| listen        | bind, connect(V1+), unbind                                                                                                        | The listen URL that the LDAP server was listening on that received the client connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| mech          | bind                                                                                                                              | Indicates the authentication method. It has one of the following values: SIMPLE, EXTERNAL, GSSAPI, DIGEST-MD5, or CRAM-MD5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

| Table 103. mergedRecord activity log fields (continued) |                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Field name                                              | bind, compare                                                                                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| msgid                                                   | abandon(V1+), add(V1+), bind(V1+), compare(V1+), delete(V1+), exop(V1+), modify(V1+), search(V1+), unknown(V1+) | Message identifier.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| newRdn                                                  | modrdn                                                                                                          | The new relative distinguished name for the target entry in the modrdn request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| policyUpdated                                           | bind                                                                                                            | <ul style="list-style-type: none"> <li>• T (true) or F (false) if the password policy operational attribute values are updated in either the bind DN entry, or in the compare target entry.</li> <li>• NA if the operation is compare and the attribute that is being compared is not <b>userPassword</b>.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                     |
| rc                                                      | add, bind, compare, delete, extendedop, modify, modrdn, search, unbind, unknown(V1+)                            | The LDAP server return code for the operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| rsn                                                     | add, bind, compare, delete, extendedop, modify, modrdn, search, unbind, unknown(V1+)                            | The LDAP reason code message number and text, if there is one, sent from the server to the client.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| saf                                                     | bind, unbind                                                                                                    | The SAF ID, if any, associated with the bind DN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| scope                                                   | search                                                                                                          | The scope of the search request. It is set to 0 for subtree searches, 1 for one level searches, and 2 for subtree searches.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| searchFlags                                             | search                                                                                                          | <p>The hex value for the following possible flag settings is:</p> <pre>SEARCH_PAGE_FIRST 0x00000001 SEARCH_PAGE_NEXT  0x00000002 SEARCH_PAGE_LAST  0x00000004 SEARCH_SORT_COMPLETE 0x00000008</pre> <p>where,</p> <ul style="list-style-type: none"> <li>• SEARCH_PAGE_FIRST=First page of a paged search request</li> <li>• SEARCH_PAGE_NEXT=Ensuing page of a paged search request</li> <li>• SEARCH_PAGE_LAST=Last page of a paged search request</li> <li>• SEARCH_SORT_COMPLETE=Sorted search requested and completed successfully</li> </ul> <p>Example: If the last page of a successfully paged and sorted search request has been returned to the client application, searchFlags = 0E is set in this field.</p> |
| seclabel                                                | bind, unbind                                                                                                    | The LDAP client security label, if there is one.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

| <i>Table 103. mergedRecord activity log fields (continued)</i> |                                                                                                    |                                                                                                                   |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Field name</b>                                              | <b>bind, compare</b>                                                                               | <b>Description</b>                                                                                                |
| target                                                         | add, compare, modify, modrdn, search                                                               | The target entry of the operation (base DN for the search, bind DN, DN to be deleted, DN to be added, and so on). |
| targetmsgid                                                    | abandon(V1+)                                                                                       | The target message ID of the abandon operation.                                                                   |
| time                                                           | abandon(V1+), add, bind, compare, delete, extendedop, modify, modrdn, search, unbind, unknown(V1+) | The elapsed time for request completion (in microseconds).                                                        |
| type                                                           | unknown(V1+)                                                                                       | The type of the request.                                                                                          |
| XOP                                                            | extendedop                                                                                         | The OID of the extended operation request.                                                                        |

Fields for the **logFileVersion** 1 or above are indicated with (V1+).



---

## Appendix G. Guidelines for interoperability between non-z/OS TDS and z/OS TDS

This section contains information to consider when setting up a mixed platform environment where an LDAP directory is being replicated between non-z/OS TDS on Linux®, UNIX, or Windows platforms and z/OS TDS. This information also applies to migration of the schema and directory entries between these different platforms.

---

### Schema considerations

#### Syntax and matching rules

There are some minor differences in the support of some syntaxes and matching rules between z/OS TDS and non-z/OS TDS.

- – z/OS TDS checks the characters used in a value of an attribute with Facsimile Telephone Number syntax, Printable String syntax, Telex Number syntax, or Telephone Number syntax. Non-z/OS TDS does not check values for these syntaxes.
- z/OS TDS supports specifying a space-separated list of numbers for a value of an attribute with Numeric String syntax. Non-z/OS TDS supports only a single number, with no spaces.
- z/OS TDS allows any printable character in a value of an attribute with Country String syntax. Non-z/OS TDS allows only alphabetic characters. z/OS TDS also allows specifying the case ignore matching rule in an attribute with this syntax. Non-z/OS TDS does not support any matching rules (and always does a case ignore match).
- z/OS TDS supports specifying `certificateMatch` and `certificateExactMatch` in an attribute with Certificate syntax. Non-z/OS TDS does not support these matching rules.

If you plan to migrate entries using attributes with these syntaxes, make sure to define the attributes using matching rules supported on both z/OS TDS and non-z/OS TDS, and restrict the attribute values to characters and formats that are supported by both. An attribute value that is not supported must be changed before the entry can be migrated.

#### Schema LDIF format

The format of the schema LDIF obtained from non-z/OS TDS or z/OS TDS by publishing the schema (using `ldapsearch -L`) might not be acceptable input for a schema modification.

- When modifying the non-z/OS TDS schema, break up the **attributetypes** and **objectclasses** in the schema file into separate schema modifications, each including a single **attributetypes** value or **objectclasses** value. Also, include an **ibmattributetypes** value (if any) in the modification for its associated **attributetypes** value. If the attribute or object class exists in the schema, the modification is modify-replace; otherwise, the modification is modify-add.

When modifying the z/OS TDS schema, the entire LDIF can be processed in a single modify-replace operation, whether the attributes or object classes exist in the schema.

For example, assume that attribute **attr1** and object class **objclass1** exist in the schema. For z/OS TDS, the following schema modification replaces those schema elements and adds new attribute **attr2** and object class **objclass2**:

```
dn: cn=schema
changetype: modify
replace: attributetypes
attributetypes: (
 1.3.18.0.2.4.11111
 NAME 'attr1'
 DESC 'Description for attribute attr1'
```

```

SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
USAGE userApplications
)
IBMAtributetypes: (
 1.3.18.0.2.4.11111
 ACCESS-CLASS normal
)
attributetypes: (
 1.3.18.0.2.4.22222
 NAME 'attr2'
 DESC 'Description for attribute attr2'
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE userApplications
)
IBMAtributetypes: (
 1.3.18.0.2.4.22222
 ACCESS-CLASS normal
)
-
replace: objectclasses
objectclasses: (
 1.3.18.0.2.6.33333
 NAME 'objclass1'
 DESC 'Description for object class objclass1'
 SUP top
 STRUCTURAL
 MUST (cn)
 MAY (attr1)
)
objectclasses: (
 1.3.18.0.2.6.44444
 NAME 'objclass2'
 DESC 'Description for object class objclass2'
 SUP top
 STRUCTURAL
 MUST (cn)
 MAY (attr1 $ attr2)
)

```

For non-z/OS TDS, this schema modification must be reformatted into separate schema modifications and modify-add used instead of modify-replace for the new schema elements, as follows:

```

dn: cn=schema
changetype: modify
replace: attributetypes
attributetypes: (
 1.3.18.0.2.4.11111
 NAME 'attr1'
 DESC 'Description for attribute attr1'
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE userApplications
)
IBMAtributetypes: (
 1.3.18.0.2.4.11111
 ACCESS-CLASS normal
)

dn: cn=schema
changetype: modify
add: attributetypes
attributetypes: (
 1.3.18.0.2.4.22222
 NAME 'attr2'
 DESC 'Description for attribute attr2'
 SYNTAX 1.3.6.1.4.1.1466.115.121.1.15
 USAGE userApplications
)
IBMAtributetypes: (
 1.3.18.0.2.4.22222
 ACCESS-CLASS normal
)

dn: cn=schema
changetype: modify
replace: objectclasses
objectclasses: (
 1.3.18.0.2.6.33333
 NAME 'objclass1'
 DESC 'Description for object class objclass1'
 SUP top

```

```

STRUCTURAL
MUST (cn)
MAY (attr1)
)

dn: cn=schema
changetype: modify
add: objectclasses
objectclasses: (
 1.3.18.0.2.6.44444
 NAME 'objclass2'
 DESC 'Description for object class objclass2'
 SUP top
 STRUCTURAL
 MUST (cn)
 MAY (attr1 $ attr2)
)

```

- Ensure that the object classes do not precede the attributes that they refer to.

## Import or export of directory entries

### Exporting data from non-z/OS TDS to z/OS TDS

- Non-z/OS TDS includes certain suffixes, such as `cn=configuration`, `cn=ibmPolicies`, and `cn=localhost`, that contain special entries used to manage LDAP configuration, policies, and replication. z/OS TDS only supports some of these special entries. See [“CDBM backend configuration and policy entries” on page 137](#) for information about the supported special entries in z/OS TDS. Remove the other non-z/OS TDS special entries from the LDIF or use **db2ldif** -s *subtreeDN* -x to avoid unloading these suffixes.
- User passwords must be in clear text, crypt, SHA, Salted SHA (SSHA), SHA224, SSHA224 (Salted SHA224), SHA256, SSHA256 (Salted SHA256), SHA384, SSHA384 (Salted SHA384), SHA512, or SSHA512 (Salted SHA512). Other forms are not compatible with z/OS TDS. If using crypt, make certain to specify **pwCryptCompat off** in the z/OS TDS configuration file.
- z/OS TDS does not support the use of filtered ACLs in the **ibm-filterAclEntry** attribute. You must remove these before importing to z/OS TDS.

### Exporting data from z/OS TDS to non-z/OS TDS

- For non-z/OS TDS, **aclEntry** and **entryOwner** attribute values must begin with the following format:

```
"access-id:|group:|role:"
```

This is not required for z/OS TDS, therefore, it might need to be added to these attribute values before importing to non-z/OS TDS. Always specify these on z/OS TDS to avoid this issue.

- User passwords must be in clear text, crypt, SHA, Salted SHA (SSHA), SHA224, SSHA224 (Salted SHA224), SHA256, SSHA256 (Salted SHA256), SHA384, SSHA384 (Salted SHA384), SHA512, or SSHA512 (Salted SHA512). Other forms are not compatible with non-z/OS TDS. If using crypt, make certain to specify **pwCryptCompat off** in the z/OS TDS configuration file. Use the -t option of the **ds2ldif** utility to unload passwords in the tagged format used by non-z/OS TDS. If importing SHA-2 or Salted SHA-2 user passwords into non-z/OS TDS 6.3 or greater, the **ibm-slapdUseNonFIPSCrypt** attribute in the `cn=configuration` entry must be set to true before doing the importing.
- Non-z/OS TDS does not support ACL filters in the **aclEntry** and **entryOwner** attribute values. If there are **aclEntry** or **entryOwner** attribute values that have **aclFilter** or **ownerFilter** scopes of protection, they must be removed before importing to non-z/OS TDS.

## Functional considerations

- For non-z/OS TDS, deleting a person entry results in removing the DN of the entry from groups and ACLs. This is not done in z/OS TDS. Instead, applications must do this themselves.

- Similarly, non-z/OS TDS supports a control that allows deletion of all entries in a subtree. z/OS TDS does not support this control, therefore, applications must do this themselves.
- There are some capabilities that only non-z/OS TDS or only z/OS TDS supports. Restrict usage to capabilities supported on both platforms to facilitate replication of operations and migration of entries.
- For non-z/OS TDS, group search limits are only used when they are contained in group entries located under `cn=localhost` or `cn=ibmpolicies`. Furthermore, the limits in groups under `cn=ibmpolicies` are ignored if there are limits in groups under `cn=localhost`. In z/OS TDS, group entries containing group search limits can be located anywhere in LDBM, CDBM, and TDBM backends and the limits in all groups are used.
- For non-z/OS TDS, the underlying Db2 database is taken advantage of to perform sorting of search results, resulting in potentially different sorted search results based on the data code page for the database. z/OS TDS does not have this restriction.
- For non-z/OS TDS, sorting of search results is limited to examination of the first 240 bytes based on its use of Db2 sorting on the index and index length limitations. z/OS TDS does not have this limitation.

## Administrative group and roles considerations

---

- Dynamic configuration is supported for the administrative group and roles in z/OS TDS. Administrative group member entries and roles are defined under the `cn=adminingroup`, `cn=configuration` entries or in the `cn=safadmingroup`, `cn=configuration` entry in the CDBM backend.
- Only simple binds are supported for administrative group members defined in the CDBM backend. However, more complex bind mechanisms, such as CRAM-MD5 and DIGEST-MD5 binds, can be used by pointing to an entry in the LDBM or TDBM backend. Then, all bind mechanisms are supported.
- If an administrative group member is in the DIT and it exists in an advanced replication context or backend (basic replication), the entry is replicated to other servers. If the other consumer or replica servers do not have the administrative group and roles set up correctly or ACLs are not set correctly, the administrative group member's credentials can be exposed.
- Administrative group members might be subject to ACL filters.
- The Audit log administrator and the Start/Stop administrator roles are not supported in z/OS TDS. However, z/OS TDS provides two additional administrative roles, root administrator and operational administrator.

## Appendix H. Searching operational attributes

The LDAP server supports many operational attributes that can be returned on search operations. However, many are derived and are not supported within search filters. If a non-searchable operational attribute is included on a search filter, it typically does not produce an error. Instead, a FALSE match is produced, making its use in a search filter predicate ineffective. [Table 104 on page 719](#) lists operational attributes that can be returned from a search and whether the attribute can be used effectively in a search filter predicate.

Table 104. Search operational attributes

| Attribute name                       | User modifiable      | Filter predicate | Description                                                                                  |
|--------------------------------------|----------------------|------------------|----------------------------------------------------------------------------------------------|
| <b>aclEntry</b>                      |                      | Yes <sup>1</sup> | Defines an access list entry.                                                                |
| <b>aclPropagate</b>                  |                      | Yes <sup>1</sup> | Defines access list subtree propagation.                                                     |
| <b>aclSource</b>                     | NO-USER-MODIFICATION | No               | Source of the access list for an entry.                                                      |
| <b>attributeTypes</b>                |                      | No               | LDAP attribute types.                                                                        |
| <b>createTimestamp</b>               | NO-USER-MODIFICATION | Yes              | Entry creation time.                                                                         |
| <b>creatorsName</b>                  | NO-USER-MODIFICATION | Yes              | Name of entry creator.                                                                       |
| <b>directoryOperationName</b>        |                      | No               | The distinguished name of a <b>directoryOperation</b> object within the same organization.   |
| <b>directoryOperationString</b>      |                      | No               | A constructed directory operation request string.                                            |
| <b>ditContentRules</b>               |                      | No               | Directory content rules.                                                                     |
| <b>ditStructureRules</b>             |                      | No               | Directory structure rules.                                                                   |
| <b>entryOwner</b>                    |                      | Yes <sup>1</sup> | Defines an entry owner.                                                                      |
| <b>hasSubordinates</b>               | NO-USER-MODIFICATION | No               | Indicates whether any subordinate entries exist below the entry holding this attribute.      |
| <b>ibm-allGroups</b>                 | NO-USER-MODIFICATION | No               | Lists all groups containing an entry.                                                        |
| <b>ibm-allMembers</b>                | NO-USER-MODIFICATION | No               | Lists all members of a group.                                                                |
| <b>ibm-effectiveReplicationModel</b> | NO-USER-MODIFICATION | No               | Advertises in the root DSE the OID of the replication model in use by the server.            |
| <b>ibm-entryChecksum</b>             | NO-USER-MODIFICATION | No               | A checksum of the user attributes for the entry containing this attribute.                   |
| <b>ibm-entryChecksumOp</b>           | NO-USER-MODIFICATION | No               | A checksum of the replicated operational attributes for the entry containing this attribute. |

Table 104. Search operational attributes (continued)

| Attribute name                             | User modifiable      | Filter predicate | Description                                                                                                                                                                                             |
|--------------------------------------------|----------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ibm-EntryUUID</b>                       | NO-USER-MODIFICATION | Yes              | Uniquely identifies an LDAP entry throughout its life.                                                                                                                                                  |
| <b>ibm-pwdAccountLocked</b>                |                      | Yes              | The indication that the users account is locked.                                                                                                                                                        |
| <b>ibm-pwdGroupPolicyDN</b>                |                      | Yes              | DN of an entry containing password policy information. This entry can be used in a group entry to associate a password policy with the entry.                                                           |
| <b>ibm-pwdIndividualPolicyDN</b>           |                      | Yes              | DN of an entry containing password policy information. This entry can be used in a user entry to associate a password policy with the entry.                                                            |
| <b>ibm-replicaPKCS11Enabled</b>            |                      | Yes              | Must be one of { TRUE   FALSE }. Specify whether PKCS11 interface is enabled to do cryptographic operation and key database file lookup from the installed Crypto device.                               |
| <b>ibm-replicationChangeLDIF</b>           | NO-USER-MODIFICATION | No               | Provides LDIF representation of the last failing operation.                                                                                                                                             |
| <b>ibm-replicationFailedChangeCount</b>    | NO-USER-MODIFICATION | No               | Indicates the number of changes that are logged as failures for this replication agreement.                                                                                                             |
| <b>ibm-replicationFailedChanges</b>        | NO-USER-MODIFICATION | No               | Unreplicated change for a specific replication agreement in the form <change id> <operation> <dn> <LDAP result code> <timestamp> <failed attempts> where operation is ADD, DELETE, MODIFY, or MODIFYDN. |
| <b>ibm-replicationIsQuiesced</b>           |                      | No               | Indicates whether the replicated subtree containing this attribute is quiesced on this server.                                                                                                          |
| <b>ibm-replicationLastActivationTime</b>   | NO-USER-MODIFICATION | No               | Indicates the last time the replication thread was activated.                                                                                                                                           |
| <b>ibm-replicationLastChangeId</b>         | NO-USER-MODIFICATION | No               | Indicates last change ID successfully replicated for a replication agreement.                                                                                                                           |
| <b>ibm-replicationLastFinishTime</b>       | NO-USER-MODIFICATION | No               | Indicates the last time the replication thread completed sending all of the pending entries.                                                                                                            |
| <b>ibm-replicationLastresult</b>           | NO-USER-MODIFICATION | No               | result of last attempted replication in the form: <time> <change-id> <result code> <operation> <entry-dn>                                                                                               |
| <b>ibm-replicationLastresultAdditional</b> | NO-USER-MODIFICATION | No               | Provides any additional error information returned by the consuming server in the message component of the LDAP result.                                                                                 |

| Table 104. Search operational attributes (continued) |                      |                  |                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------|----------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute name                                       | User modifiable      | Filter predicate | Description                                                                                                                                                                                                                                                                                                                                                                                |
| <b>ibm-replicationNextTime</b>                       | NO-USER-MODIFICATION | No               | Indicates next scheduled time for replication.                                                                                                                                                                                                                                                                                                                                             |
| <b>ibm-replicationPendingChangeCount</b>             | NO-USER-MODIFICATION | No               | Indicates the total number of pending unreplicated changes for this replication agreement.                                                                                                                                                                                                                                                                                                 |
| <b>ibm-replicationPendingChanges</b>                 | NO-USER-MODIFICATION | No               | Unreplicated change in the form <change id> <operation> <dn> where operation is ADD, DELETE, MODIFY, MODIFYDN.                                                                                                                                                                                                                                                                             |
| <b>ibm-replicationperformance</b>                    | NO-USER-MODIFICATION | No               | Values for the following metrics: connection, operations queued, dependent operations queued, operations sent, dependent operations sent, operations received, errors.                                                                                                                                                                                                                     |
| <b>ibm-replicationState</b>                          | NO-USER-MODIFICATION | No               | Indicates the state of the replication thread: active, ready, waiting, suspended, or full. If full, the value indicates the amount of progress.                                                                                                                                                                                                                                            |
| <b>ibm-replicationThisServerIsMaster</b>             | NO-USER-MODIFICATION | No               | Indicates whether the server returning this attribute is a master server for the subtree containing this entry.                                                                                                                                                                                                                                                                            |
| <b>ibm-searchSizeLimit</b>                           |                      | Yes              | Maximum number of entries to return from search requests for a member in a special search limit group. 0 = unlimited. -1 = ignored                                                                                                                                                                                                                                                         |
| <b>ibm-searchTimeLimit</b>                           |                      | Yes              | Maximum number of seconds to spend on search requests for a member in a special search limit group. 0 = unlimited. -1 = ignored                                                                                                                                                                                                                                                            |
| <b>ibm-slapdAdminDN</b>                              |                      | Yes              | Bind DN for <b>ibmslapd</b> administrator. (For example: cn=root)                                                                                                                                                                                                                                                                                                                          |
| <b>ibm-slapdAdminGroupEnabled</b>                    |                      | Yes              | Must be one of { TRUE   FALSE }. Specifies whether the administrative group is enabled. Defaults to FALSE if unspecified. If set to TRUE, the server allows users in the administrative group to log in.                                                                                                                                                                                   |
| <b>ibm-slapdAdminPW</b>                              |                      | Yes              | Bind password for <b>ibmslapd</b> administrator.                                                                                                                                                                                                                                                                                                                                           |
| <b>ibm-slapdAdminRole</b>                            |                      | Yes              | Administrative roles associated with a local administrative group member. Valid values are <b>AuditAdmin</b> , <b>DirDataAdmin</b> , <b>NoAdmin</b> , <b>PasswordAdmin</b> , <b>ReplicationAdmin</b> , <b>SchemaAdmin</b> , <b>ServerConfigGroupMember</b> , <b>ServerStartStopAdmin</b> . Additional values that are supported by z/OS are <b>RootAdmin</b> and <b>OperationalAdmin</b> . |

| Table 104. Search operational attributes (continued) |                      |                  |                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------|----------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute name                                       | User modifiable      | Filter predicate | Description                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>ibm-slapdDigestAdminUser</b>                      |                      | Yes              | Specifies the DIGEST-MD5 user name of the LDAP administrator or administrative group member. Used when DIGEST-MD5 authentication is used to authenticate an administrator.                                                                                                                                                                                                                                   |
| <b>ibm-slapdDN</b>                                   | NO-USER-MODIFICATION | No               | This attribute is used to sort search results by the entry DN.                                                                                                                                                                                                                                                                                                                                               |
| <b>ibm-slapdKrbAdminDN</b>                           |                      | Yes              | Specifies the Kerberos ID of the LDAP administrator (For example: <b>ibm-kn=name@realm</b> ). Used when Kerberos authentication is used to authenticate the administrator when logged on to the web administrator interface. This is specified instead of <b>adminDN</b> and <b>adminPW</b> .                                                                                                                |
| <b>ibm-slapdMasterDN</b>                             |                      | Yes              | Bind DN used by a replication supplier server. The value must match the <b>replicaBindDN</b> in the credentials object associated with the replication agreement. When Kerberos is used to authenticate to the replica, <b>ibm-slapdMasterDN</b> must specify the DN representation of the Kerberos ID (For example: <b>ibm-kn=freddy@realm1</b> ). When Kerberos is used, <b>MasterServerPW</b> is ignored. |
| <b>ibm-slapdMasterPW</b>                             |                      | Yes              | Bind password used by replication supplier server. The value must match the <b>replicaBindPW</b> in the credentials object associated with the replication agreement. When Kerberos is used, <b>MasterServerPW</b> is ignored.                                                                                                                                                                               |
| <b>ibm-slapdMasterReferral</b>                       |                      | Yes              | URL of master replica server. (For example: <b>ldaps://master.us.ibm.com:636</b> )                                                                                                                                                                                                                                                                                                                           |
| <b>ibm-slapdMigrationInfo</b>                        |                      | Yes              | Information that is used to control migration of a component.                                                                                                                                                                                                                                                                                                                                                |
| <b>ibm-slapdNoReplConflictResolution</b>             |                      | Yes              | Specifies whether directory server handles replication conflict resolution. If it is set to true, then the server does not try to compare time stamps for replicated entries in an attempt to resolve conflicts between the entries. However, conflict resolution does not apply to entry <b>cn=schema</b> , which is always replaced by a replicated <b>cn=schema</b> .                                     |
| <b>ibm-slapdPagedResAllowNonAdmin</b>                |                      | Yes              | Whether the server should allow non-Administrators to request paged search results.                                                                                                                                                                                                                                                                                                                          |



| Table 104. Search operational attributes (continued) |                      |                  |                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------|----------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attribute name                                       | User modifiable      | Filter predicate | Description                                                                                                                                                                                                                                                                                    |
| <b>ibm-slapdPagedResLmt</b>                          |                      | Yes              | Maximum number of outstanding paged search requests allowed simultaneously.                                                                                                                                                                                                                    |
| <b>ibm-slapdReplRestrictedAccess</b>                 |                      | Yes              | Used to control access to the replication topology entry. If it is set to true, then only the root admin, local admin group members, and the master DN have access to the replication topology entry. Otherwise, any user with proper ACL might have access to the replication topology entry. |
| <b>ibm-slapdReplVersion</b>                          |                      | Yes              | This attribute defines the current version of the advanced replication feature.                                                                                                                                                                                                                |
| <b>ibm-slapdSortKeyLimit</b>                         |                      | Yes              | Maximum number of sort keys that can be specified on a single sorted search request.                                                                                                                                                                                                           |
| <b>ibm-slapdSortSrchAllowNonAdmin</b>                |                      | Yes              | Whether the server should allow non-Administrators to request sorted search results.                                                                                                                                                                                                           |
| <b>ibmAttributeTypes</b>                             |                      | No               | IBM attribute types.                                                                                                                                                                                                                                                                           |
| <b>ldapSyntaxes</b>                                  |                      | No               | LDAP syntaxes.                                                                                                                                                                                                                                                                                 |
| <b>matchingRules</b>                                 |                      | No               | LDAP matching rules.                                                                                                                                                                                                                                                                           |
| <b>matchingRuleUse</b>                               |                      | No               | LDAP matching rule uses.                                                                                                                                                                                                                                                                       |
| <b>modifiersName</b>                                 | NO-USER-MODIFICATION | Yes              | Name of last entry modifier.                                                                                                                                                                                                                                                                   |
| <b>modifyTimestamp</b>                               | NO-USER-MODIFICATION | Yes              | Time of last entry modification.                                                                                                                                                                                                                                                               |
| <b>nameForms</b>                                     |                      | No               | Directory name forms.                                                                                                                                                                                                                                                                          |
| <b>objectClasses</b>                                 |                      | No               | LDAP object classes.                                                                                                                                                                                                                                                                           |
| <b>ownerPropagate</b>                                |                      | Yes <sup>1</sup> | Defines entry owner subtree propagation.                                                                                                                                                                                                                                                       |
| <b>ownerSource</b>                                   | NO-USER-MODIFICATION | No               | Source of the owner for an entry.                                                                                                                                                                                                                                                              |
| <b>pwdAccountLockedTime</b>                          |                      | Yes              | Specifies the time that the users account was locked.                                                                                                                                                                                                                                          |
| <b>pwdChangedTime</b>                                |                      | Yes <sup>2</sup> | Specifies the last time the entry password was changed.                                                                                                                                                                                                                                        |
| <b>pwdExpirationWarned</b>                           |                      | Yes              | The time the user was first warned about the pending expiration of the password.                                                                                                                                                                                                               |
| <b>pwdFailureTime</b>                                |                      | Yes              | The time stamps of the last consecutive authentication failures.                                                                                                                                                                                                                               |
| <b>pwdGraceUseTime</b>                               |                      | Yes              | The time stamps of the grace log in when the password expires.                                                                                                                                                                                                                                 |

Table 104. Search operational attributes (continued)

| Attribute name                                             | User modifiable      | Filter predicate | Description                                                                                 |
|------------------------------------------------------------|----------------------|------------------|---------------------------------------------------------------------------------------------|
| <b>pwdHistory</b>                                          |                      | Yes              | The history of users passwords.                                                             |
| <b>pwdReset</b>                                            |                      | Yes              | Indicates that the password is reset.                                                       |
| <b>replicaBindDN</b>                                       |                      | Yes              | Specifies the replica bind DN.                                                              |
| <b>replicaBindMethod</b>                                   |                      | Yes              | Specifies the replica bind method.                                                          |
| <b>replicaCredentials</b><br><b>replicaBindCredentials</b> |                      | Yes              | Specifies the replica bind credentials.                                                     |
| <b>replicaHost</b>                                         |                      | Yes              | Specifies the replica hostname.                                                             |
| <b>replicaPort</b>                                         |                      | Yes              | Specifies the replica bind port.                                                            |
| <b>replicaUpdateTimeInterval</b>                           |                      | Yes              | Specifies replication update interval.                                                      |
| <b>replicaUseSSL</b>                                       |                      | Yes              | Specifies SSL usage when binding to replica.                                                |
| <b>subschemaSubentry</b>                                   | NO-USER-MODIFICATION | No               | Schema that is associated with an entry.                                                    |
| <b>subtreeSpecification</b>                                |                      | No               | Subtree specification.                                                                      |
| <b>Root DSE Attributes</b>                                 |                      |                  |                                                                                             |
| <b>altServer</b>                                           |                      | No               | Alternate LDAP server.                                                                      |
| <b>changeLog</b>                                           | NO-USER-MODIFICATION | No               | Distinguished name of the server change log.                                                |
| <b>firstChangeNumber</b>                                   | NO-USER-MODIFICATION | No               | Change number for the earliest entry in the server change log.                              |
| <b>ibm-enabledCapabilities</b>                             | NO-USER-MODIFICATION | No               | Capabilities that are enabled for use on this server.                                       |
| <b>ibm-saslDigestRealmName</b>                             | NO-USER-MODIFICATION | No               | DIGEST-MD5 realm names for this server.                                                     |
| <b>ibm-serverId</b>                                        | NO-USER-MODIFICATION | No               | Advertises in the Root DSE the <b>ibm-slappedServerId</b> configuration option setting.     |
| <b>ibm-supportedCapabilities</b>                           | NO-USER-MODIFICATION | No               | Capabilities that are supported by this server.                                             |
| <b>ibm-supportedReplicationModels</b>                      | NO-USER-MODIFICATION | No               | Advertises in the root DSE the OIDs of replication models that are supported by the server. |
| <b>ibmDirectoryVersion</b>                                 | NO-USER-MODIFICATION | No               | Version of this directory server.                                                           |
| <b>lastChangeNumber</b>                                    | NO-USER-MODIFICATION | No               | Change number for the latest entry in the server change log.                                |
| <b>ldapServiceName</b>                                     | NO-USER-MODIFICATION | No               | LDAP service name for this server as host@realm.                                            |

Table 104. Search operational attributes (continued)

| Attribute name                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | User modifiable      | Filter predicate | Description                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|-----------------------------------------------------------|
| <b>namingContexts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                      | No               | LDAP server naming contexts.                              |
| <b>supportedControl</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      | No               | Controls supported by this server.                        |
| <b>supportedExtension</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                      | No               | Extensions that are supported by this server.             |
| <b>supportedLDAPVersion</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                      | No               | LDAP protocol versions that are supported by this server. |
| <b>supportedSASLMechanisms</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                      | No               | SASL mechanisms that are supported by this server.        |
| <b>vendorName</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | NO-USER-MODIFICATION | No               | Name of the company that implemented the LDAP server.     |
| <b>vendorVersion</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | NO-USER-MODIFICATION | No               | Version of the LDAP Server implementation.                |
| <b>Foot notes:</b><br><sup>1</sup> ACL related attributes: This attribute is sometimes present in the entries, and sometimes it is derived. Use of this attribute in a filter predicate only matches when the attribute is stored in the entry.<br><sup>2</sup> Password policy related attributes: This attribute is sometimes present in the entries, and sometimes it is derived. Use of this attribute in a filter predicate only matches when the attribute is stored in the entry. |                      |                  |                                                           |



---

## Appendix I. Accessibility

Accessible publications for this product are offered through [IBM Documentation for z/OS \(www.ibm.com/docs/en/zos\)](http://www.ibm.com/docs/en/zos).

If you experience difficulty with the accessibility of any z/OS documentation see [How to Send Feedback to IBM](#) to leave documentation feedback.



## Notices

---

This information was developed for products and services that are offered in the USA or elsewhere.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing  
IBM Corporation  
North Castle Drive, MD-NC119  
Armonk, NY 10504-1785  
United States of America*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing  
Legal and Intellectual Property Law  
IBM Japan Ltd.  
19-21, Nihonbashi-Hakozakicho, Chuo-ku  
Tokyo 103-8510, Japan*

**The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:** INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

This information could include missing, incorrect, or broken hyperlinks. Hyperlinks are maintained in only the HTML plug-in output for IBM Documentation. Use of hyperlinks in other output formats of this information is at your own risk.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

*IBM Corporation  
Site Counsel  
2455 South Road*

Poughkeepsie, NY 12601-5400  
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

## Terms and conditions for product documentation

---

Permissions for the use of these publications are granted subject to the following terms and conditions.

### **Applicability**

These terms and conditions are in addition to any terms of use for the IBM website.

### **Personal use**

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

### **Commercial use**

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or



reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

## Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

## IBM Online Privacy Statement

---

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering's use of cookies is set forth below.

Depending upon the configurations deployed, this Software Offering may use session cookies that collect each user's name, email address, phone number, or other personally identifiable information for purposes of enhanced user usability and single sign-on configuration. These cookies can be disabled, but disabling them will also eliminate the functionality they enable.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at [ibm.com/privacy](http://ibm.com/privacy) and IBM's Online Privacy Statement at [ibm.com/privacy/details](http://ibm.com/privacy/details) in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at [ibm.com/software/info/product-privacy](http://ibm.com/software/info/product-privacy).

## Policy for unsupported hardware

---

Various z/OS elements, such as DFSMSdfp, JES2, and MVS, contain code that supports specific hardware servers or devices. In some cases, this device-related element support remains in the product even after the hardware devices pass their announced End of Service date. z/OS may continue to service element code; however, it will not provide service related to unsupported hardware devices. Software problems related to these devices will not be accepted for service, and current service activity will cease if a problem is determined to be associated with out-of-support devices. In such cases, fixes will not be issued.

## Minimum supported hardware

---

The minimum supported hardware for z/OS releases identified in z/OS announcements can subsequently change when service for particular servers or devices is withdrawn. Likewise, the levels of other software products supported on a particular release of z/OS are subject to the service support lifecycle of those

products. Therefore, z/OS and its product publications (for example, panels, samples, messages, and product documentation) can include references to hardware and software that is no longer supported.

- For information about software support lifecycle, see: [IBM Lifecycle Support for z/OS \(www.ibm.com/software/support/systemsz/lifecycle\)](http://www.ibm.com/software/support/systemsz/lifecycle)
- For information about currently-supported IBM hardware, contact your IBM representative.

## Trademarks

---

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at [Copyright and Trademark information \(www.ibm.com/legal/copytrade.shtml\)](http://www.ibm.com/legal/copytrade.shtml).

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

The registered trademark Linux® is used pursuant to a sublicense from the Linux Foundation, the exclusive licensee of Linus Torvalds, owner of the mark on a worldwide basis.

UNIX is a registered trademark of The Open Group in the United States and other countries.

---

This glossary includes terms and definitions for z/OS LDAP documentation.

This glossary includes terms and definitions from:

- *IBM Dictionary of Computing*, SC20-1699.
- *Information Technology-Portable Operating System Interface (POSIX)*, from the POSIX series of standards for applications and user interfaces to open systems, which are copyrighted by the Institute of Electrical and Electronics Engineers (IEEE).
- *American National Standard Dictionary for Information Systems*, ANSI X3.172-1990, copyright 1990 by the American National Standards Institute (ANSI). Copies can be purchased from [American National Standards Institute \(ANSI\) \(www.ansi.org\)](http://www.ansi.org).
- *Information Technology Vocabulary*, developed by Subcommittee 1, Joint Technical Committee 1, of the International Organization for Standardization and the International Electrotechnical Commission (ISO/IEC JTC1.SC1).
- *CCITT Sixth Plenary Assembly Orange Book, Terms, and Definitions* and working documents that are published by the International Telecommunication Union, Geneva, 1978.
- Open Software Foundation (OSF).

**access control**

Ensuring that the resources of a computer system can be accessed only by authorized users in authorized ways.

**access control list (ACL)**

Data that controls access to a protected object. An ACL specifies the privilege attributes needed to access the object and the permissions that may be granted, to the protected object, to principals that possess such privilege attributes.

**ACL**

See *access control list (ACL)*.

**ACL Filter**

An **aclEntry** or **entryOwner** value that includes permissions for the **aclFilter** or **ownerFilter** scopes.

**API**

Application program interface.

**application program interface (API)**

A functional interface supplied by the operating system or by a separately orderable licensed program that allows an application program written in a high-level language to use specific data or functions of the operating system or the licensed program.

**attribute**

Information of a particular type concerning an object and appearing in an entry that describes the object in the directory information base (DIB). It denotes the attributes type and a sequence of one or more attribute values, each accompanied by an integer denoting the values syntax.

**backend**

A subsystem of the LDAP server which implements access to a persistent storage mechanism for information.

**base ACL**

Any **aclEntry** or **entryOwner** value that includes permissions for the **access-id**, **group**, or **role** scopes.

**base effective permission**

The access granted to a bound user before the application of any matching filter permissions. Before z/OS V1R12, this was the effective ACL.

**bind identity**

The bind identity for a bound user consists of their associated bind DN and alternate DNs.

After a successful bind request, a bind DN is associated with the bound user. Depending on the bind method (simple, CRAM-MD5, DIGEST-MD5, Kerberos, or certificate bind), there can also be a list of alternate DN's associated with the bound user.

**bind information**

Before z/OS V1R12, the bind information for a user included the bind identity and associated groups. Starting with z/OS V1R12, the bind information also includes the client connection IP address, bind mechanism, and whether encryption was used.

**binding**

A relationship between a client and a server involved in a remote procedure call.

**CCA**

Common Cryptographic Architecture.

**CDBM**

A file-based backend that stores configuration information.

**certificate**

Used to prove your identity. A secure server must have a certificate and a public-private key pair. A certificate is issued and signed by a Certificate Authority (CA).

**cipher**

A method of transforming text to conceal its meaning.

**CKDS**

Cryptographic Key Data Set.

**client**

A computer or process that accesses the data, services, or resources of another computer or process on the network. Contrast with *server*.

**configuration**

The manner in which the hardware and software of an information processing system are organized and interconnected.

**Cryptographic Key Data Set (CKDS)**

(1) A data set that contains the encrypting keys used by an installation. (2) In ICSF, a VSAM data set that contains all the cryptographic keys. Besides the encrypted key value, an entry in the cryptographic key data set contains information about the key.

**cryptography**

(1) The transformation of data to conceal its meaning. (2) In computer security, the principles, means, and methods for encrypting plaintext and decrypting ciphertext. (3) In ICSF, the use of cryptography is extended to include the generation and verification of MACs, the generation of MDCs and other one-way hashes, the generation and verification of PINs, and the generation and verification of digital signatures.

**daemon**

A long-lived process that runs unattended to perform continuous or periodic system-wide functions such as network control. Some daemons are triggered automatically to perform their task; others operate periodically.

**Data Encryption Standard (DES)**

In computer security, the National Institute of Standards and Technology (NIST) Data Encryption Standard, adopted by the US government as Federal Information Processing Standard (FIPS) Publication 46, which allows only hardware implementations of the data encryption algorithm.

**data hierarchy**

A data structure consisting of sets and subsets such that every subset of a set is of lower rank than the data of the set.

**data model**

(1) A logical view of the organization of data in a database. (2) In a database, the users logical view of the data in contrast to the physically stored data, or storage structure. (3) A description of the organization of data in a manner that reflects information structure of an enterprise.

**database**

A collection of data with a given structure for accepting, storing, and providing, on demand, data for multiple users.

**Database 2 (Db2)**

An IBM relational database management system.

**Db2**

Database 2.

**DES**

Data Encryption Standard (DES).

**directory**

(1) A logical unit for storing entries under one name (the directory name) in a CDS namespace. Each physical instance of a directory is called a replica. (2) A collection of open systems that cooperates to hold a logical database of information about a set of objects in the real world.

**directory entry access information**

Includes the access time of day and access day of week.

**directory schema**

The set of rules and constraints concerning directory information tree (DIT) structure, object class definitions, attribute types, and syntaxes that characterize the directory information base (DIB).

**directory service**

The directory service is a central repository for information about resources in a distributed system.

**distinguished name (DN)**

One of the names of an object, formed from the sequence of RDNs of its object entry and each of its superior entries.

**DN**

Distinguished name.

**DNS**

Domain Name System.

**Domain Name System (DNS)**

In the Internet suite of protocols, the distributed database system used to map domain names to IP addresses.

**effective permission**

The access granted to a bound user. In z/OS V1R12, the effective permission becomes finalized after any matching filter permissions are applied.

**environment variable**

A variable included in the current software environment that is available to any called program that requests it.

**extended operations**

A generic operation that extends the LDAP protocol. The operation contains an object identifier that uniquely identifies the intended operation. The extended operation allows additional operations to be defined for services not available elsewhere in the LDAP V3 protocol.

**EXOP**

A backend that supports various LDAP extended operations. No entries are kept in this backend.

**GDBM**

A backend that manages change log entries created because of changes to the LDAP schema or to entries in other backends (including RACF entries). The change log entries can be kept in z/OS UNIX System Services files or in a Db2 database.

**Generic Security Service (GSS) API**

An application programming interface enabling application programs that do not implement remote procedure calls (RPCs) to have security services provided by a server in a computing environment. The GSSAPI provides security services to callers through a generic method that functions independently of underlying cryptography mechanisms or communication protocols and can thus be used in many different environments. IBM TDS for z/OS uses GSSAPI to perform Kerberos authentications.

**ICSF**

Integrated Cryptographic Service Facility.

**Integrated Cryptographic Service Facility (ICSF)**

A licensed program that runs under z/OS and provides access to the hardware cryptographic feature for programming applications. The combination of the hardware cryptographic feature and ICSF provides secure high-speed cryptographic services

**JCL**

Job control language.

**Job control language (JCL)**

A control language used to identify a job to an operating system and to describe the jobs requirements.

**Kerberos**

The security system of the Massachusetts Institute of Technology's (MIT's) Project Athena. It uses symmetric key cryptography to provide security services to users in a network.

**key generator utility program (KGUP)**

A program that processes control statements for generating and maintaining keys in the cryptographic key data set.

**KGUP**

Key generator utility program.

**LDAP**

Lightweight Directory Access Protocol.

**LDBM**

A general-purpose backend that stores its entries in z/OS UNIX System Services files.

**Lightweight Directory Access Protocol (LDAP)**

A client/server protocol for accessing a directory service.

**master replica**

The first instance of a specific directory in the namespace. After copies of the directory are made, a different replica can be designated as the master, but only one master replica of a directory can exist at a time.

**MD5**

Message Digest 5. A hash algorithm.

**MKKF**

Make Key File.

**MKKF utility**

A command-line utility used to create public/private key pairs and certificate requests, receive certificate requests into a key ring, and manage keys in a key ring.

**NOID**

Numeric object identifier

**object class**

An identified family of objects that share certain characteristics. An object class can be specific to one application or shared among a group of applications. An application interprets and uses an entry's class-specific attributes based on the class of the object that the entry describes.

**OCSF**

Open Cryptographic Services Facility.

**ODBC**

Open database connectivity.

**Open Cryptographic Services Facility (OCSF)**

A derivative of the IBM Keyworks technology which is an implementation of the Common Data Security Architecture (CDSA) for applications running in the z/OS UNIX System Services environment.

**z/OS Cryptographic Services**

A z/OS offering that supplies a set of interfaces for cryptographic functions.

**programming interface**

The supported method through which customer programs request software services. The programming interface consists of a set of callable services provided with the product.

**protocol**

A set of semantic and syntactic rules that determines the behavior of functional units in achieving communication.

**private key**

Used for the encryption of data. A secure server keeps its private key secret. A secure server sends clients its public key so that they can encrypt data to the server. The server then decrypts the data with its private key.

**public key**

Used for the encryption of data. A secure server makes its public key widely available so that its clients can encrypt data to send to the server. The server then decrypts the data with its private key.

**RACF**

Resource Access Control Facility.

**RDN**

Relative distinguished name.

**referral**

An outcome that can be returned by a directory system agent that cannot perform an operation itself. The referral identifies one or more other directory system agents more able to perform the operation.

**relative distinguished name (RDN)**

A component of a DN. It identifies an entry distinctly from any other entries which have the same parent.

**replica**

A directory in the CDS namespace. The first instance of a directory in the namespace is the master replica. See *master replica*.

**replication**

The making of a shadow of a database to be used by another node. Replication can improve availability and load-sharing.

**Resource Access Control Facility (RACF)**

An IBM licensed program, that provides for access control by identifying and verifying the users to the system, authorizing access to protected resources, and logging the detected unauthorized access to protected resources.

**SASL**

Simple Authentication Security Layer.

**schema**

See *directory schema*.

**SDBM**

A backend that provides access to RACF data. All entries are kept in RACF.

**Secure Sockets Layer (SSL) security**

A facility used to protect LDAP access.

**server**

On a network, the computer that contains programs, data, or provides the facilities that other computers on the network can access. Contrast with *client*.

**SHA Secure Hash Algorithm**

A hash algorithm required for use with the Digital Signature Standard.

**SSHA Salted Secure Hash Algorithm**

An enhanced version of the Secure Hash Algorithm (SHA), that uses a randomly generated salt or seed, to better hash the resulting data.

**SHA-2 – Secure Hash Algorithm Version 2**

Published by NIST in Pub180-2: *Secure Hash Standard: Federal Information Processing Standards Publication 180-2* and consists of SHA224, SHA256, SHA384, and SHA512 hashing algorithms.

**SSHA-2 Salted Secure Hash Algorithm Version 2**

An enhanced version of the SHA-2 hashing algorithms that uses a randomly generated salt or seed to randomize the resulting hash.

**Simple Authentication Security Layer (SASL)**

Refers to a method of binding using authentication information outside the client and server.

**SLAPD**

A stand-alone LDAP daemon.

**SPUFI**

SQL Processor Using File Input.

**SQL Processor Using File Input (SPUFI)**

A facility of the TSO attachment subcomponent that enables the Db2I user to run SQL statements without embedding them in an application program.

**SQL**

Structured Query Language.

**SSL**

Secure Sockets Layer.

**Structured Query Language (SQL)**

A standardized language for defining and manipulating data in a relational database.

**TDBM**

A general-purpose backend that stores its entries in a Db2 database.

**TDS**

Tivoli Directory Server.

**thread**

A single sequential flow of control within a process.

**Tivoli Directory Server (TDS)**

Implementations of LDAP servers, clients, and utilities provided by IBM, supporting many IBM and non-IBM platforms.

**Time Sharing Option (TSO)**

An operating system option that provides interactive time sharing from remote terminals.

**Transport Layer Security (TLS)**

A security protocol that provides communication privacy over the Internet. The protocol allows client/server applications to communicate in a way that is designed to prevent eavesdropping, tampering, or message forgery. TLS is based on SSL Version 3.0

**TSO**

Time Sharing Option.

**UCS Transformation Format (UTF)**

The LDAP Version 3 protocol specifies that data is passed between client and server in the UTF-8 character set.

**UTF**

UCS Transformation Format.

**X.500**

The CCITT/ISO standard for the open systems interconnection (OSI) application-layer directory. It allows users to register, store, search, and retrieve information about any objects or resources in a network or distributed system.

**X/OPEN Directory Service (XDS)**

An application programming interface that DCE uses to access its directory service components. XDS provides facilities for adding, deleting, and looking up names and their attributes. The XDS library detects the format of the name to be looked up and directs the calls it receives to either GDS or CDS. XDS uses the X/OPEN object management (XOM) API to define and manage its information.



**X/OPEN object management (XOM)**

An interface for creating, deleting, and accessing objects containing information. It is an object-oriented architecture: each object belongs to a particular class, and classes can be derived from other classes inheriting the characteristics of the original classes. The representation of the object is not apparent to the programmer; the object can be manipulated only through the XOM interface.

**XOM**

The X/OPEN Object Management API.



---

# Index

## Special Characters

- ' (apostrophe) [268](#)
- (file-based)
  - setting up GDBM [65](#)
- /etc directory
  - using [45](#)
- /usr/lpp/ldap directory
  - LDAP server install directory [45](#)
- # (number sign support in SDBM) [332](#)
- # (number sign) [268](#)
- + (plus sign) [268](#)
- = (equal sign) [268](#)
- > (greater than sign) [268](#)

## Numerics

- 7-bit ASCII [86](#)

## A

- abandon behavior [571](#)
- ABSTRACT object class type [279](#), [290](#)
- access
  - determining [435](#)
- access classes
  - attribute [428](#)
  - determining [426](#)
  - permissions [429](#)
  - specifying for TDBM [279](#), [289](#)
- access control
  - configuring for Kerberos [392](#)
  - groups [446](#)
  - LDAP server capability [7](#)
  - using [425](#)
  - using RACF [317](#)
- access control and ownership
  - modify DN [303](#)
- access Control List (ACL)
  - creating owner for entry [452](#)
- Access Control List (ACL)
  - aclEntry attribute [426](#)
  - aclPropagate attribute [430](#)
  - aclSource attribute [430](#)
  - attribute classes [441](#)
  - creating a group for [455](#)
  - creating in TDBM [448](#)
  - deleting in TDBM [451](#)
  - deleting owner for entry [454](#)
  - description [6](#), [425](#)
  - entryOwner attribute [430](#)
  - examples [445](#)
  - filters [441](#)
  - groups [446](#)
  - information, retrieving [447](#)
  - modifying owner for entry [453](#)
  - override example [445](#)

- Access Control List (ACL) (*continued*)
  - ownerPropagate attribute [431](#)
  - ownerSource attribute [431](#)
  - propagation [431](#), [444](#)
  - requested attributes [441](#)
  - searching [441](#)
- access protection [131](#), [137](#)
- accessibility
  - contact IBM [727](#)
- Account status extended operation example [386](#)
- acctstatus [381](#)
- ACL (Access Control List)
  - See Access Control List (ACL) [6](#)
- ACL attributes
  - entry owner attributes [425](#), [426](#)
- ACL filters [432](#)
- ACL restrictions group gathering [416](#)
- acl restrictions group membership [416](#)
- aclEntry attribute
  - description [426](#)
- aclEntry syntax [426](#)
- aclPropagate attribute
  - description [430](#)
- aclSource attribute
  - description [430](#)
- Activating password policy [364](#)
- activity log mergedRecord field descriptions [710](#)
- activity log records list [707](#)
- activity logging [188](#)
- Activity logging support [214](#)
- adding, modifying, deleting group entries examples [417](#)
- Additional setup for generating audit records [50](#)
- Additional setup for LDAP console commands [48](#)
- Additional setup for RACF *PROXY segment and SDBM* [49](#)
- Additional setup for sysplex [49](#)
- Additional setup for user ID that runs the LDAP server [47](#)
- Additional setup for using securityLabel option [50](#)
- Additional setup for using SHA-2 or Salted SHA-2 hashing [50](#)
- additional setup when using SDBM [48](#)
- adminDN option [86](#), [150](#)
- administration
  - restricting access [6](#)
- Administration group and roles [155](#)
- Administrative group and roles considerations [718](#)
- Administrative group and roles-related extended operation [164](#)
- Administrative group member examples [162](#)
- Administrative roles [155](#)
- Administrative roles and extended operations [163](#)
- Administrative roles defined in LDAP [160](#)
- Administrative roles defined in RACF [161](#)
- administrator
  - configuring DN of [150](#)
  - password, specifying [91](#)
  - roles for config [31](#)
- advanced configuration options [36](#)
- Advanced replication

- Advanced replication (*continued*)
  - replication [473](#)
- Advanced replication configuration examples [496](#)
- Advanced replication error recovery example [531](#)
- Advanced replication features [478](#)
- Advanced replication maintenance mode [518](#)
- Advanced replication overview [476](#)
- Advanced replication related entries summary [497](#)
- Advanced replication related extended operations [523](#)
- Advanced replication terminology [473](#)
- AES encryption method [120](#), [124](#)
- alias
  - description [537](#)
- alias entry [537](#)
- aliases
  - LDAP server capability [8](#)
- aliasing on search performance
  - search performance [537](#)
- alternate server
  - specifying [91](#)
- analyzing
  - schema errors [295](#)
- anonymous searches [441](#)
- APF authorization
  - for LDAP server [51](#)
- apostrophe [268](#)
- arranging information [4](#)
- ASCII, 7-bit [86](#)
- assistive technologies [727](#)
- Associating
  - LDAP attributes [319](#)
- attribute
  - object class [5](#)
  - syntaxes [280](#)
- attribute classes
  - searching [441](#)
- Attribute encryption
  - description [10](#)
- attribute types
  - description [273](#)
  - format [288](#)
  - usage [288](#)
- attribute,ibm-entryuuid [11](#)
- attributes
  - access allowed for [426](#)
  - access classes [426](#), [428](#)
  - access control [425](#)
  - aclEntry [426](#)
  - aclPropagate [430](#)
  - aclSource [430](#)
  - cn [460](#)
  - deleting in SDBM [360](#)
  - description [461](#)
  - determining [267](#)
  - entryOwner [430](#)
  - jpegPhoto [4](#)
  - Kerberos [390](#)
  - LDAP schema [282](#)
  - mail [4](#)
  - mandatory for replica entry [459](#)
  - multi-valued ref [555](#)
  - normalizing [571](#)
  - optional for replica entry [460](#)
  - ownerpropagate [431](#)

- attributes (*continued*)
  - ownerSource [431](#)
  - ref [555](#)
  - replicaBindDN [460](#)
  - replicaBindMethod [461](#)
  - replicaCredentials [460](#)
  - replicaHost [459](#)
  - replicaPort [460](#)
  - replicaUpdateTimeInterval [460](#)
  - replicaUseSSL [461](#)
  - requested [441](#)
  - returning lowercase [571](#)
  - searching [441](#)
  - seeAlso [461](#)
  - syntaxes [267](#)
  - type [272](#)
- authenticateOnly server control [103](#)
- authentication
  - client [9](#)
  - Kerberos [389](#)
  - server [9](#), [70](#), [129](#)
- authentication bind
  - CRAM-MD5 and DIGEST-MD5 [9](#)
- authorization
  - native authentication [397](#)
- authorization, APF
  - See APF authorization [51](#)
- AUXILIARY object class type [279](#), [290](#)

## B

- backend
  - database definitions [83](#)
  - Db2, using [19](#)
  - multiple [6](#), [7](#)
  - preparing for TDBM SDBM [42](#)
  - referral entries [556](#)
- backslash character
  - DN syntax [268](#)
- backup of master server [457](#)
- basic replication
  - associating servers with [559](#)
  - SSL [468](#)
- benefits of replication [457](#)
- bind, SASL [9](#)
- binding
  - CLI plan [20](#)
  - in TDBM using native authentication [397](#)
  - Kerberos [389](#)
- Binding using a RACF user ID and password or password phrase
  - LDAP return and reason codes [318](#)
- Binding with SDBM using password policy [319](#)
- blank spaces
  - using in DN's [268](#)
- buffer pools
  - setting up for [19](#)

## C

- cache tuning [573](#)
- CAF (Call Attachment Facility) [21](#)
- Call Level Interface (CLI)

- Call Level Interface (CLI) (*continued*)
  - plan, binding [20](#)
  - setting up for [19](#)
- capabilities of LDAP server [6](#)
- capturing performance information [179](#)
- CDBM (file-based) backend-specific section
  - section in ds.conf [84](#)
- CDBM and LDBM backend [154](#)
- CDBM backend
  - configuring [40](#)
  - initializing ACLs [434](#)
  - verifying [173](#)
- CDBM configuration entries [137](#)
- CDBM performance considerations [581](#)
- certificate
  - authenticating [129](#)
  - client [9](#)
  - digital
    - server [70](#)
- change log
  - additional required configuration [546](#)
  - multiserver considerations [550](#)
  - set up and using LDAP server for logging changes [551](#)
  - when changed are logged [547](#)
- change log entries [548](#)
- change log information root DSE entry [550](#)
- change log schema [547](#)
- change logging
  - LDAP server capability [8](#)
- Changing password values when pwdsafemodify is set to true [386](#)
- checklist for configuration file [86](#)
- CICS (Customer Information Control System)
  - updating related attributes [342](#)
- classes, access
  - attribute [428](#)
  - determining [426](#)
  - permissions [429](#)
  - specifying for LDBM [279](#)
- clear text password [76](#), [121](#), [221](#)
- CLI (Call Level Interface) [19](#)
- CLI initialization file name [43](#)
- Client connections [197](#)
- client, LDAP
  - See LDAP client [565](#)
- cn=admingroup,cn=configuration
  - entry attribute descriptions [142](#)
- cn=configuration
  - entry attribute descriptions
    - cn [138](#)
    - ibm-slapdSAFSecurityDomain [138](#)
- cn=ibm-slapdAdminGroupEnabled,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [138](#)
- cn=ibm-slapdLog,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [138](#), [142](#)
- cn=ibm-slapdPagedResAllowNonAdmin,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [139](#)
- cn=ibm-slapdPagedResLmt,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [139](#)
- cn=ibm-slapdSAFSecurityDomain,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [138](#)
- cn=ibm-slapdServerID,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [139](#)
- cn=ibm-slapdSortKeyLimit,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [140](#)
- cn=ibm-slapdSortSrchAllowNonAdmin,cn=configuration
  - entry attribute descriptions
    - ibm-slapdLog [140](#)
- cn=ibmpolicies [143](#)
- cn=Log Management,cn=Configuration
  - entry attribute descriptions [142](#)
- cn=pwdpolicy,cn=ibmpolicies
  - cn=pwdpolicy [143](#)
- cn=replication,cn=configuration
  - entry attribute descriptions
    - cn [140](#)
- cn=Replication,cn=configuration
  - entry attribute descriptions
    - cn [140](#)
- cn=Replication,cn=Log Management,cn=Configuration
  - entry attribute descriptions
    - cn [138](#), [142](#)
- cn=safadmingroup,cn=configuration
  - entry attribute descriptions
    - cn [143](#)
    - member [143](#)
- code page IBM-1047 [83](#)
- command-line parameters
  - for LDAP server [168](#)
- commands
  - cp [54](#)
- commThreads option [137](#)
- Compatibility level upgrade without an LDAP outage support [213](#)
- complex modify DN replication [458](#)
- concurrent database instances [6](#), [7](#)
- configuration
  - specifying value for distinguished name [85](#)
  - specifying value for filename [85](#)
- configuration file
  - copying [54](#)
  - creating [83](#)
  - data set versions of [171](#)
  - default referral [557](#)
  - deprecated options [137](#)
  - ds.conf [83](#)
  - format [83](#)
  - Kerberos authentication [390](#)
  - locating [83](#)
  - master server [468](#)
  - options [90](#)
  - options checklist [86](#)
  - password, specifying [150](#)
  - root administrator DN, specifying [150](#)
  - scenarios [152](#)
  - setting SSL keywords [468](#)
  - specifying as data set name [167](#)
  - specifying as DD name [167](#)
- configuration file options
  - aclSourceCacheSize [90](#)

configuration file options (*continued*)

- [adminDN 90](#)
- [adminPW 90](#)
- [allowAnonymousBinds 91](#)
- [altServer 91](#)
- [armName 91](#)
- [attrOverflowCount 92](#)
- [attrOverflowSize 92](#)
- [audit 92](#)
- [blockedConnectionTimeout 93](#)
- [changeLogging 94](#)
- [changeLoggingParticipant 94](#)
- [changeLogMaxAge 94](#)
- [changeLogMaxEntries 94](#)
- [commitCheckpointEntries 95](#)
- [commitCheckpointTOD 95](#)
- [commThreads 95](#)
- [database 95](#)
- [databaseDirectory 96](#)
- [db2StartUpRetryInterval 99](#)
- [db2StartUpRetryLimit 99](#)
- [db2Terminate 100](#)
- [dbuserid 96](#)
- [digestRealm 100](#)
- [dnCacheSize 101](#)
- [dnToEidCacheSize 101](#)
- [dsnaoini 101](#)
- [enableResources 102](#)
- [entryCacheSize 102](#)
- [entryOwnerCacheSize 102](#)
- [extendedGroupSearching 102](#)
- [extendedSearch 103](#)
- [fetchSize 103](#)
- [fileTerminate 103](#)
- [filterCacheBypassLimit 104](#)
- [filterCacheSize 104](#)
- [healthcheck 104](#)
- [idleConnectionTimeout 105](#)
- [include 105](#)
- [krbIdentityMap 105](#)
- [krbKeytab 106](#)
- [krbLDAPAdmin 106](#)
- [listen 106](#)
- [logfile 109](#)
- [logFileFilter 110](#)
- [logFileMicroseconds 110](#)
- [logFileMsgs 110](#)
- [logFileOps 110](#)
- [logFileRecordType 111](#)
- [logFileRolloverDirectory 111](#)
- [logFileRolloverSize 111](#)
- [logFileRolloverTOD 112](#)
- [logFileSync 112](#)
- [logFileVersion 112](#)
- [masterServer 112](#)
- [masterServerDN 113](#)
- [masterServerPW 114](#)
- [maxConnections 114](#)
- [multiserver 115](#)
- [nativeAuthSubtree 115](#)
- [nativeUpdateAllowed 115](#)
- [operationsMonitor 116](#)
- [operationsMonitorSize 116](#)
- [pcIdleConnectionTimeout 116](#)

configuration file options (*continued*)

- [pcThreads 117](#)
- [peerServerDN 117](#)
- [peerServerPW 117](#)
- [persistentSearch 118](#)
- [plugin 118](#)
- [port 119](#)
- [pwCryptCompat 119](#)
- [pwEncryption 119](#)
- [pwSearchOutput 121](#)
- [radminAuthCheck 121](#)
- [readOnly 122](#)
- [referral 122](#)
- [schemaPath 123](#)
- [schemaReplaceByValue 123](#)
- [secretEncryption 123](#)
- [securePort 124](#)
- [security 124](#)
- [securityLabel 124](#)
- [sendV3stringsoverV2as 125](#)
- [serverCompatLevel 125](#)
- [serverEtherAddr 126](#)
- [serverKrbPrinc 127](#)
- [serverName 127](#)
- [serverSysplexGroup 128](#)
- [sizeLimit 128](#)
- [srvStartUpError 129](#)
- [sslAuth 129](#)
- [sslCertificate 129](#)
- [sslCipherSpecs 130](#)
- [sslFipsState 131](#)
- [sslKeyRingFile 131](#)
- [sslKeyRingFilePW 131](#)
- [sslKeyRingPWStashFile 132](#)
- [sslMapCertificate 132](#)
- [suffix 132](#)
- [supportKrb5 133](#)
- [tcpTerminate 133](#)
- [timeLimit 134](#)
- [unbufferedEntryLimit 135](#)
- [useAdvancedReplication 135](#)
- [useNativeAuth 135](#)
- [validateincomingV2strings 136](#)
- [wlmExcept 136](#)

configuration utility [25](#)

configuring

- [access control, Kerberos 392](#)
- [considerations 143](#)
- [EXOP backend 154](#)
- [GDBM backend 153](#)
- [LDAP server capability 8](#)
- [LDBM backend 153](#)
- [operating in multi-server mode 147](#)
- [operating in single-server mode 147](#)
- [password encryption or hashing 152](#)
- [plug-in 41](#)
- [replica server 464](#)
- [roadmap for 39](#)
- [running with SDBM 62](#)
- [scenarios 152](#)
- [SDBM backend 39, 153](#)
- [SLAPD 145](#)
- [SSL 41, 152](#)
- [TDBM backend 39, 152, 153](#)

- configuring (*continued*)
  - using dsconfig utility [25](#)
  - WebSphere Application Server [15](#)
- configuring Db2-based GDBM backend
  - Db2-based GDBM backend [546](#)
- configuring file-based GDBM backend
  - file-based GDBM backend [546](#)
- Configuring for user password encryption or hashing [78](#)
- configuring GDBM backend
  - GDBM backend [545](#)
- Configuring LDAP with WLM examples [576](#)
- configuring the activity log [190](#)
- conflict resolution
  - peer to peer [467](#)
- connection
  - group [340](#)
- connections
  - specifying number of [114](#)
  - specifying timeout [105](#)
- Consumer server entries [491](#), [498](#)
- contact
  - z/OS [727](#)
- Control of access to RACF data
  - access to RACF data [333](#)
- control, program
  - See program control [51](#)
- controls, server
  - See server controls [9](#)
- converting
  - See migrating [203](#)
- copying
  - configuration files [54](#)
  - files into data sets [171](#)
- Copying an LDBM backend
  - LDBM backend [63](#)
- Copying database
  - TDBM database [61](#)
- cp command [54](#)
- CPU usage
  - reducing [599](#)
- CRAM-MD5 and DIGEST-MD5
  - configuration option [408](#)
  - TDBM, LDBM, or CDBM backend [407](#)
- CRAM-MD5 and DIGEST-MD5 authentication [9](#)
- creating
  - ACL [448](#)
  - Db2 CLI initialization file [20](#)
  - ds.conf [83](#)
  - group for ACL [455](#)
  - owner for entry [452](#)
  - referral entries [555](#)
  - SYSTEM member [240](#)
  - versions of environment variable file [171](#)
- Creating a master-forwarder-replica (cascading) topology [506](#)
- Creating a master-replica topology [499](#)
- Creating a peer-to-peer replication topology [502](#)
- Creating group search limits [417](#)
- Credentials entries [486](#)
- critical access class [428](#)
- crypt encryption method [120](#)

## D

- DAP (Directory Access Protocol)
  - See Directory Access Protocol (DAP) [6](#)
- data encryption or hashing
  - replication [458](#)
- data model
  - LDAP [267](#)
- data set
  - accepting files as [171](#)
  - allocating for ldif2ds [238](#)
  - CLI Initialization sequential, specifying [101](#)
  - specifying configuration file as [167](#)
  - specifying for configuration file [218](#)
- DATABASE 2 (Db2)
  - backing store [7](#), [172](#)
  - CLI initialization file [20](#)
  - creating file for [172](#)
  - creating TDBM database [55](#)
  - input file for config [36](#)
  - installing [19](#)
  - referral entries [556](#)
  - running [19](#)
  - server location, specifying [127](#)
  - server utilities, running [217](#), [218](#)
- database administrator
  - role for config [32](#)
- database name [43](#)
- database option [137](#)
- database owner [43](#)
- databases
  - multiple instances [6](#), [7](#)
- Db2 [197](#)
- Db2 (DATABASE 2) [19](#)
- Db2 CLI [19](#)
- Db2 ODBC maintenance [58](#)
- Db2 subsystem ID [43](#)
- Db2 tuning [581](#)
- Db2-based
  - table spaces for TDBM [55](#)
  - TDBM database, creating [55](#)
- Db2I (Db2 Interactive) [55](#)
- db2ldif utility
  - using with replica server [458](#)
- db2pwwden utility
  - description [221](#)
- debug
  - levels [170](#)
- debug levels [168](#), [177](#)
- debug settings [573](#)
- debugging facility
  - turning on and off [177](#)
- default
  - LDAP directory [45](#)
  - mapping, Kerberos [391](#)
  - referral [557](#)
- defining
  - default referral [557](#)
  - Kerberos identity [49](#)
  - new TDBM schema elements [291](#)
  - participation in native authentication [398](#)
  - started task [167](#)
- Defining administrative group and roles [160](#)
- definitions of terms [733](#)

- deleting
  - ACL [451](#)
  - attributes in SDBM [360](#)
  - owner for entry [454](#)
- deprecated configuration options [137](#)
- DES encryption method [120](#), [123](#)
- Diagnosing advanced replication
  - monitoring and diagnosing advanced replication problems [525](#)
- digital certificate [70](#)
- directory
  - hierarchy example [4](#)
  - identifying entry in [267](#)
  - of ds.conf file [83](#)
  - planning content [15](#)
  - schema, TDBM LDBM [271](#)
  - updating [6](#)
- Directory Access Protocol (DAP)
  - defining [6](#)
- Directory data administrator [155](#)
- directory schema
  - updating for Kerberos [390](#)
- directory service
  - description [3](#)
- directory, default LDAP [45](#)
- displaying
  - schema entry [295](#), [296](#)
- Displaying advanced replication configuration [523](#)
- displaying group membership [415](#)
- distinguished name (DN)
  - description [4](#), [267](#)
  - length, maximum [267](#)
  - master server [113](#)
  - number sign (#) [332](#)
  - RACF-style [268](#)
  - ref attribute [555](#)
  - referencing by [5](#)
  - reflecting [430](#), [431](#)
  - retrieving with EXOP backend [411](#), [679](#)
  - root administrator [150](#)
  - syntax [268](#)
  - UTF-8 characters in [90](#)
- DLL (dynamic link libraries)
  - See dynamic link libraries (DLL) [167](#)
- DN (distinguished name)
  - See distinguished name (DN) [4](#)
- DN modify
  - ownership changes [307](#)
- DNs and access groups
  - bound user
    - additional bind and directory entry access [446](#)
- domain component naming [268](#)
- Draft RFCs [13](#)
- ds.conf
  - creating [83](#)
  - format [83](#)
  - locating [83](#)
  - See configuration file [84](#)
- ds.db2.profile file [36](#)
- ds.envvars file
  - system environment variables [263](#)
- ds.profile file [28](#)
- ds.racf.profile file [36](#)
- ds2ldif utility

- ds2ldif utility (*continued*)
  - description [225](#)
  - replicating [464](#)
  - running from JCL [218](#)
  - running in shell [217](#)
  - running in shell TDBM backend
    - running utilities for [217](#)
  - running in TSO [218](#)
- dsconfig utility
  - advanced options [36](#)
  - capabilities [26](#)
  - capability [8](#)
  - configuration confirmation [36](#)
  - input files [28](#)
  - overview [25](#)
  - restrictions [27](#)
  - steps for configuring with [33](#)
  - using [27](#)
- DSE, root
  - See root DSE [9](#)
- DSNAOINI environment variable [101](#)
- DSNAOINI file [20](#), [172](#)
- dssrv user ID [167](#)
- DSTDBMDB SPUIFI file [631](#)
- dynamic debugging
  - using [177](#)
- Dynamic group performance and scalability [214](#)
- dynamic groups [413](#)
- Dynamic groups memberURL filter indexing considerations
  - large directories [596](#)
- dynamic link libraries (DLL)
  - using in startup [167](#)
- dynamic schema
  - TDBM LDBM [271](#)
  - using TDBM backend [9](#)
- dynamic workload management
  - configuring LDAP server for [8](#)

## E

- Effective password policy examples [375](#)
- Effective password policy extended operation example [385](#)
- effective password policy rules [373](#)
- effectpwdpolicy [381](#)
- elements
  - schema, defining new [291](#)
- enabling
  - SSL [70](#)
- enabling advanced replication [479](#)
- Enabling group search limit processing [417](#)
- Enabling the administrative group and roles [159](#)
- encryption
  - for communication channel [70](#)
  - installing ICSF for [21](#)
- encryption or hashing
  - configuring for [76](#)
- encryption, password
  - See password encryption [120](#)
- entries
  - access allowed for [426](#)
  - acLSource attribute [430](#)
  - arranging [4](#)
  - creating for referrals [555](#)
  - data model [267](#)



## entries (*continued*)

- defining [267](#)
- description [4](#)
- entryOwner attribute [430](#)
- identifying [267](#)
- loading from TDBM [225](#)
- loading into TDBM [235](#)
- loading large number of [235](#)
- ownerPropagate attribute [431](#)
- ownerSource attribute [431](#)
- permissions [429](#)
- protecting [425](#)
- referral [556](#)
- replica [459](#)
- replica, adding in TDBM or LDBM [462](#)
- TDBM directory schema [271](#)
- entryOwner attribute
  - description [430](#)
- entryOwner syntax [431](#)
- environment variable file
  - data set versions of [171](#)
- environment variables
  - LANG [263](#)
  - NLSPATH [263](#)
- Environment variables
  - variables used by the LDAP server [174](#)
- environments
  - operating, Kerberos [396](#)
- equal sign [268](#)
- errors
  - schema, analyzing [295](#)
- escape mechanism for UTF-8 characters [86](#)
- etc directory
  - using [45](#)
- Evaluation of a user's individual and composite group password policy [373](#)
- example
  - CRAM-MD5 and DIGEST-MD5 [408](#)
- examples
  - ACL [445](#)
  - aclEntry attribute [441](#)
  - adding a group to RACF [358](#)
  - adding a resource profile in the facility class
    - giving a user and a group access to the profile [360](#)
  - adding user to RACF [357](#)
  - alias [540](#)
  - attribute definition [428](#)
  - configuration scenarios [152](#)
  - configuring EXOP [154](#)
  - configuring SDBM and TDBM [153](#)
  - configuring TDBM, SSL, and password encryption or hashing [152](#)
  - connecting user to group in RACF [358](#)
  - directory hierarchy [4](#)
  - DNs [268](#)
  - ds.envvars file [263](#)
  - files shipped with LDAP server [54](#)
  - LDAP URL [108](#)
  - modifying user in RACF [357](#)
  - object class hierarchy [279](#)
  - overrides [445](#)
  - permissions [438](#)
  - propagation [444](#)
  - referral entries [557](#)

## examples (*continued*)

- referrals, distributing namespace [559](#)
- refreshing the RACLIST for the facility class [360](#)
- removing user from group in RACF [359](#)
- removing user from RACF [359](#)
- replica entry definition [462](#)
- samples [54](#)
- schema entry [272](#)
- searching for user information in RACF [357](#)
- searching for user's connection to group [359](#)
- setting up Kerberos directory [394](#)
- setting up native authentication [401](#)
- SPUFI script (TDBM) [631](#), [643](#)
- using ref attribute [555](#)
- EXOP backend
  - configuring, example [154](#)
  - GetDnForUserid [411](#)
  - GetPrivileges [411](#), [683](#)
  - Policy Director [679](#)
  - section in ds.conf [84](#)
  - using [411](#)
  - using for Policy Director [8](#)
- extended group membership searching [9](#), [102](#)
- extended operations
  - Account status [669](#)
  - Cascading control replication [670](#)
  - changeLogAddEntry [672](#)
  - Control replication [674](#)
  - Control replication error log [675](#)
  - Control replication queue [677](#)
  - Effective password policy [678](#)
  - GetDnForUserid [679](#)
  - GetEffectiveACL [680](#)
  - GetPrivileges [683](#)
  - Quiesce or unquiesce context [684](#)
  - Remote auditing [685](#)
  - Remote authorization [685](#)
  - RemoteCryptoCCA [686](#)
  - RemoteCryptoPKCS#11 [686](#)
  - Replication topology [686](#)
  - Start TLS [688](#)
  - unloadRequest [689](#)
  - User type [691](#)
- extended operations backend
  - See EXOP backend [8](#)
- extensibleObject object class [290](#)
- external bind, SASL [9](#)
- external security manager [45](#)

## F

- file system [198](#)
- files
  - configuration, global options [90](#)
  - copying configuration [54](#)
  - Db2 CLI initialization [20](#)
  - ds.conf [84](#)
  - ds.db2.profile file [36](#)
  - ds.profile [28](#)
  - ds.racf.profile file [36](#)
  - DSTDBMDB SPUFI [631](#)
  - profile [25](#)
  - SPUFI [631](#)
  - TDBMMGRT SPUFI [643](#)

- filters
  - searching [441](#)
- Finalizing setup
  - setup of LDAP backends [173](#)
- finding
  - subschemaSubentry DN [296](#)
- FIPS compliant [211](#)
- formats
  - ds.conf [84](#)
  - GIF [4](#)
  - JPEG [4](#)
- Forwarding (cascading) replication [477](#)
- front end
  - for X.500 [6](#)

## G

- gateway replication [477](#)
- Gateway topology
  - Creating gateway topology [511](#)
- gathering group memberships [102](#)
- GDBM (Db2-based) backend-specific section
  - section in ds.conf [84](#)
- GDBM (file-based) backend-specific section
  - section in ds.conf [84](#)
- GDBM backend
  - configuring [40](#)
  - configuring SDBM and GDBM [153](#)
  - initializing ACLs [434](#)
  - setting up for [65](#)
  - verifying [172](#)
- GDBM change log performance considerations
  - changelog performance [601](#)
- GDS (Global Directory Service)
  - See Global Directory Service (GDS) [6](#)
- general performance considerations
  - server performance [573](#)
- Generalized Time syntax [295](#)
- GetDnForUserid [411](#)
- GetPrivileges [411](#)
- GIF format [4](#)
- global configuration file options [90](#)
- Global Directory Service (GDS) [6](#)
- Global password policy example [383](#)
- global section in ds.conf [83](#)
- globalization characters
  - retrieving [9](#)
  - storing [9](#)
- Globalization support [263](#)
- glossary of terms [733](#)
- group
  - extended, membership searching [102](#)
- group examples [417](#)
- group membership [415](#)
- Group password policy example [384](#)
- groups
  - access control [446](#)
  - connecting to in RACF [340](#)
  - creating for ACL [455](#)
  - extended, membership searching [9](#)
- GSS API bind [389](#), [391](#)
- Guidelines for interoperability
  - interoperability

- Guidelines for interoperability (*continued*)
  - interoperability (*continued*)
    - non-z/OS TDS and z/OS TDS [715](#)

## H

- health check functions
  - TDS-CONFIG [198](#)
  - TDS-Db2 [198](#)
- hierarchical tree
  - defining [4](#)
- hierarchy
  - directory [267](#)
  - directory, example of [4](#)
  - example, object class [279](#)
  - referrals [555](#)

## I

- i [22](#)
- IBM attribute types
  - description [278](#)
  - format [289](#)
  - usage [289](#)
- IBM-1047 character set [90](#)
- ibm-entryuuid
  - replication [458](#)
- ibm-entryuuid,attribute [11](#)
- ibm-slapedAdminGroupMember objectclass attributes
  - entry attribute descriptions
    - ibm-slapedAdminDN [160](#)
    - ibm-slapedAdminPW [160](#)
    - ibm-slapedAdminRole [161](#)
- IBMAAttributeTypes schema attribute [278](#), [290](#)
- ICSF (Integrated Cryptographic Services Facility) [21](#)
- identity mapping
  - Kerberos [391](#)
- identity, Kerberos [49](#)
- indexes, create Db2 [643](#)
- Individual password policy example [385](#)
- information
  - arranging [4](#)
  - protecting [6](#)
  - referencing [5](#)
- inheritance
  - default [431](#)
- Initial validation of compatible server versions
  - consumer and replica servers [315](#)
- initialization file, Db2 CLI [20](#)
- initializing
  - native authentication [397](#)
  - replica directory [463](#)
- Initializing ACLs with schema entry
  - Initializing ACLs [435](#)
- Installation Verification Procedure (IVP)
  - for configuring LDAP server [36](#)
- installing
  - Db2 [19](#)
  - first time [16](#)
  - for CLI [19](#)
  - for ODBC [19](#)
  - LDAP server [15](#)

installing (*continued*)

migrating [203](#)

RACF [21](#)

related products [17](#)

roadmap [15](#)

System SSL [21](#)

Installing a z/OS UNIX System Services file system for LDBM, GDBM (file-based), and CDBM backends [21](#)

Installing and setting up WLM (Workload Management) [17](#)

Integrated Cryptographic Service Facility (ICSF)

installing for encryption [21](#)

interactions, backend variables [42](#)

IVP (Installation Verification Procedure) [36](#)

## J

Japanese messages [263](#)

JCL (Job Control Language)

See Job Control Language (JCL) [167](#)

JOB card, modifying [218](#)

Job Control Language (JCL)

for running SLAPD as started task [167](#)

generated by config [25](#)

running Db2 server utilities from [218](#)

JPEG format [4](#)

## K

KDC (Key Distribution Center) [389](#)

Kerberos

authentication

description [389](#)

bind capability [9](#)

configuring access control [392](#)

configuring administrator for [151](#)

identity

defining [49](#)

identity mapping [391](#)

identity mapping option [106](#)

installing [22](#)

operating environments [396](#)

setting up for [389](#)

setup up directory example [394](#)

specifying administrator identity [106](#)

specifying keytab [106](#)

specifying participation in [133](#)

updating directory schema [390](#)

using dsconfig with [38](#)

key database file

specifying [137](#)

specifying for server [131](#)

Key Distribution Center (KDC) [389](#)

keyboard

navigation [727](#)

PF keys [727](#)

shortcut keys [727](#)

keytab file

generating for server [389](#)

krbLDAPAdmin option [151](#)

## L

IA5 character set [571](#)

LANG environment variable [263](#)

LANG parameter [45](#)

language setting [45](#)

large number of entries, loading [235](#)

Large static groups considerations

large directories [595](#)

LDAP (Lightweight Directory Access Protocol)

See Lightweight Directory Access Protocol (LDAP) [4](#)

LDAP administrator

role for config [32](#)

LDAP client

cipher specifications [130](#)

considerations [565](#)

using in LDAP [6](#)

UTF-8 data [571](#)

LDAP client requests

listening for [106](#)

LDAP configuration utility [25](#)

LDAP Data Interchange Format (LDIF)

loading entries from TDBM [225](#)

loading entries into TDBM [235](#)

LDAP directory

protecting information in [6](#)

LDAP schema attributes [282](#)

ldap server

threads [573](#)

LDAP server

access control [425](#)

alternate server [91](#)

attribute types supported [288](#)

capabilities [6](#)

changing replica to master [465](#)

command-line options [168](#)

configuration options [83](#)

configuring [145](#)

configuring for multi-server mode [147](#)

configuring with dsconfig utility [25](#)

data model [267](#)

Db2 server location [127](#)

debugging facility [177](#)

default directory [45](#)

defining started task for [167](#)

defining user ID [45](#)

enabling SSL for [70](#)

equivalent server [91](#)

extended group membership searching [9](#), [102](#)

IBM attribute types supported [289](#)

IBM Tivoli Directory Server for z/OS [3](#)

installing [15](#), [17](#)

LDAP syntaxes supported [282](#)

master and replica [468](#)

matching rules supported [284](#)

migrating [203](#)

model for [4](#)

multi-server mode [146](#)

multiple single-server mode LDAP servers [146](#)

name, installation [45](#)

naming [6](#)

object classes supported [290](#)

planning for [15](#)

preparing [45](#)

RACF [317](#)

replica [463](#)

replication [457](#)

## LDAP server (*continued*)

- requirements for user ID [46](#)
- retrieving Policy Director data [8](#)
- root administrator distinguished name (DN) [150](#)
- running as started task [167](#)
- sample [15](#)
- sample files [54](#)
- SDBM backend [317](#)
- setting up LDBM [62](#)
- Setting up multiple LDAP servers with Db2-based backends [147](#)
- setting up SDBM [62](#)
- single-server mode [145](#)
- started task, defining [167](#)
- starting from console [168](#)
- starting in SDSF [168](#)
- starting up [19](#)
- stopping from console [171](#)
- stopping in SDSF [171](#)
- TDBM collation [264](#)
- user ID [43](#)
- using [6](#)
- using for user ID [45](#)
- verifying [172](#)
- Version 3 protocol [8](#)
- LDAP server abnormal termination [198](#)
- LDAP Server Configuration Health Checks [211](#)
- LDAP syntaxes
  - description [280](#)
  - format [282](#)
  - supported, general use [282](#)
  - supported, server use [284](#)
  - usage [282](#)
- LDAP URL
  - starting LDAP server [168](#)
- LDAP URL format
  - specifying for listen [106](#)
- LDAP\_DEBUG environment variable [170](#)
- ldap\_ssl\_client\_init API
  - using for SASL bind [76](#)
- ldap\_ssl\_init API
  - using for SASL bind [76](#)
- ldapadd utility
  - loading entries into TDBM [240](#)
- ldapdiff
  - Comparing directories [11](#)
- ldapdiff utility
  - description [245](#)
- ldapexop
  - Extended operations utility [11](#)
- ldapexop utility
  - description [253](#)
- ldapsearch utility
  - using to verify LDAP server [172](#)
- LDAPSrv user ID [45](#)
- LDBM and TDBM backend
  - object class supported [290](#)
- LDBM backend
  - configuring [40, 41](#)
  - section in ds.conf [84](#)
  - setting up for [62](#)
- LDIF (LDAP Data Interchange Format) [235](#)
- ldif2db utility
  - using with replica server [458](#)

## ldif2ds utility

- allocating data sets for [238](#)
- description [235](#)
- entering ACLs [425](#)
- loading adminDN entry [150](#)
- recovery [243](#)
- running from JCL [218](#)
- running in shell [217](#)
- running in TSO [218](#)
- less than sign [268](#)
- levels, debug [168](#)
- Lightweight Directory Access Protocol (LDAP)
  - description [4](#)
  - how it works [6](#)
  - schema publication [271](#)
- limitations, referrals [558](#)
- listen option [137, 149](#)
- loading
  - entries from TDBM [225](#)
  - entries into TDBM [235](#)
  - large number of entries [235](#)
- localhost
  - Enabling advanced replication [480](#)
- locating
  - ds.conf [83](#)
  - subschemaSubentry DN [296](#)

## M

- mail attribute [4](#)
- maintenance mode
  - peer to peer [463](#)
- manageDsaIT [558](#)
- managing
  - replication [523](#)
- Managing group search limits [416](#)
- managing password
  - managing administrator DN [150](#)
- mapping
  - identity, Kerberos [391](#)
  - Kerberos default [391](#)
  - LDAP attributes [320](#)
- mask for debug level [168](#)
- master
  - backup of [457](#)
  - changing replica to [465](#)
  - communicating with replica [468](#)
  - database, description [457](#)
  - server [457](#)
  - server DN [113](#)
  - server password [114](#)
  - server, setting up [468](#)
  - server, specifying [113](#)
- Master-replica replication [476](#)
- matching rules
  - description [280](#)
  - EQUALITY values [275](#)
  - EQUALITY, defaults [273](#)
  - format [284](#)
  - ORDERING values [275](#)
  - SUBSTR values [275](#)
  - supported [285](#)
  - usage [284](#)
- maxThreads option [95, 137](#)

- MAY attribute type [279, 290](#)
- MD5 encryption method [120](#)
- membership
  - extended group, searching [9](#)
- mergedRecord activity log fields [710](#)
- mergedRecords
  - activity log start and end field descriptions
  - activity log field descriptions [707](#)
- messages
  - started task [171](#)
- migrating
  - from previous LDAP releases [203](#)
- minimum schema for TDBM [603](#)
- modes
  - choosing multiserver [115](#)
  - multi-server [146](#)
  - multi-server, operating in [147](#)
  - PC callable support [146, 149](#)
  - single-server mode [145](#)
  - single-server mode LDAP servers [146](#)
  - single-server, operating in [147](#)
- modify
  - updating ACLs [448](#)
- modify DN
  - access control [303](#)
  - access control changes [305](#)
  - basic replication synchronization [316](#)
  - complex replication [458](#)
  - considerations [303](#)
  - considerations in the use of [301](#)
  - entries for rename [302](#)
  - operation syntax [297](#)
  - operations and replication [314](#)
  - relocating an entry [304, 305](#)
  - scenario constraints [308](#)
  - SDBM schema [332](#)
  - suffix DNs [307](#)
- Modify DN
  - validation [315](#)
- monitor search examples [591](#)
- monitor support [571](#)
- Monitoring LDAP server resources
  - server resources [196](#)
- monitoring performance [585](#)
- Multi-factor Authentication Support [209](#)
- Multi-Row Fetch [209](#)
- multi-server mode
  - configuring for [147](#)
  - running in [146](#)
- multi-valued ref attribute [555](#)
- multicultural support [263](#)
- multiple databases
  - concurrent [6, 7](#)
- multiple directories [457](#)
- multiple LDAP servers
  - setting up [147](#)
- multiple socket ports [10](#)
- MUST attribute type [279, 290](#)
- mutual authentication [9](#)

## N

- namespace
  - entries, RACF [331](#)

- namespace (*continued*)
  - hierarchy diagram for RACF [331](#)
- native authentication
  - capability [8](#)
  - defining participation [398](#)
  - description [397](#)
  - example of setting up [401](#)
  - initializing [397](#)
  - installing RACF for [21](#)
  - operating modes [398](#)
  - password changes [115](#)
  - specifying DN [115](#)
  - updating schema [397](#)
  - using with web servers [405](#)
- native operations
  - running [400](#)
- nativeAuthSubtree option [398](#)
- nativeUpdateAllowed option [398](#)
- navigation
  - keyboard [727](#)
- nested groups [415](#)
- Network Authentication and Privacy Service [389](#)
- Network communications [197](#)
- no administrator [156](#)
- normal access class [428](#)
- nstalling
  - Kerberos [22](#)
- number sign (#) support in SDBM [332](#)
- numeric object identifier (OID) [291](#)

## O

- object class
  - adding for LDBM and TDBM [290](#)
  - definitions, adding for LDBM and TDBM [290](#)
  - description [267, 279](#)
  - extensibleObject [290](#)
  - format for LDBM and TDBM [290](#)
  - hierarchy [279](#)
  - Kerberos [390](#)
  - LDBM and TDBM usage [290](#)
  - referral [555](#)
  - replicaObject [459](#)
  - TDBM directory schema
    - LDBM directory schema [272](#)
- object class attribute
  - description [5](#)
- object class definitions
  - adding for LDBM and TDBM [290](#)
  - specifying for LDBM and TDBM [290](#)
- object identifiers
  - oid
    - supported and enabled capabilities [567](#)
- objectClass attribute [272](#)
- objects
  - protecting [425](#)
- ODBC (Open Database Connectivity) [19](#)
- OGET command [171](#)
- OID (numeric object identifier) [291](#)
- One-way hashing formats [77](#)
- Open Database Connectivity (ODBC)
  - setting up for [19](#)
- operating environments
  - Kerberos [396](#)

- operating in multiple single-server mode
  - multiple single-server mode [147](#)
- operating modes
  - native authentication [398](#)
- operational administrator [156](#)
- operational attributes in user entries [376–378](#)
- operations
  - defining [6](#)
- operationsMonitorSize
  - monitor [116](#)
- operator console
  - starting SLAPD from [168](#)
- Optional products [18](#)
- options
  - checklist [86](#)
  - configuration file [90](#)
- organizing
  - information [4](#)
- out-of-sync conditions [471](#)
- overhead, reducing [7](#)
- override, ACL example [445](#)
- Overriding password policy and unlocking accounts [381](#)
- owner
  - creating for entry [452](#)
  - deleting for entry [454](#)
  - modifying for entry [453](#)
  - ownerPropagate attribute [431](#)
  - ownerSource attribute [431](#)
- ownerPropagate attribute
  - description [431](#)
- ownerSource attribute
  - description [431](#)

**P**

- Paged search considerations [599](#)
- paged search requests
  - configuration options
    - ibm-slapdPagedResAllow NonAdmin [599](#)
    - ibm-slapdPagedResLmt [599](#)
    - sizeLimit [600](#)
- Parallel Sysplex
  - using [146](#)
- Partial replication [478](#)
- participation in multilevel security
  - multilevel security [12](#)
- partition-by-growth Db2 table spaces for TDBM or GDBM
  - partitioning Db2 tables for TDBM
    - EID value [60](#)
- partition-by-range Db2 table spaces for TDBM
  - partitioning Db2 table spaces [59](#)
- partitioned data set (PDSE)
  - DLLs [167](#)
- partitioning Db2 table spaces
  - Simple table spaces [58](#)
- Partitioning Db2 table spaces
  - DATABASE 2 (Db2)
    - table spaces, partitioning for Db2 [58](#)
- password
  - administrator, specifying [91](#)
  - changing [115](#)
  - master server [114](#)
  - replication key database [137](#)
  - SSL key database file [131](#)

- password (*continued*)
  - storing in stash file [132](#)
- password administrator [157](#)
- password encryption
  - configuring for [42](#)
  - db2pwden utility [221](#)
- password or password phrase
  - RACF
    - changing using SDBM [356](#)
- password or password phrases
  - native modify [400](#)
- password phrase [355](#)
- Password policy [363](#)
- Password policy attributes
  - ibm-pwdGroupAndIndividual Enabled [365](#)
  - ibm-pwdPolicy [365](#)
  - ibm-pwdPolicyStartTime [365](#)
  - passwordMaxConsecutive RepeatedChars [367](#)
  - passwordMaxRepeatedChars [366](#)
  - passwordMinAlphaChars [366](#)
  - passwordMinDiffChars [367](#)
  - passwordMinOtherChars [366](#)
  - pwdAllowUserChange [367](#)
  - pwdAttribute [368](#)
  - pwdCheckSyntax [368](#)
  - pwdExpireWarning [368](#)
  - pwdFailureCountInterval [369](#)
  - pwdGraceLoginLimit [369](#)
  - pwdInHistory [369](#)
  - pwdLockout [370](#)
  - pwdLockoutDuration [370](#)
  - pwdMaxAge [370](#)
  - pwdMaxFailure [371](#)
  - pwdMinAge [371](#)
  - pwdMinLength [371](#)
  - pwdMustChange [372](#)
  - pwdSafeModify [372](#)
- Password policy considerations [578](#)
- Password policy entries [363](#)
- Password policy evaluation [372](#)
- Password policy examples [383](#)
- Password policy extended operations [381](#)
- Password policy operational attributes
  - ibm-pwdAccountLocked [378](#)
  - pwdAccountLockedTime [376](#)
  - pwdChangedTime [376](#)
  - pwdExpirationWarned [377](#)
  - pwdFailureTime [377](#)
  - pwdGraceUseTime [377](#)
  - pwdHistory [377](#)
  - pwdReset [377](#)
- Password policy related extended operations [381](#)
- Password policy with native authentication [401](#)
- PasswordPolicy control
  - PasswordPolicy response control
    - PasswordPolicy response [378](#)
  - PasswordPolicy response control errors [379](#)
  - PasswordPolicy response control warnings [379](#)
- passwords in change log entries [550](#)
- PC (program call)
  - See program call (PC) [117](#)
- PDSE (partitioned data set)
  - See partitioned data set (PDSE) [167](#)
- peer replica



- peer replica (*continued*)
  - Adding to existing server [467](#)
- peer server
  - Downgrade to read-only replica [468](#)
- peer to peer
  - peer to peer replication [466](#)
- peer-to-peer
  - replication [517](#)
- peer-to-peer replication [477](#)
- performance improvements [8](#)
- performance information
  - capturing [179](#)
- Performance tuning
  - tuning [573](#)
- performance, LDAP server [7](#)
- Periodic validation of compatible server versions in basic replication replicas [315](#)
- permissions
  - access [426](#)
  - access determination examples [438](#)
  - attribute access classes [429](#)
  - determining [435](#)
  - entry [429](#)
- Persistent search [11](#)
- PKCS #11 tokens [220](#)
- plan name [43](#)
- PLANNAME value [43](#)
- planning
  - LDAP server setup [15](#)
- plug-in extension [41](#)
- Plug-in support [11](#)
- plus sign [268](#)
- Policy Director
  - data, accessing [411](#)
  - data, retrieving for LDAP [8](#)
  - retrieving data [411](#), [683](#)
  - setting up to use [66](#)
- port
  - multiple socket [10](#)
  - numbers, default [168](#)
  - TCP/IP for SSL [124](#)
  - TCP/IP, specifying [119](#)
- port option [137](#)
- pre-configuration set up [17](#)
- preparing
  - for backend interactions [42](#)
  - LDAP server [45](#)
- Preparing WLM, backends, sysplex, SSL/TLS, and encryption [53](#)
- Prevent visibility of sensitive data in debug trace [212](#)
- procedure
  - JCL to run SLAPD [167](#)
- profile files
  - used with config [25](#)
- program call (PC)
  - callable support mode [146](#), [149](#)
  - initializing threads for [117](#)
- program control
  - for LDAP server [51](#)
- propagation, ACL
  - description [444](#)
  - example [444](#)
  - indicating, flag for [430](#)
- protecting

- protecting (*continued*)
  - environment for LDAP server [51](#)
  - information [6](#)
  - information using ACLs [425](#)
- protecting access [131](#), [137](#)
- Protecting replication topology entries [517](#)
- protection, scope of
  - determining [426](#)
- protocol
  - directory [4](#)
  - Version 3 [8](#)
- PROXY segment [49](#)
- pseudo DN [427](#)
- publication, schema [271](#)
- pwEncryption option [221](#), [458](#)

## Q

- query command [179](#)
- querying
  - root DSE [565](#)
  - schema [272](#)
  - subschemaSubentry [272](#)
- querying group membership examples [420](#)

## R

- RACF authorization [318](#)
- RACF key rings
  - using [220](#)
- racfAttributes
  - racfConnectAttributes [331](#)
- RACFFIELD [289](#)
- RDN (relative distinguished name) [5](#)
- read-only replica
  - Upgrading to be a peer replica of the master server [467](#)
- recovering
  - from out-of-sync conditions [471](#)
  - ldif2ds [243](#)
- Recovering from advanced replication errors [529](#)
- ref attribute [555](#)
- references [555](#)
- referencing information [5](#)
- referrals
  - default [122](#)
  - default, defining [557](#)
  - description [555](#)
  - example of distributing namespace [559](#)
  - LDAP server capability [7](#)
  - limitations with version 2 [558](#)
  - manageDsaIT server control [657](#)
  - processing [557](#)
  - replication [465](#)
  - specifying [122](#)
  - suppressing [657](#)
  - using without dynamic WLM [147](#)
  - Version 2 protocol [558](#)
  - Version 3 protocol [558](#)
- Refresh DB2RUNSTATS
  - DB2 RUNSTATS [200](#)
- relational database
  - loading entries into TDBM [235](#)
- relative distinguished name (RDN)

relative distinguished name (RDN) (*continued*)

description [5](#), [267](#)

relocating an entry with DN realignment [305](#)

Replacing individual schema values

Replacing values [293](#)

replica

changing to master [465](#)

communicating with master [468](#)

master server [113](#)

setting up [468](#)

Replica groups [481](#)

Replica server with SSL/TLS enablement [521](#)

Replica subentries [482](#)

replicating

server [459](#)

Replicating password policy operational attributes [380](#)

Replicating server with SSL/TLS enablement [522](#)

replication

benefits [457](#)

command line tasks

configuration information [525](#)

data encryption [458](#)

database,description [457](#)

description [457](#)

entries [459](#)

entries, adding in TDBM or LDBM [462](#)

ibm-entryuuid [458](#)

LDAP server capability [7](#)

partial replication [519](#)

server [463](#)

server, configuring [464](#)

specifying key database file for [137](#)

troubleshooting [470](#)

replication administrator [157](#)

Replication agreements [483](#)

Replication conflict resolution [479](#)

replication consumer [245](#)

Replication contexts [481](#)

Replication of password policy attributes [215](#)

Replication scheduling [479](#)

Replication schema updates [517](#)

replication supplier [245](#)

Replication topology [475](#)

Replication topology hints and tips [516](#)

replKeyRingFile option [137](#)

replKeyRingPW option [137](#)

Request for Comments (RFC)

supported by z/OS LDAP

[12](#)

requested attributes [441](#)

Required products [17](#)

Resource Access Control Facility (RACF)

accessing information in [62](#), [65](#)

changing password or password phrase with SDBM [356](#)

command to create LDAPSRV [47](#)

commands for defining started task [167](#)

configuring LDAP server for [7](#)

connection to group [340](#)

distinguished names [268](#)

input file for config [36](#)

installing for native authentication [21](#)

installing for SDBM [21](#)

LDAP access to [317](#)

namespace entries [331](#)

Resource Access Control Facility (RACF) (*continued*)

password [151](#)

PROXY segment [49](#)

RACF fields [319](#)

RACF fixed fields [320](#)

restriction on amount of output [355](#)

root administrator DN [151](#)

Subsystem function [21](#)

resource profiles

searching [354](#)

retrieving racf

racf password envelope

user password or password phrase envelopes [355](#)

RFC (Request for Comments)

See Request for Comments (RFC) [12](#)

roadmap

configuring LDAP server [39](#)

installing and running LDAP server [15](#)

roles

configuration utility [31](#)

root administrator [158](#)

root DSE

searching [565](#)

support of [9](#)

RRSAF (Resource Recovery Services attachment facility) [21](#)

running

Db2 server utilities [217](#), [218](#)

LDAP server as started task [167](#)

LDAP server using data sets [171](#)

LDAP server using Db2 [19](#)

LDAP tools with SDBM [333](#)

native operations [400](#)

roadmap [15](#)

Running and using the LDAP server utilities

Running and using server utilities [217](#)

running utilities for [218](#)

## S

samples

ds.envvars file [263](#)

DSNAOINI file [21](#)

LDAP server [15](#)

object class hierarchy [279](#)

schema entry [272](#)

SPUFI script (TDBM) [631](#), [643](#)

SASL CRAM-MD5 and DIGEST-MD5 [9](#)

SASL external bind [9](#)

SASL GSS API Kerberos bind [9](#)

scenarios

configuration [152](#)

Schedule entries [488](#)

schema

dynamic [9](#)

modifying [235](#)

updating for Kerberos [390](#)

updating for native authentication [397](#)

schema (LDBM and TDBM)

defining new elements [291](#)

object classes [290](#)

schema (LDBM)

updating LDBM [291](#)

schema (TDBM)

attribute syntax



- schema (TDBM) *(continued)*
  - attribute syntax *(continued)*
    - schema (LDBM) [280](#)
  - attribute types
    - schema (LDBM) [288](#)
  - directory [271](#)
  - entry, displaying [295](#)
  - errors, analyzing [295](#)
  - IBM attribute types
    - schema (LDBM) [289](#)
  - LDAP attributes
    - schema (LDBM) [282](#)
  - LDAP syntaxes [282](#)
  - matching rules
    - schema (LDBM) [284](#)
  - minimum schema [603](#)
  - publication [271](#)
  - replica entry [459](#)
  - retrieving TDBM [295](#)
  - sample entry
    - schema (LDBM) [272](#)
  - searching for schema entry [296](#)
  - update [271](#)
  - updating TDBM [291](#)
- schema administrator [158](#)
- scope of protection
  - attribute privileges [427](#), [431](#)
  - determining [426](#)
- script
  - modifying for TDBM [57](#)
- SDBM authorization [317](#)
- SDBM backend
  - changing password in RACF [356](#)
  - configuration utility [26](#)
  - configuring for [39](#)
  - configuring with GDBM [153](#)
  - connection to group [340](#)
  - deleting attributes [360](#)
  - dsconfig utility [26](#)
  - implementing [7](#), [317](#)
  - installing RACF for [21](#)
  - mapping, Kerberos [392](#)
  - namespace hierarchy [331](#)
  - number sign (#) support [332](#)
  - preparing for [42](#)
  - RACF-style DNs [268](#)
  - running LDAP tools with [333](#)
  - schema publication [271](#)
  - section in ds.conf [83](#)
  - setting BINDPW in PROXY segment [49](#)
  - setting up for [62](#)
  - setting up user ID [48](#)
  - support of PROXY segment [49](#)
  - using for authentication [425](#)
  - using LDAP client utilities with [357](#)
  - verifying [172](#)
- SDBM performance considerations [601](#)
- SDBM schema
  - modify DN [332](#)
- SDBM search capabilities
  - SDBM search [343](#)
  - searching resource profiles [354](#)
  - searching universal groups [354](#)
- SDSF

- SDSF *(continued)*
  - file [167](#)
  - starting LDAP server in [168](#)
- search [11](#)
- searching
  - across multiple servers [555](#)
  - anonymous [441](#)
  - directories [6](#)
  - entire RACF database [355](#)
  - permissions required [441](#)
  - replication [457](#)
  - root DSE [565](#)
  - schema entry [296](#)
  - using attributes [441](#)
- Searching operational attributes [719](#)
- searching the change log [549](#)
- Secure Sockets Layer (SSL)
  - certificate [129](#)
  - certificate authentication [129](#)
  - cipher specifications [130](#)
  - configure LDAP server using [8](#)
  - configuring [41](#)
  - enablement [468](#)
  - enabling [70](#)
  - key database file
    - protecting access to [131](#), [137](#)
    - specifying [137](#)
    - specifying for server [131](#)
  - password for key database file [132](#)
  - preparing for [21](#)
  - replication [468](#)
  - setting up options for [70](#)
  - specifying in configuration file [124](#)
  - stash file [132](#)
  - TCP/IP port for [124](#)
- securePort option [137](#)
- SecureWay Security Server Network Authentication and Privacy Service for z/OS [22](#)
- security
  - options, setting up [70](#)
  - specifying type of [124](#)
- security administrator
  - role for config [32](#)
- security manager, external [45](#)
- security option [70](#), [137](#)
- segment, PROXY [49](#)
- sendV3stringsoverV2as option [571](#)
- sensitive access class [428](#)
- server
  - associating with referrals [556](#)
  - certificate [70](#)
  - master [468](#)
  - master, problems [470](#)
  - master, specifying [113](#)
  - parent [555](#)
  - pointing to others [556](#)
  - referrals [555](#)
  - replica [463](#), [468](#)
  - retrieving ACL information [447](#)
  - using in LDAP [6](#)
- Server backends and plug-ins during startup [196](#)
- server configuration
  - peer to peer [466](#)
- server configuration file

- server configuration file (*continued*)
  - data set [218](#)
- server configuration group member [158](#)
- server controls
  - authenticateOnly [103](#), [653](#)
  - Do Not Replicate [653](#)
  - IBMLdapProxyControl [653](#)
  - IBMModifyDNRealignDNAttributes Control [655](#)
  - IBMModifyDNTimelimitControl
    - manageDsaIT server control [655](#)
  - IBMSchemaReplaceBy ValueControl [656](#)
  - IBMSdbmExtendedSearchControl [656](#)
  - LDAP server capability [9](#)
  - manageDsaIT [657](#)
  - No Replication Conflict Resolution [657](#)
  - pagedresults [658](#)
  - PasswordPolicy [659](#)
  - PersistentSearch [660](#)
  - Refresh Entry [663](#)
  - replicateOperationalAttributes [663](#)
  - Replication bind failure time stamp control [665](#)
  - Replication Supplier ID Bind [665](#)
  - Server Administration [666](#)
  - SortKeyRequest [667](#)
  - SortKeyResponse [667](#)
- server ID [497](#)
- server name [43](#)
- server replication
  - modify DN [316](#)
- server utilities, Db2 [217](#), [218](#)
- Setting AUTOCOMMIT [21](#)
- setting time zone
  - time zone [38](#), [43](#)
- setting up
  - buffer pools [19](#)
  - Db2 [19](#)
  - for CLI [19](#)
  - for ODBC [19](#)
  - Kerberos directory [394](#)
  - LDAP server using roadmap [15](#)
  - multiple LDAP servers [147](#)
  - native authentication example [401](#)
  - related products [17](#)
  - TEMP data sets [19](#)
  - TEMP space [19](#)
  - user ID to run ldif2ds [238](#)
- Setting up for Policy Director extended operations
  - setting up for [66](#)
- Setting up for WLM (workload management) [53](#)
- setup when defining administrative roles in RACF [50](#)
- SHA encryption method [120](#)
- shortcut keys [727](#)
- shutting down
  - LDAP server [171](#)
- single-server mode
  - configuring for [147](#)
  - multiple [146](#)
  - replicating in [457](#)
  - running in [145](#)
- Size limitations [188](#)
- SMF records
  - Record Type 83, subtype 3 [693](#)
- socket ports, multiple [10](#)
- Sorted search considerations [600](#)
- sorted search requests
  - configuration options
    - ibm-slapdSortKeyLimit [600](#)
    - ibm-slapdSortSrchrAllow NonAdmin [600](#)
- space, white [268](#)
- spaces, blank [268](#)
- Special usage of racfAttributes and racfConnectAttributes
  - racfAttributes and racfConnectAttributes [331](#)
- SPUFI (SQL Processor Using File Input) facility
  - See SQL Processor Using File Input (SPUFI) facility [55](#)
- SQL Processor Using File Input (SPUFI) facility
  - creating TDBM database with [55](#)
  - DSTDBMDB SPUFI script (TDBM) [631](#)
  - TDBMMGRT SPUFI script (TDBM) [643](#)
- SSL/TLS
  - creating key database, RACF key ring, or PKCS #11 token [69](#)
  - enabling [70](#)
  - LDAP utilities [219](#)
  - obtaining a certificate [70](#)
  - protected communications [68](#)
  - setting up an LDAP client [75](#)
  - setting up for [68](#)
- SSL/TLS and advanced replication [521](#)
- sslAuth option [76](#)
- sslKeyRingFile option [137](#)
- sslKeyRingPWStashFile option [137](#)
- stand-alone LDAP daemon
  - See LDAP server [4](#)
- started task
  - changing debug setting [177](#)
  - defining [167](#)
  - defining user ID for [45](#)
  - messages [171](#)
  - running LDAP server as [167](#)
- starting
  - LDAP server in SDSF [168](#)
  - loading DLLs [167](#)
  - SLAPD from console [168](#)
- stash file [132](#)
- static
  - dynamic
    - nested [413](#)
- static groups [413](#)
- steps for installing and running LDAP [15](#)
- stopping
  - LDAP server from console [171](#)
  - LDAP server in SDSF [171](#)
- storing information [4](#)
- STRUCTURAL object class type [279](#), [290](#)
- subject
  - determining rights for [426](#)
- submit command [218](#)
- subschemaSubentry attribute [272](#)
- subschemaSubentry DN [296](#)
- suffix
  - option [150](#)
- summary of changes [xxix](#)
- Superseded RFCs [13](#)
- Supplier server entries [480](#), [497](#)
- Suppliers and consumers [496](#)
- Support Db2 Partitioning by Growth for ITDS TDBM and GDBM databases [212](#)
- supported extended operations [669](#)

- Symmetric encryption keys [78](#)
- synchronizing directories [457](#)
- syntax
  - DN [268](#)
  - EQUALITY matching rules [273](#), [275](#)
  - ORDERING matching rules [275](#)
  - schema attribute [280](#)
  - SUBSTR matching rules [275](#)
- system administrator
  - role for config [32](#)
- SYSTEM member, creating [240](#)
- system programming
  - role for config [32](#)

## T

- table spaces for TDBM
  - creating [55](#)
- task, started
  - See started task [167](#)
- TCP/IP (Transaction Control Protocol/Internet Protocol)
  - See Transaction Control Protocol/Internet Protocol (TCP/IP) [4](#)
- TDBM and GDBM (Db2-based) backend
  - installing and setting up [19](#)
- TDBM backend
  - access control
    - pseudo DN [427](#)
  - attribute types supported
    - LDBM backend [288](#)
  - buffer pools [19](#)
  - collation [264](#)
  - configuration utility [26](#)
  - configuring [39](#)
  - configuring password [150](#)
  - configuring root administrator DN [150](#)
  - configuring sample server with [54](#)
  - configuring with SDBM [153](#)
  - configuring with SSL and password encryption or hashing [152](#)
  - creating Db2 databases [55](#)
  - creating table spaces [55](#)
  - Default ACLs [434](#)
  - directory schema [271](#)
  - ds2ldif utility [225](#)
  - dsconfig utility [26](#)
  - dynamic schema [9](#), [271](#)
  - IBM attribute types supported
    - LDBM backend [289](#)
  - LDAP syntaxes supported
    - schema (LDBM) [282](#)
  - ldif2ds utility [235](#)
  - matching rules supported
    - LDBM backend [284](#)
  - native authentication [397](#)
  - preparing for [42](#)
  - running utilities for [218](#)
  - schema attribute syntax [280](#)
  - section in ds.conf [84](#)
  - setting up multiple servers [147](#)
  - SPUFI [631](#)
  - SPUFI script [643](#)
  - verifying [172](#)
- TDBM database

- TDBM database (*continued*)
  - Copying a TDBM database [61](#)
- TDBM database tuning [584](#)
- TDBM Health Checks [210](#)
- TDBM or LDBM backend
  - adding replica entries [462](#)
  - CRAM-MD5 and DIGEST-MD5 [407](#)
  - initializing ACLs [433](#)
- TDBM performance considerations [581](#)
- TDBM schema
  - setting up
    - LDBM schema [271](#)
- TDBM\_persistentsearch [118](#)
- TDBMMGRT SPUFI file [643](#)
- TDS-CONFIG health check [198](#)
- TDS-Db2 health check [198](#)
- TEMP data sets
  - setting up [19](#)
- terms, glossary of [733](#)
- threads
  - for performance [7](#)
  - specifying number in configuration [117](#)
  - specifying with commThreads [95](#)
- ticket
  - Kerberos authentication [389](#)
- Time Sharing Option (TSO)
  - running server utilities in [218](#)
- timeout
  - specifying [105](#)
- Tivoli
  - migration [203](#)
- trace
  - debug levels [170](#)
- trademarks [732](#)
- Transaction Control Protocol/Internet Protocol (TCP/IP)
  - port for SSL [124](#)
  - port, specifying [119](#)
  - running over [4](#)
- tree structure
  - hierarchical [4](#)
- trimming change log [550](#)
- troubleshooting
  - replication [470](#)
- Two-way encryption formats [78](#)
- types of information to store [4](#)

## U

- UID O
  - running under [168](#)
- Unconfiguring advanced replication [517](#)
- universal groups
  - searching [354](#)
- UNIX database
  - Robust general-purpose databases [7](#)
- unloading and loading change log [550](#)
- Unlocking or unexpiring the LDAP administrator's account [383](#)
- unsynchronized directories [471](#)
- update, TDBM schema
  - update, LDBM schema [291](#)
- updating
  - schema errors [295](#)
  - schema for native authentication [397](#)

- Updating a numeric object identifier (NOID)
  - Updating a NOID
    - NOID [294](#)
- user Attribute encryption
  - See Attribute encryption [10](#)
- User groups considerations
  - large directories [594](#)
- user ID
  - defining for LDAP server [45](#)
  - specifying for owner [97](#)
- user ID to run ldif2ds, setting up [238](#)
- user interface
  - ISPF [727](#)
  - TSO/E [727](#)
- User type extended operation examples [164](#)
- userNativeAuth option [398](#)
- userPassword and ibm-slapdAdminPw attribute values
  - specifying encryption method for [120](#)
- userPassword attribute value
  - encrypting [221](#)
- Using the limits from search limit groups [417](#)
- UTC Time syntax [295](#)
- UTF-8 characters
  - mapping with Unicode [263](#)
  - retrieving [9](#)
  - storing [9](#), [571](#)
  - using in DNs [90](#)
- utilities
  - config [25](#)
  - db2pwwden [221](#)
  - ds2ldif [225](#)
  - LDAP client
    - using with SDBM [357](#)
  - ldapdiff [245](#)
  - ldapexop [253](#)
  - ldif2ds [235](#)

## V

- V2 protocol
  - See Version 2 protocol [558](#)
- V3 protocol
  - See Version 3 protocol [8](#)
- ValueControl
  - ibmSchema [656](#)
- variable interactions, backend [42](#)
- verifying
  - LDAP server [172](#)
- verifying configuration [36](#)
- Verifying the service class for the LDAP server
  - SDSF enclave display example [578](#)
- Version 2 protocol
  - output data format [125](#)
  - referrals [558](#)
  - referrals, limitations [558](#)
  - validating data [136](#)
- Version 2 Release 2 (z/OS LDAP)
  - new and changed functions [213](#)
  - update summary [213](#)
- Version 2 Release 3 (z/OS LDAP)
  - new and changed functions [208](#)
  - update summary [208](#)
- Version 3 protocol
  - LDAP support of [8](#)

- Version 3 protocol (*continued*)
  - referrals [558](#)
  - TDBM schema [271](#)
  - UTF-8 characters [263](#), [571](#)

## W

- waitingThreads option [95](#), [137](#)
- web servers
  - using native authentication with [405](#)
- WebSphere Application Server
  - configuring for [15](#)
- white space [268](#)

## X

- X.500
  - description [6](#)
- X.509 standard
  - digital certificate [70](#)





Product Number: 5655-ZOS

SC23-6788-70

