

z/OS
3.2

*Security Server RACF
Auditor's Guide*



Note

Before using this information and the product it supports, read the information in [“Notices” on page 181.](#)

This edition applies to IBM® z/OS® 3.2 (5655-ZOS) and to all subsequent releases and modifications until otherwise indicated in new editions.

Last updated: 2025-09-30

© **Copyright International Business Machines Corporation 1994, 2025.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures.....	vii
Tables.....	xi
About this document.....	xiii
Intended audience.....	xiii
How to use this document.....	xiii
Where to find more information.....	xiii
RACF courses.....	xiv
Other sources of information.....	xiv
Internet sources.....	xiv
Summary of changes.....	xv
Summary of changes for z/OS 3.2.....	xv
Summary of changes for z/OS 3.1.....	xv
Chapter 1. The RACF auditor.....	1
AUDITOR, group-AUDITOR and ROAUDIT attribute.....	1
Access control and accountability.....	1
Logging.....	2
Owner-controlled logging.....	4
Auditor-controlled logging.....	4
Using the RACF cross-reference utility program (IRRUT100).....	6
Using the RACF database unload utility program (IRRDBU00).....	6
Using the RACF SMF data unload utility program (IRRADU00).....	7
Using the DFSORT ICETOOL.....	7
IBM Health Checker for z/OS.....	7
Using the RACF report writer.....	8
Conducting the audit.....	8
Preliminary information.....	9
System information.....	9
RACF implementation.....	11
Chapter 2. Setting and listing audit controls.....	17
General audit controls.....	17
Logging RACF commands and DEFINE requests.....	18
Bypassing logging of activity of users with the SPECIAL attribute.....	19
Logging the activities of users with the OPERATIONS attribute.....	19
Logging and bypassing RACF command violations.....	19
Activating auditing for security levels.....	20
Activating auditing for access attempts by class.....	20
Activating auditing for security labels.....	21
Auditing for APPC/MVS.....	22
User verification requests.....	22
Transaction program auditing.....	23
Relationship of APPC/MVS audit records.....	23
Activating APPC/MVS auditing.....	23
Deactivating APPC/MVS auditing.....	24
Refreshing profiles.....	24

Refreshing in-storage generic profiles.....	24
Refreshing RACLISTed profiles.....	25
SETOPTS REFRESH processing on shared systems.....	25
Examples for setting audit controls using SETOPTS.....	25
Specific audit controls.....	27
User controls.....	27
ALTUSER command example.....	28
Data set controls.....	28
General resource controls.....	29
Listing specific audit controls.....	29
LISTDSD command example.....	30
Auditing for the RACF/Db2 external security module.....	30
Auditing for z/OS UNIX System Services.....	31
Classes that control auditing for z/OS UNIX System Services.....	31
Auditable events.....	34
Commands.....	34
Audit options for file and directory levels.....	35
Auditing for superuser authority in the UNIXPRIV class.....	35
Auditing for the RACF remote sharing facility (RRSF).....	36
Auditing password and password phrase changes at logon.....	45
Auditing application logon and logoffs.....	45
Extending SETOPTS APPLAUDIT to UNIX and initACEE applications.....	47
Considerations for administering profiles in the OPTAUDIT class.....	47

Chapter 3. The RACF SMF data unload utility..... 49

Operational considerations.....	49
Using IRRADU00.....	49
Writing your own application.....	51
IRRADU00 example.....	51
Return codes for IRRADU00.....	52
IRRADU00 output.....	52
Using output from the RACF SMF data unload utility.....	52
Sort/Merge programs.....	53
Relational databases.....	53
XML.....	53
Using the DFSORT ICETOOL to create reports.....	53
The report format.....	54
The record selection criteria.....	55
Using the RACFICE PROC to generate reports.....	55
Reports based on the SMF data unload utility (IRRADU00).....	56
Creating customized reports.....	57
Using the RACF SMF data unload utility output with Db2.....	58
Steps for using IRRADU00 output with Db2.....	58
Creating a Db2 database for unloaded RACF SMF data.....	59
Creating a Db2 table space.....	59
Creating the Db2 tables.....	59
Loading the Db2 tables.....	60
Reorganizing the unloaded RACF SMF data in the Db2 database.....	62
Creating optimization statistics for the Db2 database.....	62
Deleting data from the Db2 database.....	62
Db2 table names.....	62
Using the RACF SMF data unload utility to generate XML documents.....	65
XML overview.....	65
Producing XML output.....	66
How the XML tag names are derived.....	67
Viewing and working with XML audit reports.....	68
Event code qualifiers.....	69

Event 1(1): JOB INITIATION/TSO LOGON/TSO LOGOFF.....	69
Event 2(2): RESOURCE ACCESS.....	73
Event 3(3): ADDVOL/CHGVOL.....	75
Event 4(4): RENAME RESOURCE.....	76
Event 5(5): DELETE RESOURCE.....	77
Event 6(6): DELETE ONE VOLUME OF A MULTIVOLUME RESOURCE.....	78
Event 7(7): DEFINE RESOURCE.....	78
Event 8(8)–25(19): COMMANDS.....	79
Event 26(1A): APPCLU.....	80
Event 27(1B): GENERAL AUDITING.....	81
Event 28(1C)–58(3A): z/OS UNIX EVENT TYPES.....	81
Event 59(3B): RACLINK EVENT TYPES.....	86
Event 60(3C)–62(3E): z/OS UNIX XPG4 EVENT TYPES.....	86
Event 63(3F): z/OS UNIX SETGROUPS EVENT TYPE.....	87
Event 64(40): X/OPEN SINGLE UNIX SPECIFICATION EVENT TYPES.....	87
Event 65(41): z/OS UNIX PASSING OF ACCESS RIGHTS EVENT TYPES.....	87
Event 66(42)–67(43): CERTIFICATE EVENT TYPES.....	87
Event 68(44): GRANT OF INITIAL KERBEROS TICKET.....	88
Event 69(45): R_PKIServ GENCERT.....	88
Event 70(46): R_PKIServ EXPORT.....	89
Event 71(47): POLICY DIRECTOR ACCESS CONTROL DECISION.....	89
Event 72(48): R_PKIServ QUERY.....	89
Event 73(49): R_PKIServ UPDATEREQ.....	89
Event 74(4A): R_PKIServ UPDATECERT.....	90
Event 75(4B): CHANGE FILE ACL.....	90
Event 76(4C): REMOVE FILE ACL.....	90
Event 77(4D): SET FILE SECURITY LABEL.....	90
Event 78(4E): SET WRITE-DOWN PRIVILEGE.....	90
Event 79(4F): CRL PUBLICATION.....	91
Event 80(50): R_PKIServ RESPOND.....	91
Event 81(51): PassTicket Evaluation.....	91
Event 82(52): PassTicket Generation.....	91
Event 83(53): R_PKIServ SCEPREQ.....	91
Event 84(54): R_Datalib RDATAUPD.....	92
Event 85(55): PKIAURNW.....	92
Event 86(56): R_PgmSignVer.....	92
Event 87(57): RACMAP.....	93
Event 88(58): AUTOPROF.....	93
Event 89(59): RPKIQREC.....	93
Event 90(5A): PKIGENC.....	93
Audit function codes for z/OS UNIX System Services.....	93

Chapter 4. The data security monitor (DSMON)..... 105

Appendix A. The RACF report writer..... 127

Sample reports.....	156
Merging SMF records produced by RACF for z/VM with SMF records produced by RACF for MVS.....	175

Appendix B. XML Schema..... 177

Appendix C. Accessibility..... 179

Notices..... 181

Terms and conditions for product documentation.....	182
IBM Online Privacy Statement.....	183
Policy for unsupported hardware.....	183
Minimum supported hardware.....	183

RSA Secure code.....	184
Trademarks.....	184
Index.....	185

Figures

1. RACF logging and reporting.....	3
2. Sample ISPF panel for RACF.....	6
3. GLOBALAUDIT Operand on the ALTDSD Command.....	28
4. JCL to Invoke the RACF SMF data unload utility.....	51
5. DFSORT's ICETOOL Utility.....	54
6. Member SELU: Selected User Report report format statements.....	55
7. Member SELUCNTL: Selected User Report record selection statements.....	55
8. Report for all IRRADU00 Records Associated with a Specific User ID.....	56
9. Customized Record Selection Criteria.....	57
10. Customized Report Format.....	58
11. Customized Report JCL.....	58
12. Sample SQL Utility Statements Defining a Table Space.....	59
13. Sample SQL Utility Statements Creating a Table.....	60
14. Db2 Utility Statements Required to Load the Tables (Part 1 of 2).....	61
15. Db2 Utility Statements Required to Load the Tables (Part 2 of 2).....	62
16. Db2 Utility Statements Required to Delete the Group Records.....	62
17. Specifying DSMON JCL	105
18. Reports produced by DSMON.....	110
19. Sample System Report	111
20. Sample Group Tree Report.....	112
21. Sample Program Properties Table Report.....	113
22. Sample RACF Authorized Caller Table Report.....	114
23. Class Descriptor Table Report.....	116

24. Sample RACF Exits Report.....	117
25. Sample RACF Global Access Checking Table Report.....	118
26. Sample RACF Started Procedures Table Report (ICHRIN03).....	119
27. Sample RACF Started Procedures Table Report (STARTED Class Active).....	120
28. Selected User Attribute Report.....	122
29. Selected User Attribute Summary Report.....	122
30. Sample Selected Data Sets Report.....	125
31. RACF Report Writer Overview.....	128
32. JCL for Dumping SMF Records and Running the Report Writer as a Batch Job.....	132
33. Summary Activity Report from SMF.....	157
34. Standard Header Page (1/3).....	157
35. Standard Header Page (2/3).....	158
36. Standard Header Page (3/3).....	159
37. General Summary Report.....	160
38. Listing of Status Records.....	160
39. Listing of Process Records.....	161
40. Short User Summary Report.....	162
41. Short Group Summary Report.....	162
42. Short Resource Summary Report.....	163
43. Short Command Summary Report.....	164
44. Short Event Summary Report.....	165
45. Short Owner Summary Report.....	166
46. User by Resource Summary Report.....	166
47. Group by Resource Summary Report.....	167
48. Resource by User Summary Report.....	168

49. Resource by Group Summary Report.....	169
50. Resource by Event Summary Report.....	170
51. Event by Resource Summary Report.....	171
52. Command by User Summary Report.....	172
53. Command by Group Summary Report.....	173
54. Command by Resource Summary Report.....	174
55. Owner by Resource Summary Report.....	174

Tables

1. Setting and listing audit controls.....	17
2. Events that SETROPTS AUDIT (class) affects.....	18
3. Command keywords that are suppressed in the LOGSTR data.....	37
4. How RACF Simulates Db2 Authorization Checking.....	42
5. LOGSTR Data.....	43
6. Return codes for the SMF data unload utility (IRRADU00).....	52
7. ICETOOL Reports from IRRADU00 Output.....	56
8. Correlation of Db2 Table Names and Record Types.....	62
9. XML naming exceptions.....	67
10. XML interpretation of special characters example.....	68
11. XML special characters substitutions.....	68
12. Audit Function Codes for z/OS UNIX System Services.....	93
13. Reports Specified by the FUNCTION Control Statement.....	108
14. Reports Specified by the USEROPT Control Statement.....	109
15. RACFRW Command Summary.....	130
16. Summary of RACFRW Subcommands.....	131

About this document

This information supports z/OS (5655-ZOS) and describes Resource Access Control Facility (RACF®), which is part of z/OS Security Server.

Purpose of this information

This information describes the role of the RACF auditor and explains the auditing tools that RACF provides. Reports on system and resource use can provide the auditor with information about the basic system-security environment of an installation.

z/OS Security Server works with these components:

- Integrated Security Services components
- Open Cryptographic Enhanced Plug-Ins
- PKI Services
- Resource Access Control Facility (RACF)
- z/OS Firewall Technologies
- z/OS LDAP Server
- z/OS Security Server Network Authentication Service

Some of the components referenced are not part of Security Server, but are included in other z/OS packages.

Who should read this information

This document is intended for those individuals defined as RACF auditors. These users have the AUDITOR or group-AUDITOR user attribute.

Intended audience

This document is intended for those individuals defined as RACF auditors (persons who have the AUDITOR, group-AUDITOR, or ROAUDIT user attribute).

You should be familiar with both RACF and z/OS, if you are running RACF on two or more systems that share the same RACF database.

How to use this document

This document provides detailed information about the RACF SMF data unload utility, which allows you to create a sequential file from the security relevant audit data. Also, chapters cover the RACF report writer, the data security monitor (DSMON), and optional audit controls for tracking RACF events.

Where to find more information

When possible, this information uses cross-document links that go directly to the topic in reference using shortened versions of the document title. For complete titles and order numbers of the documents for all products that are part of z/OS, see *z/OS Information Roadmap*.

To find the complete z/OS library, including the z/OS Documentation, see the [z/OS Internet library](http://www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary) (www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary).

To find educational material, see the [IBM Education home page](http://www.ibm.com/training) (www.ibm.com/training).

RACF courses

The following RACF classroom courses are available in the United States:

ES191

Basics of z/OS RACF Administration

BE870

Effective RACF Administration

ES885

Exploiting the Advanced Features of RACF

IBM provides various educational offerings for RACF. For more information about classroom courses and other offerings, do any of the following:

- See your IBM representative
- Call 1-800-IBM-TEACH (1-800-426-8322)

Other sources of information

IBM provides customer-accessible discussion areas where RACF may be discussed by customer and IBM participants. Other information is also available through the Internet.

Internet sources

The following resources are available through the Internet to provide additional information about the RACF library and other security-related topics:

- [z/OS Internet library \(www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary\)](http://www.ibm.com/servers/resourcelink/svc00100.nsf/pages/zosInternetLibrary)
- [IBM Redbooks \(www.ibm.com/redbooks\)](http://www.ibm.com/redbooks)
- [Enterprise security \(www.ibm.com/systems/z/solutions/enterprise-security.html\)](http://www.ibm.com/systems/z/solutions/enterprise-security.html)
- [RACF home page \(www.ibm.com/products/resource-access-control-facility/resources\)](http://www.ibm.com/products/resource-access-control-facility/resources)
- [RACF download page \(github.com/IBM/IBM-Z-zOS/tree/master/zOS-RACF/Downloads\)](https://github.com/IBM/IBM-Z-zOS/tree/master/zOS-RACF/Downloads)

Summary of changes

This information includes terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations for the current edition are indicated by a vertical line to the left of the change.

Note: IBM z/OS policy for the integration of service information into the z/OS product documentation library is documented on the z/OS Internet Library under [IBM z/OS Product Documentation Update Policy](http://www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy) (www.ibm.com/docs/en/zos/latest?topic=zos-product-documentation-update-policy).

Summary of changes for z/OS 3.2

The following content is new, changed, or no longer included in z/OS 3.2.

New

The following content is new.

September 2025 release

- **RACF user ID containment:** RACF provides the ability to contain a user ID, which immediately stops the user from accessing RACF-protected resources during an active session. The user ID containment functionality, which is an extension of RACF user ID revocation processing, is available in z/OS 3.2 and z/OS 3.1 when you install the PTF for [APAR OA67286](http://www.ibm.com/support/pages/apar/OA67286) (www.ibm.com/support/pages/apar/OA67286).

In support of this function, the "Selected user attribute summary report" of the data security monitor (DSMON) is updated to list attributes related to user ID containment, as follows:

- CONTAIN column is added to report on the user's containment status. The attributes of CONTAIN and NEVERCONTAIN are indicated by a C or N for the user. See ["Selected user attribute summary report" on page 122](#).
- CONTAIN and NEVERCONTAIN columns are added to the "Total Selected Attribute Users" section of the report to list the totals for those attributes. See ["TOTAL DEFINED USERS column headings" on page 122](#) and [Figure 29 on page 122](#).

Changed

The following content is changed.

September 2025 release

- None.

Deleted

The following content is deleted.

September 2025 release

- None.

Summary of changes for z/OS 3.1

The following content is new, changed, or no longer included in z/OS 3.1.

New

The following content is new.

April 2025

- In support of APAR OA66611, information is added to the following classes in [“Classes that control auditing for z/OS UNIX System Services”](#) on page 31:
 - DIRACC
 - FSSEC
 - PROCESS
 - PROCACT
- In support of APAR OA67321:
 - Information, including RACF class/setting controlling logging, is added to [Table 12 on page 93](#).
 - z/OS UNIX services are added to [“Auditing for superuser authority in the UNIXPRIV class”](#) on page 35.

October 2024

- Type 80 event code 1 event code qualifiers 40(28) through 46(2E) have been added to Event Code 1 ("JOB INITIATION/TSO LOGON/TSO LOGOFF"). See [“Event code qualifiers”](#) on page 69.

September 2023

- SETROPTS APPLAUDIT has been extended to log successful logons. For more information, see the following new sections:
 - [“Auditing password and password phrase changes at logon”](#) on page 45
 - [“Auditing application logon and logoffs”](#) on page 45
 - [“Extending SETROPTS APPLAUDIT to UNIX and initACEE applications”](#) on page 47
 - [“Considerations for administering profiles in the OPTAUDIT class”](#) on page 47

Changed

The following content is changed.

October 2023

- The Classes that control auditing for z/OS UNIX System Services section has been updated. See [“Classes that control auditing for z/OS UNIX System Services”](#) on page 31.
- The Db2 table names section has been updated. See [“Db2 table names”](#) on page 62.
- The Audit Function Codes for z/OS UNIX System Services table has been updated. See [“Audit function codes for z/OS UNIX System Services”](#) on page 93.

September 2023

- None.

Deleted

The following content was deleted.

September 2023

- None.

Chapter 1. The RACF auditor

RACF is a flexible security tool. It allows you to set your own security objectives and use RACF to help achieve those objectives in a way that best meets your installation's needs.

Although installations might have slightly different security needs, certain RACF user roles or tasks are common to all users. At any installation, different users have different levels of responsibility for security or different needs to access resources. Some people might have extensive responsibility for security, whereas others might have little or none; some users might require almost unlimited access to resources, whereas others might need only limited access, and some might be barred from entering the system at all.

The primary means of defining a user's responsibility for security is the RACF *user attribute*. A user attribute is a part of the RACF definition of what an installation allows a particular user to do. The SPECIAL attribute, for example, is normally assigned to the RACF security administrator; a SPECIAL user can execute any RACF command except those reserved for a user with the AUDITOR attribute.

This separation of powers is necessary because it is the security administrator's job to establish RACF controls; it is the auditor's job to test the adequacy and effectiveness of these controls. In this sense, your job as the auditor is very similar to the job of a financial auditor in a bank.

AUDITOR, group-AUDITOR and ROAUDIT attribute

Once a SPECIAL user assigns the AUDITOR or ROAUDIT user attribute to you, your responsibility is to verify that RACF is meeting your installation's security goals. As a RACF auditor, your job is essentially the same, regardless of whether you have the AUDITOR or ROAUDIT attribute (with responsibility for checking RACF controls on a user, or system-wide, level) or the group-AUDITOR attribute (with responsibility for checking RACF controls for a group and its subgroups). Whereas a user with the group-AUDITOR attribute can only monitor the users and resources owned by a specific group and its subgroups, the responsibility is so much like that of a user with the AUDITOR attribute that this document applies to both and notes any specific differences.

The user with the ROAUDIT attribute (read-only auditor) has the same primary responsibility as the user with the AUDITOR attribute, to monitor the system. The difference between the AUDITOR attribute and the ROAUDIT attribute is that a user with the AUDITOR attribute has the ability to monitor the system as well as setting auditing controls. A user with the ROAUDIT attribute can only monitor the system with the existing set of auditing controls.

Access control and accountability

As the auditor, you are responsible for checking that RACF is meeting the installation's needs for access control and accountability. Access control means that you can control user accesses to resources and verify that the accesses allowed are appropriate to the particular resource. For example, you might question why a tape librarian had access to a payroll data set. The auditor must verify that an installation has a way to maintain accountability. Accountability means that you can trace activities on the protected system to a particular person. Normally, several people should not share a user ID. A user ID can be shared by people who use a digital certificate to identify and authenticate themselves. In this case, accountability is maintained because each person's unique X500 name is audited in addition to the shared user ID.



Attention: If the person responsible for setting or resetting passwords uses the NOEXPIRED keyword of the ALTUSER command to set a new, unexpired password for a user, you might experience problems maintaining accountability. For example, an administrator might reset an expired password with the following command:

```
ALTUSER VIOLA PASSWORD(ME51NOW)
```

When VIOLA uses the password for the first time, RACF forces her to change it. After she changes the password, only VIOLA knows the new password, which provides reasonable assurance that the audit record indicates that VIOLA performed some action. However, the administrator might issue:

```
ALTUSER VIOLA PASSWORD(ME51NOW) NOEXPIRED
```

VIOLA gets an unexpired password and does not need to change it, which means that the administrator and VIOLA both know the password. Although an audit record written by the ALTUSER command indicates whether NOEXPIRED was specified, there is no assurance that an audit event with VIOLA in the record occurred because of something VIOLA did. You need to consider the possibility that the administrator performed the action that caused RACF to write the audit record.

To help you to audit access control and accountability, RACF provides:

- Logging routines that record the information you require
- Audit control functions that enable you to specify the information RACF is to record (or log)
- The RACF SMF data unload utility, which converts SMF records into formats which can be used by a relational database manager, such as an XML version which can be easily viewed by a web browser
- The DFSORT ICETOOL, which generates reports from RACF SMF data unload utility information and RACF database unload utility information
- The data security monitor (DSMON), which generates reports containing information about the security environment for MVS
- The RACF report writer, which generates tailored reports based on the information you have directed RACF to log

To specify the audit control functions, use either the RACF ISPF panels or the RACF commands to direct RACF to log any events relevant to your installation's data security program.

After RACF has logged security events, you can analyze this log by:

- Loading the records produced by the RACF SMF data unload utility into a relational database manager for analysis.
- Creating XML output of the report and viewing the results in a web browser. This report can also be customized by the use of an XSLT style sheet file.
- Invoking the RACF report writer to print the data RACF has logged and use the reports to identify possible security violations or weaknesses in the security mechanism.

The data security monitor (DSMON) generates a set of reports that lets you audit the current status of the data security environment. You can use the information in the reports to compare the actual system characteristics and resource protection levels with the installation's requirements. If the installation has not defined ICHDSM00 (DSMON) as a controlled program, you must have the AUDITOR attribute or the ROAUDIT attribute to run DSMON.

If DSMON has been defined as a controlled program, you must have at least EXECUTE or READ access to the ICHDSM00 resource in the PROGRAM class. Additionally, with READ access from the PROGRAM class if DSMON is not running in a clean program-controlled environment you also need the AUDITOR or ROAUDIT attribute.

Logging

Logging, the recording of data about specific events, is the key to auditing the use of RACF at your installation. You must ensure that RACF logs the information you need. RACF uses the system management facilities (SMF) to log data about various RACF events. RACF writes SMF records to an SMF data set or log stream.

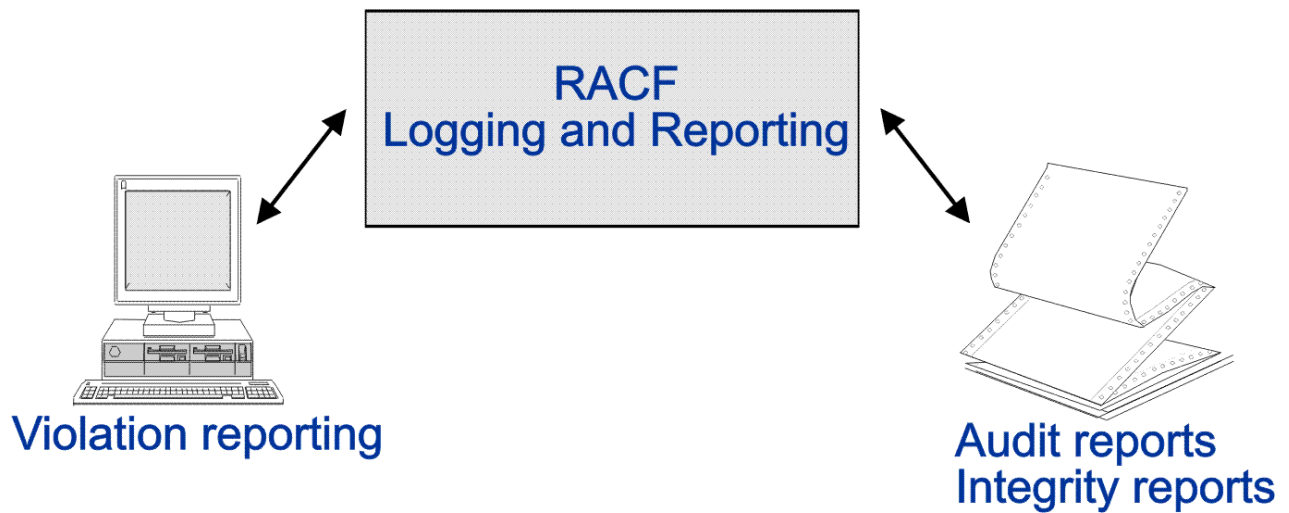


Figure 1. RACF logging and reporting

Things to Consider

- Each additional logging activity that you specify increases RACF and SMF processing and, as a result, might affect RACF performance.
- When RACF is enabled for sysplex communication, RACF logs the use of commands only for the system from which the command originated (if auditing has been turned on), even though some commands are propagated to the other members in the RACF sysplex data sharing group.
- When you are sharing a RACF database among two or more systems, you must run the logging and reporting utilities from the highest level system.

RACF always logs information about certain events because knowing about these events is essential to an effective data-security mechanism. The events that RACF always logs are:

- Every use of the RVARY or SETROPTS command.
If you are using the RACF subsystem on MVS and issue RVARY as an MVS operator command, the job name information is propagated in the SMF record. This distinguishes it from an RVARY command issued from a TSO session.
- A successful RACROUTE REQUEST=VERIFY under the following conditions:
 - SETROPTS AUDIT(USER) is active and a user's password or password phrase is changed
 - authentication using a PassTicket
 - authentication of an IBM Multi-Factor Authentication user using a password or password phrase.
- Every time a RACROUTE REQUEST=VERIFY request fails or an initACEE fails because a certificate is unknown or not trusted.
- Every time a distributed identity is unknown.
- Every time the console operator grants access to a resource as part of the failsoft processing performed when RACF is inactive
- When a user not defined as a z/OS UNIX System Services user tries to dub a process
- When an unauthorized user tries to mount or unmount the file system
- When a user successfully sets or resets his write-down mode, or fails attempting to do so because the user does not have the write-down privilege
- Other components may also cause security events to be logged

For more details about z/OS UNIX System Services events for which audit records are always written, see [*z/OS UNIX System Services Planning*](#).

RACF never logs some events, because knowing about these events is not essential to effective data security. RACF never logs any use of the following RACF commands: LISTDSD, LISTGRP, LISTUSER, RLIST, and SEARCH.

In addition, RACF can *optionally* log other events. Optional logging is under the control of either a resource-profile owner or the auditor.

Owner-controlled logging

Owners of resources can specify, in the resource profile, what types of accesses to log (successes, failures, or both) and what level of access to log (READ, UPDATE, CONTROL, or ALTER). Owners can also specify that no logging is to occur for an access that is a success or failure. Owner-controlled logging is not directly under your control, but you should verify that resource owners request a level of logging that is consistent with the sensitivity of the resource. Furthermore, your installation can use three methods to *override* the logging that an owner specifies in the resource profile.

1. First, you can suppress auditing for all resources in a specific class by specifying LOGOPTIONS(NEVER(*class-name*)) on the SETROPTS command. Likewise, you can activate auditing for all access attempts for all resources in a specific class by specifying LOGOPTIONS(ALWAYS(*class-name*)). See [“Activating auditing for access attempts by class” on page 20](#).
2. Second, if you have the AUDITOR attribute, you can specify additional logging that supersedes the owner's logging specification for a specific resource by *adding* audit controls to the resource profile. Note that you cannot *change* the owner's logging specifications for a specific resource profile, only add to them. You can do this for specific resource profiles by specifying the GLOBALAUDIT operand on the ALTDSD or RALTER command. The use of these controls is described in [“Data set controls” on page 28](#) and [“General resource controls” on page 29](#).
3. Third, for resources that have their authority checked by RACROUTE REQUEST=AUTH, your installation can bypass a profile owner's logging specification by using the RACROUTE REQUEST=AUTH postprocessing exit routine. This exit routine can, for certain accesses, specify unconditional logging or unconditionally suppress logging. For example,
 - An installation might use the exit routine to specify unconditional logging for accesses to a highly classified resource.
 - An installation might suppress logging when the exit routine recognizes READ access to common system resources, such as SYS1.MACLIB.

You should be aware of any such exit-routine specifications. For more information about using exit routines, see [z/OS Security Server RACF System Programmer's Guide](#).

Note to z/OS UNIX System Services Users

Owner-controlled logging for z/OS UNIX files is specified in the file security packet (FSP) instead of a profile. The access levels are different and logging is set with the **chaudit** command. For more information about this command, see [z/OS UNIX System Services User's Guide](#).

Auditor-controlled logging

You can direct RACF to log additional events. These events are:

- Changes to any RACF profiles
- All RACF commands issued by users who either had the SPECIAL attribute, or gained authority to issue the command because they had the group-SPECIAL attribute
- All unauthorized attempts to use RACF commands
- All RACF-related activities of specific users
- All accesses to resources (data sets and general resources) that RACF allows because the user has the OPERATIONS or group-OPERATIONS attribute

- All accesses to specific data sets
- All accesses to specific general resources
- All accesses to resources protected by specific profiles in the SECLABEL class
- All accesses to a specified class of resources may be logged optionally depending on whether the attempt is a success or failure, or all auditing of a class may be suppressed, based on LOGOPTIONS keyword of the SETROPTS command
- Selected events in related APPC/MVS transactions
- z/OS UNIX System Services events. See [Chapter 3, “The RACF SMF data unload utility,” on page 49](#) for event codes and a table of event code qualifiers.

You can identify which of these events apply to your installation's security goals and use audit controls to direct RACF to log the events you require.

Using the ISPF panels

In general, you can perform the same RACF functions using the ISPF panels.

The **ISPF panels** provide the following advantages:

- When you use the panels, you avoid having to memorize a command and type it correctly. Panels can be especially useful if the command is complex or you perform a task infrequently.
- ISPF creates in the ISPF log a summary record of the work that you do. Unless you use the TSO session manager, the RACF commands do not create such a record.
- From the panels, you can press the HELP key to display brief descriptions of the fields on the panels.
- The options chosen when installing the RACF panels determine whether output (for example, profile listings, search results, and RACF options) is displayed in a scrollable form.
- The ISPF panels for working with password rules allow you to enter all of the password rules on one panel. The figure below shows one of these panels.
- When you use the ISPF panels to update a custom field definition in the CFDEF segment, the current values are displayed. You can then overwrite the values to make changes.
- When you use the ISPF panels to add, update, or delete custom field information (CSDATA segment fields), the panels are primed with the custom field names and values. You can then make additions, changes, and deletions.

Limitations: The following limitations apply to the use of the ISPF panels:

- The ISPF panels do not support all options of all commands. For example, the SETROPTS PASSWORD option to activate and deactivate mixed-case password support is not available through the RACF panels.
- The ISPF RACF panels are limited to 32000 lines of command output. If the output listing for a command (most commonly, the RLIST command) exceeds 32000 lines, the output is truncated at the 32000 line limit and an error is likely to occur. To avoid this limitation, use one of the following alternate methods:
 - Issue the command using a batch execution of the terminal monitor program (TMP) and use the SDSF **XD** command to store the output in a data set.
 - Create a report using output from the RACF database unload (IRRDBU00) utility.

```

                                RACF - SET PASSWORD FORMAT RULES
COMMAND ===>

Enter PASSWORD FORMAT RULES:
                                MINIMUM  MAXIMUM
                                LENGTH    LENGTH    FORMAT
RULE 1:  --                    --          -----
RULE 2:  --                    --          -----
RULE 3:  --                    --          -----
RULE 4:  --                    --          -----
RULE 5:  --                    --          -----
RULE 6:  --                    --          -----
RULE 7:  --                    --          -----
RULE 8:  --                    --          -----
To cancel an existing rule, enter NO for MINIMUM LENGTH.
To specify FORMAT, use the following codes for each character position:
* = Any Character      $ = National      V = Vowel      N = Numeric
C = Consonant          A = Alphabetic     v = Mixed Vowel  m = Mixed Numeric
c = Mixed Consonant    L = Alphanumeric  W = No Vowel    s = Special
x = Mixed All

```

Figure 2. Sample ISPF panel for RACF

Using the RACF cross-reference utility program (IRRUT100)

If you have the AUDITOR, ROAUDIT or SPECIAL attribute, you can use the RACF cross-reference utility to find and list occurrences of a user ID or group name in the RACF database.

If you have the group-AUDITOR or group-SPECIAL attribute, you can use these utilities only for a user ID or group that is within your scope of authority.

You can also process your profile or profiles that you own.

Remember

Before using the RACF cross-reference utility, you should consult with your RACF system programmer. You may need to find out:

- How to run the utility
- When to run the utility to reduce its impact on system operations

For more information about using this utility, see [z/OS Security Server RACF System Programmer's Guide](#).

Using the RACF database unload utility program (IRRDBU00)

You can also use the RACF database unload utility to provide flexibility in analyzing RACF profile information. The output from this utility is a sequential file that is a relational representation of a RACF database.

If the output is loaded into a database management system (such as Db2®*), you can issue your own queries. For example:

- You can find and list occurrences of a user ID or group name in the RACF database
- You can list members of a group by name rather than user ID
- You can list the last recorded date and time that a RACROUTE REQUEST=VERIFY request was issued for a user.

A user with the SPECIAL attribute can request that RACF record statistics during RACROUTE REQUEST=VERIFY processing. REQUEST=VERIFY is issued when a user is logging on to a system or a batch job is entering a system including when RACF does such work as a directed command, application update, or password change on behalf of the user. See [z/OS Security Server RACF Security Administrator's Guide](#) for more information about recording RACROUTE REQUEST=VERIFY statistics.

Before using the RACF database unload utility, you should consult with your RACF system programmer. You may need to find out *how* to run the utility. Your input database must be in the correct format and you must have UPDATE authority to it.

For more information about running this utility, see *z/OS Security Server RACF Macros and Interfaces* and *z/OS Security Server RACF Security Administrator's Guide*. For information about using this utility with Db2, see *z/OS Security Server RACF Security Administrator's Guide*.

Using the RACF SMF data unload utility program (IRRADU00)

The RACF SMF data unload utility program is the recommended utility for processing RACF audit records. With it, you can create a sequential file from the security relevant audit data. You can use the sequential file in several ways. You can:

- View the file directly
- Use the file as input for installation-written programs
- Manipulate the file with sort/merge utilities
- Browse an XML-formatted output

You can also upload the file to a database manager (for example, Db2) to process complex inquiries and create installation-tailored reports.

For details about the RACF SMF data unload utility program, see [Chapter 3, “The RACF SMF data unload utility,”](#) on page 49.

Using the DFSORT ICETOOL

IBM's DFSORT product provides a reporting facility called ICETOOL. RACF provides a collection of reports in IRRICE, a member in SYS1.SAMPLIB, which you can use to create your own reports. IRRICE uses DFSORT statements for the selection criteria and ICETOOL statements for the report format for all the reports. The IEBUPDTE utility processes the IRRICE member and creates a partitioned data set that contains the report formats and record selection criteria.

If you want to use the ICETOOL to create RACF reports, you must:

- Be sure you have the IBM's DFSORT product or its equivalent installed on your system
- Unpack the DFSORT ICETOOL control statements that are supplied by RACF
- Customize the DFSORT ICETOOL control statements supplied by RACF to produce the reports you need

See [“Using the DFSORT ICETOOL to create reports”](#) on page 53 for a detailed description of the DFSORT ICETOOL and the IRRICE member.

IBM Health Checker for z/OS

IBM® Health Checker for z/OS® identifies potential problems before they impact your availability or, in worst cases, cause outages. It checks the current active z/OS and sysplex settings and definitions for a system and compares the values to those suggested by IBM or defined by you.

Some of the z/OS RACF health checks are as follows:

RACF_ADDRESS_SPACE

Validates the system to ensure that the RACF address space is configured and active.

RACF_AIM_STAGE

Examines the RACF database application identity mapping (AIM) to see whether it is at AIM stage 3.

RACF_AUDIT_CONTROLS

Examines the RACF SAUDIT, OPERAUDIT, and CMDVIOL settings.

RACF_ENCRYPTION_ALGORITHM

Verifies that the KDFAES algorithm is used for password protection.

RACF_ERASE_ON_SCRATCH

Validates that the system is set to overwrite data sets when they are erased and will raise an exception if it is not.

RACF_PASSWORD_CONTROLS

Examines the client's RACF password control settings and raises an exception when recommended settings are not being used.

RACF_PROTECTALL_FAIL

Validates that the system is set to deny access to any data set which does not have an associated profile and will raise an exception if it is not.

RACF_RRSF_RESOURCES

Examines the security characteristics of the RRSF INMSG/OUTMSG workspace data sets.

RACF_SYSPLEX_COMMUNICATION

Validates the system to ensure that Sysplex Communication is enabled.

For a complete list of z/OS RACF health checks and more information, see [RACF checks \(IBMRACF\)](#) in *IBM Health Checker for z/OS User's Guide*.

Using the RACF report writer

The profile listings the RACF commands provide can help you to verify the audit controls that exist at any particular time. The RACF report writer helps you to monitor RACF-related activity during system operation and to verify that these activities are consistent with your installation's security goals. It provides printed reports based on the data your audit controls directed RACF to log.

The report writer makes use of certain system management facility (SMF) records to obtain information. You can control the selection of these records and the format and type of report that the report writer produces through the use of the RACFRW command and its subcommands.

However, the report writer supports audit records for RACF release 1.9.2 and earlier. It does not support most of the audit records introduced in the RACF Version 2 releases or as part of the z/OS releases.

See [Appendix A, "The RACF report writer,"](#) on page 127 for a detailed description of the report writer, the RACFRW command, and samples of the available reports.

Conducting the audit

Asking the right questions is an essential part of *any* audit, including an audit of your own RACF-protected installation or a review of another installation. In such a review or audit, your principal review objectives are:

1. Judge how effectively RACF has been implemented to handle security at the installation.
2. Identify any security exposures.
3. Recommend ways to improve the system.

To accomplish these objectives, you need to understand your installation and its security requirements. To obtain the information, you can interview a few key people such as the security administrator, the system programmer responsible for installing and implementing RACF, and a senior member of the system support group. Asking the right questions of the right people can help you in your audit.

One way to deal with the mass of information used for an audit is to divide it into categories: preliminary information, system information, and RACF information. The rest of this chapter uses these categories to identify blocks of information you need or questions you might ask. Not all of the suggestions apply at any one installation; any particular installation may require additional investigation. Treat these suggestions as a starting point, then tailor and expand your audit to fit the conditions that exist.

When you are conducting an audit, you should obtain current installation reports from the data security monitor (DSMON). These reports are helpful in answering a number of your questions. You can also use the DSMON reports to verify that the *actual* status of various security mechanisms is what you and the installation expect. DSMON is described in [Chapter 4, "The data security monitor \(DSMON\),"](#) on page 105.

Preliminary information

Before conducting an audit, you should establish preliminary information concerning the type, size, and complexity of your installation. The following questions should help you get started.

1. What are the processor complexes and their associated system control programs (SCPs), including the release and level of RACF for each? You can use the DSMON reports to answer this particular question.
2. For each processor complex, what are the subsystems—such as TSO/E, IMS/ESA®, CICS®/ESA—protected by RACF (including the release and level of each)? List them.
3. Are processor complexes linked (for example, by NJE, RSCS, JES2, or JES3)?
4. Is DASD shared between systems? What type of data is shared?
5. Do you have dial-up lines?
6. Explain briefly the classification system.
7. What is the highest classification of data processed and/or transmitted?
8. Will you be using z/OS UNIX System Services?

System information

An operating system should have integrity; that is, it should prevent one program from interfering with or modifying the execution of another system or user program unless the interference is authorized. To increase your awareness of potential security problems, read related MVS documentation that provide overview information and describe system features that promote security. A list of the related documentation is provided in the preface of this document.

Basic system

Use the following questions to help establish foundation information concerning your system.

1. What is the operating system version and release level and PTF level (PUT tape)? You can use the DSMON reports to answer this particular question.
2. How many local modifications have been applied (excluding exit routines)?
3. What are the main areas and/or functions modified?
4. Are the systems the same on all processor complexes?
5. What user-written SVC routines does the system include and what is their purpose?
6. What exit routines are in the system and what is their purpose? Could these exit routines affect RACF protection? Some examples of subsystems or components that can have exit routines are:

- SMF
- TSO/E
- JES
- Job management

Authorization

Use the following questions to determine current system authorization.

1. What are the entries in the program properties table (PPT) that automatically bypass password protection? You can use the DSMON reports to answer this particular question.
2. Which started procedures have the trusted or privileged attribute? You can use the DSMON reports to answer this particular question.
3. What are the authorized libraries?
 - In your PARMLIB concatenation (IEAAPFxx)? You can use the DSMON reports to answer this particular question.

- In your PARMLIB concatenation (LNKLSTxx)? You can use the DSMON reports to answer this particular question.
- In your PARMLIB concatenation (IEALPAXx)?
- In your PARMLIB concatenation (LPALSTxx)?

Note: You can find your PARMLIB concatenation with an MVS operator command or you can use the RACF_SENSITIVE_RESOURCES health check which reports on the concatenated PARMLIB data sets.

4. Other than standard IBM programs, what programs require authorization in these libraries?
5. What are the commands and programs that can be executed in the foreground as Authorized Program Facility (APF)-authorized (CSECTs IKJEFTE2 and IKJEFTE8 in module IKJEFT01 or IKJTABLS, or SYS1.PARMLIB member IKJTSO00, depending on your release of TSO)?
6. Is the list of authorized programs and commands reasonable and consistent with the installation's security goals? You can use the DSMON reports to answer this particular question.
7. How are changes and additions to the authorized libraries controlled? Who authorizes changes?

System protection

Use the following questions to determine current system protection.

1. How are changes to the system controlled and documented?
2. How are the system libraries (including page data sets, dump data sets, JES spool and checkpoint data sets, and SMP data sets) protected? Who can access these libraries?
3. What libraries have a universal access of READ? You can use the DSMON reports to answer this particular question.
4. What libraries have a universal access of UPDATE or higher? You can use the DSMON reports to answer this particular question.
5. What libraries have a universal access of EXECUTE? You can use the DSMON reports to answer this particular question.
6. Are the DLIB data sets also protected? You can use the DSMON reports to answer this particular question.
7. Are all the catalogs protected? You can use the DSMON reports to answer this particular question.
8. Are key security items, (such as RACF databases, SYS1.UADS, password data, cipher key file, SMF data, source and load modules for RACF exit routines, and SMF routines) all identified and protected? You can use the DSMON reports to answer this particular question.
9. If JES3 is installed, is the use of dynamic support program (DSP) controlled (including utilities such as tape-to-tape and tape-to-print)?

Miscellaneous

The following questions do not fall into any of the preceding categories; however, the information gained from the answers could be useful when conducting an audit.

1. Can bypass label processing (BLP) be used? If yes, how is it controlled?
2. Is OS password protection used? If yes, why?
3. If dial-up terminals are used, how is unauthorized use prevented?
4. Is full SMF recording in use? If not, what is excluded either by options or exit routine code?
5. What is the wait limit that causes a terminal to be logged off?
6. How far back do system backup dumps go?
7. Are all IPLs logged and the reasons reported?
8. Is all time on the system accounted for?
9. Is it possible to detect if the system has been loaded without RACF? You can use the DSMON reports to answer this particular question.

10. How is the use of RACF commands controlled?

RACF implementation

Installing RACF does not necessarily mean that the RACF security facilities were correctly implemented and are being correctly maintained. (For more information about implementing RACF, see [*z/OS Security Server RACF Security Administrator's Guide*](#).)

Protection plan

Use the following questions to determine what resources your installation is currently protecting.

1. How many RACF users and groups do you have? All or part of this question can be answered by using the DSMON reports.
2. Do you have any non-RACF users? If so, why?
3. Which of the following resources are RACF-protected, what proportion of each is protected, and how is it decided which to protect? All or part of this question can be answered by manipulating the output of the RACF database unload utility.

- DASD data sets
- Tape data sets
- Nodes
- Terminals
- IMS/ESA
- CICS/ESA
- Db2 resources
- Programs
- Surrogate user IDs
- TSO procedures
- TSO account numbers
- Unit record devices
- Graphics devices
- TP devices
- Operator commands
- VTAM® applications
- JES writers
- JES SYSIN and SYSOUT data sets
- Job names
- JES input devices
- MCS consoles
- Temporary data sets
- Hiperbatch
- User IDs that cannot be propagated
- TSO message transmission
- Key resources unique to the installation
- z/OS UNIX System Services resources

4. How does the installation ensure that appropriate protection is maintained?
5. What protection is available for resources *not* protected by RACF?
6. Is the protection policy reasonable?

Usage

Use the following questions to determine how RACF is currently being implemented.

1. Which user IDs (including started tasks) have any of the following privileged attributes or authorities? Why? You can use the IRRICE reports or DSMON reports to answer this particular question.
 - SPECIAL and group-SPECIAL
 - OPERATIONS and group-OPERATIONS
 - AUDITOR and group-AUDITOR
 - ROAUDIT
 - CLAUTH
 - JOIN
 - CONNECT
 - GRPACC
2. How is the granting of these privileges controlled?
3. Are user IDs shared? If so, why, and how is accountability maintained? Is the RESTRICTED attribute used to limit the resource access of the shared user IDs?
4. Is the default for UACC always NONE? If not, why?

All or part of this question can be answered by manipulating the output of the RACF database unload utility or by using the sample reports contained in the IRRICE member of SYS1.SAMPLIB.
5. How are password qualities complied with? Do you use, for example, password length, nature (alphabetic, alphanumeric, no vowels), repetition, or change frequency?
6. What RACF information, such as the following, is logged to SMF?
 - Command violations
 - Changes to profiles
 - Accesses to specific resources
 - Actions of SPECIAL and group-SPECIAL users
 - Actions of OPERATIONS and group-OPERATIONS users
7. Who decides what resource-access information is to be collected? On what criteria?
8. What RACF statistics are collected?
9. What are the access rules when RACF is inactive or unavailable, such as stopping production, performing repair work only, or allowing selected jobs and applications to run?
10. Is WARNING mode active, entirely or partially? Are there non-WARNING mode resources?

All or part of this question can be answered by manipulating the output of the RACF database unload utility.
11. Do access lists contain groups rather than individuals?
12. How is the authority to run production work handled? Does the job submitter have access to production data? If so, how are the profiles deleted?
13. How is RACF protection handled in disaster-recovery plans?
14. Describe any operational or usage problems for which the installation cannot currently determine a solution.
15. Do you need to delete tape profiles before using tape volumes again?
16. Is DASDVOL authorization used instead of the OPERATIONS user attribute?

Technical

The following questions provide technical orientation.

1. What RACF exit routines are used, and what functions do they perform? The following list identifies the exits. You can use the DSMON reports to answer this particular question.
 - **Exit Routine**
Function

ICHDEX01
password authentication

ICHDEX11
password authentication

ICHRIX01
RACROUTE REQUEST=VERIFY preprocessing

ICHRIX02
RACROUTE REQUEST=VERIFY postprocessing

ICHRCX01
RACROUTE REQUEST=AUTH preprocessing

ICHRCX02
RACROUTE REQUEST=AUTH postprocessing

ICHRDX01
RACROUTE REQUEST=DEFINE preprocessing

ICHRDX02
RACROUTE REQUEST=DEFINE postprocessing

ICHCCX00
command preprocessing

ICHCNX00
command preprocessing

ICHRFX01
RACROUTE REQUEST=FASTAUTH preprocessing

ICHRFX02
RACROUTE REQUEST=FASTAUTH postprocessing

ICHRFX03
RACROUTE REQUEST=FASTAUTH preprocessing

ICHRFX04
RACROUTE REQUEST=FASTAUTH postprocessing

ICHPWX01
new password

ICHPWX11
new password phrase

ICHLX01
RACROUTE REQUEST=LIST pre/postprocessing

ICHLX02
RACROUTE REQUEST=LIST selection

ICHRSMFE
report writer

IRRACX01
ACEE compression and expansion

IRRACX02
ACEE compression and expansion

IRREVX01
command pre/postprocessing

IRRVAF01
custom field validation exit

2. How are the exit routine functions and changes authorized and controlled?
3. Who is allowed to update exit routine code (both source and load form)?
4. What SETROPTS options are used? Are any important protection or monitoring functions set off?

5. Have basic RACF facilities been enhanced, excluding exit routine code?
6. How many primary RACF databases are there? You can use the DSMON reports to answer this particular question.
7. Does each primary RACF database have a backup on a different volume? You can use the DSMON reports to answer this particular question.
8. What other backup facilities exist for RACF databases?
9. How is the RACF database synchronized after a restore?
10. Are all RACF databases adequately protected, and who has access to them? You can use the DSMON reports to answer this particular question.
11. How does the installation control the switching and deactivating of the RACF databases (RVARY command, IPL/database name table)?
12. Are any special checks required on the use of PERMIT?
13. How are passwords and password phrases protected against disclosure when batch jobs are submitted through internal readers?
14. How are restores of entire volumes handled? How are synchronization problems between volumes and the RACF databases resolved?
15. What are the RACF class names as defined in the class descriptor table? What are the UACCs associated with these names? Can OPERATIONS users access the resources by default? You can use the DSMON reports to answer this particular question.
16. Is there a global access table, and what resources are specified in the table? You can use the DSMON reports to answer this particular question.
17. What is in the started procedures table (ICHRIN03), and is the authority of the associated user IDs appropriate? You can use the DSMON reports to answer this particular question.

Administration control

The following questions provide information concerning how RACF is administered at your installation.

1. Who is responsible for the administration of RACF? You can use the DSMON reports to answer this particular question.
2. Who is responsible for the technical aspects of RACF?
3. Are data owners identified?
4. Do data owners classify their data?
5. Is the degree of protection provided by the installation based on the owner classification?
6. Are there written and approved procedures for RACF administration?
7. Does the installation maintain written records of requests for changes to RACF protection and the resulting actions taken?
8. How are users and groups administered? How are additions, deletions, changes, connections, and authorities handled?
9. How is the authority to protect resources and grant access checked and handled?
10. How is the granting of temporary authorities handled? Can users issue PERMIT/CONNECT for temporary access, or are there privileged attributes available for emergency use?
11. How is password distribution handled?
12. How are lost passwords handled?
13. Is additional verification required for users with privileged attributes? Are these users restricted to particular terminals?
14. Is there an emergency user ID with the SPECIAL attribute available for use when no other SPECIAL user ID can be used? If so, how does the installation protect the user ID and its password? You can use the DSMON reports to answer this particular question.

15. Is the auditor a different person from the RACF security administrator? What are the responsibilities of the auditor? You can use the DSMON reports to answer this particular question.
16. Is there any user education available?
17. Are there any entries in the authorized caller table? If so, why are they there and are they adequately protected?

Management control

The following questions address management control.

1. What reports are available to users, owners, and installation management to ensure that the system is not being misused? Examples are reports that identify violation attempts, unauthorized access attempts, and unauthorized use of commands and privileges.
2. How frequently are reports produced, and who sees them?
3. If a security violation occurs, what follow-up action does the installation take?
4. Is the installation using DSMON reports to monitor the basic system security environment? If not, why isn't it?

Chapter 2. Setting and listing audit controls

Audit controls are special RACF functions that RACF allows only the auditor to perform. To preserve the checks and balances necessary to an effective security mechanism, not even the security administrator with the SPECIAL attribute can execute auditor functions. Therefore, you should ensure that SPECIAL users do not also have the AUDITOR attribute.

Note: Users with the ROAUDIT attribute can only perform the actions to list the specific audit controls that are mentioned in this topic, because the ROAUDIT attribute only enables the user to perform the monitoring tasks of the auditor. The actions to set auditing controls that are mentioned in this topic are not included with the ROAUDIT attribute.

Table 1. Setting and listing audit controls	
Audit control	Action
General	You can use: <ul style="list-style-type: none">Auditing options specified on the SETROPTS (set RACF options) command
Specific	You can specify: <ul style="list-style-type: none">All RACF related activities of specific usersAttempts to access data sets protected by specific profilesAttempts to access general resources (such as terminals) that are protected by specific profiles

Some audit controls are product-specific. Refer to the appropriate product documentation for setting these audit controls.

General audit controls

You specify general (system-wide) audit controls on either the SETROPTS command or the SET AUDIT OPTIONS ISPF panel. General audit controls direct RACF to log (or not to log) certain security-relevant events, such as the activities of OPERATIONS or group-OPERATIONS users, RACF command violations, and attempts to access RACF-protected resources.

To specify the general audit controls, you must have the AUDITOR attribute. After you have initially established your controls or modified existing controls, it is a good practice to list the current options to verify that the controls are correct.

If you have the AUDITOR attribute, you can specify these SETROPTS operands or request the function on the corresponding panel:

APPLAUDIT and NOAPPLAUDIT
AUDIT and NOAUDIT
CMDVIOL and NOCMDVIOL
LIST
LOGOPTIONS
OPERAUDIT and NOOPERAUDIT
REFRESH GENERIC
REFRESH RACLIST
SAUDIT and NOSAUDIT
SECLABELAUDIT and NOSECLABELAUDIT
SECLEVELAUDIT and NOSECLEVELAUDIT

If you have the group-AUDITOR attribute, you can use only the LIST and REFRESH GENERIC operands.

Logging RACF commands and DEFINE requests

If you have the AUDITOR attribute, you can specify the classes for which RACF logs all detected accesses to the RACF database through RACF commands and DEFINE requests. You can specify this option with the AUDIT operand on the SETROPTS command; it becomes effective immediately. The following example specifies that you want RACF to log RACF commands and DEFINE requests for users, groups, data sets, and the TERMINAL general-resource classes.

```
SETROPTS AUDIT(USER GROUP DATASET TERMINAL)
```

If you specify AUDIT(*), RACF logs RACF command and DEFINE request activity for all classes.

If you want to log any change in RACF protection for IMS, enter:

```
SETROPTS AUDIT(IMS)
```

The following table shows the events that SETROPTS AUDIT(*class*) affects:

Table 2. Events that SETROPTS AUDIT (class) affects			
User	Group	Data set	Classes in the CDT
ADDUSER	ADDGROUP	ADDSD	PERMIT
ALTUSER	ALTGROUP	ALTDSD	DEFINE Request
CONNECT	CONNECT	DELDSD	RALTER
DELUSER	DELGROUP	PERMIT	RDEFINE
getUMAP	getGMAP	DEFINE Request	RDELETE
initACEE registration / deregistration	REMOVE		
PASSWORD			
RACDCERT			
RACLINK			
RACMAP			
REMOVE			
R_pkiserv			
VERIFY			

If you have the AUDITOR attribute, you can also specify the NOAUDIT operand on the SETROPTS command and identify the class or classes for which you do not want RACF to log RACF command and DEFINE requests. If you specify NOAUDIT(*), RACF does not log RACF commands and DEFINE requests for any class.

NOAUDIT(*) is in effect at RACF initialization.

Note: If you have the AUDITOR attribute, you can specify with the UAUDIT operand on the ALTUSER command that you want RACF to log the following:

- All RACF commands (except LISTDSD, LISTGRP, LISTUSER, RLIST, and SEARCH) issued by this user
- All additions, changes, or deletions that the user makes to RACF profiles using RACROUTE REQUEST=DEFINE requests

- All attempts that the user makes to access RACF-protected resources, except those authorized by global access checking and those not logged because the resource manager (issuer of the RACROUTE REQUEST=AUTH or RACROUTE REQUEST=FASTAUTH request) specified no logging
- All security decisions that are made during RACF callable services involving this user and any resource in certain z/OS UNIX classes. For a list of these classes, see [“Auditing for z/OS UNIX System Services” on page 31.](#)

Bypassing logging of activity of users with the SPECIAL attribute

If you have the AUDITOR attribute, you can request that RACF bypass logging of all RACF commands and the AUTH and DEFINE requests issued by users with the SPECIAL or group-SPECIAL attribute. You can specify this option with the NOSAUDIT operand on the SETROPTS command as shown in the following example:

```
SETROPTS NOSAUDIT
```

If you have the AUDITOR attribute, you can also specify the SAUDIT operand on the SETROPTS command, to indicate that you want RACF to log the command and request activity (except LISTDSD, LISTGRP, LISTUSER, RLIST, and SEARCH, which are never logged) of users with the SPECIAL or group-SPECIAL attribute.

Note: If you are concerned only with how SPECIAL users change profiles, you do not need to specify SAUDIT if AUDIT(*) is in effect.

SAUDIT is in effect at RACF initialization.

Logging the activities of users with the OPERATIONS attribute

If you have the AUDITOR attribute, you can audit all accesses to resources granted because the user has the OPERATIONS or group-OPERATIONS attribute, by using the OPERAUDIT operand on the SETROPTS command. The following example shows how to specify this option.

```
SETROPTS OPERAUDIT
```

If you specify OPERAUDIT, RACF logs all accesses to RACF-protected resources granted because the user has the OPERATIONS or group-OPERATIONS attribute, and all uses of the ADDSD, and RDEFINE commands allowed because a user has the OPERATIONS or group-OPERATIONS attribute.

Note: Some programs that call RACF functions such as RACROUTE REQUEST=AUTH and RACROUTE REQUEST=DEFINE can request that RACF perform no logging. Thus, if an OPERATIONS or group-operations user accesses a protected resource through such a program, RACF does not log the access even if you request OPERAUDIT.

OPERAUDIT overrides the audit field of data set, file, directory and general resource profiles.

If you have the AUDITOR attribute, you can also specify NOOPERAUDIT. NOOPERAUDIT does no special auditing of users with the OPERATIONS or group-OPERATIONS attribute.

NOOPERAUDIT is in effect at RACF initialization.

Logging and bypassing RACF command violations

A violation can occur because RACF does not authorize a user to modify a particular profile or to enter a particular operand on a command.

If you have the AUDITOR attribute, you can specify the CMDVIOL operand on the SETROPTS command. This operand tells RACF to log all command violations (except for LISTDSD, LISTGRP, LISTUSER, RLIST, and SEARCH, which are never logged).

Note: Specifying CMDVIOL causes RACF to log all the command violations that it detects. You can then use the RACF report writer to produce a printed audit trail of command violations. You can determine how many command violations are occurring and which users are causing the violations. A significant

number of command violations, especially when RACF is first installed, may indicate the need for more user education. The report can also help you to identify any specific users who are persistently trying to alter profiles without the proper authority.

CMDVIOL is in effect at RACF initialization.

If you have the AUDITOR attribute, you can request that RACF bypass logging of all violations detected by RACF commands (except RVARY and SETROPTS, which are always logged) during RACF command processing. You can specify this option with the NOCMDVIOL operand on the SETROPTS command as shown in the following example:

```
SETROPTS NOCMDVIOL
```

Activating auditing for security levels

If you have the AUDITOR attribute, you can activate auditing of access attempts to all RACF-protected resources. To activate this option, specify the SECLEVELAUDIT operand with an installation-defined security level name on the SETROPTS command. Auditing is done if the profile protecting a resource is equal to or greater than the security level you specify on the SECLEVELAUDIT operand.

Note:

1. You can only specify a security level name defined by your installation in the SECLEVEL profile in the SECCLASS class. If you specify a security level that is not in the SECLEVEL profile for the SECCLASS class, RACF ignores the operand and does no logging.
2. The SECCLASS class must be active if you want RACF to perform security level control.

The following example shows how to activate auditing based on the security level CONFIDENTIAL. (This example assumes that the installation has defined the level CONFIDENTIAL in the SECLEVEL profile.)

```
SETROPTS SECLEVELAUDIT(CONFIDENTIAL)
```

When you specify a security level, RACF audits all attempts to access resources with the specified security level and higher. This option allows your installation to audit access attempts to a RACF-protected resource, based on the sensitivity of the resource, as determined by the installation. If you do not specify a security level, RACF audits all access attempts to all resources for which your installation has defined a security level (SECLEVEL).

Note:

1. If a program issues an AUTH or DEFINE request and specifies that RACF should not perform any logging, RACF does not log the event even if you request logging.
2. When RACF grants access to a resource because of an entry in the global access checking table, RACF does not log the event even if you request logging.

If you have the AUDITOR attribute, you can also deactivate auditing of access attempts to RACF-protected resources based on installation-defined security levels. To deactivate this option, specify the NOSECLEVELAUDIT operand on the SETROPTS command.

NOSECLEVELAUDIT is in effect at RACF initialization.

Activating auditing for access attempts by class

If you have the AUDITOR attribute, you can audit attempts to access resources in specified classes according to the option selected. You can specify the DATASET class and any active classes in the class descriptor table. The resources need not have profiles created in order for the auditing to occur.

The following command specifies that auditing be done for all attempts to access the TERMINAL class.

```
SETROPTS LOGOPTIONS(ALWAYS(TERMINAL))
```

In this case, auditing is done every time a user logs on at any terminal on the system, whether that terminal is protected by a profile or not, and whether that profile specifies auditing or not.

You can specify that auditing be done for the following conditions:

ALWAYS

All attempts to access resources protected by the class are audited.

NEVER

No attempts to access resources protected by the class are audited. (All auditing is suppressed.)

SUCCESSSES

All successful attempts to access resources protected by the class are audited.

FAILURES

All failed attempts to access resources protected by the class are audited.

DEFAULT

Auditing is controlled by the profile protecting the resource, if a profile exists. You can specify DEFAULT for all classes by specifying an asterisk (*) with DEFAULT.

Note:

1. The SUCCESSSES and FAILURES operands result in auditing in addition to any auditing specified in profiles in the class. In contrast, the ALWAYS and NEVER operands override any auditing specified in profiles in the class.
2. If LOG=NONE is specified on a RACROUTE REQUEST=AUTH, it takes precedence and auditing is not performed.
3. When RACF grants access to a resource because of an entry in the global access checking table, RACF does not log the event even if you request logging.
4. If authority checking is performed with a RACROUTE REQUEST=FASTAUTH request, auditing is not affected by a SETROPTS LOGOPTIONS command.

LOGOPTIONS(DEFAULT(*)) is in effect at RACF initialization.

If your installation has specified SETROPTS LOGOPTIONS for any number of classes and you want this reset, specify LOGOPTIONS(DEFAULT(*)) on the SETROPTS command.

Activating auditing for security labels

If you have the AUDITOR attribute, you can audit all attempts to access resources whose profiles have a security label specified. The auditing that is done is specified in the SECLABEL profile that defines the security label. To do this, specify the SETROPTS command as follows:

```
SETROPTS SECLABELAUDIT
```

When SECLABELAUDIT is in effect, the SECLABEL profiles for which RACLIST processing has been done enhance the auditing specified in resource profiles. For example, if the security label EAGLE has been defined by the installation and a resource with security label EAGLE is accessed, when a user with security label EAGLE logs on, RACF records the event if either:

- The in-storage copy of the SECLABEL profile named EAGLE requires it, or
- The profile protecting the resource requires it.

For example, to audit all failed accesses to resources with a security label of EAGLE, the installation should issue the following command:

```
RALTER SECLABEL EAGLE AUDIT(FAILURES(READ))
```

After this command has been issued, a DATASET profile that has a security label of EAGLE, but no auditing specified, will have failed access attempts audited due to the security label auditing specified.

Note: A value of NONE in the SECLABEL profile does not suppress auditing; auditing is determined by other auditing specifications (such as the resource profile).

NOSECLABELAUDIT is in effect at RACF initialization.

If your installation has specified SETROPTS SECLABELAUDIT, additional auditing is done based on SECLABEL profiles. This option can be reset to the default by specifying NOSECLABELAUDIT on the SETROPTS command. The auditing options in the SECLABEL profiles do not have to be changed, however, because NOSECLABELAUDIT causes the audit options to be ignored.

The SECLABELAUDIT function applies whenever resources are accessed or defined, and includes accessing and defining z/OS UNIX files and directories. SECLABELAUDIT is checked during the following operations:

- RACROUTE REQUEST=AUTH
- RACROUTE REQUEST=FASTAUTH
- RACROUTE REQUEST=DEFINE .

Additionally, SECLABELAUDIT is checked during the following file and directory operations:

- ck_access
- ck_IPC_access
- ck_owner_two_files
- make_FSP
- make_ISP
- ck_process_owner
- R_ptrace.

Note that auditing is determined not only by the security label of a resource, but also of the user. Therefore, if a resource's security label does not request auditing, but a user has a security label which does request auditing, auditing will be performed.

When auditing security labels with the SECLABELAUDIT function, SMF audit records are written, thus requiring a high amount of system overhead. It is advised that auditing **not** be turned on for every security label in the system. Only those security labels with specific auditing requirements, as defined by the installation, should be audited.

Auditing for APPC/MVS

There are several considerations associated with APPC/MVS auditing:

- Auditing user verification requests as transactions enter the system and complete
- Auditing the use of a particular APPC/MVS transaction program
- Determining the relationship between the audit records created during the execution of APPC/MVS transactions

User verification requests

There are two alternatives used in APPC/MVS that affect how auditing is performed. The alternative in effect is determined by the level of conversation security established between a pair of LUs. With either alternative, you can request a pair of audit records that mark the creation and deletion of a user's security environment.

1. One alternative uses a concept known as *persistent verification (PV)*. When PV is used, the security environment for a user is created when the user's *first* transaction request enters the system. The security environment *persists* over multiple transactions before being deleted.

In terms of audit records for user verification, a user is audited twice at the most:

- First, when the user begins work on the system
 - Next, when the user signs off, regardless of how many transactions are submitted.
2. In the other alternative (non-PV), the user's security environment is created and deleted for *each* transaction the user requests.

In terms of audit records for user verification, every transaction a user submits may be audited. This can potentially produce a large volume of SMF records.

With either alternative, the audit records marking the creation and deletion of the security environment contain a common audit key that links the audit records together.

With either alternative, the auditing is controlled with the APPL profile and the APPLAUDIT operand of the SETROPTS command. See [“Activating APPC/MVS auditing” on page 23](#).

Transaction program auditing

Auditing of resource access attempts is done as part of day-to-day operations set up by the auditor or profile-owner for your installation. This existing auditing also occurs for transaction programs, but with a slight difference in audit records.

The audit records created by a transaction program contain an audit key that can be used to link audit records together.

In the case of persistent verification (where user verification is audited only twice—at signon and signoff), the audit key links records to a particular user. In the case of non-PV, the audit key links records created for a single transaction request.

Relationship of APPC/MVS audit records

Audit records created for users and transaction programs may be linked by a common key. All APPC/MVS audit records contain an 8-byte key that may be used to link the beginning and ending records together.

Activating APPC/MVS auditing

APPLAUDIT is a RACF option that allows user verification auditing to occur at the beginning and ending of a user's transaction processing work. Activating this auditing requires two steps:

1. You must specify the APPLAUDIT operand on the SETROPTS command.
2. You must request auditing for the APPL profile associated with an APPC/MVS LU.

Issue the following command:

```
SETROPTS  APPLAUDIT
```

In addition to setting APPLAUDIT on, you must also request auditing for the APPL profile.

For example, you could issue the following command:

```
RALTER  APPL profile-name GLOBALAUDIT(ALL)
```

where *profile-name* is the name of the APPC/MVS LU.

Note: The security administrator must have previously activated the APPL class, defined the APPL profile, and issued a SETROPTS RACLIST for the class.

To turn on auditing for the profile in the APPL class, use any of the following operands on the RALTER command:

- AUDIT(ALL)
- AUDIT(SUCCESS)
- AUDIT(FAILURE)
- GLOBALAUDIT(ALL)
- GLOBALAUDIT(SUCCESS)
- GLOBALAUDIT(FAILURE)

Note: Remember to issue a SETROPTS RACLIST REFRESH for the APPL class.

Deactivating APPC/MVS auditing

To disable auditing of APPC transactions, users with the AUDITOR attribute should specify the SETROPTS command as follows:

```
SETROPTS NOAPPLAUDIT
```

NOAPPLAUDIT is in effect at RACF initialization.

Refreshing profiles

You can use the SETROPTS command to refresh profiles. This includes refreshing:

- In-storage generic profiles
- Profiles processed by SETROPTS RACLIST
- The global access table
- The program access table
- Shared systems

Refreshing in-storage generic profiles

You may want to use GENERIC REFRESH after changing the logging options in a generic profile that protects a specific data set, as described in [“Specific audit controls” on page 27](#). However, extensive use of GENERIC REFRESH can adversely affect system performance.

You can refresh in-storage generic profiles by specifying both the GENERIC and REFRESH operands on the SETROPTS command. When you specify both GENERIC and REFRESH, you also specify one or more

classes for which you want RACF to refresh in-storage generic profiles. This causes all the in-storage generic profiles within the specified general resource class (except those in the global access checking table) to be replaced with new copies from the RACF database. The following example shows how to refresh in-storage generic profiles for the DATASET and TERMINAL classes:

```
SETROPTS GENERIC(DATASET TERMINAL) REFRESH
```

Note that you must issue this command each time you want RACF to perform the refresh process.

If you specify GENERIC(*), RACF refreshes profile lists for the DATASET class and all active classes in the except group resource classes (such as GTERMINL and GDASDVOL). When you initiate the refresh procedure, RACF sets an indicator in the RACF communication vector table for the class(es) that you specified. After the indicator is set, RACF refreshes the profile lists the next time it invokes the generic-profile search routine.

If you specify NOGENERIC on the SETROPTS command, RACF stops using in-storage generic profile lists but does not immediately delete them. RACF deletes the profile lists at the end of the job or TSO session, or when you again specify GENERIC. When you specify GENERIC, RACF rebuilds the profile lists. (If SETROPTS GENLIST has been used on your system, a copy of the generic profiles for the resource resides in common storage. You can also use REFRESH GENERIC to refresh these in-storage generic profiles.)

For classes RACLISTed by either the SETROPTS RACLIST command or RACROUTE REQUEST=LIST, generic including discrete profiles for the class must be refreshed. This process is described in the next section.

Refreshing RACLISTed profiles

If SETROPTS RACLIST has been used on your system, copies of the discrete and generic profiles for any resource within a general resource class reside in a data space and can be shared among users. SETR RACLIST(classname) REFRESH causes the data space to be replaced with another data space containing new copies of the discrete and generic profiles from the RACF database.

If SETROPTS RACLIST has been issued for a general resource class and you change the logging options for a general resource profile in the class, you may want to use the REFRESH option to refresh the profile.

The following example shows how to refresh SETROPTS RACLIST processing for the DASDVOL and TERMINAL classes.

```
SETROPTS RACLIST(DASDVOL TERMINAL) REFRESH
```

The RACROUTE REQUEST=FASTAUTH service routine works with in-storage profiles RACLISTed by the RACROUTE REQUEST=LIST macro with ENVIR=CREATE specified. To refresh those profiles, the application must delete them by using RACROUTE REQUEST=LIST,ENVIR=DELETE and then re-create them using RACROUTE REQUEST=LIST,ENVIR=CREATE again. However, if the GLOBAL=YES parameter is specified, a refresh is accomplished with SETR RACLIST(classname) REFRESH.

SETROPTS REFRESH processing on shared systems

If RACF is enabled for sysplex communication, the refresh operation for SETROPTS processing is propagated to all members of the RACF sysplex data sharing group.

Otherwise, the command applies only to the system on which you issue the SETROPTS command. If your installation has two or more systems sharing a RACF database, you must issue the SETROPTS command on all systems to have the refresh done on all systems.

However, if you do not perform a refresh (issue the SETROPTS command with the REFRESH option) on a system sharing a RACF database and that system needs to re-IPL, the refresh takes effect on that system when re-IPL is performed.

When you issue a SETROPTS REFRESH command, or one of the propagated RVARY commands (ACTIVE, INACTIVE, DATASHARE, NODATASHARE, SWITCH) from one member of a RACF sysplex data sharing group, the request is audited only on the system from which you issue the command, and only if auditing has been selected for that system. The request is not audited on the peer member systems (regardless of whether auditing has been selected).

For more details about SETROPTS commands that are propagated to all members of the RACF sysplex data sharing group, refer to [*z/OS Security Server RACF Command Language Reference*](#).

Examples for setting audit controls using SETROPTS

The following examples show how to set system-wide audit controls by using the SETROPTS command.

Note: If you want to list the current system-wide audit controls set with the SETROPTS command, enter:

```
SETROPTS LIST
```

You can also use the LIST operand on the SETROPTS command; for example:

```
SETROPTS SAUDIT LIST
```

SETROPTS command Example 1

To log any changes to the profiles in the USER, GROUP, DATASET, and DASDVOL classes, enter:

```
SETROPTS AUDIT(USER, GROUP, DATASET, DASDVOL)
```

SETROPTS command Example 2

To log RACF commands issued by SPECIAL and group-SPECIAL users, enter:

```
SETROPTS SAUDIT
```

SETROPTS command Example 3

To log all accesses to resources that users make as a result of the OPERATIONS attribute, enter:

```
SETROPTS OPERAUDIT
```

SETROPTS command Example 4

To log all successful password changes (including password phrase changes), enter:

```
SETROPTS AUDIT(USER)
```

SETROPTS command Example 5

To log all RACF command violations, enter:

```
SETROPTS CMDVIOL
```

SETROPTS command Example 6

To log all attempts to access any resource with a security level of confidential or higher enter:

```
SETROPTS SECLEVELAUDIT(CONFIDENTIAL)
```

SETROPTS command Example 7

To refresh the in-storage, generic data set profiles, enter:

```
SETROPTS REFRESH GENERIC(DATASET)
```

Note: You can combine these six examples into a single SETROPTS command by entering:

```
SETROPTS AUDIT(USER, GROUP, DATASET, DASDVOL)  
          SAUDIT OPERAUDIT CMDVIOL SECLEVELAUDIT(CONFIDENTIAL)  
          REFRESH GENERIC(DATASET)
```

SETROPTS command Example 8

To refresh the in-storage profiles for terminals when SETROPTS RACLIST has been used for the terminal class, enter:

```
SETROPTS REFRESH RACLIST(TERMINAL)
```

SETROPTS command Example 9

To log all device access checking for communication, unit record, and graphics devices, enter:

```
SETROPTS LOGOPTIONS(ALWAYS(DEVICES))
```

SETROPTS command Example 10

To log all operator commands that are protected by profiles in the OPERCMDS class, enter:

```
SETROPTS LOGOPTIONS(ALWAYS(OPERCMDS))
```

SETROPTS command Example 11

To enable the use of SECLABEL profiles to determine the level of auditing you want, enter:

```
SETROPTS SECLABELAUDIT
```

SETROPTS command Example 12

To audit APPC transactions, enter:

```
SETROPTS APPLAUDIT  
RALTER APPL profile-name AUDIT
```

where

profile-name is the name of the APPC/MVS LU name.

SETROPTS command Example 13 (z/OS UNIX System Services)

To log all failing directory searches and access checks for read/write access to directories, enter:

```
SETROPTS LOGOPTIONS(FAILURES(DIRSRCH,DIRACC))
```

SETROPTS command Example 14 (z/OS UNIX System Services)

To control auditing of the successful creation and deletion of file system objects and dubbing and undubbing of processes, enter:

```
SETROPTS AUDIT(FSOBJ,PROCESS)
```

Specific audit controls

Specific audit controls enable you to log the following:

- All RACF-related activities for specific users
- Attempts to access specific data sets
- Attempts to access specific general resources
- Attempts to access resources protected by a security label

You can also list the complete contents of all profiles, including the owner-specified and auditor-specified logging options for resources.

If you have the AUDITOR attribute, you can set specific controls for any user, data set, or general resource, and list the contents of any profile. If you have the group-AUDITOR attribute, you can set controls and list profile contents only for those users, data sets, and general resources owned by the group in which you have the attribute, and any subgroup of that group.

User controls

You can use the UAUDIT or NOUAUDIT operand on the ALTUSER command, or request the corresponding functions on the AUDIT USER panel, to log all RACF-related activities for a specific user. When you set this control, RACF logs the following events:

- All RACF commands (except LISTDSD, LISTGRP, LISTUSER, RLIST and SEARCH) issued by this user
- All additions, changes, or deletions that the user makes to RACF profiles using RACROUTE REQUEST=DEFINE requests
- All attempts that the user makes to access RACF-protected resources, except those authorized by global access checking and those not logged because the resource manager (issuer of the RACROUTE REQUEST=AUTH or RACROUTE REQUEST=FASTAUTH request) specified no logging
- All security decisions made during RACF callable services involving this user and any resource in certain z/OS UNIX classes. For a list of these classes, see [“Auditing for z/OS UNIX System Services” on page 31](#).

In general, you would probably not request user audit-logging as a matter of course, but it is useful in special situations. For example, you can specify user-audit logging if you suspect, based on other indicators such as command violations, that a particular user may be misusing the system or persistently trying to access or delete resources outside the user's control. Examples of the type of event that might indicate misuse of the system are either unauthorized attempts to modify a critical system resource (such as a PARMLIB data set) or a highly classified user resource (like payroll or business-planning data).

ALTUSER command example

To use the UAUDIT operand on the ALTUSER command to audit the person whose user ID is SMITH, enter:

```
ALTUSER SMITH UAUDIT
```

Data set controls

If owner controlled logging does not provide enough information for your audit, you can use the GLOBALAUDIT operand on the ALTDSD command or request the corresponding function on the AUDIT DATA SET ACCESS panel, in addition to the owner-specified logging values, to log user accesses to data sets.

GLOBALAUDIT allows you to specify logging for different kinds of attempts that users make to access resources at a given access level. With GLOBALAUDIT, you can log successful accesses, failed accesses, or both to a given resource and specify READ, UPDATE, CONTROL, or ALTER for the access level to the resource.

[Figure 3 on page 28](#) summarizes the GLOBALAUDIT operand for ALTDSD and what you are able to specify for logging. (For a complete description of the ALTDSD command and its operands, see [z/OS Security Server RACF Command Language Reference](#).)

```
ALTDSD [ [ GLOBALAUDIT ( { ALL
                        { FAILURES }
                        { NONE }
                        { SUCCESS }
                        { (audit-access-level) } ... ) ] ] ]
```

Figure 3. GLOBALAUDIT Operand on the ALTDSD Command

Note: Some authorized programs that call RACF to perform authority checking can request that RACF perform no logging. Therefore, if you request GLOBALAUDIT auditing for an access attempt made through such a program, RACF does not log the event.

As with the other specific controls, you do not audit accesses to most data sets, as a general rule. Therefore, GLOBALAUDIT(NONE) is the default for the operand. After you complete your audit of the data set, it is good practice to restore the default. When GLOBALAUDIT(NONE) is in effect, RACF logs accesses to the data set only as specified by the resource owner.

ALTDSD command Example 1

To use the GLOBALAUDIT operand of the ALTDSD command to direct RACF to log all accesses to data set JIM.MEMO.TEXT, enter:

```
ALTDSD 'JIM.MEMO.TEXT' GLOBALAUDIT(ALL(READ))
```

ALTDSD command Example 2

To use the GLOBALAUDIT operand of the ALTDSD command to direct RACF to log all failed accesses, all successful updates, and any scratch of data set A.B.C, enter:

```
ALTDSD 'A.B.C' GLOBALAUDIT(FAILURES(READ) SUCCESS(UPDATE))
```

General resource controls

You can use the GLOBALAUDIT operand on the RALTER command or request the corresponding function on the AUDIT GENERAL RESOURCES ACCESS panel to log user accesses to a specific general resource. Because the audit level that you specify on GLOBALAUDIT overrides the level the resource owner specified in the profile, you use it when the logging specified in the profile does not produce enough information for your needs.

When you set audit controls for a general resource, you specify what information RACF is to log-the result of the access attempt-and when RACF is to log the information-the level of access. [“Data set controls” on page 28](#) shows the various valid combinations of what to log and when to log it.

As with the other specific controls, you would not audit accesses to most general resources usually. Therefore, GLOBALAUDIT(NONE) is the default for the operand. After you complete your audit of the general resource, it is good practice to restore the default. When GLOBALAUDIT(NONE) is in effect, RACF logs accesses to the resource as specified in the profile.

RALTER command example

To use the RALTER command to specify auditing of all events for a tape volume NR1234, enter:

```
RALTER TAPEVOL NR1234 GLOBALAUDIT(ALL(READ))
```

Listing specific audit controls

RACF provides commands and corresponding ISPF panels that allow RACF users, depending on their authority or attributes, to examine the contents of RACF profiles. You, as an auditor with the AUDITOR or ROAUDIT attribute, can list the contents of all the RACF profiles (or all the profiles within the scope of your group if you are a group-AUDITOR). You can find a complete description of each of the commands, including sample output, in the [z/OS Security Server RACF Command Language Reference](#).

The commands and the functions related to auditing are:

- **LISTDSD**

This lists the contents of data set profiles. If you have the AUDITOR attribute or ROAUDIT attribute, you can list all profiles; if you have the group-AUDITOR attribute, you can list only those profiles within the scope of your group and its subgroups.

- **LISTGRP**

This lists the contents of group profiles. While the output does not contain any information directly related to specific audit controls, it does include information about the group structure and each user's authority within the group. This information may be useful to you. If you have the AUDITOR attribute or ROAUDIT attribute, you can list all group profiles; if you have the group-AUDITOR attribute, you can list only the profiles within the scope of your group and its subgroups. This will not list all users in a universal group.

- **LISTUSER**

This lists the contents of user profiles. If you have the AUDITOR attribute or ROAUDIT attribute, you can list all user profiles; if you have the group-AUDITOR attribute, you can list only those profiles within the scope of your group and its subgroups.

- **RLIST**

This lists the contents of general resource profiles. If you have the AUDITOR attribute or ROAUDIT attribute, you can list all resource profiles; if you have the group-AUDITOR attribute, you can list only those profiles within the scope of your group and its subgroups.

LISTDSD command example

To list the complete profile for data set 'JIM.MEMO.TEXT', enter:

```
LISTDSD DA('JIM.MEMO.TEXT') ALL
```

Note: If no discrete profile exists for data set 'JIM.MEMO.TEXT', a generic profile may protect the data set. To list any such generic profile, enter:

```
LISTDSD DA('JIM.MEMO.TEXT') ALL GENERIC
```

Auditing for the RACF/Db2 external security module

The RACF/Db2 external security module allows you to use RACF resource profiles to check authorization for Db2 privileges and authorities. With these profiles, which represent the various Db2 privileges, you can use the RACF auditing tools to extract the information you need.

You can use the SMF data unload utility or the RACF report writer to extract and format the SMF records. When the RACF/Db2 external security module uses a RACROUTE REQUEST=FASTAUTH request to create an audit record, the record contains log string data that includes additional diagnosis information described in “Using the log string (LOGSTR) data” on page 43. You can use the log string information to link Db2 trace record IFCID 314 and a corresponding RACF SMF record.

Restriction

This topic contains information about using RACF with Db2 Version 7, and earlier Db2 versions. For information about using RACF with Db2 Version 8, and later Db2 versions, see [IMS in IBM Documentation \(www.ibm.com/docs/en/ims\)](http://www.ibm.com/docs/en/ims).

In addition, you can use the information found in messages IRR908I through IRR913I to help you understand how the RACF/Db2 external security module is set up for a particular subsystem. These messages identify the:

- Version and length of the RACF/Db2 external security module
- Name of the subsystem or group attach name
- FMID or APAR number associated with the module
- Customization options used for the module

- Classes that the module is trying to use
- Classes for which a RACROUTE request was successful
- &ERROROPT specifies the correct action to be taken for Db2 initialization and authorization errors.

Note: The system programmer sets these options.

For detailed information, see [z/OS Security Server RACF System Programmer's Guide](#).

Auditing for z/OS UNIX System Services

RACF writes audit records for the z/OS UNIX System Services auditable events in SMF type 80 records. The following classes are defined to control auditing:

- DIRSRCH
- DIRACC
- FSOBJ
- FSSEC
- IPCOBJ
- PROCESS
- PROCACT

The classes are in the class descriptor table (ICHRRCDX). No profiles can be defined in these classes. They are for audit purposes only. These classes do not need to be active to be used to control z/OS UNIX System Services auditing. Activating the classes has no effect on auditing or authorization checking, except for the FSSEC class, which enables the use of ACLs in authorization checking.

Audit records are always written for security decisions made during RACF callable services involving resources in these z/OS UNIX classes when the user has the UAUDIT attribute, regardless of the LOGOPTIONS and AUDIT settings.

In addition, audit records are always written, and there is no option to turn them off, when one of the following conditions occurs:

- A user who is not defined as a z/OS UNIX System Services user tries to dub a process
- An unauthorized user tries to mount or unmount a file system

For more details about z/OS UNIX System Services events for which audit records are always written, see [z/OS UNIX System Services Planning](#).

You can use profiles in the UNIXPRIV class to audit certain superuser functions. For more information about this z/OS UNIX System Services class, see [“Auditing for superuser authority in the UNIXPRIV class” on page 35](#).

Classes that control auditing for z/OS UNIX System Services

Each of the classes controls auditing for z/OS UNIX System Services in a particular way. The descriptions that follow define the type of auditing each class controls and include:

- The audit event types that it controls
- The RACF callable services that write the audit record
- The z/OS UNIX services that can cause the event

The classes are:

DIRSRCH

Controls auditing of directory searches using SETROPTS LOGOPTIONS:

Audit event type:

28

RACF callable service:

ck_access

z/OS UNIX services:

chaudit, chdir, chmod, chmount, chmountsetuid, chown, getcwd, ioctl, lstat, link, mkdir, mknod, mount, mountsetuid, open, opendir, pathconf, readlink, rename, rmdir, stat, symlink, ttyname, unlink, unmount, unmountsetu, utime, chattr, vsetattr, vcreate, vmkdir, vlink, vremovedir, vremove, vrename, vsymlink, vresolvepn, vlookup, exec (indirectly using an open)

DIRACC

Controls auditing for access checks for read/write access to directories using SETROPTS LOGOPTIONS:

Audit event types:

29, 64

RACF callable service:

ck_access, ck_owner_two_files

z/OS UNIX services:

chmount, chmountsetuid, getcwd, ioctl, link, mkdir, mknod, mount, mountsetuid, open(new file), open(a directory), opendir, remove, rename, rmdir, symlink, ttyname, unlink, unmount, unmountsetu, vlink, vmkdir, vcreate, vrename, vremovedir, vsymlink, vremove, vreaddir, utime (a directory)

FSOBJ

Controls auditing for all access checks for file system objects except directory searches using SETROPTS LOGOPTIONS and controls auditing of creation and deletion of file system objects using SETROPTS AUDIT (see the following note).

For object access:

Audit event types:

30, 56

RACF callable service:

ck_access

z/OS UNIX services:

link, vlink, open, quiescesetu, unquiescesu, vreadwrite, utime, quiesce, unquiesce, exec (indirectly using an open)

For object create and delete or name change:

Audit event types:

32, 41, 42, 43, 44, 45, 47, 48, 53, 54, 55, 64

RACF callable service:

ck_owner_two_files, ckpriv, makeFSP, R_audit

z/OS UNIX services:

chdir, chmount, chmountsetuid, ioctl, link, mkdir, mknod, mount, mountsetuid, open(new file), pfsctl, pivot_root, quiesce, remove, rename, rmdir, symlink, unlink, unmount, unmountsetu, unquiesce, vlink, vmkdir, vcreate, vremove, vremovedir, vrename, vsymlink

Note: Chdir, symlink, and vsymlink are included to make it possible to re-create from the audit records the full path name you are using when accessing files. Services other than those listed are audited with audit event type 42 or 43.

FSSEC

Controls auditing for changes to the security data (FSP and ACL) for file system objects using SETROPTS LOGOPTIONS:

Audit event types:

31, 33, 34, 35, 75, 76, 77

RACF callable services:

R_chaudit, R_chmod, R_chown, clear_setid, R_setfacl, R_setfsecl

z/OS UNIX services:

chaudit, chmod, chown, fchmod, fchown, write, chattr, fchattr, setfacl, vsetattr, vreadwrite

Note: Event type 75, SETFACL, has a separate audit record created for each ACL entry which is added, modified, or deleted.

IPCOBJ

Specifies auditing options for IPC accesses. For access control and for z/OS UNIX user identifier (UID), z/OS UNIX group identifier (GID), and mode changes, use SETROPTS LOGOPTIONS. For object create and delete, use SETROPTS AUDIT (see the following note).

For access control or UID, GID, or mode changes:

Audit event types:

60, 62

RACF callable services:

ck_IPC_access, R_IPC_ctl

z/OS UNIX services:

msgctl, msgget, msgsnd, msgrcv, semctl, semget, semop, shmat, shmctl, shmget, w_getipc

For object create and delete or for remove ID:

Audit event types:

61, 62

RACF callable services:

makeISP, R_IPC_ctl

z/OS UNIX services:

msgctl, msgget, semctl, semget, shmctl, shmget

PROCESS

Controls auditing of changes to the UIDs and GIDs of processes and changing of the Osigset action, thread limit, and other privileged operations using the SETROPTS LOGOPTIONS, and controls auditing of dubbing, undubbing, and server registration of processes using SETROPTS AUDIT (see the following note).

For UID/GID, Osigset and thread limit changes, and other privileged operations:

Audit event types:

36, 49, 50, 51, 52, 57, 63

RACF callable services:

R_exec, R_setuid, R_setgid, R_seteuid, R_setegid, ck_priv

z/OS UNIX services:

_console, exec, __login, auth_check_resource_np, nice, poe, pthread_security_np, server_init, setuid, setgid, seteuid, setegid, seteuid, setregid, setpriority, setrlimit, shutdown_reg, sigaction, spawn, swap services, thlmt

For process dubbing, undubbing, and registration:

Audit event types:

38, 39, 57

Note: Unsuccessful process dubs (38 events) are always audited.

RACF callable services:

initUSP, delete_USP, ck_priv

z/OS UNIX services:

first syscall for a process, dub, _exit, undub, vregister

PROCACT

Controls auditing of functions that look at data from or affect other processes using SETROPTS LOGOPTIONS:

Audit event types:

37, 40, 46, 57, 58, 65, 91

RACF callable services:

ck_process_owner, ck_priv R_ptrace

z/OS UNIX services:

getpsent, kill, ptrace, recv, recvmsg, sendmsg, prlimit

Audit records are written for getpsent only during the following configuration: SETROPTS LOGOPTIONS (ALWAYS).

Notes:

1. With the exception of CKPRIV, for the services listed whose auditing is controlled by SETROPTS AUDIT, all successful requests are audited. Failures for these services are audited by the authority check that failed. For example, an access check to a FACILITY class profile, or an access check controlled by the FSOBJ or DIRACC classes. To audit these, use LOGOPTIONS (FAILURES) for the appropriate classes.
2. When an SMF record is created for a failing event, an ICH408I violation message is issued to the security console. The message displays a character representation of the audit function code that z/OS UNIX System Services provided in the SAF call. The audit function code provides context for the z/OS UNIX function that made the SAF call. The SMF Unload utility (IRRADU00) issues this same character string for SMF records that contain audit function codes. For a list of the audit function codes and their descriptions, see [“Audit function codes for z/OS UNIX System Services”](#) on page 93.

Auditable events

RACF writes audit records for the z/OS UNIX System Services auditable events in SMF type 80 records. File owners and auditors can establish separate sets of auditing rules, and can also specify auditing for each file and directory. For more information about these event codes, see [z/OS Security Server RACF Macros and Interfaces](#).

Commands

You can control auditing by using the existing SETROPTS LOGOPTIONS and SETROPTS AUDIT.

Use SETROPTS LOGOPTIONS to specify logging options for all the classes associated with z/OS UNIX System Services:

- DIRSRCH: Directory searches
- DIRACC: Access checks for read/write accesses to directories
- FSOBJ: Access checks for files and directories
- FSSEC: Changes to file system security
- IPCOBJ: Access checks for objects and changes to UIDs, GIDs, and modes
- PROCESS: Changes to UIDs and GIDs of processes and to privileged operations requiring superuser authority
- PROCACT: Functions that look at data from other processes or effect other processes

Here is an example:

```
SETROPTS LOGOPTIONS (FAILURES (DIRSRCH, DIRACC))
```

In addition, you can use the SETROPTS AUDIT option to control auditing for the FSOBJ, IPCOBJ, and the PROCESS classes.

- FSOBJ: Successful creation and deletion of file system objects
- IPCOBJ: Successful creation and deletion of objects (message queues, semaphores, and shared memory segments)
- PROCESS: Successful dubbing or undubbing of a process

Here is an example:

Audit options for file and directory levels

The following audit options for file and directory levels are stored inside the HFS along with the *file permission bits*:

- don't_audit
- audit_access_allowed
- audit_access_failed
- audit_all_access

A directory is just a special-purpose file. When a file or a directory is created, default audit options are assigned. Different defaults are set for users and auditors. The same audit option is used no matter what kind of access is attempted (read, write, or execute).

When a file is created, these are the default audit options:

- User audit options: for all access types, audit_access_failed
- Auditor audit options: for all access types, don't_audit

To change the audit options, you must use **chaudit**, a z/OS UNIX System Services Shell and Utilities feature. For complete information about this command, see [z/OS UNIX System Services Command Reference](#). There are restrictions on who can change these options.

- For user audit options, you must be the owner of the file.
- For auditor audit options, you must have the RACF AUDITOR attribute. You can then change the auditor audit options for any file in the file system.

The default file-level audit options control the auditing of directory and file accesses. These defaults are only used for a particular class (DIRSRCH, DIRACC, or FSOBJ) if SETROPTS LOGOPTIONS(DEFAULT(*class*)) has been issued for that class.

Auditing for superuser authority in the UNIXPRIV class

If you use profiles in the UNIXPRIV class to control superuser authorities, you can use the same profiles for auditing.

UNIXPRIV

Controls auditing of superuser authorities:

Audit event type:

2

RACF callable services:

ck_access, ck_owner_two_files, ck_priv, ck_process_owner, R_chown, R_IPC_ctl, R_ptrace, R_chmod

z/OS UNIX services:

chmod, chmount, chmountsetuid, chown, clone, exec container, getpsent, kill, link, mkdir, mount, mount container, mountsetuid, nice, open, opendir, pfscctl, pivot_root, prlimit, ptrace, quiesce, quiescesetu, readlink, realpath, rename, rmdir, setns, setpriority, shmconv, sigqueue, stat, symlink, unlink, unmount, unmount container, unmountsetu, unquiesce, unquiescesu, unshare, user mount, user mount setuid, user unmount, user unmount setuid, vregister

RACF logs successful attempts to use superuser authorities. If you want to check the use of superuser authority for specific resources, you can audit successful uses of the UNIXPRIV profiles. RACF logs failed attempts to use SHARED.IDS in the UNIXPRIV class. For other UNIXPRIV resources, no audit record is written to show authorization failures in the UNIXPRIV class.

For example, to audit the successful uses of the `kill()` function, granted by the `SUPERUSER.PROCESS.KILL` profile, set the audit options as follows:

```
RALTER UNIXPRIV SUPERUSER.PROCESS.KILL AUDIT(SUCCESS(READ))
```

`LOG=NOFAIL` is specified on all authorization checks in the `UNIXPRIV` class, except for `SHARED.IDS`. Therefore, RACF does not log failures, even when you specify `AUDIT(FAILURES)` or `AUDIT(ALL)` in the profile. RACF also ignores any `SETROPTS LOGOPTIONS` settings in the `UNIXPRIV` class because the `RACROUTE REQUEST=FASTAUTH` request performs all authorization checks in that class.

It is possible to see multiple audit records for the same operation, as described in the following example:

1. You are auditing successful uses of the `SUPERUSER.PROCESS.KILL` profile.
2. You also issued the `SETROPTS LOGOPTIONS(SUCCESSES(PROCACT))` command to audit success in the `PROCACT` class.

Note: This is not recommended because of the large number of audit records it could produce.

3. User LAURIE has UID 40 and READ access to the `SUPERUSER.PROCESS.KILL` profile in the `UNIXPRIV` class.
4. User LAURIE issued the `kill()` function for another user's process.

The `kill()` function succeeds and RACF writes two audit records as a result of:

- Auditing for the `PROCACT` class
- A `RACROUTE REQUEST=FASTAUTH` call in the `UNIXPRIV` class

For more information about the `UNIXPRIV` class, see [z/OS Security Server RACF Security Administrator's Guide](#).

Auditing for the RACF remote sharing facility (RRSF)

The RACF remote sharing facility (RRSF) allows you to administer and maintain RACF databases that are distributed throughout the enterprise. It helps to ensure that data integrity is kept across system or network failures and delays. You are informed when key events occur and returns output to view at your convenience.

RRSF uses the RACF subsystem address space. The address space supports a library that contains information that is needed by the remote sharing facility. For more information, see [z/OS Security Server RACF Security Administrator's Guide](#) and [z/OS Security Server RACF System Programmer's Guide](#).

RACF MVS operator commands for RRSF

The following RACF MVS operator commands can be used to control the RRSF function:

- **SET**

A RACF command that establishes operational characteristics for RRSF. It also has a list capability that provides a summary of the information related to the RRSF node that the command runs on.

- **TARGET**

A RACF command that defines, to the logical node being configured, the communication attributes and associated information for RRSF nodes with which it can potentially communicate. It also has a list capability that provides a list of attributes associated with each of the target nodes defined to the RRSF node.

- **STOP**

A RACF command that stops the RACF subsystem address space without losing any requests that may be waiting for completion.

- **RESTART**

A RACF command that restarts RRSF subtasks in the RACF subsystem address space.

For more information about these commands, including issuing options, see [z/OS Security Server RACF Command Language Reference](#).

The SET and TARGET commands generate SMF records, depending on where these commands are issued. If these commands are issued from the operator console and the auditing attributes have been defined in the OPERCMDS profile that covers the command, auditing takes place accordingly. If, however, the SET and TARGET commands are issued from the RACF parameter library, either because of RRSF initialization during RACF subsystem address space initialization or because of a SET command with the INCLUDE keyword specified, authorization to individual commands is not checked and no auditing occurs.

RACF also writes audit records for the STOP and RESTART commands, if auditing attributes have been defined in the OPERCMDS profile for the command.

As with all operator commands protected by an OPERCMDS profile, if an SMF record is cut, the command-up to 255 characters-is included in the audit record.

Directed commands for RRSF

The AT and ONLYAT keywords are used to direct specific RACF commands to run in the RACF subsystem address space on the specified local or remote RRSF node, under the authorization of the specified user ID.

• AT

A keyword used to direct specific RACF commands to run at a specified target node in the RACF subsystem address space under the authority of a specified user ID. When using the AT keyword, automatic command direction can occur from the target node. For example, if the RACF command was sent from node A to node B and automatic command direction is enabled between node B and node C, the command also takes effect on node C.

The AT keyword is controlled by profiles in the RRSFDATA class. In order for an authorization check to be audited, the audit attributes must be set in the general resource profile in the RRSFDATA class. In this case, the SMF record is generated on the issuing node. If the profile does not exist, the command fails and no auditing occurs.

Audit records produced from the authorization check include a LOGSTR relocate section that contains a copy of the command image. The LOGSTR is limited to a length of 255 characters. Longer strings may be truncated. The following command keywords are suppressed in the LOGSTR data:

Table 3. Command keywords that are suppressed in the LOGSTR data	
Command	Keyword(Field)
ADDUSER	PASSWORD() PHRASE()
ALTUSER	PASSWORD() PHRASE()
PASSWORD	PASSWORD()
RDEFINE	SESSION(SESSKEY()) SSIGNON(KEYMASKED()) SSIGNON(KEYENCRYPTED())
SETROPTS	RVARYPW(SWITCH()) RVARYPW(STATUS())

For information about the RRSFDATA class, see [z/OS Security Server RACF Security Administrator's Guide](#).

- **ONLYAT**

A keyword used to fix an 'out of sync' condition between RACF databases in the RRSF network. It works much like the AT keyword, but automatic command direction does not occur on the target node. No auditing occurs on the issuing node from failures or successes, regardless of audit settings such as SETROPTS SAUDIT or ALTUSER UAUDIT. However, auditing still occurs on the target system. To use the ONLYAT keyword, you must have the SPECIAL attribute.

For more information about these commands, refer to [z/OS Security Server RACF Command Language Reference](#).

After the command has passed authorization checking for command direction, the command is sent to the target system. Records that are cut on the target system automatically include, in the audit record, information to reflect command direction. The issuing node and user ID is added to the SMF record by including a type 44 relocate section whenever the command is directed. Since this relocate section is generally used for segments, a dummy segment name of CMDSRC (command source) is used. The type 44 relocate section format is as follows:

Byte	Description	Value
Byte 1	Bit string	Not used
Byte 2-9	Name of segment	CMDSRC
Byte 10	Length of subkeyword	15
Byte 11-25	Subkeyword	ORIGINATED_FROM
Variable length	Origination data	node.userid,DIRECTED BY_AT/BY_ONLYAT/ AUTOMATICALLY

This additional information is added to the audit record that gets generated on the target system. Auditing is based on the same criteria as if the command had been issued on the target system. No command auditing takes place on the issuing system.

If commands run in the RACF subsystem address space, the SMF80JBN is filled in with the subsystem name. SMF80UID contains the user ID under whose authority the command is running.

Automatically directed commands for RRSF

Automatic command direction is designed primarily to ensure that RACF profiles remain synchronized between two or more remote nodes regarding RACF TSO commands. It is similar to command direction in the following ways:

- Like directed commands using the AT keyword, automatically directed commands are controlled by profiles in the RRSFDATA class. An audit record produced from this authority check contains a LOGSTR relocate section.
- Like command direction, the command is sent to the target node after it passes authorization checking. All records produced on the target node contain a type 44 relocate section, which identifies the source of the command.

See “Directed commands for RRSF” on page 37 for detailed information about the LOGSTR and type 44 relocate sections. For information about the RRSFDATA class, see [z/OS Security Server RACF Security Administrator's Guide](#).

Automatically directed application updates for RRSF

Automatic direction of application updates is designed primarily to ensure that RACF profiles remain synchronized between two or more nodes regarding application updates. It is similar to command direction in the following ways:

- Like directed commands using the AT keyword, automatically directed application updates are controlled by profiles in the RRSFDATA class. An audit record produced from this authority check contains a LOGSTR relocate section. This authority check is only done on the originating node before propagation. Any corresponding SMF records are only created on the originating node.

On the RACROUTE REQUEST=AUTH application update for the RRSFDATA class, the LOGSTR parameter is specified to describe the application update. The LOGSTR parameter contains:

request FOR CLASS *class-name*, PROFILE *profile-name*:
APPLICATION UPDATE PROPAGATION ATTEMPTED

Since the maximum LOGSTR length is 255, this information may be truncated if the profile name is very long. The possible values of *request* are:

- RACROUTE REQUEST=DEFINE TYPE=CHGVOL
- RACROUTE REQUEST=DEFINE TYPE=ADDVOL
- RACROUTE REQUEST=DEFINE TYPE=DELETE
- RACROUTE REQUEST=DEFINE TYPE=DEFINE
- RACROUTE REQUEST=DEFINE TYPE=DEFINE,NEWNAME
- RACROUTE REQUEST=EXTRACT
- ICHEINTY ALTER OPERATION
- ICHEINTY ADD OPERATION
- ICHEINTY DELETE OPERATION
- ICHEINTY DELETEA OPERATION
- ICHEINTY RENAME OPERATION

For information about the RRSFDATA class, see [z/OS Security Server RACF Security Administrator's Guide](#).

- Like command direction, the application update is sent to the target node after it passes authorization checking. No auditing is done for RACROUTE REQUEST=EXTRACT and ICHEINTY requests on the system on which they run. Auditing is done for RACROUTE REQUEST=DEFINE requests. Records that are cut on the target system automatically include, in the audit record, information to reflect an automatically directed application update. The issuing node and user ID is added to the SMF record by including a type 44 relocate section whenever a RACROUTE REQUEST=DEFINE application update has been automatically directed. Since this relocate section is generally used for segments, a dummy segment name of APPLSRC (application source) is used. The type 44 relocate section format is as follows:

Byte	Description	Value
Byte 1	Bit string	Not used
Byte 2-9	Name of segment	APPLSRC
Byte 10	Length of subkeyword	15
Byte 11-25	Subkeyword	ORIGINATED_FROM
Variable length	Origination data	node.userid,DIRECTED_AUTOMATICALLY

This additional information is added to the audit record that gets generated on the target system. Auditing is based on the same criteria as if the application update had been issued on the target system.

Automatically directed passwords for RRSF

Automatic password direction is designed primarily to ensure that RACF user profiles remain synchronized between two or more remote nodes regarding RACF passwords. There is no need to establish RACLINK PEER PWSYNC associations.

Like directed commands using the AT keyword, automatically directed passwords are controlled by profiles in the RRSFDATA class on the issuing node. Audit records contain a LOGSTR relocate section only for password changes resulting from a RACF command and do not contain the new password. Automatically directed passwords are not audited on the target node.

RACF considers password changes resulting from the ADDUSER, ALTUSER, or PASSWORD command to be automatically directed commands and can be audited on the target node like other commands. Password changes resulting from a logon or from RACROUTE or ICHEINTY calls are not audited on the target node.

The RACLINK command

The RACLINK command is a RACF TSO command used to:

- Define, approve, and undefine user ID associations
- Enable password synchronization between pairs of user IDs
- List information related to user ID associations

The DEFINE keyword used with the RACLINK command allows two user IDs to form a user ID association. A user ID association enables RACF users to take advantage of command direction and password synchronization.

Several user IDs are involved in RACLINK processing. These are:

Issuing user ID

is the user who issues the RACLINK command from the source system.

Source user ID

is the user on the source system for whom an association is created.

Target user ID

is the user on the target system for whom an association is created.

Authorization user ID

is the user on the target system used by the authority checking program for processing the RACLINK request. For information about the associated list used to determine the authorization user ID, see [*z/OS Security Server RACF Security Administrator's Guide*](#).

There are three potential phases for RACLINK commands. Each phase uses event code 59, which is described in [*z/OS Security Server RACF Macros and Interfaces*](#). The phases are:

Phase 1: Local issuance of the RACLINK command

In phase 1, auditing is based on the auditing criteria of the issuing user ID. Auditing can be set up for both DEFINE and PWSYNC keywords.

Phase 2: Processing on the target node

In phase 2, auditing is based on the auditing criteria of the authorization user ID. If no user ID in the associated list is found to have the appropriate authorization, auditing is based on the auditing criteria of the target user ID.

Phase 3: Response from the target node

Phase 3 occurs only with the DEFINE keyword. If no error is detected, auditing is based on the issuing user ID. This allows you to determine what took place on the target system without having to log on to the target system to view the SMF records. These audit records get cut on the issuing node based on the auditing criteria of the issuing user ID.

Although phases 2 and 3 are not commands, SMF records are generated as if they were. For phase 2, auditing is based on either the authorization user ID or the target user ID, as if a command had been issued. For phase 3, auditing is based on the issuing user ID.

As with directed commands, the DEFINE and PWSYNC parameters of the RACLINK command are controlled by profiles in the RRSFDATA class. Auditing for this authorization check occurs on the issuing system and is determined by the auditing attributes in the RRSFDATA class profiles. If either the DEFINE or PWSYNC keyword is specified and the corresponding profile does not exist, the command fails and no auditing takes place.

To better understand this process, see the examples that follow.

RRSF Example 1

In this example, user JAMES on node NODEA has the SPECIAL attribute and SETROPTS SAUDIT is in effect. On node NODEA, the following RRSFDATA profiles exist, each with UACC(READ) and AUDIT(SUCCESS):

```
RACLINK.DEFINE.NODEB
RACLINK.PWSYNC.NODEB
```

On node NODEB, user JIM has JIMSPW as a password, has the SPECIAL attribute, and SETROPTS SAUDIT is in effect.

- Phase 1

When JAMES issues:

```
RACLINK DEFINE(NODEB.JIM/JIMSPW) PWSYNC
```

1. Two separate audit records are produced (one for the RACLINK DEFINE in general and the second for the PWSYNC). These records are produced because user ID JAMES passed both authority checks by having UACC(READ) and AUDIT(SUCCESS) set in each of the profiles. The LOGSTR data in each contains a copy of the command image, up to a maximum of 255 characters.
2. Authority checking has passed, so there can also be an SMF record based on the local issuance of RACLINK (event code 59). Because JAMES has the SPECIAL attribute and SETROPTS SAUDIT is in effect, this third audit record is produced with event code qualifier 0.

- Phase 2

On node NODEB the TARGET PROCESSING phase begins with checking the supplied password for JIM (in this case, JIMSPW is correct).

Auditing takes place on the target user ID, JIM, because JIM has the SPECIAL attribute and the target node (NODEB) has SETROPTS SAUDIT in effect. This record, cut for RACLINK (event code 59, qualifier 0), is the fourth audit record to be produced, although it is the first record cut on node NODEB.

- Phase 3

On node NODEA, a fifth audit record is produced (event code 59, qualifier 0) for the final phase because JAMES has the SPECIAL attribute and SAUDIT is still in effect for the issuing node (NODEA).

RRSF Example 2

For this example, assume that Example 1 has completed successfully.

- Phase 1

User JAMES on node NODEA issues:

```
RACLINK ID(MARY) DEFINE(NODEB.MARY) PWSYNC
```

As in phase 1 of example 1, the authorization checking on SPECIAL user JAMES yields two SMF records, and a RACLINK record is produced. A significant difference in the event code 59 record is that while JAMES is still the issuing user ID, MARY is the source user ID.

- Phase 2

In this phase, target processing uses JAMES' association with JIM. This means that although MARY (on NODEB) is the target user ID, JIM is the authorization ID. Therefore, auditing is based on JIM. Because JIM has the SPECIAL attribute and SETROPTS SAUDIT is in effect on NODEB, an event code 59 record (qualifier 0) is produced. This indicates that the association has been established successfully.

- Phase 3

As in example 1, auditing for this phase is based on JAMES. The issuing user ID is JAMES, the source user ID is MARY (from NODEA), the target user ID is MARY (from NODEB), and there exists an authorization user ID, JAMES.

An event code 59 record, which contains this data, is produced because JAMES has the SPECIAL attribute and SAUDIT is still in effect on the issuing node (NODEA).

Checking Db2 authorization

When you use the RACF/Db2 external security module to check authorization, RACF simulates Db2 authorization. Each Db2 SQL statement, command, or utility specifies a particular set of privileges and authorities. The RACF/Db2 external security module checks the RACF profiles that correspond to each set.

Table 4. How RACF Simulates Db2 Authorization Checking

In Db2:	Maps to in RACF:
Object types	Class names
Privileges	Profile names
Authorities	Administrative authority profile names
Privilege sets	Profile checking

Note: When an input ACEE (XAPLACEE) is not provided, the RACF/Db2 external security module returns the authority checking responsibility to Db2. For more information, see *Db2 Administration Guide*. For details about authority checking with the RACF/Db2 external security module, see [z/OS Security Server RACF Security Administrator's Guide](#).

Example of profile checking

Db2 privilege sets map to RACF profile checking. This example describes RACF profile checking for the SELECT statement.

When RACF checks authorization, the requester must own the object or have read access to one of the following profiles:

Class

Profile Type

MDSNTB

subsystem.table-name.SELECT

(gives access to the table)

DSNADM

subsystem.database-name.DBADM

(gives access to the database that holds the table)

DSNADM

subsystem.SYSCTRL

(bypassed for user tables)

DSNADM

subsystem.SYSADM

RACF produces an SMF record for a failure only after checking the entire list of profiles and the requestor fails to meet any of the requirements. RACF does not produce an audit record if:

- The requestor meets any of the requirements and access is granted
- The RACF/Db2 external security module returns the authority checking responsibility to Db2

An audit record is produced for the first resource that has auditing indicated by the covering profile and receives a return code of 8.

RACF produces an SMF record for a success when the requestor indicates that should be performed.

For a description of the RACF classes, see [z/OS Security Server RACF System Programmer's Guide](#).

Using the log string (LOGSTR) data

The log string data consists of information that can help you audit Db2 successfully. Db2 uses the XAPL parameter list (DSNDXAPL macro) to pass the log string information to the RACF/Db2 external security module. The "LOGSTR=" parameter of the RACROUTE REQUEST=FASTAUTH request contains the input portion of XAPL and does the following:

- Identifies the RACF/Db2 external security module request that caused RACF to create the audit record. The RACF profile causing the audit record to be cut could be a profile that provides a Db2 administrative authority and might not identify the specific Db2 resource being accessed. The LOGSTR data contains values from the XAPL parameter list that are necessary to identify that unique request from the RACF/Db2 external security module.
- Links RACF SMF 80 records with Db2 IFCID 314 records. Each invocation of the RACF/Db2 external security module might produce an SMF 80 record. Db2 might produce a Db2 IFCID 314 record in addition to the SMF 80 records cut by RACF. You can determine that the records were cut for the same RACF/Db2 external security module request if the LOGSTR_TIME and LOGSTR_USER values in the SMF 80 record match the XAPLSTCK and XAPLUCHK values in the IFCID 314 request. The RACF/Db2 external security module uses these time and user values created from the LOGSTR data to link the RACF and Db2 information.

The LOGSTR data includes the following ordered information. A blank space separates each field, as indicated in the table.

Table 5. LOGSTR Data			
Log string data	Length	XAPL field Name	Description
LOGSTR_DATA	DS 0CL241		
LOGSTR_TIME	DS CL8	XAPLSTCK	Time
	DS CL1		
LOGSTR_USER	DS CL8	XAPLUCHK	User
	DS CL1		
LOGSTR_SUBSYSTEM	DS CL4	XAPLGPAT	Subsystem/Db2 group attach name
	DS CL1		
LOGSTR_OBJTYPE	DS CL1	XAPLTYPE	Object type

Table 5. LOGSTR Data (continued)			
Log string data	Length	XAPL field Name	Description
	DS CL1		
LOGSTR_FLAGS	DS 0CL16	XAPLFLG1	Flags: The flags in this field are declared as BL1. It is translated to CL16 in the LOGSTR data field, containing one character for each bit and a blank space between each one. <ul style="list-style-type: none"> • If the bit is on, "Y" is inserted • If the bit is off, "N" is inserted • Reserved bits are left blank
LOGSTR_SECNDRY_ID	DS CL1	XAPLFLG1	Secondary ID (Y/N)
	DS CL1		
LOGSTR_USERTAB	DS CL1	XAPLFLG1	User table (Y/N)
	DS CL13		Reserved (blank)
LOGSTR_OBJNAME	DS CL20	XAPLOBJN	Object name
	DS CL1		
LOGSTR_OBJOWNER	DS CL20	XAPLOWNQ	Object owner or qualifier
	DS CL1		
LOGSTR_REL1	DS CL20	XAPLREL1	Related information 1
	DS CL1		
LOGSTR_REL2	DS CL20	XAPLREL2	Related information 2: This is the first 20 bytes of the XAPLREL2 field.
	DS CL1		
LOGSTR_PRIV	DS CL3	XAPLPRIV	Privilege
	DS CL1		
LOGSTR_SOURCE	DS CL1	XAPLFROM	Source of the request
	DS CL1		
LOGSTR_CLASS	DS CL8		Class name
	DS CL1		
LOGSTR_ENTY	DS CL100		Entity name: This is the first resource checked for a specific request.

Examples for setting audit controls for Db2

The RACF/Db2 external security module attempts to produce an audit record after checking the list of profiles.

Audit Controls example 1

In this example, user SIVLE wants to use the Db2 SELECT statement to retrieve table CADDY, which is in database DSNDB04, from Db2 subsystem CARS.

1. Does SIVLE own the table?

Because SIVLE does not own the table, the table name qualifier passed from Db2 does not match the user ID. In this case, RACF does not check a profile, so no audit record is written.

2. Does SIVLE have SELECT authority?

RACF checks CARS.CADDY.SELECT in class MDSNTB. SIVLE does not have SELECT authority. If SIVLE does not meet any of the other requirements, this is the 'first failing resource.'

3. Does SIVLE have database administrator authority?

RACF checks CARS.DSNDB04.DBADM in class DSNADM. SIVLE does not have this authority.

4. Does SIVLE have system administrator authority?

RACF checks CARS.SYSADM in class DSNADM. SIVLE does not have this authority.

Because SIVLE has none of the correct authorities, RACF produces SMF records relating to the first failure it encountered. Although SIVLE did not own the table, no profiles were checked and failures were not audited. Therefore, the first failing resource is CARS.CADDY.SELECT. RACF produces an audit record for this resource and identifies it in message ICH408I. The data is contained in the LOGSTR information and can be used in a report.

Audit Controls example 2

In this example, user SIVLE issues a START PROCEDURE TUNEUP request for Db2 subsystem CARS.

1. Does SIVLE have SYSOPR authority?

RACF checks CARS.SYSOPR in class DSNADM. SIVLE does not have SYSOPR authority.

2. Does SIVLE have system administrator authority?

RACF checks CARS.SYSADM in class DSNADM. SIVLE does not have this authority.

Because SIVLE has none of the correct authorities, RACF produces SMF records relating to the failure. The failure record is cut for resource CARS.SYSOPR, which was the first failing resource. The LOGSTR information can help you to determine what SIVLE wanted to do. It includes the object type, object name, and privilege, which you can use in a report.

Auditing security events for other components

It is possible to set audit controls for other components using RACF commands, such as EIM.

Auditing password and password phrase changes at logon

When SETROPTS AUDIT(USER) is in effect, an SMF Type 80 Event Code 1 ("JOBINIT") record is created by RACROUTE REQUEST=VERIFY when a user's password or password phrase is changed during logon. This occurs regardless of the logging behavior requested by the application issuing the RACROUTE macro.

SMF 80 records generally contain a field indicating the reason for logging. For a password change at logon, the reason will indicate that SETROPTS AUDIT(*class-name*) was the reason. In SMF Unload output, this appears as the value "YES" in the <col_id>_LOG_CLASS field in the header portion of the formatted record.

Auditing application logon and logoffs

The SMF Type 80 Event Code 1 ("JOBINIT") record is used to describe both 'logons' and 'logoffs', differentiated by the Event Code Qualifier. These records are the result of a SAF RACROUTE REQUEST=VERIFY macro or RACROUTE REQUEST=VERIFY issued with ENVIR=CREATE ('logon') or ENVIR=DELETE ('logoff'). Applications may invoke this macro directly or may use another authentication interface, such as the initACEE SAF callable service (IRRSIA00), that internally issues RACROUTE REQUEST=VERIFY.

Whether or not an SMF record is created is determined by how the application makes its call, how customer logging options are configured, and RACF's own decision making.

An application can control logging behavior when using RACROUTE directly, by specifying the LOG= parameter.

- When LOG=ALL is specified, the SMF record is always created.
- When LOG=NONE is specified, the SMF record is not created, with the exception of password and phrase changes, as described in the previous topic.
- When LOG=ASIS is specified (or defaulted), logging is performed at RACF's and the customer's discretion. RACF will log all failures, and the following types of success:
 - Password and password phrase changes, as described in the [“Auditing password and password phrase changes at logon” on page 45](#) topic.
 - PassTicket authentication.
 - Password or password phrase authentication for an MFA user subject to password-fallback processing.

The remaining success cases can be logged at the customer's discretion using the SETROPTS APPLAUDIT function.

SETROPTS APPLAUDIT is a RACF option that allows user verification auditing to occur at the beginning (ACEE creation) and ending (ACEE deletion) of a user's logon session to an application.

For an application to be eligible for this support, it must:

- Specify an application name on the APPL= keyword of the RACROUTE REQUEST=VERIFY or VERIFYX macro. Note that UNIX services such as `__login__applid()` and `__passwd_applid()` call these SAF services. See below for instructions on extending the APPLAUDIT function to UNIX applications and callers of the SAF initACEE callable service (IRRSIA00).
- Specify (or take the default of) LOG=ASIS on RACROUTE REQUEST=VERIFY or VERIFYX.

Note: Consult application documentation to determine the application name it passes to SAF. The application may require a configuration action to pass an application name to SAF. For example, TSO requires that you specify VERIFYAPPL(YES) on the LOGON statement in the IKJTSOxx member of SYS1.PARMLIB.

Activating this logging requires the following steps:

1. Specify the APPLAUDIT operand on the SETROPTS command.

```
SETROPTS APPLAUDIT
```

2. Request successful logging for the APPL profile associated with the application to which the user is logging on. This is the same profile that is used to protect applications. See [Protecting applications in z/OS Security Server RACF Security Administrator's Guide](#) for more information.

```
RALTER APPL profile-name GLOBALAUDIT(ALL)
```

3. Activate and RACLIST the APPL class.

```
SETROPTS CLASSACT(APPL) RACLIST(APPL)
```

If the APPL class is already active but not RACLISTed, RACLIST it.

```
SETROPTS RACLIST(APPL)
```

If the APPL class is already RACLISTed, refresh it.

```
SETROPTS RACLIST(APPL) REFRESH
```

It is important to note that, while we use the terms 'logon' and 'logoff' for convenience, there is not always a one-to-one correspondence between a logon event and a RACROUTE REQUEST=VERIFY. For example:

- An application might maintain its own ACEE cache. This could result in a logon record the first time a user logs on, but a subsequent logon might not generate a SAF call. In fact, RACF maintains a managed ACEE cache for initACEE callers who request it. In this scenario, you would only see an SMF record for the first VERIFY. Furthermore, the DELETE request may not occur until such time as the cache object expires, which could be some time after the user logs off from the application.
- The RACROUTE caller's LOG= setting is honored for both CREATE and DELETE. It is possible that an application could request logging for the CREATE request, but suppress logging for the DELETE request, or vice versa.
- If an application does not properly clean up an ACEE with a DELETE request, there would be no DELETE record.

Extending SETROPTS APPLAUDIT to UNIX and initACEE applications

To extend the APPLAUDIT function to UNIX applications (those that specify SESSION=OMVSSRV on RACROUTE REQUEST=VERIFY or VERIFYX) and callers of the initACEE callable service (IRRSIA00) that specify the APPL_id parameter, you must define a discrete profile named APPLAUDIT.FOR.UNIX in the OPTAUDIT class.

```
RDEFINE OPTAUDIT APPLAUDIT.FOR.UNIX
SETROPTS CLASSACT(OPTAUDIT) RACLIST(OPTAUDIT)
```

For these applications, RACF only logs RACROUTE REQUEST=VERIFY calls that authenticate the user (i.e. those that specify the PASSCHK=YES keyword).

Note: As with non-UNIX applications, consult application documentation to determine the application name it passes to SAF. UNIX uses a default application name of OMVSAPPL if the application does not explicitly specify one. UNIX-based applications such as WebSphere Liberty may specify their own default value and may provide a way to override that default. PKI Services is an example of an application that can use either WebSphere Liberty or the IBM HTTP Server and provides guidance on configuring both to specify an application name. See [Steps for giving Liberty users authorization to use PKI Services functions in z/OS Cryptographic Services PKI Services Guide and Reference](#) for more information.

Important: The RACF subsystem address space must be configured to extend the APPLAUDIT function to UNIX applications. Function in the subsystem address space reacts to RACLIST events in the OPTAUDIT class, recognizing the creation or deletion of the OPTAUDIT profile and turning on or off a bit in the RCVT that indicates the function is active. If the RACLIST is issued when the subsystem is down, the RCVT remains unchanged. When the subsystem is active, issue the SETROPTS command again.

Considerations for administering profiles in the OPTAUDIT class

Consider granting CLAUTH(OPTAUDIT) to your auditors so they can define profiles in the OPTAUDIT class and RACLIST REFRESH the class. By default, the user performing the RDEFINE will be made owner of a profile, which allows that (and only that) person to RDELETE the profile, if necessary.

By connecting these users to a group with the group-SPECIAL attribute and making that group the OWNER of this profile, all members of the group will be able to manage the profile (including listing and deleting it) after it has been created.

Chapter 3. The RACF SMF data unload utility

RACF audit data is a record of an installation's security relevant events. This data is used to verify the effectiveness of an installation's security policy, determine whether the installation's security objectives are being met, and identify unexpected security relevant events.

The RACF SMF data unload utility (IRRADU00) enables installations to create a sequential file from the security relevant audit data. The sequential file can be used in several ways: viewed directly, used as input for installation-written programs, manipulated with sort/merge utilities, output to an XML-formatted file for viewing on a web browser, or uploaded to a database manager (for example, Db2) to process complex inquiries and create installation-tailored reports. It is not intended to be used directly as input to RACF commands.

Operational considerations

IRRADU00 processes these types of SMF records:

Type 30

Job initiation - Subtype 1 (Job initiation) and subtype 5 (Job termination)

Type 80

Resource access - No subtypes in record

Type 81

RACF initialization - No subtypes in record

Type 83

- Subtype 1, Data sets affected by a security label change
- Subtype 2, EIM
- Subtype 3, LDAP
- Subtype 4, Remote audit
- Subtype 5, Websphere
- Subtype 6, TKLM

To correlate the RACF audit data with the data unloaded by IRRADU00, see the description of the SMF records contained in *z/OS Security Server RACF Macros and Interfaces*. For more details about working with subtype 3 LDAP audit records, see [z/OS IBM Tivoli Directory Server Administration and Use for z/OS](#).

Using IRRADU00

The RACF SMF data unload utility uses the SMF Dump Utilities (IFASMFDP or IFASMFDL) as the "driver" module to control its invocation. The RACF SMF data unload utility is invoked as USER2 and USER3 exits to IFASMFDP or IFASMFDL. To request RACF SMF data unload utility processing, enter the names of the RACF SMF data unload utility modules (IRRADU00 and IRRADU86) in the SYSIN data stream for IFASMFDP or IFASMFDL.

The following job control statements are necessary for executing IRRADU00:

JOB

Initiates the job.

EXEC

Specifies the program name (PGM=IFASMFDP or PGM=IFASMFDL) or, if the job control statements are in a procedure library, the procedure name.

SYSPRINT DD

Defines a sequential message data set for the messages produced by IFASMFDP or IFASMFDL.

SYSIN DD

Defines a sequential input data set for the SMF Dump Utility control statements. These statements must include the USER2 (IRRADU00) and USER3 (IRRADU86) statements for invoking the RACF SMF data unload utility. Additional IFASMFDP or IFASMF DL control statements can be used to select records based on date, time, and SMF system ID. IFASMFDP and IFASMF DL use defaults for control parameters that are allowed to default. In particular, the default value for the OPTIONS parameter is ALL, which causes the input data set to be reset so that it can be reused. See *z/OS MVS System Management Facilities (SMF)* for information on overriding defaults.

Note: IRRADU00 is called once for each IFASMFDP OUTDD or IFASMF DL OUTDD control statement that meets the specified selection criteria. This might result in multiple calls for the same SMF record, causing that record to appear more than once in the SMF unload output.

ADUPRINT DD

Defines a sequential message data set for the messages produced by the RACF SMF data unload utility.

DUMPIN DD

Defines the input SMF data stream.

Note: The ddname DUMPIN can be changed by the control statements that are contained in the SYSIN data stream.

DUMPOUT DD

Defines the output SMF data stream. After the RACF SMF data unload utility processes a record, it returns control to IFASMFDP or IFASMF DL and tells these utilities to continue its processing of the record. This causes IFASMFDP or IFASMF DL to write the record to DUMPOUT. If you do not want to retain these records, allocate DUMPOUT to DUMMY.

Note: The ddname DUMPOUT can be changed by the control statements that are contained in the SYSIN data stream.

OUTDD DD

Defines the single sequential output data set. The output of IRRADU00 is a set of variable length records. This data set must be allocated as a variable length data set, with a logical record length (LRECL) of at least 12288. If a shorter LRECL is supplied, IRRADU00 changes the LRECL to 12288.

IRRADU00 also changes the block size of the data set to be at least four more than the LRECL, unless the block size was set to zero to allow the system to choose the best block size.

XMLFORM DD

Creates an easily readable form of the report in XML. Each data tag appears on its own line. This file can be easily read in any editor, including displayed in a web browser. This data set must be allocated as a variable length data set, with a logical record length (LRECL) of at least 12288. If a shorter LRECL is supplied, IRRADU00 changes the LRECL to 12288. IRRADU00 also changes the block size of the data set to be at least four more than the LRECL, unless the block size was set to zero to allow the system to choose the best block size.

XMLOUT DD

Creates a compressed form of the report in XML. The resulting XML file will be small in filesize but will not be as easily readable as the output obtained by specifying XMLFORM DD. This data set must be allocated as a variable length data set, with a logical record length (LRECL) of at least 12288. If a shorter LRECL is supplied, IRRADU00 changes the LRECL to 12288. IRRADU00 also changes the block size of the data set to be at least four more than the LRECL, unless the block size was set to zero to allow the system to choose the best block size.

The output type generated is dependent on the statements incorporated in the JCL. Whichever output type is coded in the JCL is the only type that will be generated, according to the following rules:

- Is XMLFORM DD specified in the JCL? If so, that is the only output written
- If that is not specified, is XMLOUT DD specified in the JCL? If so, that is the only output written
- If that is not specified, is OUTDD DD specified in the JCL? If so, that is the only output written

- If none of these types are specified in the JCL, the utility issues message IRR67522I **Open failed for OUTDD**

If more than one DDname is placed in the JCL, the above order (XMLFORM, XMLOUT, OUTDD) is used to see which one is created. The actual order of DD statements in the JCL is irrelevant.

After the RACF SMF data unload utility has processed a record, control is returned to IFASMFDP or IFASMF DL, which writes the record to the ddname that was specified in the IFASMFDP SYSIN or IFASMF DL SYSIN control statement.

Writing your own application

When writing an application to process the output of IRRADU00, you must remember that the output of IRRADU00 can change with new releases of z/OS or when service is applied. Your application should be designed to tolerate these compatible changes in the IRRADU00 output. For example:

- Specific record types may grow in size as new fields are added. These fields are added to the end of the record.
- If the updated records exceed the existing blocksize of either the XML-formatted output (from DDNAME XMLFORM) or the non-XML-formatted output (from DDNAME OUTDD), then IRRADU00 automatically updates the blocksize of the output dataset to the new minimum acceptable blocksize. Message IRR6541I is issued. The IRRADU00/IFASMFDP utility return code is zero.
- New values may be added to existing fields in records.

IRRADU00 example

Figure 4 on page 51 shows an example of JCL to execute the RACF SMF data unload utility. The SMF dump utility (IFASMFDP or IFASMF DL) is used to select records based on the date, time, and SMF system identifier.

Due to restrictions of the SMF dump utilities, IRRADU00 and IRRADU86 must reside in an APF-authorized library. For more information on the SMF dump utilities, see [z/OS MVS System Management Facilities \(SMF\)](#).

```
//SMFUNLD JOB  , 'SMF DATA UNLOAD' ,
//          MSGLEVEL=(1,1)
//SMFDUMP EXEC PGM=IFASMFDP
//SYSPRINT DD  SYSOUT=A
//ADUPRINT DD  SYSOUT=A
//OUTDD    DD  DISP=SHR,DSN=USER01.RACF.IRRADU00
//SMFDATA  DD  DISP=SHR,DSN=USER01.RACF.SMFDATA
//SMFOUT   DD  DUMMY
//SYSIN    DD  *
              INDD(SMFDATA,OPTIONS(DUMP))
              OUTDD(SMFOUT,TYPE(000:255))
              ABEND(NORETRY)
              USER2(IRRADU00)
              USER3(IRRADU86)
/*
```

Figure 4. JCL to Invoke the RACF SMF data unload utility



Attention: Do not confuse SMF utility's use of the parameter that is called OUTDD for the normal SMF output of IFASMFDP and RACF's (architecturally fixed) DDNAME called OUTDD.

Return codes for IRRADU00

Table 6. Return codes for the SMF data unload utility (IRRADU00)

Hex (decimal)	Explanation
0 (0)	<p>The SMF dump was successful; no errors were encountered. However, IRRADU00 might not unload some records for one or more of the following reasons:</p> <ul style="list-style-type: none">• Unexpected event code. The numeric value of the event code is unloaded when the event code is unknown. No message is issued.• Unexpected relocate section in record.• Inability to convert data due to unexpected values.• A pre-RACF 1.9 record was encountered.• The SMF record type 83 subtype is unknown.
4 (4)	<p>The SMF dump was successful; one or more errors were encountered but processing continues. IRRADU00 might not unload some records for one or more of the following reasons:</p> <ul style="list-style-type: none">• Cannot open ADUPRINT.• Open failed for specified DDNAME.• ABEND during utility processing.• Unable to establish recovery environment.• RACF is not enabled.
8 (8)	<p>The SMF dump was not successful; an error terminated processing.</p>

IRRADU00 output

The RACF SMF data unload utility processes every type 80, 81, and 83 SMF record and every job initiation type 30 record that is selected for processing by the SMF dump utilities, IFASMFDP or IFASMF DL. All of the records are written to a sequential file. For details about the format and content of the records created, see *z/OS Security Server RACF Macros and Interfaces*.

Sample Db2 statements, data definition language statements, load utility statements, and queries are provided in SYS1.SAMPLIB. The members are named IRRADULD, IRRADUTB, and IRRADUQR.

Sample DFSORT and ICETOOL statements are provided in SYS1.SAMPLIB. The member is named IRRICE.

XML samples can be obtained online at the RACF website. For more details, see [“Internet sources”](#) on page xiv and [“Using the RACF SMF data unload utility to generate XML documents”](#) on page 65.

Using output from the RACF SMF data unload utility

The output file from the RACF SMF data unload utility can be:

- Viewed directly
- Used as input to your own programs
- Manipulated with sort/merge utilities
- Used as input to a database management system so you can produce reports tailored to your requirements
- Viewed using a web browser

Note: The output file is not intended to be used directly as input to RACF commands.

For audit records created for RACF commands, the exact order and format of the unloaded keywords and operands from the commands are not part of the programming interface. They are contained in fields with names ending in `_SPECIFIED`, `_IGNORED`, and `_FAILED`.

Sort/Merge programs

The RACF SMF data unload utility processes all of the type 80, 81, and 83 SMF records, and all of the job initiation type 30 records that are in the input data stream. If you want a subset of the output records, you can use a standard utility such as DFSORT to select them. For example, the following DFSORT control statements select all the job initiation records. All other record types are excluded.

```
SORT FIELDS=(5,8,CH,A)
INCLUDE COND=(5,8,CH,EQ,C'JOBINIT ')
OPTION VLSHRT
```

For more information about using the DFSORT ICETOOL with the RACF SMF data unload utility, see [“Using the DFSORT ICETOOL to create reports”](#) on page 53.

Relational databases

You can use the power of a relational database management system (DBMS), such as Db2, to process the RACF SMF data records. Refer to the following section for details.

XML

RACF SMF data records can be output as XML and then viewed using a web browser. This can give you a better view of the data and use colors to differentiate information. For more details, see [“Using the RACF SMF data unload utility to generate XML documents”](#) on page 65.

Using the DFSORT ICETOOL to create reports

IBM's DFSORT product provides a reporting facility called ICETOOL.

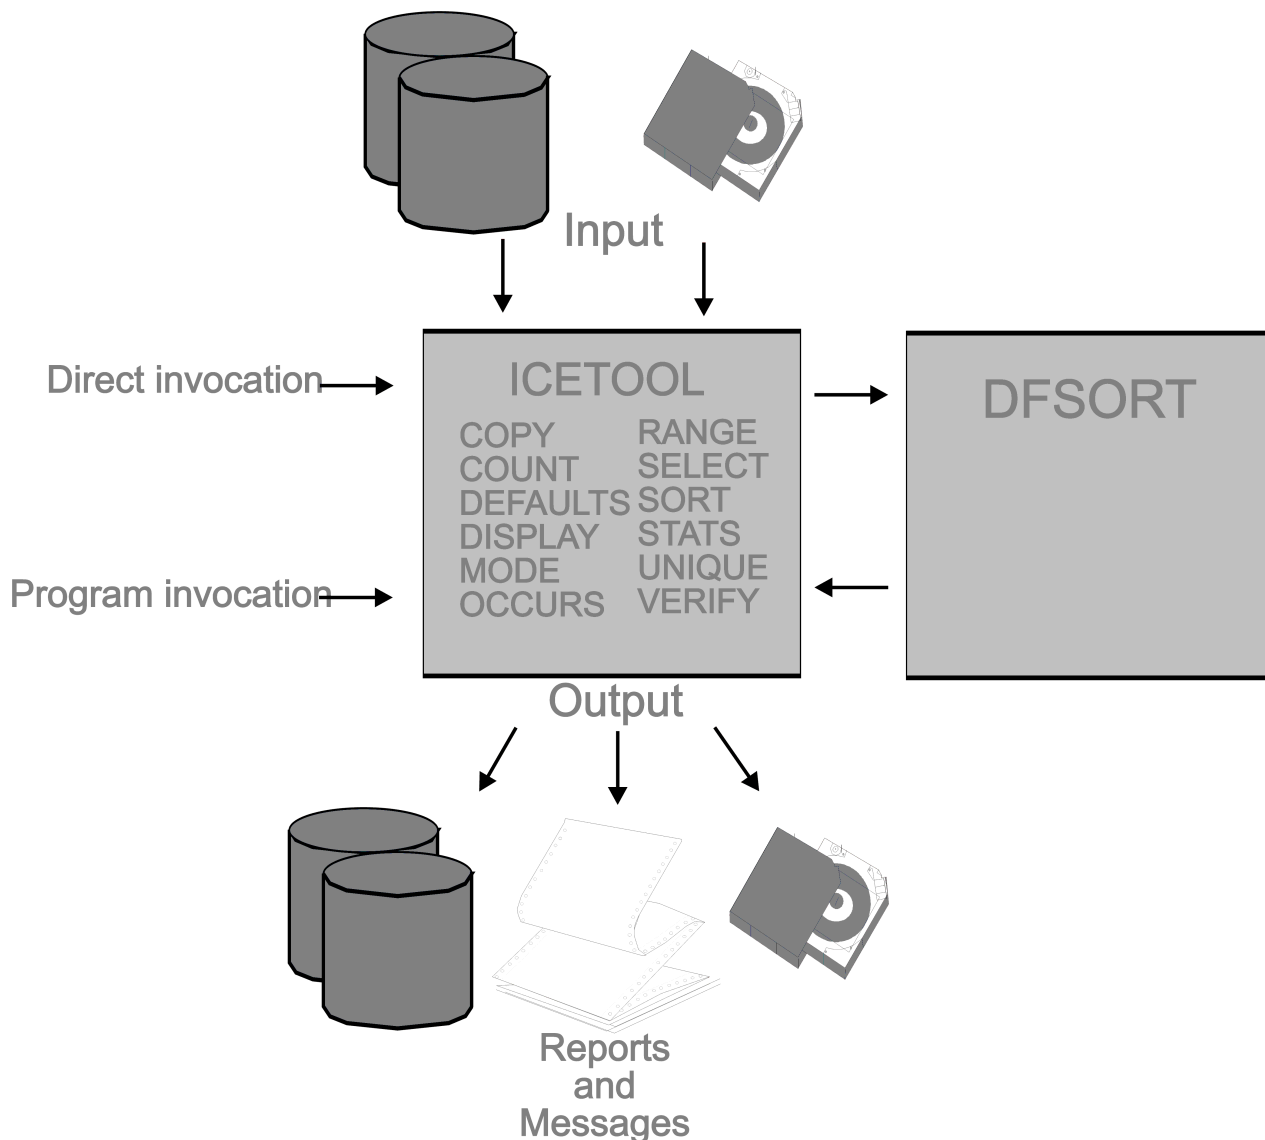


Figure 5. DFSORT's ICETOOL Utility

RACF makes it easy for you to create ICETOOL reports by using the RACFICE PROC, a procedure contained in the IRRICE member of SYS1.SAMPLIB. IRRICE uses DFSORT statements for the selection criteria and ICETOOL statements for the report format for all the reports. The IEBUPDTE utility processes the IRRICE member and creates a data set that contains the report formats and record selection criteria.

Each report consists of these two members of this PDS:

- The report format
- The record selection criteria

The report format

The report format has a 1-4 character name (for example, SELU) that is a member name in the partitioned data set created by the IEBUPDTE utility. The ICETOOL statements control the report format and record summary information, such as SORT, COPY, DISPLAY, and OCCURS statements. An example of a report format member is shown in Figure 6 on page 55. This is the report format member SELU, which is the report format for the "Selected User" report. See [z/OS DFSORT Application Programming Guide](#) for the complete details of the DFSORT statements.

```

*****
* Name: SELU *
* *
* Find all of the records which are applicable to a specific *
* user ID. *
* *
*****
COPY FROM(ADUDATA) TO(TEMP0001) USING(RACF)
DISPLAY FROM(TEMP0001) LIST(PRINT) -
PAGE -
TITLE('SELU: Events Associated with a Specific User')-
DATE(YMD/) -
TIME(12:) -
BLANK -
ON(63,8,CH) HEADER('User ID') -
ON(72,8,CH) HEADER('Group') -
ON(5,8,CH) HEADER('Event') -
ON(12,8,CH) HEADER('Qualifier') -
ON(23,8,CH) HEADER('Time') -
ON(32,10,CH) HEADER('Date') -
ON(43,4,CH) HEADER('System') -
ON(175,8,CH) HEADER('Terminal') -
ON(184,8,CH) HEADER('Jobname')

```

Figure 6. Member SELU: Selected User Report report format statements

The record selection criteria

The record selection criteria has a name consisting of the report member name followed by CNTL (e.g. SELUCNTL). Record selection is performed using DFSORT control statements, such as SORT and INCLUDE. An example of a record selection member is shown in Figure 7 on page 55. This is the report selection member SELUCNTL, which is the selection criteria for the "Selected User" report.

```

INCLUDE COND=(63,8,CH,EQ,C'IBMUSER')
OPTION VLSHRT

```

Figure 7. Member SELUCNTL: Selected User Report record selection statements

You can find a list of IRRADU00 reports in [“Reports based on the SMF data unload utility \(IRRADU00\)” on page 56](#).

You can find a list of IRRDBU00 reports in [z/OS Security Server RACF Security Administrator's Guide](#).

Using the RACFICE PROC to generate reports

You can invoke the ICETOOL utility with the RACFICE PROC. This procedure, which is contained in the IRRICE member of SYS1.SAMPLIB, simplifies the JCL required to execute reports and contains JCL symbolic variables that represent the input to the RACFICE PROC. These variables are:

DBUDATA

Output of IRRDBU00 that is being used as input to the RACFICE PROC

ADUDATA

Output of IRRADU00 that is being used as input to the RACFICE PROC

REPORT

The name of the report that is being generated. [“Creating customized reports” on page 57](#) describes how you can create your own reports.

You do not need to specify each of these variables every time you execute the RACFICE PROC. For example, if you specify the default IRRDBU00 and IRRADU00 data sets in the RACFICE PROC, you create a report (shown in Figure 8 on page 56) that lists all of the audit records for a specific user with the JCL:

```

//jobname JOB Job card...
//stepname EXEC RACFICE,REPORT=SELU

```

If the default IRRDBU00 or IRRADU00 data sets are not correct, you can override them. For example, if the IRRDBU00 output is in the data set USER01.TEST.IRRDBU00 and the IRRADU00 output is in the data set USER01.TEST.IRRADU00, you should enter:

```
//jobname JOB Job card...
//      SET ADUDATA=USER01.TEST.IRRADU00
//      SET DBUDATA=USER01.TEST.IRRDBU00
//stepname EXEC RACFICE,REPORT=SELU
```

- 1 - Events Associated with a Specific User				99/02/14	05:14:49 pm		
User ID	Event	Qualifier	Time	Date	System	Terminal	Jobname
IBMUSER	ACCESS	SUCCESS	15:49:59	1999-02-08	IM13	LOCALC10	IBMUSER
IBMUSER	ACCESS	SUCCESS	15:50:27	1999-02-08	IM13	LOCALC10	IBMUSER
IBMUSER	ACCESS	SUCCESS	15:50:27	1999-02-08	IM13	LOCALC10	IBMUSER
IBMUSER	ACCESS	SUCCESS	15:50:28	1999-02-08	IM13	LOCALC10	IBMUSER
IBMUSER	ACCESS	SUCCESS	15:50:29	1999-02-08	IM13	LOCALC10	IBMUSER
IBMUSER	ACCESS	SUCCESS	16:42:11	1999-02-08	IM13		IBMUSERM
IBMUSER	ACCESS	SUCCESS	17:42:36	1999-02-10	IM13	LOCALC10	IBMUSER
IBMUSER	ACCESS	SUCCESS	17:43:11	1999-02-10	IM13	LOCALC10	IBMUSER

Note: This is a sample report only. IBM suggests that you revoke IBMUSER, which would mean that no events would be recorded for this user.

Figure 8. Report for all IRRADU00 Records Associated with a Specific User ID

Reports based on the SMF data unload utility (IRRADU00)

The following reports are based on the output of IRRADU00. You can find a sample of each report in SYS1.SAMPLIB.

Table 7. ICETOOL Reports from IRRADU00 Output		
Name	Description	Value
ACD\$	Users who are using automatic command direction	Identifies users who are using the RACF remote sharing facility for automatic command direction
CADU	Count of the IRRADU00 records	Shows the number of SMF-recorded events
CCMD	Count of commands issued (by user)	Shows the command activity for a specific user
ECD\$	Users who are directing commands explicitly	Identifies users who are using the RACF remote sharing facility to explicitly direct commands by specifying "AT(node.user_ID)"
LOGB	Users who log on with LOGON BY, a VM facility	Identifies users who are logging on as other users
LOGF	Users with excessive incorrect passwords	Identifies users who have exceeded a "bad password" threshold. This threshold is independent of the SETROPTS PASSWORD(REVOKE(nn)) value
OPER	Accesses allowed because the user has OPERATIONS	Identifies users with the OPERATIONS attribute
PWD\$	Users who are using password synchronization	Identifies users who are using the RACF remote sharing facility
RACL	RACLINK audit records	Identifies users who are using the RACF remote sharing facility
RINC	RACF class initialization information	Shows the status of RACF classes at RACF initialization

Table 7. ICETOOL Reports from IRRADU00 Output (continued)		
Name	Description	Value
SELU	All audit records for a specific user	Reports on all audited events for a user
SPEC	Accesses allowed because the user has SPECIAL	Identifies users with the SPECIAL attribute
TRMF	Excessive incorrect passwords from terminals	Identifies intruders who are attempting to guess passwords but are moving from one ID to another to avoid the revocation of user IDs
VIOL	Access violations	Identifies failed events
WARN	Accesses allowed due to WARNING mode profiles	Identifies events that are allowed but which you might want to prevent in the future

Creating customized reports

You can create your own reports using the RACFICE PROC by following these steps:

1. Identify the records that you want for the report.
 - a. Define the DFSORT statements for the record selection criteria.
 - b. Place them in the RACFICE data set with a unique member name consisting of a 1-4 character report identifier followed by CNTL.

If there is an existing RACFICE report that has similar selection criteria, use it as a model. For example, if you want to report all the access records created when users PATTY, MAXINE, and LAVERNE accessed resources, you need to create DFSORT selection statements that look like [Figure 9 on page 57](#) and store them in your RACFICE report data set as the PMLCNTL member.

```
INCLUDE COND=(63,8,CH,EQ,C'PATTY',OR,
              63,8,CH,EQ,C'MAXINE',OR,
              63,8,CH,EQ,C'LAVERNE')
OPTION VLSHRT
```

Figure 9. Customized Record Selection Criteria.

Note the similarity of this record selection criteria to the "Selected User" record selection criteria shown in [Figure 7 on page 55](#).

For complete details about the DFSORT statements, see *DFSORT Application Programming Guide*.

2. Identify the report format you want to use.
 - a. Define the ICETOOL statements for the report format.
 - b. Place them in the RACFICE data set with a 1-4 character report identifier that you chose.

If there is an existing RACFICE report that has similar report format, use it as a model. For example, if you wanted your report to contain the user ID, job name, date, time, and status of the access you could use the ICETOOL report statements shown in [Figure 10 on page 58](#), and store them in your RACFICE report data set as the PML member.

```

COPY      FROM(ADUDATA) TO(TEMP0001) USING(RACF)
DISPLAY   FROM(TEMP0001) LIST(PRINT) -
PAGE      -
TITLE('Patty, Maxine, and Laverne's Accesses')-
DATE(YMD/) -
TIME(12:) -
BLANK     -
ON(63,8,CH)  HEADER('User ID') -
ON(5,8,CH)   HEADER('Event') -
ON(12,8,CH)  HEADER('Qualifier') -
ON(23,8,CH)  HEADER('Time') -
ON(32,10,CH) HEADER('Date') -
ON(184,8,CH) HEADER('Job Name')

```

Figure 10. Customized Report Format

Note the similarity of this report format to the "Selected User" report format shown in [Figure 6 on page 55](#).

For complete details about the ICETOOL statements, see *DFSORT Application Programming Guide*.

3. Update the report JCL to invoke the RACFICE PROC with the 1-4 character report identifier you chose, as shown in [Figure 11 on page 58](#).

```

//jobname JOB Job card...
//stepname EXEC RACFICE,REPORT=PML

```

Figure 11. Customized Report JCL

Using the RACF SMF data unload utility output with Db2

The records produced by the RACF SMF data unload utility are designed to be processed by the Db2 load utility or its equivalent. The definition and control statements for a Db2 utilization of the output, all of which are contained in SYS1.SAMPLIB, are as follows:

- Sample data definition language (DDL) statements to define the relational presentation of the audit information and sample Db2 definitions which perform database and index creation. These are in member IRRADUTB.
- Sample control statements for the Db2 load utility that map the output from the RACF SMF data unload utility. These are in member IRRADULD.
- Sample structured query language (SQL) queries that demonstrate useful inquiries that can be made. These are in member IRRADUQR.

For complete information about Db2, see:

- *Db2 for MVS/ESA Administration Guide*
- *Db2 for MVS/ESA SQL Reference*
- *Db2 for MVS/ESA What's New*

Steps for using IRRADU00 output with Db2

To create and manage a Db2 database that contains the output from the RACF SMF data unload utility, you must:

1. Create one or more Db2 databases.
2. Create one or more Db2 table spaces.
3. Create Db2 tables.
4. Load data into the tables.
5. Reorganize the data in the tables (optional).
6. Create performance statistics (optional).
7. Delete table data (optional).

The first three steps are the initial setup of the database. These steps are required only once, when you first initialize the data manager. After the tables are established, you can import into the Db2 database continuously over a period of time. For example, you can load several days' worth of data before you decide to run the report. This is left up to the installation. At any time, you can delete your current table data. In this case, you reload and reorganize your tables. Also, by using Db2, you can create any required performance statistics at any time.

These steps are similar to those performed when using the RACF database unload utility (IRRDBU00), which is described in *z/OS Security Server RACF Security Administrator's Guide*. Information about the contents of the records produced by RACF SMF data unload utility is in *z/OS Security Server RACF Macros and Interfaces*.

The following sections show examples of the Db2 utility input for each of the previously listed steps.

Creating a Db2 database for unloaded RACF SMF data

A Db2 database names a collection of table spaces. The following SQL statement creates a Db2 database for the output of the RACF SMF data unload utility:

```
CREATE DATABASE databasename
```

where *databasename* is supplied by the user.

Creating a Db2 table space

A table space is one or more data sets in which one or more tables are stored. [Figure 12 on page 59](#) contains examples of SQL statements that create a table space. There are other methods of allocating a table space. For details, see the Db2 documentation.

```
CREATE TABLESPACE tablespacename IN databasename
  LOCKSIZE      TABLESPACE
  SEGSIZE 4
  PCTFREE 0
  BUFFERPOOL BP32K
  USING STOGROUP storagegroup
  PRIQTY 20000
  SECQTY 500
  CLOSE NO
;
```

Figure 12. Sample SQL Utility Statements Defining a Table Space

The user must supply the name of the table space (*tablespacename*) and the storage group (*storagegroup*). The sample shows a value of 4 for SEGSIZE, 20000 for PRIQTY, and 500 for SECQTY.

Member IRRADUTB in SYS1.SAMPLIB contains statements that create a table space. The sample in IRRADUTB puts all of the tables into one table space. The sample also suggests using a segment size, because segmented table spaces improve performance. You may want to define your own table spaces rather than use table spaces that are defined by the storage group.

You have a number of other options, such as the number of table spaces to use, the type of spaces, and the security for the data. You may want to keep the number of tables per table space fairly small for better performance, and you may want to consider putting the larger tables into separate table spaces.

Creating the Db2 tables

After the database and the table space are created, SQL statements that define the tables are executed. [Figure 12 on page 59](#) contains an example of the SQL statements that are required to create a table for the job initiation records created by the RACF SMF data unload utility.

Member IRRADUTB in SYS1.SAMPLIB contains examples that create separate tables for each record type that is produced by the RACF SMF data unload utility. The user must supply the user ID (*userid*).

```

CREATE TABLE userid.JOBINIT (
    INIT_EVENT_TYPE CHAR(8),
    INIT_EVENT_QUAL CHAR(8),
    INIT_TIME_WRITTEN TIME,
    INIT_DATE_WRITTEN DATE,
    INIT_SYSTEM_SMFID CHAR(4),
    INIT_VIOLATION CHAR(1),
    INIT_USER_NDFND CHAR(1),
    INIT_USER_WARNING CHAR(1),
    INIT_EVT_USER_ID CHAR(8),
    INIT_EVT_GRP_ID CHAR(8),
    INIT_AUTH_NORMAL CHAR(1),
    INIT_AUTH_SPECIAL CHAR(1),
    INIT_AUTH_OPER CHAR(1),
    INIT_AUTH_AUDIT CHAR(1),
    INIT_AUTH_EXIT CHAR(1),
    INIT_AUTH_FAILSFT CHAR(1),
    INIT_AUTH_BYPASS CHAR(1),
    INIT_AUTH_TRUSTED CHAR(1),
    INIT_LOG_CLASS CHAR(1),
    INIT_LOG_USER CHAR(1),
    INIT_LOG_SPECIAL CHAR(1),
    .
    .
    .
    INIT_UTK_SECL CHAR(8),
    INIT_UTK_EXECNODE CHAR(8),
    INIT_UTK_SUSER_ID CHAR(8),
    INIT_UTK_SNODE CHAR(8),
    INIT_UTK_SGRP_ID CHAR(8),
    INIT_UTK_SPOE CHAR(8),
    INIT_UTK_SPCLASS CHAR(8),
    INIT_UTK_USER_ID CHAR(8),
    INIT_UTK_GRP_ID CHAR(8),
    INIT_UTK_DFT_GRP CHAR(1),
    INIT_UTK_DFT_SECL CHAR(1),
    INIT_APPC_LINK CHAR(16),
    INIT_UTK_NETW CHAR(8),
    INIT_RES_NAME VARCHAR(255),
    INIT_CLASS CHAR(8),
    INIT_X500_SUBJECT VARCHAR(255),
    INIT_X500_ISSUER VARCHAR(255),
    INIT_SERVSECL CHAR(8),
    INIT_SERV_POENAME CHAR(64),
    INIT_CTX_USER VARCHAR(510),
    INIT_CTX_REG VARCHAR(255),
    INIT_CTX_HOST CHAR(128),
    INIT_CTX_MECH CHAR(16)
) IN databasename.tablespace

```

Figure 13. Sample SQL Utility Statements Creating a Table

Loading the Db2 tables

Figure 14 on page 61 shows the statements that are required to load the job initiation records. The IRRADULD member of SYS1.SAMPLIB contains statements that load all of the record types produced by the RACF SMF data unload utility. You can choose not to load some of the tables.

```

LOAD DATA INDDN ddname RESUME YES LOG NO
INTO TABLE userid.JOBINIT
WHEN(1:8)='JOBINIT' (
  INIT_EVENT_TYPE POSITION(1:8) CHAR(8),
  INIT_EVENT_QUAL POSITION(10:17) CHAR(8),
  INIT_TIME_WRITTEN POSITION(19:26) TIME EXTERNAL(8),
  INIT_DATE_WRITTEN POSITION(28:37) DATE EXTERNAL(10),
  INIT_SYSTEM_SMFID POSITION(39:42) CHAR(4),
  INIT_VIOLATION POSITION(44:44) CHAR(1),
  INIT_USER_NDFND POSITION(49:49) CHAR(1),
  INIT_USER_WARNING POSITION(54:54) CHAR(1),
  INIT_EVT_USER_ID POSITION(59:66) CHAR(8),
  INIT_EVT_GRP_ID POSITION(68:75) CHAR(8),
  .
  .
  .
  INIT_AUTH_OMVSSU POSITION(258:258) CHAR(1),
  INIT_AUTH_OMVSSYS POSITION(263:263) CHAR(1),
  INIT_USR_SECL POSITION(268:275) CHAR(8),
  INIT_RACF_VERSION POSITION(277:280) CHAR(4),
  INIT_APPL POSITION(282:289) CHAR(8),
  INIT_LOGSTR POSITION(291:545) CHAR(255),
  INIT_BAD_JOBNAME POSITION(547:554) CHAR(8),
  INIT_USER_NAME POSITION(556:575) CHAR(20),
  INIT_UTK_ENCR POSITION(577:577) CHAR(1),
  INIT_UTK_PRE19 POSITION(582:582) CHAR(1),
  INIT_UTK_VERPROF POSITION(587:587) CHAR(1),
  INIT_UTK_NJEUNUSR POSITION(592:592) CHAR(1),
  INIT_UTK_LOGUSR POSITION(597:597) CHAR(1),
  INIT_UTK_SPECIAL POSITION(602:602) CHAR(1),
  INIT_UTK_DEFAULT POSITION(607:607) CHAR(1),
  INIT_UTK_UNKNUSR POSITION(612:612) CHAR(1),
  INIT_UTK_ERROR POSITION(617:617) CHAR(1),
  INIT_UTK_TRUSTED POSITION(622:622) CHAR(1),
  INIT_UTK_SESSTYPE POSITION(627:634) CHAR(8),
  INIT_UTK_SURROGAT POSITION(636:636) CHAR(1),
  INIT_UTK_REMOTE POSITION(641:641) CHAR(1),
  INIT_UTK_PRIV POSITION(646:646) CHAR(1),
  INIT_UTK_SECL POSITION(651:658) CHAR(8),
  INIT_UTK_EXECNODE POSITION(660:667) CHAR(8),
  INIT_UTK_SUSER_ID POSITION(669:676) CHAR(8),
  INIT_UTK_SNODE POSITION(678:685) CHAR(8),
  INIT_UTK_SGRP_ID POSITION(687:694) CHAR(8),
  INIT_UTK_SPOE POSITION(696:703) CHAR(8),
  INIT_UTK_SPCCLASS POSITION(705:712) CHAR(8),
  INIT_UTK_USER_ID POSITION(714:721) CHAR(8),
  INIT_UTK_GRP_ID POSITION(723:730) CHAR(8),
  INIT_UTK_DFT_GRP POSITION(732:732) CHAR(1),
  INIT_UTK_DFT_SECL POSITION(737:737) CHAR(1),
  INIT_APPC_LINK POSITION(742:757) CHAR(16),
  INIT_UTK_NETW POSITION(759:766) CHAR(8),
  INIT_RES_NAME POSITION(768:1022) VARCHAR(255),
  INIT_CLASS POSITION(1024:1031) CHAR(8),
  INIT_X500_SUBJECT POSITION(1033:1287) VARCHAR(255),
  INIT_X500_ISSUER POSITION(1289:1543) VARCHAR(255),
  INIT_SERVSECL POSITION(1545:1552) CHAR(8),
  INIT_SERV_POENAME POSITION(1554:1617) CHAR(64),
  INIT_CTX_USER POSITION(1619:2128) CHAR(510),
  INIT_CTX_REG POSITION(2130:2384) CHAR(255),
  INIT_CTX_HOST POSITION(2386:2513) CHAR(128),
  INIT_CTX_MECH POSITION(2515:2530) CHAR(16),
  INIT_IDID_USER POSITION(2532:3516) CHAR(985),
  INIT_IDID_REG POSITION(3518:4538) CHAR(1021)
)

```

Figure 14. Db2 Utility Statements Required to Load the Tables (Part 1 of 2)

```

INIT_ACEE_VLF          POSITION(4540:4540) CHAR(1)
INIT_MFA_USR          POSITION(4545:4545) CHAR(1)
INIT_MFA_FALLBACK     POSITION(4550:4550) CHAR(1)
INIT_MFA_UNAVAIL      POSITION(4555:4555) CHAR(1)
INIT_MFA_PWD_EXPIRED  POSITION(4560:4560) CHAR(1)
INIT_MFA_NPWD_INV     POSITION(4565:4565) CHAR(1)
INIT_MFA_PART_SUCC    POSITION(4570:4570) CHAR(1)
.
INIT_PASSWORD_EVAL    POSITION(4580:4580) CHAR(1)
INIT_PASSWORD_SUCC    POSITION(4585:4585) CHAR(1)
INIT_PHRASE_EVAL      POSITION(4590:4590) CHAR(1)
INIT_PHRASE_SUCC      POSITION(4595:4595) CHAR(1)
INIT_PASSTICKET_EVAL  POSITION(4600:4600) CHAR(1)
INIT_PASSTICKET_SUCC  POSITION(4605:4605) CHAR(1)
INIT_MFA_SUCC         POSITION(4610:4610) CHAR(1)
INIT_MFA_FAIL         POSITION(4615:4615) CHAR(1)
INIT_AUTH_RSN1        POSITION(4620:4627) CHAR(7)
INIT_AUTH_RSN2        POSITION(4629:4636) CHAR(8)

```

Figure 15. Db2 Utility Statements Required to Load the Tables (Part 2 of 2)

Reorganizing the unloaded RACF SMF data in the Db2 database

Queries are processed faster if they are performed against an organized database. The Db2 utility statement required to reorganize the database is:

```
REORG TABLESPACE databasename.tablespace
```

Creating optimization statistics for the Db2 database

Queries are processed faster if they are performed against an organized database for which Db2 has collected performance statistics. The Db2 utility statement required to create these statistics is:

```
RUNSTATS TABLESPACE databasename.tablespace
```

Deleting data from the Db2 database

Before you reload the database with new data, you should archive the SMF flat files for future reference, and then delete the old data. Deleting the data can be done in several ways:

1. Use the DROP TABLE statement for each table you want to delete.
2. Use the DROP TABLESPACE statement for each table space.
3. Delete all of the records in each table.

[Figure 16 on page 62](#) shows the sample SQL statements that delete the group record data from the tables.

```

DELETE FROM userid.JOBINIT;
DELETE FROM userid.ACCESS;
DELETE FROM userid.ADDVOL;
DELETE FROM userid.RENAMEDS;
DELETE FROM userid.DELRES;

```

Figure 16. Db2 Utility Statements Required to Delete the Group Records

Db2 table names

Member IRRADULD in SYS1.SAMPLIB creates Db2 tables for each record type. [Table 8 on page 62](#) provides a useful reference of record type, record name, and Db2 table name.

Table 8. Correlation of Db2 Table Names and Record Types		
Db2 Table Name	Column Prefix	Description
JOBINIT	INIT	Job initiation

Table 8. Correlation of Db2 Table Names and Record Types (continued)

Db2 Table Name	Column Prefix	Description
ACCESS	ACC	Resource access, other than file or directory
ADDVOL	ADV	ADDVOL/CHGVOL
RENAMEDS	REN	Rename data set
DELRES	DELR	Delete resource
DELVOL	DELV	Delete volume
DEFINE	DEF	Define resource
ADDSD	AD	ADDSD command
ADDGROUP	AG	ADDGROUP command
ADDUSER	AU	ADDUSER command
ALTDSD	ALD	ALTDSD command
ALTGROUP	ALG	ALTGROUP command
ALTUSER	ALU	ALTUSER command
CONNECT	CON	CONNECT command
DELDSD	DELD	DELDSD command
DELGROUP	DELG	DELGROUP command
DELUSER	DELU	DELUSER command
PASSWORD	PWD	PASSWORD command
PERMIT	PERM	PERMIT command
RALTER	RALT	RALTER command
RDEFINE	RDEF	RDEFINE command
RDELETE	RDEL	RDELETE command
REMOVE	REM	REMOVE command
SETROPTS	SETR	SETROPTS command
RVAR	RVAR	RVAR command
APPCLU	APPC	APPC session
GENERAL	GEN	General purpose
DIRSRCH	DSCH	Directory search
DACCESS	DACC	Check access to a directory
FACCESS	FACC	Check access to file
CHAUDIT	CAUD	Change audit options
CHDIR	CDIR	Change current directory
CHMOD	CMOD	Change file mode
CHOWN	COWN	Change file ownership
CLRSETID	CSID	Clear SETID bits for a file
EXESETID	ESID	EXEC with SETUID/SETGID
GETPSENT	GPST	Get z/OS UNIX process entry
INITOEDP	IOEP	Initialize z/OS UNIX process
TERMOEDP	TOEP	z/OS UNIX process complete
KILL	KILL	Terminate a process

Table 8. Correlation of Db2 Table Names and Record Types (continued)

Db2 Table Name	Column Prefix	Description
LINK	LINK	LINK
MKDIR	MDIR	Make directory
MKNOD	MNOD	Make node
MNTFSYS	MFS	Mount a file system
OPENFILE	OPEN	Open a new file
PTRACE	PTRC	PTRACE authority checking
RENAMEF	RENF	Rename file
RMDIR	RDIR	Remove directory
SETEGID	SEGI	Set effective GID
SETEUID	SEUI	Set effective UID
SETGID	SGI	Set GID
SETUID	SUI	Set UID
SYMLINK	SYML	SYMLINK
UNLINK	UNL	UNLINK
UMNTFSYS	UFS	Unmount file system
CHKFOWN	CFOW	Check file owner
CHKPRIV	CPRV	Check z/OS UNIX privilege
OPENSTTY	OSTY	Open subsidiary TTY
RACLINK	RACL	RACLINK command
IPCCHK	ICLK	Check IPC access
IPCGET	IGET	Make ISP
IPCCTL	ICTL	R_IPC control
SETGROUP	SETG	Set group
CKOWN2	CKO2	Check owner two files
ACCR	ACCR	Access rights passed
RADCERT	RACD	RADCERT command
RACFINIT	RINI	RACF initialization data
CLASNAME	RINC	RACF class data
DSNSAFF	DSAF	Data sets affected by a security label change
INITACEE	INTA	initACEE functions
KTICKET	KTKT	Kerberos ticket
PDACCESS	PDAC	Policy Director Access Control Decision
PKIDPUBR	PKDP	CRL Publication
RPKIGENC	RPKG	R_PKIServ GENCERT
RPKIEPT	RPKE	R_PKIServ EXPORT
RPKIREAD	RPKR	R_PKIServ Read Data
RPKISCEP	RPKS	R_PKIServ SCEP Request
RPKIUPDR	RPKU	R_PKIServ Update Request
RPKIUPDC	RPKC	R_PKIServ Update Certificate

Table 8. Correlation of Db2 Table Names and Record Types (continued)

Db2 Table Name	Column Prefix	Description
SETFACL	SACL	R_Setfacl SETFACL
DELFACL	DACL	R_Setfacl DELFACL
SETFSECL	SSCL	R_setfsecl Set file security label
WRITEDWN	WDWN	R_writepriv Set writedown privilege
RPKIRESP	RPKO	R_PKIServ Respond
PTCREATE	PTCR	PassTicket Creation
PTEVAL	PTEV	PassTicket Evaluation
RDATAUPD	RPUT	R_Datalib
PKIAURNW	PKRN	PKI AutoRenew
PGMVERYF	PGMV	R_PgmSignVer
RACMAP	RACM	RACMAP command
AUTOPROF	AUTO	getUMAP/getGMAP automatic profile update
RPKIQREC	RPKQ	R_PKIServe QRECOVER
PRLIMIT	PRLM	Get/set process limits

Using the RACF SMF data unload utility to generate XML documents

The records produced by the SMF data unload utility can be formatted as an Extensible Markup Language (XML) document. XML has many advantages over the usual tabular-style data, such as the many applications that can use XML as a format for reading and writing of data. The benefits of XML include:

- A better view of the data. Instead of the tabular format, which may be difficult to focus in on the information you are looking for, the XML audit report formats the data for ease of reading and retrieval.
- The display can include different fonts, text emphasis (bold, italic) and different colors to differentiate information.
- A complete set of data for each field. The tabular data is limited by space and can be truncated. XML does not have this restriction.
- A view of the audit data that can be tailored to your environment.

XML overview

XML is a flexible language which allows you to tag data and have it displayed in a variety of ways. Many software applications read and write XML data, both in enterprise computing and consumer applications. Therefore, an auditing report using XML can be distributed and analyzed on multiple platforms and operating systems. For more information about XML, see [XML Toolkit for z/OS \(www.ibm.com/systems/z/os/zos/tools/xml\)](http://www.ibm.com/systems/z/os/zos/tools/xml).

An XML document which contains the audit report looks like this:

```
<?xml version='1.0'?>
<securityEventLog xmlns='http://www.ibm.com/xmlns/zOS/IRRSchema'>

  <rdf:Description rdf:about=''
    xmlns:rdf='http://www.w3.org/1999/02/22-rdf-syntax-ns#'
    xmlns:dc='http://purl.org/dc/elements/1.1/'
    xmlns:z='http://www.ibm.com/xmlns/zOS'>

    <dc:creator>
      <z:application>SMF Unload</z:application>
      <z:product>z/OS Security Server RACF</z:product>
      <z:fmid>HRF7720</z:fmid>
    </dc:creator>
    <dc:subject>RACF Security Event Log 2003-01-01 04:12:33</dc:subject>
    <dc:language>en</dc:language>
  </rdf:Description>
```

```

<event>
  <eventType>*CONNECT</eventType>
  <eventQual>SUCCESS</eventQual>
  <timeWritten>02:03:01.23</timeWritten>
  <dateWritten>2004-03-28</dateWritten>
  <systemSmfid>SYSA</systemSmfid>
  <prodName>Enterprise Identity Mapping</prodName>
  <prodFmid>HRF7720</prodFmid>
  <details xmlns:d="http://www.ibm.com/xmlns/zOS/EIMSchema">
    <violation>Y</violation>
    <userNdfnd>Y</userNdfnd>
    <userWarning>Y</userWarning>
    <evtUserId>IBMUSER</evtUserId>
    <evtGrpId>SYS1</evtGrpId>
    <authNormal>Y</authNormal>
    <authSpecial>Y</authSpecial>
    <authOper>Y</authOper>
    <authAudit>Y</authAudit>
    <authExit>Y</authExit>
    <authFailsft>Y</authFailsft>
    <authBypass>Y</authBypass>
    <authTrusted>Y</authTrusted>
    <logClass>Y</logClass>
    <logUser>Y</logUser>
    <logSpecial>Y</logSpecial>
    <logAccess>Y</logAccess>
    <logRacinit>Y</logRacinit>
    <logAlways>Y</logAlways>
    <logCmdviol>Y</logCmdviol>
    <logGlobal>Y</logGlobal>
    <termLevel>934</termLevel>
    <backoutFail>Y</backoutFail>
    <profSame>Y</profSame>
    <term>L0437634</term>
    <jobName>$EIMTEST</jobName>
    <readTime>01:03:04</readTime>
    <readDate>2004-03-28</readDate>
    <smfUserId>SMFUSER</smfUserId>
    <logLevel>Y</logLevel>
    <logLogopt>Y</logLogopt>
    <logSec1>Y</logSec1>
    <logCompatm>Y</logCompatm>
    <logApplaud>Y</logApplaud>
    <usrSec1>HIGHEST</usrSec1>
    <logVmevent>Y</logVmevent>
    <logNonomvs>Y</logNonomvs>
    <logOmvsnpv>Y</logOmvsnpv>
    <authOmvsu>Y</authOmvsu>
    <authOmvsys>Y</authOmvsys>
    <racfVersion>7720</racfVersion>
    <svrUserId>IBMUSER</svrUserId>
    <svrGrpId>SYS1</svrGrpId>
    <prodId>EIM</prodId>
    <logRauditx>Y</logRauditx>
    <x500Subject>cn=ibmuser,c=us</x500Subject>
    <x500Issuer>cn=PKI CA,c=us</x500Issuer>
    <resName>EIM.MYDOMAIN.CONNECT</resName>
    <class>RAUDITX</class>
    <profileName>EIM.*.CONNECT</profileName>
    <d:api>eimConnect</d:api>
    <d:domainUrl>ldap://some.big.host/ibm-eimdomainname=My Domain, c=us</d:domainUrl>
    <d:connectType>SIMPLE</d:connectType>
    <d:bindUser>cn=EIM administrator</d:bindUser>
    <d:certLabel>label</d:certLabel>
    <d:keyRing>keyring</d:keyRing>
  </details>
</event>

```

Producing XML output

You can have SMF Unload create an XML document by including only one of the following DD names in your IFASMFDP job:

- XMLOUT DD creates a compressed form of the XML document
- XMLFORM DD creates a more readable form of the XML document.

Whichever output type is coded in the JCL is the only type that is generated. For instance:

- If XMLFORM DD is specified in the JCL, then only the expanded, more readable XML output is written
- If XMLOUT DD is specified in the JCL, then only the compressed XML output type is written
- If OUTDD DD is specified in the JCL, then this is the only output type written (this is the traditional tabular non-xml form)

- If none of these types are specified in the JCL, the utility issues message IRR67522I **Open failed for OUTDD**

If more than one DDname is placed in the JCL, the above order (XMLFORM, XMLOUT, OUTDD) is used to see which one is created. The actual order of DD statements in the JCL is irrelevant.

For example:

```
//SMFDUMP EXEC PGM=IFASMFDP
//SYSPRINT DD SYSOUT=A
//ADUPRINT DD SYSOUT=A
//XMLOUT DD DISP=SHR,DSN=USER01.RACF.SMF.XMLOUT
//SMFDATA DD DISP=SHR,DSN=USER01.RACF.SMFDATA
//SMFOUT DD DUMMY
//SYSIN DD *
INDD(SMFDATA,OPTIONS(DUMP))
OUTDD(SMFOUT, TYPE(30(1,5),80:83))
ABEND(NORETRY)
USER2(IRRADU00)
USER3(IRRADU86)
//
```

This job creates a compressed form of the XML document in a data set that already exists. You can think of this as “raw output”, since it is the most basic form of the XML document. While this report takes up the least space, it is not well-suited for reading due to its limited line wrapping and tag justification. In the document, the tags and information are often composed of one long line to save space. A more readable form of the report can be created using the XMLFORM DD statement. The output from this would include better line wrapping, and the tags would be justified so that they begin on new lines when necessary. It is a more readable form but takes up more space.

How the XML tag names are derived

The names of the tags and the syntax of the tags are defined by XML schema document. The schema can be used to validate the data contained in an XML document. The tags appear in the order described by the schema documents. The schema document for RACF can be found in Sys1.Samplib(IRRSCHEM).

In general, the tag names used in RACF are derived from the corresponding Db2 field names. The rules for converting a field name to a tag name are:

1. Remove the column name and the first underscore (“_”) from the field name
2. Capitalize the first letter after each of the remaining underscores in the name. The rest of the characters should be lowercase.
3. Remove the underscores from the name

The exceptions to this methodology are as follows:

Table 9. XML naming exceptions	
Db2 Field Name	XML Tag Name
RINI_TERM	riniTerm
SECL_LINK	eventLink
CAUD_REQUEST_WRITE	caudRequestWrite
CAUD_REQUEST_READ	caudRequestRead
CAUD_REQUEST_EXEC	caudRequestExec
SSCL_OLDSECL	oldSecl
<col>logstring	logstr
KTKT_PRINCIPAL	kerbPrincipal
PDAC_PRINCIPAL	pdasPrincipal

Table 9. XML naming exceptions (continued)	
Db2 Field Name	XML Tag Name
any field with RESERVED in the name	Note: no XML tag
ACC_NAME	profileName
APPC_NAME	profileName

XML interprets certain characters as having a special meaning, such as "<" and ">". If a value contains one of these special characters, which are listed in Table 11 on page 68, SMF Unload replaces the value with an "entity reference" so that it will not be misinterpreted by an XML parser. Here is an example:

Table 10. XML interpretation of special characters example	
Before Value	After Value
<subjectDN>cn=John,ou=Smith & Sons,c=us</subjectDN>	<subjectDN>cn=John,ou=Smith & Sons,c=us,<subjectDN>

The special characters are:

Table 11. XML special characters substitutions	
Character	Substitution symbol
<	<
&	&
>	>
"	&odq;
'	'

It is possible for a single element or value in the XMLOUT or XMLFORM to cause the length of a record to exceed the maximum 8K limit. SMF Unload breaks the line into two. If the line break would naturally occur in the middle of a tag or entity reference, SMF Unload splits the line before or after the tag or entity reference so that the tag or entity reference is not broken. What this means is that the data value may include a carriage return or line feed that was not originally part of the value. It is up to the application processing the document to detect this condition and concatenate the two lines before passing the element to an XML parser.

Viewing and working with XML audit reports

On z/OS, you can process the document using the IBM XML Toolkit for z/OS. The XML can be used in the following ways:

- Viewed using the ISPF edit function
- Viewed using an XML-capable web browser
- Converted to HTML using a style sheet
- Processed by an XML parser and processor

On other systems, such as personal computers and workstations, the audit report can be viewed using an XML-capable web browser. Many browsers available today have the ability to correctly parse and render XML documents. Therefore, once the audit report is on that system, you can read it as easily as any other web document. Simply bring up a listing of the files and single- or double-click the file to open it in the browser window. The platform documentation can help you discover which applications are able to parse and display XML files.

One thing to note is that to use the XML file on a personal computer, you must first alter the EBCDIC encoding line at the top of the file:

```
<?xml version='1.0' encoding='ebcdic-cp-us' ?>
```

So that it looks like the following:

```
<?xml version='1.0' encoding='ISO8859-1' ?>
```

Event code qualifiers

The RACF event code (found in the SMF80EVT field of the SMF record) and the RACF event code qualifier (found in the SMF80EVQ field of the SMF record) are determined during RACF processing. The following sections explain the meaning of each qualifier code by event.

You may also see event codes for another component, such as EIM. The data in the audit record identifies the component. See the documentation of the component for details.

Event 1(1): JOB INITIATION/TSO LOGON/TSO LOGOFF

This event is logged by RACROUTE REQUEST=VERIFY and RACROUTE REQUEST=VERIFYX. Installation exit ICHRIX02 can change the return code of the RACROUTE REQUEST=VERIFY or RACROUTE REQUEST=VERIFYX request to any value. The return code significantly influences the corresponding audit record's event code 1 qualifier. You should be familiar with any ICHRIX02 processing in effect for your installation. See *z/OS Security Server RACF System Programmer's Guide* for details.

For this event, code qualifiers 0 and 8 do not exist as type 80 records. They are contained in the unloaded records from the RACF SMF data unload utility (IRRADU00) and as reports and reformatted records from the RACF report writer (RACFRW).

The explanations of the event code qualifiers for Event 1 are:

0(0)

SUCCESSFUL INITIATION The job began successfully.

1(1)

INVALID PASSWORD The password specified on the job card or at logon is incorrect.

2(2)

INVALID GROUP The user tried to log on or to initiate a job using a group that the user is not a member of.

3(3)

INVALID OIDCARD Operator identification cards are used at the installation, and the data received from the one used does not match that of the user's profile.

4(4)

INVALID TERMINAL/CONSOLE The user is not authorized to the port of entry (POE). There are four kinds of POEs, each with its own profile class: APPCPORT, CONSOLE, JESINPUT, and TERMINAL. One of the following occurred:

- The port of entry is active but the user is not authorized.
- The user is denied access because of conditional days/times in the user profile.
- The user is denied access because of conditional days/times in the class profile (TERMINAL class only).

5(5)

INVALID APPLICATION The APPL class is active, and the user is trying to log on to an application without authorization.

6(6)

REVOKED USER ID ATTEMPTING ACCESS The user ID specified on the logon or job card has been revoked. One of the following occurred:

- The installation-defined limit of password attempts was reached at an earlier time.
- The inactive interval was reached.
- The revoke date in the user's profile is in effect.
- The RACF administrator revoked the user ID.

The RACF administrator must reset the user ID before the user can log on again.

7(7)

USER ID AUTOMATICALLY REVOKED The user ID has been automatically revoked. The installation-defined limit of password and password phrase attempts was reached.

8(8)

SUCCESSFUL TERMINATION The job completed successfully.

9(9)

UNDEFINED USER ID The user ID specified on the job card or at logon is not defined to the RACF database.

10(A)

INSUFFICIENT SECURITY LABEL AUTHORITY One of the following occurred:

- SETROPTS MLS FAILURES is in effect and the user's security label does not dominate the submitter's security label. Two exceptions are explained under Qualifier 20.
- SETROPTS MLACTIVE FAILURES is in effect and the job card/logon attempt does not specify a valid security label. One exception is explained under Qualifier 21.

11(B)

NOT AUTHORIZED TO SECURITY LABEL The user is not authorized to the security label specified. One exception is explained under Qualifier 22.

12(C)

SUCCESSFUL RACINIT INITIATION The job or user was verified.

13(D)

SUCCESSFUL RACINIT DELETE The job completed or the user logged off.

14(E)

SYSTEM NOW REQUIRES MORE AUTHORITY SETROPTS MLQUIET is in effect. If this is a user verification, the user is not a console operator and does not have the SPECIAL attribute. If this is a job verification, the job is not part of the trusted computing base (TCB). The verification fails.

15(F)

REMOTE JOB ENTRY—JOB NOT AUTHORIZED The submitting node is not authorized to the system; a NODES profile prevents remote job entry. The profile has the format 'submit_node.RUSER.userid' and has a UACC of NONE.

Note:

Surrogate Function Qualifiers:

Qualifiers 16, 17, and 18 involve the use of the surrogate function, and occur if any of the following conditions is met:

- The SURROGAT class is active.
- General resource profiles of the SURROGAT class are defined for the job card's user ID, and the user ID submitting the job is permitted to the profile with at least READ access.
- The submitter is authorized to the security label of the job.

For more information, see [z/OS Security Server RACF Security Administrator's Guide](#).

16(10)

SURROGATE CLASS IS INACTIVE The SURROGAT class is inactive. The job card has a user ID that is different from the submitter's user ID, and there is no password specified.

17(11)

SUBMITTER IS NOT AUTHORIZED BY USER The SURROGAT class is active. Either there is no SURROGAT profile for the job card's user ID, or the submitter's user ID is not permitted to the profile.

18(12)

SUBMITTER IS NOT AUTHORIZED TO SECURITY LABEL The SECLABEL class is active and there is a security label on the job card. The submitter is not authorized to the security label specified on the job card.

19(13)

USER IS NOT AUTHORIZED TO JOB The JESJOBS class is active, and the user is not authorized to the jobname.

20(14)

WARNING—INSUFFICIENT SECURITY LABEL AUTHORITY One of the following occurred:

- SETROPTS MLS WARNING is in effect and the security label on the job card does not dominate the submitter's security label.
- SETROPTS MLS FAILURES is in effect, the user's security label does not dominate the submitter's, and the user has the SPECIAL attribute.
- SETROPTS MLS FAILURES and SETROPTS COMPATMODE are in effect, the user's security label does not dominate the submitter's, and the submitter's or the job owner's security label is the default.

The verification does not fail.

21(15)

WARNING—SECURITY LABEL MISSING FROM JOB, USER, OR PROFILE One of the following occurred:

- MLACTIVE WARNING is in effect, and the job card or logon attempt did not specify a valid security label.
- MLACTIVE FAILURES is in effect, the user has the SPECIAL attribute, and a valid security label is not specified.

The verification does not fail.

22(16)

WARNING—NOT AUTHORIZED TO SECURITY LABEL The user has the SPECIAL attribute, the security label is SYSHIGH, and the user does not have authority to it. The verification does not fail.

23(17)

SECURITY LABELS NOT COMPATIBLE SETROPTS MLS is not active, the submitter's user ID is different from the user ID on the job card, and the submitter's and the user's security labels are disjoint (neither one dominates the other).

One exception is listed under Qualifier 24.

24(18)

WARNING—SECURITY LABELS NOT COMPATIBLE SETROPTS MLS is not active, the submitter's user ID is different from the user ID on the job card, the submitter's and user's security labels are disjoint, SETROPTS COMPATMODE is in effect, and the submitter's or user's security label is the default. The verification does not fail.

25(19)

CURRENT PASSWORD HAS EXPIRED The user's password has expired for one of the following reasons:

- The installation specification in SETROPTS PASSWORD INTERVAL command
- Creation of the password in the ADDUSER command
- Alteration of the password with the ALTUSER PASSWORD command

26(1A)

INVALID NEW PASSWORD The new password specified may be incorrect because:

- It is all blanks.

- The characters are not all alphanumeric.
- The characters do not match the installation's password syntax rules (set by the SETROPTS PASSWORD command).
- It is the same as a past password (the extent of the past history determined by the SETROPTS PASSWORD HISTORY command).
- It is marked invalid by the installation's password exit.
- It is too soon to change the password (as determined by the SETROPTS PASSWORD MINCHANGE command).

27(1B)

VERIFICATION FAILED BY INSTALLATION The installation exit ICHRIX01 or ICHRIX02 failed the request.

28(1C)

GROUP ACCESS HAS BEEN REVOKED The user's membership to the group specified has been revoked.

29(1D)

OIDCARD IS REQUIRED An OIDCARD is required by the installation but none was given.

30(1E)

NETWORK JOB ENTRY—JOB NOT AUTHORIZED For session types of NJE SYSOUT or NJE BATCH, the verification fails because one of the following occurred:

- The user, group, or security label requirements in the NODES profiles were not met.
- The submitter's node is not valid.
- The reverify check failed.

See *z/OS Security Server RACF Security Administrator's Guide* for details on NJE.

31(1F)

WARNING—UNKNOWN USER FROM TRUSTED NODE PROPAGATED The combination of having a trusted node submit a job with the undefined user ID warrants this logging. The verification does not fail.

For an NJE BATCH job, the submitting user is the NJE undefined user ID. The default NJE undefined user ID is eight question marks (????????), unless it was changed with the SETROPTS JES NJEUSERID command. The submitting node is trusted (its best-fit NODES profile on the receiving node's system has a UACC of at least UPDATE). This profile allows propagation of submitters; however, the undefined user ID does not propagate.

32(20)

SUCCESSFUL INITIATION USING PASSTICKET Logon was achieved using a PassTicket.

33(21)

ATTEMPTED REPLAY OF PASSTICKET Logon was rejected because of attempted replay of a PassTicket.

34(22)

CLIENT SECURITY LABEL NOT EQUIVALENT TO SERVER'S Logon was rejected because security labels are not equivalent.

35(23)

USER AUTOMATICALLY REVOKED DUE TO INACTIVITY A user has not logged on, submitted a job or accessed the system for so long that the user ID has become inactive. RACF prevents the user from accessing the system.

36(24)

PASS PHRASE IS NOT VALID A user attempted to access the system specifying a password phrase that is not valid or specifying a password phrase for a protected user ID. RACF prevents the user from accessing the system.

37(25)

NEW PASS PHRASE IS NOT VALID Logon was rejected because the new password phrase is not valid.

38(26)

CURRENT PASS PHRASE HAS EXPIRED Logon was rejected because the current password phrase has expired.

39(27)

NO RACF USER ID FOUND FOR DISTRIBUTED IDENTITY Logon was rejected because no RACF user ID was found for the distributed identity.

40(28)

Successful Multi-Factor Authentication (MFA) Logon was successful for multi-factor authentication.

41(29)

Failed Multi-Factor Authentication (MFA) Logon was rejected due to nonvalid multi-factor authentication credentials.

42(2A)

Failed Authentication Authentication failed because no multi-factor decision could be made for an MFA user who has the NOPWFALLBACK option.

43(2B)

IBM MFA partial success The credentials were not incorrect, but a re-authentication is required.

44(2C)

Identity Token validation error An error was encountered validating a provided identity token.

45(2D)

Identity Token build error An error was encountered attempting to build an identity token.

46(2E)

Failed Identity Token authentication Signature validation of a provided identity token failed.

Event 2(2): RESOURCE ACCESS

This event is logged by RACROUTE REQUEST=AUTH, RACROUTE REQUEST=DIRAUTH and RACROUTE REQUEST=FASTAUTH.

The explanations of the event code qualifiers for Event 2 are:

0(0)

SUCCESSFUL ACCESS The user has authorization to the resource.

1(1)

INSUFFICIENT AUTHORITY The user does not have authorization to the resource.

2(2)

PROFILE NOT FOUND—RACFIND SPECIFIED ON MACRO If the request is AUTH, the RACFIND keyword equaled YES on the authorization request, specifying that a discrete profile should exist for the resource. No discrete or generic RACF protection was found.

If the request is FASTAUTH, the program is not controlled and the PADS data sets are open.

3(3)

ACCESS PERMITTED DUE TO WARNING The user does not have proper authority to the resource. However, the resource's profile has the WARNING option and allows the access.

Note:

Exceptions

- PROGRAM class profiles cannot use the WARNING option.
- RACLISTed profiles use the WARNING option only if they are RACLISTed by SETROPTS or a RACROUTE REQUEST=LIST that specifies RELEASE=1.8 or later.

4(4)

FAILED DUE TO PROTECTALL SETROPTS PROTECTALL FAILURES is in effect, and the data set has not been protected by a discrete or generic profile.

Note:

Exceptions

- A privileged user bypasses this checking (no auditing done).
- A trusted user bypasses the checking, but can be audited with the SETROPTS LOGOPTIONS command.
- A user with the SPECIAL attribute gets a warning (see Qualifier 5).
- A system-generated temporary data set does not require protection.

5(5)

WARNING ISSUED DUE TO PROTECTALL SETROPTS PROTECTALL WARNING is in effect, and the data set has not been protected by a discrete or generic profile. The authorization request does not fail.

The exceptions in Qualifier 4 also apply.

6(6)

INSUFFICIENT CATEGORY/SECLEVEL The installation uses categories or security levels as separate entities. One of the following occurred:

- The user's SECLEVEL is less than the SECLEVEL of the resource.
- The user is not a member of every CATEGORY associated with the resource.

7(7)

INSUFFICIENT SECURITY LABEL AUTHORITY The SECLABEL class is active and one of the following occurred:

- The user's security label does not dominate the resource's.
- The user does not have a security label, but the resource does.
- SETROPTS MACTIVE FAILURES is in effect, and either the user or the resource is missing a security label. One exception is explained in Qualifier 8.
- The resource's class requires reverse domination checking, and the resource's security label does not dominate the user's.
- SETROPTS MLS FAILURES is in effect; the user's security label does not equal the resource's, and the requested access is UPDATE or CONTROL. One exception is explained under Qualifier 9.

8(8)

SECURITY LABEL MISSING FROM JOB, USER OR PROFILE One of the following occurred:

- SETROPTS MACTIVE WARNING is in effect, the SECLABEL class is active, and either the resource or user is missing a security label.
- SETROPTS MACTIVE FAILURES is in effect, the user has the SPECIAL attribute, and either the resource or the user is missing a security label.

9(9)

WARNING—INSUFFICIENT SECURITY LABEL AUTHORITY One of the following occurred:

- The SECLABEL class is active, SETROPTS MLS WARNING is in effect, the user's security label does not equal the resource's security label, and the requested access is UPDATE or CONTROL.
- SETROPTS MLS FAILURES is in effect, the user's security label does not equal the resource's security label, the requested access is UPDATE or CONTROL, and the user has the SPECIAL attribute.

10(A)

WARNING—DATA SET NOT CATALOGED SETROPTS CATDSNS WARNING is in effect. The data set being accessed cannot be cataloged.

See *z/OS Security Server RACF Command Language Reference* for more information.

11(B)

DATA SET NOT CATALOGED SETROPTS CATDSNS FAILURES is in effect. The data set being accessed cannot be cataloged. If the user has the SPECIAL attribute, only a warning is issued (see Qualifier 10).

See *z/OS Security Server RACF Command Language Reference* for more information.

12(C)

PROFILE NOT FOUND—REQUIRED FOR AUTHORITY CHECKING A profile was not found for the general resource, and that resource's class has a default return code greater than 4. The authorization request fails.

13(D)

WARNING—INSUFFICIENT CATEGORY/SECLEVEL The installation uses categories or security levels as separate entities. One of the following occurred:

- The user's SECLEVEL is less than the SECLEVEL of the resource.
- The user is not a member of every CATEGORY associated with the resource.

The resource profile has the WARNING option, so access is given.

Note:

Exceptions

- PROGRAM class profiles cannot use the WARNING option.
- RACLISTed profiles can use the WARNING option only if they are RACLISTed by SETROPTS or a RACF 1.8 (or later) RACROUTE REQUEST=LIST.

14(E)

WARNING—NON-MAIN EXECUTION ENVIRONMENT Non-MAIN execution environment was detected while in ENHANCED PGMSECURITY mode. Conditional access for Program Access to Data Sets (PADS) or access to EXECUTE-controlled program is temporarily allowed.

15(F)

CONDITIONAL ACCESS ALLOWED VIA® BASIC MODE PROGRAM Conditional access for Program Access to Data Sets (PADS) or access to EXECUTE-controlled program is allowed through the BASIC mode program while in ENHANCED PGMSECURITY mode.

Event 3(3): ADDVOL/CHGVOL

This event refers to RACROUTE REQUEST=DEFINE,TYPE=ADDVOL and RACROUTE REQUEST=DEFINE,TYPE=CHGVOL.

The explanations of the event code qualifiers for Event 3 are:

0(0)

SUCCESSFUL PROCESSING OF NEW VOLUME One of the following occurred:

- The user has proper administrative authority to the DATASET profile; in the case of tape data sets with TAPEVOL active, the user also had administrative authority to the TAPEVOL profile.
- SETROPTS MLS WARNING is in effect, the TAPEVOL class is active, a TAPEVOL profile exists, and the user's security label does not equal the resource's.
- SETROPTS MLACTIVE WARNING is in effect, the TAPEVOL class is active, and no TAPEVOL profile exists for the volume.

1(1)

INSUFFICIENT AUTHORITY The user did not have administrative authority to the DATASET profile, or, in the case of tape data sets, the TAPEVOL class is active and the user did not have administrative authority to the TAPEVOL profile.

2(2)

INSUFFICIENT SECURITY LABEL AUTHORITY The SECLABEL class is active, the data set is a tape data set, the TAPEVOL class is active, and the user's security label does not dominate the security label found in the TAPEVOL profile.

3(3)

LESS SPECIFIC PROFILE EXISTS WITH DIFFERENT SECURITY LABEL The SECLABEL class is active, SETROPTS MLSTABLE is in effect, a less specific generic profile exists that does not have the same security label, the data set is a tape data set, and the TAPEVOL class is active. Changing the volume would change the TAPEVOL profile's security label, violating SETROPTS MLSTABLE rules.

Note:

Exception

If SETROPTS MLQUIET is also in effect and the user has the SPECIAL attribute, the request does not fail and this event is not logged.

Event 4(4): RENAME RESOURCE

This event is based on RACROUTE REQUEST=DEFINE,TYPE=DEFINE,NEWNAME or RACROUTE REQUEST=DEFINE,TYPE=DEFINE,NEWNAMX.

The explanations of the event code qualifiers for Event 4 are:

0(0)

SUCCESSFUL RENAME One of the following occurred:

- The user has sufficient authority to rename the resource.
- The SECLABEL class is active, SETROPTS MLACTIVE WARNING is in effect, and the user or the resource does not have a security label.

1(1)

INVALID GROUP The resource to be renamed is a data set, and the high-level qualifier of the new data set is not a valid group or user ID.

2(2)

USER NOT IN GROUP The resource is a data set, RACFIND is not set to NO, the high-level qualifier of the new data set name is a group, and the user does not belong to that group.

3(3)

INSUFFICIENT AUTHORITY One of the following occurred:

- SETROPTS GENERICOWNER is in effect, and renaming the profile would violate GENERICOWNER rules.
- The resource is a data set, and the high-level qualifier is a group or user ID. The user is not authorized to create a new data set by the generic profile protecting the new name, and the high-level qualifier of the new data set name is beyond the scope of the user.
- The resource is an SFS file or directory, and the second qualifier is a user ID. The user is not authorized to create a new file or directory by the generic profile protecting the new name, and the second qualifier of the new file or directory name is beyond the scope of the user.

See *z/OS Security Server RACF Security Administrator's Guide*.

4(4)

RESOURCE NAME ALREADY DEFINED The requested new name already has a discrete profile defined. The return code of the RENAME is 4.

5(5)

USER NOT DEFINED TO RACF The installation's naming convention routine has indicated that the high-level qualifier is a user ID that is not defined to RACF. One of the following occurred:

- RACFIND is not set to NO.

- The resource is protected by a generic or global profile, and the user does not have ALTER access to it.

6(6)

RESOURCE NOT PROTECTED SETROPTS PROTECTALL FAILURES is in effect, and the new data set name is not protected by a profile.

7(7)

WARNING—RESOURCE NOT PROTECTED SETROPTS PROTECTALL WARNINGS is in effect, and the new data set name is not protected by a profile.

The RENAME is allowed.

8(8)

USER IN SECOND QUALIFIER IS NOT RACF DEFINED The second qualifier of the new name is not a valid user ID.

9(9)

LESS SPECIFIC PROFILE EXISTS WITH DIFFERENT SECURITY LABEL The SECLABEL class is active, SETROPTS MLSTABLE is in effect, and there is a less specific generic profile existing for the new name with a different security label. Renaming this resource would violate SETROPTS MLSTABLE rules.

10(A)

INSUFFICIENT SECURITY LABEL AUTHORITY The SECLABEL class is active, SETROPTS MLS FAILURES is in effect, and the user is not authorized to the security label of the resource to be renamed.

11(B)

RESOURCE NOT PROTECTED BY SECURITY LABEL The SECLABEL class is active, SETROPTS MLS FAILURES is in effect, and the profile covering the old resource name does not have a security label.

12(C)

NEW NAME NOT PROTECTED BY SECURITY LABEL The SECLABEL class is active, SETROPTS MLS FAILURES is in effect, and the profile that would cover the new resource name does not have a security label.

13(D)

NEW SECURITY LABEL MUST DOMINATE OLD SECURITY LABEL The SECLABEL class is active, SETROPTS MLS FAILURES is in effect, and the security label of the profile covering the new resource name does not dominate the security label of the profile covering the old resource name.

14(E)

INSUFFICIENT SECURITY LABEL AUTHORITY The SECLABEL class is active, SETROPTS MLS WARNING is in effect, and the user is not authorized to the security label of the profile. The RENAME is allowed.

15(F)

WARNING—RESOURCE NOT PROTECTED BY SECURITY LABEL The SECLABEL class is active, SETROPTS MLS WARNING is in effect, and the profile covering the old resource name does not have a security label. The RENAME is allowed.

16(10)

WARNING—NEW NAME NOT PROTECTED BY SECURITY LABEL The SECLABEL class is active, SETROPTS MLS WARNING is in effect, and the profile that would cover the new resource name does not have a security label. The RENAME is allowed.

17(11)

WARNING—NEW SECURITY LABEL MUST DOMINATE OLD SECURITY LABEL The SECLABEL class is active, SETROPTS MLS WARNING is in effect, and the security label of the profile covering the new resource name does not dominate the security label of the profile covering the old resource name. The RENAME does not fail.

Event 5(5): DELETE RESOURCE

This event is based on RACROUTE REQUEST=DEFINE,TYPE=DELETE.

The explanations of the event code qualifiers for Event 5 are:

0(0)

SUCCESSFUL SCRATCH The resource profile was deleted.

1(1)

RESOURCE NOT FOUND The resource profile was not found.

2(2)

INVALID VOLUME The class is DATASET, and the data set does not reside on the volume specified.

Event 6(6): DELETE ONE VOLUME OF A MULTIVOLUME RESOURCE

This event is based on RACROUTE REQUEST=DEFINE,TYPE=DELETE.

The explanations of the event code qualifiers for Event 6 are:

0(0)

SUCCESSFUL DELETION The volume was successfully deleted from the DATASET profile.

Event 7(7): DEFINE RESOURCE

This event is based on RACROUTE REQUEST=DEFINE,TYPE=DEFINE.

The explanations of the event code qualifiers for Event 7 are:

0(0)

SUCCESSFUL DEFINITION

- The user had sufficient authority to define the resource.
- The SECLABEL class is active, SETROPTS MACTIVE WARNING is in effect, and the user or the resource does not have a security label.

1(1)

GROUP UNDEFINED The resource to be defined is a data set, and the high-level qualifier is not a valid group or user ID.

2(2)

USER NOT IN GROUP The resource is a data set, RACFIND is not set to NO, the high-level qualifier is a group, and the user does not belong to that group.

3(3)

INSUFFICIENT AUTHORITY One of the following occurred:

- SETROPTS GENERICOWNER is in effect and defining the profile would violate GENERICOWNER rules.
- For general resources, the user is not authorized to define profiles in the class.
- The resource is a data set, and the high-level qualifier of the resource is a group or user ID. The user is not authorized to create a new data set by the generic profile protecting the new name, and the high-level qualifier of the new data set name is beyond the scope of the user.
- The resource is an SFS file or directory, and the second qualifier is a user ID. The user is not authorized to create a new file or directory by the generic profile protecting the new name, and the second qualifier of the new file or directory name is beyond the scope of the user.

See *z/OS Security Server RACF Security Administrator's Guide*.

4(4)

RESOURCE NAME ALREADY DEFINED The requested name already has a discrete profile defined. The return code of the DEFINE is 4.

5(5)

USER NOT DEFINED TO RACF The installation's naming convention routine has indicated that the high-level qualifier is a user ID that is not defined to RACF. One of the following occurred:

- RACFIND is not set to NO.

- The resource is protected by a generic or global profile, and the user does not have ALTER access to it.

6(6)

RESOURCE NOT PROTECTED SETROPTS PROTECTALL FAILURES is in effect, and the data set to be defined is not protected by a profile.

7(7)

WARNING—RESOURCE NOT PROTECTED SETROPTS PROTECTALL WARNINGS is in effect, and the data set to be defined is not protected by a profile. The DEFINE is allowed.

8(8)

WARNING—SECURITY LABEL MISSING FROM JOB, USER, OR PROFILE The SECLABEL and TAPEVOL classes are active. SETROPTS MLACTIVE WARNING is in effect, and the TAPEVOL profile is without a security label. The DEFINE is allowed.

9(9)

INSUFFICIENT SECURITY LABEL AUTHORITY The SECLABEL and TAPEVOL classes are active. SETROPTS MLS WARNING is in effect, and the user's security label does not dominate the one found in the TAPEVOL profile.

The DEFINE is allowed.

10(A)

USER IN SECOND QUALIFIER IS NOT RACF-DEFINED The second qualifier of the name is not a valid user ID.

11(B)

INSUFFICIENT SECURITY LABEL AUTHORITY The SECLABEL class is active, and one of the following occurred:

- SETROPTS MLACTIVE FAILURES is in effect, and the user is missing a security label.
- SETROPTS MLACTIVE FAILURES is in effect, and the resource is missing a security label.
- The user's security label does not dominate the resource's.
- SETROPTS MLS FAILURES is in effect, and the user's security label does not equal the resource's.

12(C)

LESS SPECIFIC PROFILE EXISTS WITH A DIFFERENT SECURITY LABEL The SECLABEL class is active, SETROPTS MLSTABLE is in effect, and there is a less specific generic profile existing for the name with a different security label.

Defining this resource would violate SETROPTS MLSTABLE rules.

Event 8(8)–25(19): COMMANDS

Events 8 through 25 apply to the RACF commands. The following qualifier codes are used for each event:

0(0)

NO VIOLATIONS DETECTED The RACF command was issued successfully. This qualifier applies to all RACF commands.

1(1)

INSUFFICIENT AUTHORITY The user did not have the authority to issue the RACF command. This qualifier applies to all RACF commands.

2(2)

KEYWORD VIOLATIONS DETECTED The user had the authority to issue the RACF command, but not to all the keywords that were specified. Keywords that the user is not authorized to use are ignored. For example, a user with the SPECIAL attribute but without the AUDITOR attribute can issue the ALTUSER command, but not with the GLOBALAUDIT keyword. This qualifier applies to all RACF commands.

3(3)

SUCCESSFUL LISTING OF DATASETS This logs the successful use of LISTDSD DSNS.

4(4)

SYSTEM ERROR IN LISTING OF DATA SETS This logs an error in attempting LISTDSD DSNS.

Note:

1. When the SETROPTS command is issued with a keyword that contains an asterisk (*), the asterisk is displayed in the output. For example, if you issue the command SETROPTS AUDIT(*), the output contains AUDIT(*) .
2. When the SETROPTS command is issued with a keyword that lists more than ten classes, the output lists the first ten classes and displays the remaining number as an ellipsis. For example, if you issue the command SETROPTS CLASSACT(class1 class2 class3 class4 class5 class6 class7 class8 class9 class10 class11 class12), the output appears as CLASSACT(class1 class2 class3 class4 class5 class6 class7 class8 class9 class10 ...(00002)) .
3. When the RVARY command is issued, the DATASET keyword lists the names of as many RACF databases as can fit in the 1024 character output. The remainder are shown as an ellipsis (... (nnnnn)) .
4. When the RVARY command is issued with the NOCLASSACT(*) keyword or with more than ten classes specified, the output lists the first ten classes. The remaining classes are shown as an ellipsis.

Event 26(1A): APPCLU

This event is logged by RACROUTE REQUEST=AUDIT,EVENT='APPCLU'. This event applies to establishing a session between two logical units (referred to as the local LU and the partner LU) in accordance with the System Network Architecture (SNA). VTAM and CICS call RACF for security information stored in general resource profiles in the APPCLU class.

Each profile contains an 8-byte session key that is used in verification; the two LUs must have corresponding profiles with identical keys so that the handshaking of encrypted data is successful.

The explanations of the event code qualifiers for Event 26 are:

0(0)

PARTNER VERIFICATION WAS SUCCESSFUL The handshaking was successful. The LUs established a connection.

1(1)

SESSION ESTABLISHED WITHOUT VERIFICATION No handshaking was done, but the LUs were still allowed to establish a connection, with the knowledge that the partners were not verified.

2(2)

LOCAL LU KEY WILL EXPIRE IN 5 DAYS OR LESS The handshaking was successful; this qualifier was set to tell users when the local LU's session key would expire.

3(3)

PARTNER LU ACCESS HAS BEEN REVOKED Too many unsuccessful attempts were made at matching the session key.

4(4)

PARTNER LU KEY DOES NOT MATCH THIS LU KEY An attempt was made to establish a session, but the session keys did not match. For example, the two sets of identical data encrypted with the two keys did not match.

5(5)

SESSION TERMINATED FOR SECURITY REASONS One or both of the APPCLU profiles involved have the keyword LOCK specified in their session information, preventing any connections from being made. This keyword enables the security administrator to temporarily prevent specific connections without deleting any profiles.

6(6)

REQUIRED SESSION KEY NOT DEFINED The local LU had VERIFY=REQUIRED coded on its APPL statement, indicating that session level verification must be used on all sessions with the LU. One of the following occurred:

- The local LU is the primary LU and no password was defined in RACF for the LU pair.

- The partner LU is the primary LU, but the bind it sent to the local LU did not contain random data (which would indicate that the partner is using session level verification also).

7(7)

POSSIBLE SECURITY ATTACK BY PARTNER LU The local LU sent out a random number to another LU as part of the handshaking process of establishing a session. That same number then came in from a third LU for the local LU to encrypt. It is a coincidence that the same number is chosen; the number is 64 bits of random data.

It may be that an unauthorized user is attempting to steal the encrypted response.

8(8)

SESSION KEY NOT DEFINED FOR PARTNER LU The local LU had VERIFY=OPTIONAL coded on its APPL statement. There was a password defined in the local LU's RACF profile for the LU-LU pair, indicating that session level verification should be used on all sessions between the two LUs. However, the partner LU tried to start a session without using session level verification.

9(9)

SESSION KEY NOT DEFINED FOR THIS LU The local LU had VERIFY=OPTIONAL coded on its APPL statement. No password was defined in the local LU's RACF profile for the LU-LU pair, indicating that session level verification may not be used to establish sessions with this LU. However, the partner LU tried to establish a session using session level verification.

10(A)

SNA SECURITY-RELATED PROTOCOL ERROR The LU trying to establish a connection is not responding correctly according to the handshaking protocol.

11(B)

PROFILE CHANGE DURING VERIFICATION The handshaking was attempted, but it is evident that one of the LU's profiles (specifically the session key) changed in the middle of the handshaking, making its success impossible.

12(C)

EXPIRED SESSION KEY The session key in one or both of the APPCLU profiles has expired.

Event 27(1B): GENERAL AUDITING

This event is logged by RACROUTE REQUEST=AUDIT,EVENT='GENERAL'. RACF does not make any authority checks for this event.

The explanations of the event code qualifiers for Event 27 are:

0 - 99 GENERAL AUDIT RECORD WRITTEN

Qualifiers 0 to 99 can be used for Event 27. These qualifiers are installation defined.

Event 28(1C)–58(3A): z/OS UNIX EVENT TYPES

Events 28 through 58 apply to z/OS UNIX. The following qualifier codes are used for each event:

28(1C)

DIRECTORY SEARCH

0(0)

Access allowed

1(1)

Not authorized to search directory

2(2)

Security label failure

29(1D)

CHECK ACCESS TO DIRECTORY

0(0)

Access allowed

- 1(1)**
Caller does not have requested access authority
- 2(2)**
Security label failure
- 30(1E)**
CHECK ACCESS TO FILE
 - 0(0)**
Access allowed
 - 1(1)**
Caller does not have requested access authority
 - 2(2)**
Security label failure
- 31(1F)**
CHAUDIT
 - 0(0)**
File's audit options changed
 - 1(1)**
Caller does not have authority to change user audit options of specified file
 - 2(2)**
Caller does not have authority to change auditor audit options
 - 3(3)**
Security label failure
- 32(20)**
CHDIR
 - 0(0)**
Current working directory changed
 - ***
Failures logged as directory search event types
- 33(21)**
CHMOD
 - 0(0)**
File's mode changed
 - 1(1)**
Caller does not have authority to change mode of specified file
 - 2(2)**
Security label failure
- 34(22)**
CHOWN
 - 0(0)**
File's owner or group owner changed
 - 1(1)**
Caller does not have authority to change owner or group owner of specified file
 - 2(2)**
Security label failure
- 35(23)**
CLEAR SETID BITS FOR FILE
 - 0(0)**
S_ISUID, S_ISGID, and S_ISVTX bits changed to zero (write)

No failure cases

36(24)

EXEC WITH SETUID/SETGID

0(0)

Successful change of UIDs and GIDs

No failure cases

37(25)

GETPSENT

0(0)

Access allowed

1(1)

Not authorized to access specified process

38(26)

INITIALIZE z/OS UNIX PROCESS (DUB)

0(0)

z/OS UNIX process successfully initiated

1(1)

User not defined as a z/OS UNIX user (no user profile or no OMVS segment)

2(2)

User incompletely defined as a z/OS UNIX user (no UID in user profile)

3(3)

User's current group has no GID

39(27)

z/OS UNIX PROCESS COMPLETION (UNDUB)

0(0)

Process completed

No failure cases

40(28)

KILL

0(0)

Access allowed

1(1)

Not authorized to access specified process

2(2)

Security label failure

41(29)

LINK

0(0)

New link created

Failures logged as directory search or check access event types

42(2A)

MKDIR

0(0)

Directory successfully created

- *
 - Failures logged as directory search or check access event types
- 43(2B)**
 - MKNOD**
 - 0(0)**
 - Successful creation of a node
 - *
 - Failures logged as directory search or check access event types
- 44(2C)**
 - MOUNT FILE SYSTEM**
 - 0(0)**
 - Successful mount
 - *
 - Failures logged as ck_priv event type
- 45(2D)**
 - OPEN (NEW FILE)**
 - 0(0)**
 - File successfully created
 - *
 - Failures logged as directory search or check access event types
- 46(2E)**
 - PTRACE**
 - 0(0)**
 - Access allowed
 - 1(1)**
 - Not authorized to access specified process
 - 2(2)**
 - Security label failure
- 47(2F)**
 - RENAME**
 - 0(0)**
 - Rename successful
 - *
 - Failures logged as directory search or check access event types
- 48(30)**
 - RMDIR**
 - 0(0)**
 - Successful rmdir
 - *
 - Failures logged as directory search or check access event types
- 49(31)**
 - SETEGID**
 - 0(0)**
 - Successful change of effective GID
 - 1(1)**
 - Not authorized to setegid
- 50(32)**
 - SETEUID**

0(0)
Successful change of effective UID

1(1)
Not authorized to seteuid

51(33)
SETGID

0(0)
Successful change of GIDs

1(1)
Not authorized to setgid

52(34)
SETUID

0(0)
Successful change of UIDs

1(1)
Not authorized to setuid

53(35)
SYMLINK

0(0)
Successful symlink

Failures logged as directory search or check access event types

54(36)
UNLINK

0(0)
Successful unlink

Failures logged as directory search or check access event types

55(37)
UNMOUNT FILE SYSTEM

0(0)
Successful unmount

Failures logged as ck_priv event type

56(38)
CHECK FILE OWNER

0(0)
User is the owner

1(1)
User is not the owner

2(2)
Security label failure

57(39)
CK_PRIV

0(0)
User is authorized

1(1)
User not authorized to use requested function

58(3A)
OPEN SUBSIDIARY TTY

0(0)
Access allowed

1(1)
Not authorized to access specified process

Event 59(3B): RACLINK EVENT TYPES

The explanations of the event code qualifiers for Event 59 are:

0(0)
No violation detected

1(1)
Insufficient authority

2(2)
Keyword violation detected

3(3)
Association already defined

4(4)
Association already approved

5(5)
Association does not match

6(6)
Association does not exist

7(7)
Invalid password or revoked user ID

Event 60(3C)–62(3E): z/OS UNIX XPG4 EVENT TYPES

60(3C)
CHECK IPC ACCESS

0(0)
Access allowed

1(1)
Caller does not have requested access authority

2(2)
Security label failure

61(3D)
MAKE ISP

0(0)
Successful creation of ISP

1(1)
Security label failure

62(3E)
R_IPC CONTROL

0(0)
Access allowed

1(1)
Caller does not have requested access authority

2(2)
Security label failure

Event 63(3F): z/OS UNIX SETGROUPS EVENT TYPE

0(0)
Successful

1(1)
Not authorized

Event 64(40): X/OPEN SINGLE UNIX SPECIFICATION EVENT TYPES

64(40)
CHECK OWNER TWO FILES

0(0)
User is the owner

1(1)
User is not the owner

2(2)
Security label failure

Event 65(41): z/OS UNIX PASSING OF ACCESS RIGHTS EVENT TYPES

65(41)
R_AUDIT

0(0)
Successful r_audit

No failure cases

Event 66(42)–67(43): CERTIFICATE EVENT TYPES

66(42)
RACDCERT

0(0)
No violation detected

1(1)
Insufficient authority

67(43)
initACEE

0(0)
Successful certificate registration

1(1)
Successful certificate deregistration

2(2)
Insufficient authority to register a certificate

3(3)
Insufficient authority to deregister a certificate

4(4)
No user ID found for certificate

5(5)
Certificate is not trusted

- 6(6)**
Successful CERTAUTH certificate registration
- 7(7)**
Insufficient authority to register the CERTAUTH certificate
- 8(8)**
Client security label not equivalent to server's
- 9(9)**
Invalid use of reserved user ID
- 10(A)**
No RACF userID found for distributed identity
- 11(B)**
Successful IDT generated from ACEE
- 12(C)**
Failed attempting to generate IDT from ACEE

Event 68(44): GRANT OF INITIAL KERBEROS TICKET

- 68(44)**
Kerberos
- 0(0)**
Success
- 1(1)**
Failure

Event 69(45): R_PKIServ GENCERT

- 69(45)**
RPKIGENC
- 0(0)**
Successful GENCERT request
- 1(1)**
Insufficient authority for GENCERT
- 2(2)**
Successful REQCERT request
- 3(3)**
Insufficient authority for REQCERT
- 4(4)**
Successful GENRENEW request
- 5(5)**
Insufficient authority for GENRENEW
- 6(6)**
Successful REQRENEW request
- 7(7)**
Insufficient authority for REQRENEW
- 8(8)**
Successful PREREGISTER request
- 9(9)**
Insufficient authority for PREREGISTER

Event 70(46): R_PKIServ EXPORT

70(46)

RPKIEXPT

0(0)

Successful certificate EXPORT request

1(1)

Unsuccessful certificate EXPORT request due to insufficient authority

2(2)

Incorrect pass phrase specified for EXPORT

Event 71(47): POLICY DIRECTOR ACCESS CONTROL DECISION

71(47)

PDACCESS

This event is reserved for use by Policy Director Authorization Services.

0(0)

Authorized

1(1)

Not authorized but permitted because of warning mode

2(2)

Not authorized due to insufficient traverse authority but permitted because of warning mode

3(3)

Not authorized due to time-of-day check but permitted because of warning mode

4(4)

Not authorized

5(5)

Not authorized due to insufficient traverse authority

6(6)

Not authorized due to time-of-day check

Event 72(48): R_PKIServ QUERY

72(48)

RPKIREAD

0(0)

Successful admin QUERY or DETAILS request

1(1)

Insufficient authority for admin QUERY or DETAILS

2(2)

Successful VERIFY request

3(3)

Insufficient authority for VERIFY

4(4)

Incorrect VERIFY certificate, no record found for this certificate

Event 73(49): R_PKIServ UPDATEREQ

73(49)

RPKIUPDR

0(0)

Successful admin UPDATEREQ request

1(1)

Insufficient authority for admin UPDATEREQ

Event 74(4A): R_PKIServ UPDATECERT

74(4A)

RPKIUPDC

0(0)

Successful admin UPDATECERT request

1(1)

Insufficient authority for admin UPDATECERT

2(2)

Successful REVOKE request

3(3)

Insufficient authority for REVOKE

Event 75(4B): CHANGE FILE ACL

75(4B)

SETFACL

0(0)

ACL entry added, changed, or deleted

1(1)

Caller does not have authority to change ACL of specified file

2(2)

Security label failure

Event 76(4C): REMOVE FILE ACL

76(4C)

DELFACL

0(0)

Entire ACL deleted

1(1)

Caller does not have authority to remove ACL of specified file

2(2)

Security label failure

Event 77(4D): SET FILE SECURITY LABEL

77(4D)

SETFSECL

0(0)

Security label change

1(1)

Not authorized to change security label

Event 78(4E): SET WRITE-DOWN PRIVILEGE

78(4E)

WRITEDWN

0(0)

Requested function successful

1(1)

Not authorized to IRR.WRITEDOWN.BYUSER

Event 79(4F): CRL PUBLICATION

79(4F)

PKIDPUBR

0(0)

Successful publication of revocation information

Event 80(50): R_PKIServ RESPOND

80(50)

RPKIRESP

0

Successful RESPOND request

1

Insufficient authority for RESPOND

Event 81(51): PassTicket Evaluation

81

0

Successful request

1

Request failed

Event 82(52): PassTicket Generation

82

0

Successful generation

1

Generation request failed

Event 83(53): R_PKIServ SCEPREQ

83(53)

RPKISCEP

0

Successful AutoApprove PKCSReq request

1

Successful AdminApprove PKCSReq request

2

Successful GetCertInitial request

3

Rejected PKCSReq or GetCertInitial request

4

Incorrect SCEP transaction ID specified for GetCertInitial

5

Insufficient authority for SCEPREQ

Event 84(54): R_Datalib RDATAUPD

84(54)

RDATAUPD

0

Successful NewRing

1

Not authorized to call NewRing

2

Successful DataPut

3

Not authorized to call DataPut

4

Successful DataRemove

5

Not authorized to call DataRemove

6

Successful DelRing

7

Not authorized to call DelRing

Event 85(55): PKIAURNW

85(55)

PKIAURNW

0

Successful renewal of a PKI Services issued certificate

Event 86(56): R_PgmSignVer

86(56)

R_PgmSignVer

0

Successful signature verification

1

Signature appears valid but root CA certificate not trusted

2

Module signature failed verification

3

Module certificate chain incorrect

4

Signature required but module not signed

5

Signature required but signature has been removed

6

Program verification module not loaded. Program verification was not available when attempt was made to load this program.

7

The Algorithmic self test failed while verifying the program verification module.

Event 87(57): RACMAP

87(57)

RACMAP

0(0)

No violation detected

1(1)

Insufficient authority (no update to RACF database)

Event 88(58): AUTOPROF

88(58)

AUTOPROF

0

Successful profile modification

Event 89(59): RPKIQREC

89(59)

RPKIQREC

0

Successful user QRECOVER request

1

Insufficient authority for user QRECOVER

Event 90(5A): PKIGENC

90(5A)

PKIGENC

0

Successful GENCERT request

Audit function codes for z/OS UNIX System Services

Notes:

1. Several of the file system-related audit function codes are designated as 'not logged' in the table below. While the ultimate event is not logged, log records might be created during path name resolution. These records are controlled by SETROPTS LOGOPTIONS for the DIRSRCH class.
2. More as they come... Leaving this ref for future use. See [“Audit function codes for z/OS UNIX System Services” on page 93.](#)

Table 12. Audit Function Codes for z/OS UNIX System Services

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
1	AFC_ACCESS	ACCESS	Not logged	check file accessibility
2	AFC_CHAUDIT_U	CHAUDIT	SETROPTS LOGOPTIONS for the FSSEC class	change user audit options
3	AFC_CHDIR	CHDIR	SETROPTS AUDIT for the FSOBJ class	change current working directory

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
4	AFC_CHMOD	CHMOD	SETROPTS LOGOPTIONS for the FSSEC class	change file modes
5	AFC_CHOWN	CHOWN	SETROPTS LOGOPTIONS for the FSSEC class	change owner and group of file
6	AFC_DUB	DUB	SETROPTS AUDIT for the PROCESS class	initialize a process
7	AFC_EXEC	EXEC	SETROPTS LOGOPTIONS for the PROCESS class	execute with new jobname
8	AFC_FCHAUDIT_U	FCHAUDIT	SETROPTS LOGOPTIONS for the FSSEC class	change user audit options when file is open
9	AFC_FCHMOD	FCHMOD	SETROPTS LOGOPTIONS for the FSSEC class	change file modes when file is open
10	AFC_FCHOWN	FCHOWN	SETROPTS LOGOPTIONS for the FSSEC class	change owner and group of file when open
11	AFC_GETCWD	GETCWD	SETROPTS LOGOPTIONS for the DIRACC class	get current working directory
12	AFC_GETPSENT	GETPSENT	SETROPTS LOGOPTIONS for the PROCACT class	get process entry
13	AFC_KILL	KILL	SETROPTS LOGOPTIONS for the PROCACT class	signal a process
14	AFC_LINK	LINK	SETROPTS LOGOPTIONS for the DIRACC class	link to a file
15	AFC_LSTAT	LSTAT	Not logged	get file status - do not resolve ending symlink
16	AFC_MKDIR	MKDIR	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	make a directory
17	AFC_MKNOD	MKNOD	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	make a file node

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
18	AFC_MOUNT	MOUNT	SETROPTS AUDIT for the FSOBJ class for successes. Failures are always logged.	mount a file system (nosetuid)
19	AFC_OPEN	OPEN	SETROPTS LOGOPTIONS for the FSOBJ and DIRACC classes	open a file
20	AFC_OPENDIR	OPENDIR	SETROPTS LOGOPTIONS for the DIRACC class	open a directory
21	AFC_PATHCONF	PATHCONF	Not logged	get configurable path name variables
22	AFC_PTRACE	Ptrace	SETROPTS LOGOPTIONS for the PROACT class	debug a process
23	AFC_READLINK	READLINK	Not logged	read a symbolic link
24	AFC_RENAME	RENAME	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	rename a file
25	AFC_RMDIR	RMDIR	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	remove a directory
26	AFC_SETEGID	SETEGID	SETROPTS LOGOPTIONS for the PROCESS class	set effective GID
27	AFC_SETEUID	SETEUID	SETROPTS LOGOPTIONS for the PROCESS class	set effective UID
28	AFC_SETGID	SETGID	SETROPTS LOGOPTIONS for the PROCESS class	set real and/or effective GID
29	AFC_SETUID	SETUID	SETROPTS LOGOPTIONS for the PROCESS class	set real and/or effective UID
30	AFC_STAT	STAT	Not logged	get file status
31	AFC_SYMLINK	SYMLINK	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	create a symbolic link

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
32	AFC_UNLINK	UNLINK	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	remove directory entries (delete a file)
33	AFC_UNMOUNT	UNMOUNT	SETROPTS AUDIT for the FSOBJ class for successes. Failures are always logged.	unmount a file system (nosetuid)
34	AFC_UTIME	UTIME	SETROPTS LOGOPTIONS for the FSOBJ and DIRACC classes	set file access/ modification times
35	AFC_UNDUB_EXIT	UNDUB/_EXIT	SETROPTS AUDIT for the PROCESS class	terminate a process
36	AFC_WRITE	WRITE	SETROPTS LOGOPTIONS for the FSSEC class	write to a file (clear setid bits)
37	AFC_CHAUDIT_A	CHAUDIT	SETROPTS LOGOPTIONS for the FSSEC class	change auditor audit options
38	AFC_FCHAUDIT_A	FCHAUDIT	SETROPTS LOGOPTIONS for the FSSEC class	change auditor audit options when file is open
39	AFC_LOOKUP	LOOKUP	SETROPTS LOGOPTIONS for the DIRSRCH class	path name resolution
40	AFC_TTYNAME	TTYNAME	SETROPTS LOGOPTIONS for the DIRACC class	get pathname of terminal
41	AFC_IOCTL	_IOCTL	SETROPTS LOGOPTIONS for the DIRACC and FSOBJ classes	get path name
42	AFC_GETMNT	GETMNT	Not logged	get mount entry
43	AFC_QUIESCE	QUIESCE	SETROPTS AUDIT for the FSOBJ class	quiesce a file system (nosetuid)
44	AFC_UNQUIESCE	UNQUIESCE	SETROPTS AUDIT for the FSOBJ class	unquiesce a file system (nosetuid)
45	AFC_VREGISTER	VREGISTER	SETROPTS AUDIT for the PROCESS class	server registration, v_reg
46	AFC_VRESOLVEPN	VRESOLVEPN	Not logged	server resolve pathname, v_rpn

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
47	AFC_VLOOKUP	VLOOKUP	SETROPTS LOGOPTIONS for the DIRSRCH class	server lookup, v_lookup
48	AFC_VREADWRITE	VREADWRITE	SETROPTS LOGOPTIONS for the FSOBJ and FSSEC classes	server read write, v_rdwr
49	AFC_VREADDIR	VREADDIR	SETROPTS LOGOPTIONS for the DIRACC class	server read directory, v_reddir
50	AFC_SIGACTION	SIGACTION	SETROPTS LOGOPTIONS for the PROCESS class	change Osigset action
51	AFC_VCREATE	VCREATE	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	server create, v_create
52	AFC_VMAKEDIR	VMAKEDIR	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	server make directory, v_mkdir
53	AFC_VSYMLINK	VSYMLINK	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	server symbolic link, v_symlink
54	AFC_VSETATTR	VSETATTR	SETROPTS LOGOPTIONS for the FSSEC class	server file attributes, v_setattr
55	AFC_VLINK	VLINK	SETROPTS LOGOPTIONS for the DIRACC and FSOBJ classes / SETROPTS AUDIT for the FSOBJ class	server link, v_link
56	AFC_VREMOVEDIR	VREMOVEDIR	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	server remove directory, v_rmdir
57	AFC_VREMOVE	VREMOVE	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	server remove, v_remove

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
58	AFC_VRENAME	VRENAME	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	server rename, v_rename
59	AFC_CHATTR	CHATTR	SETROPTS LOGOPTIONS for the FSSEC class	change file attributes
60	AFC_FCHATTR	FCHATTR	SETROPTS LOGOPTIONS for the FSSEC class	change file attributes when file is open
61	AFC_THLMT	THLMT	SETROPTS LOGOPTIONS for the PROCESS class	set thread limit
62	AFC_MSGCTL	MSGCTL	SETROPTS LOGOPTIONS for the IPCOBJ class / SETROPTS AUDIT for the IPCOBJ class	message control
63	AFC_MSGGET	MSGGET	SETROPTS LOGOPTIONS for the IPCOBJ class / SETROPTS AUDIT for the IPCOBJ class	get message queue
64	AFC_MSGRCV	MSGRCV	SETROPTS LOGOPTIONS for the IPCOBJ class	message receive
65	AFC_MSGSND	MSGSND	SETROPTS LOGOPTIONS for the IPCOBJ class	message send
66	AFC_SEMCTL	SEMCTL	SETROPTS LOGOPTIONS for the IPCOBJ class / SETROPTS AUDIT for the IPCOBJ class	semaphore control
67	AFC_SEMGET	SEMGET	SETROPTS LOGOPTIONS for the IPCOBJ class / SETROPTS AUDIT for the IPCOBJ class	get set of semaphores
68	AFC_SEMOP	SEMOP	SETROPTS LOGOPTIONS for the IPCOBJ class	semaphore operations
69	AFC_SHMAT	SHMAT	SETROPTS LOGOPTIONS for the IPCOBJ class	shared memory attach

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
70	AFC_SHMCTL	SHMCTL	SETROPTS LOGOPTIONS for the IPCOBJ class / SETROPTS AUDIT for the IPCOBJ class	shared memory control
71	AFC_SETREUID	SETREUID	SETROPTS LOGOPTIONS for the PROCESS class	set real and/or effective UID
72	AFC_SHMGET	SHMGET	SETROPTS LOGOPTIONS for the IPCOBJ class / SETROPTS AUDIT for the IPCOBJ class	shared memory get
73	AFC_WGETIPC	W_GETIPC	SETROPTS LOGOPTIONS for the IPCOBJ class	query IPC status
74	AFC_REMOVE	IPC_RMID	SETROPTS LOGOPTIONS for the DIRACC class / SETROPTS AUDIT for the FSOBJ class	remove
75	AFC_SET_MODE	SET_MODE	SETROPTS LOGOPTIONS for the IPCOBJ class	set mode
76	AFC_SET_MSGQB	SET_MSGQB	SETROPTS LOGOPTIONS for the IPCOBJ class	set max bytes for msg queue
77	AFC_SET_GID	SET_GID	SETROPTS LOGOPTIONS for the PROCESS class	set supplementary groups
78	AFC_PASSWORD	PASSWORD	Not logged as a UNIX event. Logged by RACROUTE REQUEST=VERIFY as a JOBINIT (event code 1) record.	verify password
79	AFC_LCHOWN	LCHOWN	SETROPTS LOGOPTIONS in the FSSEC class	change owner and group of a symbolic link
80	AFC_TRUNCATE	TRUNCATE		truncate a file
81	AFC_PFSCTL	PFSCTL	SETROPTS AUDIT for the FSOBJ class	control function for the physical file system
82	AFC_SETRLIMIT	SETRLIMIT	SETROPTS LOGOPTIONS for the PROCESS class	set maximum resource consumption

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
83	AFC_SETPRIORITY	SETPRIORITY	SETROPTS LOGOPTIONS for the PROCESS class	set process scheduling priority
84	AFC_NICE	NICE	SETROPTS LOGOPTIONS for the PROCESS class	change priority of a process
85	AFC_SETREGID	SETREGID	SETROPTS LOGOPTIONS for the PROCESS class	set real and effective GID
86	AFC_WRITEV	WRITEV		write on a file
87	AFC_FCHDIR	FCHDIR	SETROPTS LOGOPTIONS for the DIRSRCH class/ SETROPTS AUDIT for the FSOBJ class	change working directory
88	AFC_CHROOT	CHROOT	SETROPTS AUDIT for the FSOBJ class	change root directory
89	AFC_REALPATH	REALPATH	SETROPTS LOGOPTIONS for the DIRSRCH class	resolve path name
90	AFC_STATVFS	STATVFS	SETROPTS LOGOPTIONS for the DIRSRCH class	get file system information
91	AFC_BIND	BIND		bind a name to a socket
92	AFC_SOCKET	SOCKET	SETROPTS AUDIT for the FSOBJ class	create an endpoint for communication
93	AFC_THREAD_SEC	THREAD_SEC	SETROPTS AUDIT for the PROCESS class	thread level security
94	AFC_AUTHCHECK	AUTHCHECK	SETROPTS AUDIT for the PROCESS class	authority check
95	AFC_ACC_SEND	ACC_SEND	SETROPTS AUDIT for the PROCACT class	send access rights
96	AFC_ACC_RECV	ACC_RECV	SETROPTS AUDIT for the PROCACT class	receive access rights
97	AFC_ACC_DISC	ACC_DISC	SETROPTS AUDIT for the PROCACT class	discard access rights
98	AFC_NEWGRP	NEWGRP		newgrp shell utility
99	AFC_CONSOLE	CONSOLE	SETROPTS LOGOPTIONS for the PROCESS class	console communication service
100	AFC_SERV_INIT	SERV_INIT	SETROPTS LOGOPTIONS for the PROCESS class	WLM service

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
101	AFC_SPAWN	SPAWN	SETROPTS LOGOPTIONS for the PROCESS class	spawn with user ID
102	AFC_SWAP_SERV	SWAP_SERV	SETROPTS LOGOPTIONS for the PROCESS class	swap services
103	AFC_WLMC	WLMC	SETROPTS LOGOPTIONS in the PROCESS class	WLM C and C++
104	AFC_LOGIN	_LOGIN	SETROPTS LOGOPTIONS for the PROCESS class	__login system call
105	AFC_MOUNT_SETUID	MOUNT_SETUID	SETROPTS AUDIT for the FSOBJ class	mount a file system (setuid)
106	AFC_UNMOUNT_SETUID	UNMOUNTSETUID	SETROPTS AUDIT for the FSOBJ class	unmount a file system (setuid)
107	AFC_QUIESCE_SETUID	QUIESCE_SETUID	SETROPTS AUDIT for the FSOBJ class	quiesce a file system (setuid)
108	AFC_UNQUIESCE_SETUID	UNQUIESCE_SETUID	SETROPTS AUDIT for the FSOBJ class	unquiesce a file system (setuid)
109	AFC_CHMOUNT	CHMOUNT	SETROPTS Audit for the FSOBJ class	change mount point of a file system
110	AFC_CHMOUNT_SETUID	CHMOUNT_SETUID	SETROPTS Audit for the FSOBJ class	change mount point of a file system (setuid)
111	AFC_SETFACL	SETFACL	SETROPTS LOGOPTIONS for the FSSEC class	add, alter, or delete an access control list
112	AFC_SHUTDOWN_REG	SHUTDOWN_REG	SETROPTS LOGOPTIONS for the PROCESS class	shutdown registration
113	AFC_EACCESS	EACCESS	Not logged	check effective access
114	AFC_SETFSECL	SETFSECL	SETROPTS LOGOPTIONS for the FSSEC class	Set file security label
115	AFC_POE	_POE	SETROPTS LOGOPTIONS for the PROCESS class	Provide port of entry identifier
116	AFC_LCHATTR	LCHATTR	SETROPTS LOGOPTIONS for the FSSEC class	Change file attributes
117	AFC_UNAVAILABLE	UNAVAILABLE	SETROPTS AUDIT in the USER or GROUP class	AFC unavailable

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
118	AFC_MOUNT_NA	MOUNT_NA	Not logged	mount no audit
119	AFC_MOUNT_U	MOUNT_U	SETROPTS AUDIT for the FSOBJ class	mount
120	AFC_MOUNT_UNA	MOUNT_UNA	Not logged	user mount no audit
121	AFC_UNMOUNT_U	UNMOUNT_U	SETROPTS AUDIT for the FSOBJ class	user unmount
122	AFC_UNMOUNT_U NA	NMOUNT_UNA	Not logged.	user unmount no audit
123	AFC_FSACCESS	FSACCESS	SETROPTS LOGOPTIONS for the FSACCESS class	File system access
124	AFC_SHMMCV	SHMMCV	SETROPTS LOGOPTIONS in the UNIXPRIV class	Shared memory segment mutexes and condition variables
125	AFC_FSEXEC	FSEXEC	SETROPTS LOGOPTIONS for the FSEXEC class	File system execute access
126	AFC_MOUNTUS	MOUNTUS	SETROPTS AUDIT for the FSOBJ class	User setuid mount.
127	AFC_MOUNTUSNA	MOUNTUSNA	Not logged	User setuid mount no audit
128	AFC_UNMOUNTUS	UNMOUNTUS	SETROPTS AUDIT for the FSOBJ class	User setuid unmount
129	AFC_UNMOUNTUS NA	UNMOUNTUSNA	Not logged	User setuid unmount no audit
130	AFC_CLONE	CLONE	Not logged	Create a child process
131	AFC_SETNS	SETNS	SETROPTS LOGOPTIONS for the PROCESS class	Associate with a namespace
132	AFC_UNSHARE	UNSHARE	SETROPTS LOGOPTIONS for the PROCESS class	Run in new namespaces
133	AFC_PRLIMIT	PRLIMIT	SETROPTS LOGOPTIONS for the PROCACT class	Get/set process limits
134	AFC_PIVOT_ROOT	PIVOT_ROOT	SETROPTS AUDIT for the FSOBJ class	Change the root mount
135	AFC_MOUNT_CNT R	MOUNT_C	SETROPTS AUDIT for the FSOBJ class	Containers mount
136	AFC_MOUNT_CNT R_NA	MOUNT_CNA	Not logged	Containers mount no audit

Table 12. Audit Function Codes for z/OS UNIX System Services (continued)

Code	Name	ICH4081 short name	RACF class/setting controlling logging	Description
137	AFC_UNMOUNT_C NTR	UNMOUNT_C	SETROPTS AUDIT for the FSOBJ class	Containers unmount
138	AFC_UNMOUNT_C NTR_NA	UNMOUNT_CNA	Not logged	Containers unmount no audit
139	AFC_EXEC_CNTR	EXEC_C	SETROPTS LOGOPTIONS for the PROCESS class	Containers exec
140	AFC_MOUNT_SET UID_NA	MOUNT_SETUID _NA	Not logged	Mount with setuid, no audit
141	AFC_ENDOF_TAB	ENDOF_TAB		end of table

Chapter 4. The data security monitor (DSMON)

RACF enables you to protect resources, but the protection is only as good as the implementation. You need a way to verify that the security mechanisms actually in effect are the ones intended. The data security monitor (DSMON) helps provide this information.

DSMON is a program that produces reports on the status of the security environment at your installation and, in particular, on the status of resources that RACF controls. You can use the reports to audit the current status of your installation's system security environment by comparing the actual system characteristics and resource protection levels with the intended characteristics and levels. You can also control the reporting that DSMON does by specifying control statements that request certain functions for user input.

The DSMON program

The data security monitor (DSMON) is a program that normally runs while RACF is active.

If the installation has not defined ICHDSM00 (DSMON) as a controlled program, you must have the AUDITOR or ROAUDIT attribute to run DSMON.

If DSMON has been defined as a controlled program, you must have at least EXECUTE or READ access to the ICHDSM00 resource in the PROGRAM class. Additionally, with READ access using the PROGRAM class if DSMON is not running in a clean program-controlled environment, you also need the AUDITOR or ROAUDIT attribute.

You can specify DSMON control statements to produce the reports you want and control the number of lines per page for each report. The output from DSMON consists of a message data set and an output data set for the reports.

Note:

1. To find out if DSMON is a controlled program at your MVS installation, contact your RACF security administrator.
2. If you run DSMON while RACF is inactive, DSMON produces only the system report.

How to run DSMON

DSMON runs as an authorized program facility (APF)-authorized batch program. DSMON can also be run on TSO if IKJTSO00 is configured correctly; it can reside in any PARMLIB data set.

To invoke DSMON, you can use the sample job control language (JCL) statements in [Figure 17 on page 105](#). A SYSIN DD statement lets you specify DSMON control statements that can perform selected DSMON functions for specified user input. The words that appear in lowercase are parameters that you can change.

```
//stepname EXEC PGM=ICHDSM00
//SYSPRINT DD SYSOUT=A
//SYSUT2 DD SYSOUT=A
//SYSIN DD *
LINECOUNT 55
FUNCTION all
USEROPT USRDSN sivle.memo.text
```

Figure 17. Specifying DSMON JCL

SYSPRINT

Defines the sequential message data set (for example, SYSOUT) for status and error messages. SYSPRINT has a variable block (VB) format; block size, if specified, must be 137 (LRECL of 133 plus 4 for the block length) or greater.

SYSUT2

Defines the output listing data set (for example, SYSOUT) for the printed reports that DSMON generates. SYSUT2 has a fixed block (FB) format; block size, if specified, must be a multiple of 133.

SYSIN

Defines the control data set that contains DSMON control statements. SYSIN is required if you want to select specific DSMON functions. The control data set can be one of the following:

- A data set defined as in-stream data
- A data set defined as a sequential data set
- A data set defined as a member of a partitioned data set

Block size, if specified, must be a multiple of 80.

If you do not specify SYSIN, all DSMON functions except USRDSN are performed. (The USRDSN function requires you to specify a list of user data sets on the USEROPT control statement.)

DSMON control statements

The three DSMON control statements that allow you to control DSMON reporting are:

- LINECOUNT
- FUNCTION
- USEROPT

Define these statements as part of the SYSIN DD statement in the JCL (see [Figure 17 on page 105](#)).

Entering DSMON control statements

DSMON control statements can be entered in any order, one per input line, using columns 1 through 72. You can enter uppercase or lowercase characters. Use commas or blanks to separate list items in each DSMON statement.

You can include comments by entering a /* beginning in column 1. If you want to continue a control statement on a following line, break the statement at any place a blank or comma is allowed and insert a blank followed by a trailing hyphen (-) before you continue to the next line. For example:

```
/* Start of user data sets
USEROPT USRDSN jim.memo.text vol=8V0L03 -
jim.report.script
```

The DSMON control statements are:

LINECOUNT number

specifies the number of lines per page for reports. The valid values for number are 0 or a number in the range of 40 through 99. A value of 0 indicates that a page break occurs only at the start of a new report. If you do not specify LINECOUNT, the default is 55 lines per page. If you specify more than one LINECOUNT statement, RACF uses only the last one.

Note: The LINECOUNT statement controls the number of lines per page for the SYSUT2 data set. It does not affect the number of lines per page for the SYSPRINT message data set, fixed at 55 lines per page.

FUNCTION function-name

specifies the DSMON function or functions you want to include.

The default is ALL, which causes DSMON to generate all reports except USRDSN. For a complete description of the DSMON reports specified for function-name, see [“Functions DSMON uses”](#) on page 108.

USEROPT function-name user-input

defines user input to be processed by the function you specify. Function-name specifies the function to process the user-input; user-input specifies the actual input you want processed. The valid functions you can specify for function-name on the USEROPT control statement are:

- USRDSN
- RACGRP

Be sure to use one USEROPT control statement for each valid function you want to process the specified input.

USEROPT control statement

USEROPT and USRDSN

Specifying USRDSN with USEROPT causes DSMON to list the RACF protected status of the selected user data set or sets. To obtain information processed by USRDSN, specify USEROPT followed by one or more blanks, then followed by USRDSN and the data set name and volume or both for which you want information.

For example, if you want to specify a cataloged data set, use the full data set name after USRDSN:

```
USEROPT USRDSN jim.memo.text
```

If you want to specify an uncataloged data set, use the full data set name and volume:

```
USEROPT USRDSN jim.memo.text VOL=volser
```

You can use the USRDSN option with other DSMON functions. For example, the following specifies that all other functions in addition to USRDSN are to be performed:

```
FUNCTION ALL
USEROPT USRDSN jim.memo.text VOL=volser
```

Note that FUNCTION ALL is the default; if you omit it, DSMON produces all reports. The following specifies that only the USRDSN function is to be performed on the specified data set:

```
FUNCTION USRDSN
USEROPT USRDSN jim.memo.text
```

In the next example, USRDSN is specified for a list of data sets:

```
FUNCTION USRDSN
USEROPT USRDSN jim.memo.text -
          VOL=8VOL03 jim.test.obj -
          jim.racf.cntl jim.racf.clist
```

Note: The VOL keyword does not apply for SMS.

USEROPT and RACGRP

Specifying RACGRP with USEROPT causes DSMON to list the group tree and its levels for any specified RACF group name. The following specifies RACGRP for FUNCTION and the RACF group "payroll" (for which all subordinate groups are to be retrieved) for USEROPT RACGRP:

```
FUNCTION RACGRP
USEROPT RACGRP payroll
```

If you specify SYS1 for USEROPT RACGRP, DSMON lists all group names in the system. If you want all DSMON reports but do not specify USEROPT RACGRP, SYS1 is the default group name for the RACF group tree report. You can specify any RACF-defined group. For more information about the DSMON report RACGRP produces, see [“Group tree report” on page 111](#).

USEROPT considerations

A JCL REGION= keyword may limit the number of USEROPT control statements that can be specified. If many USEROPT statements are specified, increase the REGION= keyword value accordingly. Users may also run a multistep job if increasing the region size is unsuccessful.

Functions DSMON uses

DSMON generates different kinds of reports that you can specify on the FUNCTION or USEROPT control statements. After completing each function on the control statement (except for the system report), DSMON issues a message to SYSPRINT stating whether the report executed successfully or unsuccessfully.

If the report ended unsuccessfully, DSMON issues an error code that indicates the cause of the failure. In most cases, DSMON continues processing with the next control statement.

[Table 13 on page 108](#) summarizes the DSMON reports that are generated when you use the FUNCTION control statement. [Table 14 on page 109](#) summarizes the DSMON reports that are generated when you use the USEROPT control statement. You can specify the kind of report you want by modifying function name on each control statement. Both tables list the type of report produced and the information (or checks) each report provides.

<i>Table 13. Reports Specified by the FUNCTION Control Statement</i>		
Function-name	Type of Report	Information Provided
SYSTEM	System Report	<ol style="list-style-type: none"> 1. Identification number of the processor complex 2. Model number of the processor complex 3. Name, version, and release number of the operating system 4. System residence volume 5. System identifier used by the System Management Facilities 6. RACF version and release number and whether RACF is active
RACGRP	Group Tree Report (also used with USEROPT; Table 14 on page 109)	Group name and level in hierarchy for entire system
SYSPT	Program Properties Table Report	All information (see sample report)
RACAUT	RACF Authorized Caller Table Report	All information (see sample report)
RACCDT	RACF Class Descriptor Table Report	All information (see sample report)
RACEXT	RACF Exits Report	All information (see sample report)
RACGAC	RACF Global Access Table Report	All information (see sample report)
RACSPT	RACF Started Procedures Table Report	All information (see sample report)
RACUSR	Selected User Attribute Report and Selected User Attribute Summary Report	All information (see sample reports)

<i>Table 13. Reports Specified by the FUNCTION Control Statement (continued)</i>		
Function-name	Type of Report	Information Provided
SYSLNK	Selected Data Sets Report	All LNKLSTxx data set members of the SYS1.PARMLIB library
SYSAPF	Current Link List Data Set Report	Authorized program facility (APF) libraries
SYSCAT	Selected Data Sets Report	Master catalog and all user catalogs. Requires additional authorization to obtain information on user catalogs Note: If you have a FACILITY class profile that protects SYSCAT resource ICHDSM00.SYSCAT and you do not have READ access, DSMON suppresses the user catalog listing and issues message ICH66134I, notifying you of the insufficient authorities
RACDST	Selected Data Sets Report	Primary and backup RACF databases
SYSSDS	Selected Data Sets Report	Selected system data sets
USRDSN	Selected Data Sets Report (used with USEROPT; Table 14 on page 109)	Selected user data sets

<i>Table 14. Reports Specified by the USEROPT Control Statement</i>		
Function-name	Type of Report	Information Provided
USRDSN	Selected User Data Sets Report	Selected user data sets
RACGRP	Group Tree Report	Group name and level in hierarchy for user-specified group

DSMON reports

DSMON produces the following reports:

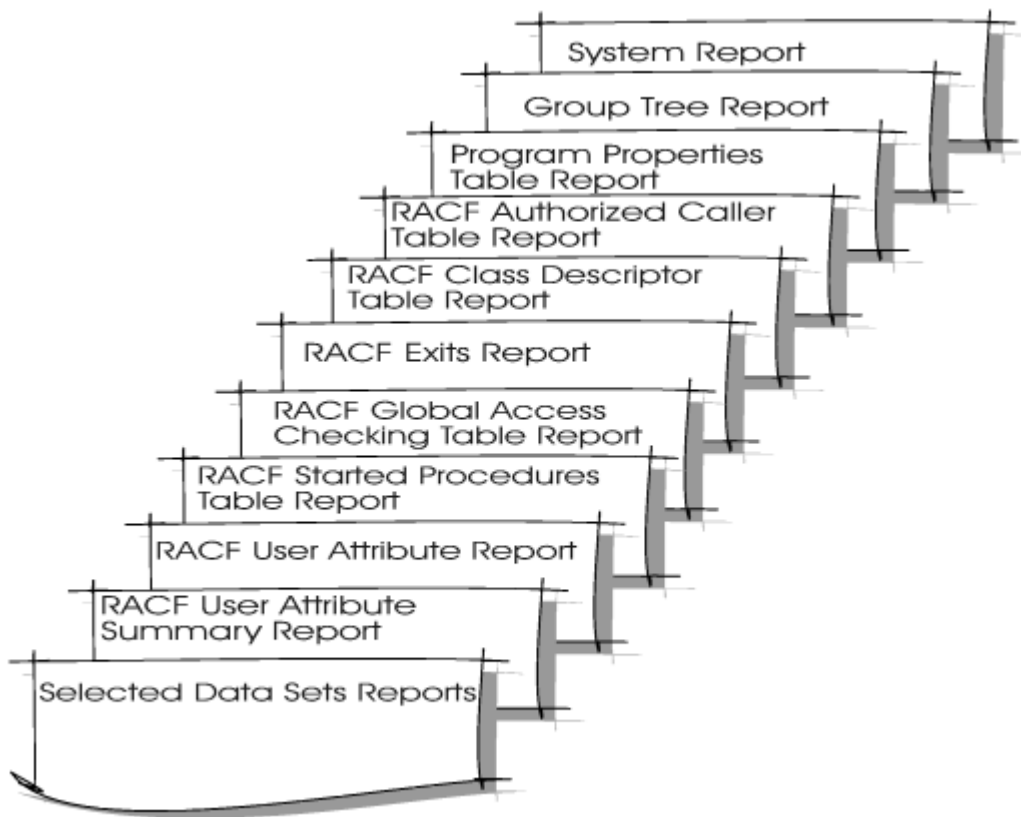


Figure 18. Reports produced by DSMON

Note: Producing the group tree report or the selected user attribute report and selected user attribute summary report can have an impact on system performance. Depending on the size of and load on your RACF databases, you should consider running these DSMON reports during slack time.

The information in the DSMON reports answers many of your audit questions. (See [“Conducting the audit”](#) on page 8.)

DSMON system report

The system report contains:

- The identification number and model of the processor complex
- The name, version, and release of the operating system
- The serial number of the system residence volume
- The system identifier (SMF-ID) that SMF uses

The report also specifies the RACF version and release number and whether RACF is active. If RACF is inactive, either because it was not activated at IPL or because it has been deactivated by the RVARY command, DSMON prints a message.

You can use the system report to verify that the system has the expected hardware and software. In addition, you can verify the status of RACF.

Note: DSMON always produces the system report. However, if RACF is not installed and active, DSMON produces only the system report and then stops.

CPU-ID column headings

The report contains the following information:

CPU-ID

is the identification number of the processor complex on which the system is running.

CPU MODEL

is the model number of the processor complex.

OPERATING SYSTEM/LEVEL

specifies the name, version and release of the operating system, the product FMID for the operating system, and the installation's personalized name, if the information is present in the communications vector table (CVT).

SYSTEM RESIDENCE VOLUME

specifies the serial number of the volume on which the system resides.

SMF-ID

is the system identifier that the system management facilities (SMF) uses when creating log records.

System report messages

The following messages may appear at the end of the report:

```
RACF FMID HRFnnnn IS ACTIVE
```

Explanation: The specified FMID of RACF is active during initial program load (IPL). In most cases, this is the message that appears on the report.

```
RACF FMID HRFnnnn IS INACTIVE
```

Explanation: The specified FMID of RACF is inactive.

Note: Under normal circumstances, this message should not appear. If it does, notify your RACF security administrator or your installation manager.

```
RACF FMID HRFnnnn HAS BEEN DEACTIVATED
```

Explanation: The specified FMID of RACF has been deactivated by the RVARY command; this situation is normally temporary.

```
RACF IS NOT INSTALLED
```

Explanation: DSMON cannot locate the RACF communications vector table (RCVT), indicating that RACF has not been installed.

Note: Under normal circumstances, this message should not appear. If it does, notify your RACF security administrator or your installation manager.

Sample system report

S Y S T E M R E P O R T			

CPU-ID	111606		
CPU MODEL	2064		
OPERATING SYSTEM/LEVEL	z/OS 1.2.0	HBB7705	Test System 2390
SYSTEM RESIDENCE VOLUME	DR250B		
SMF-ID	IM13		
RACF FMID HRF7705 IS ACTIVE			

Figure 19. Sample System Report

Group tree report

The group tree report lists all subgroups for the SYS1 group and continues to list subgroups for those subgroups on down the group tree. Alternately, if a user-specified group name is specified for the USEROPT control statement, the report lists all subgroups for that user-supplied group. The report provides the owner's name for each group, if the owner is not the superior group.

You can use the group tree report to examine the overall RACF group structure for your system. You can also determine how the group related attributes (group-SPECIAL, group OPERATIONS, and group AUDITOR) for users associated with each subgroup are related. In this way, you can decide whether the group authorities are structured effectively for your system.

LEVEL column headings

LEVEL

Starting with the highest requested group, the group level number that indicates the relative nesting level of the group or subgroup within the requested group tree. SYS1 is always 1; the groups with SYS1 as their superior group are 2, and so on down the group tree.

GROUP

is the name of the RACF-defined group.

(OWNER)

is the name of the owner of the group. This name is listed only if the owner is not the superior group.

Sample group tree report messages

An arrow (==>) in the report indicates that the information has overflowed the right-hand margin. The missing information appears after the main body of the report is printed. The characters ----- CONTINUATION----- appear before the overflowed information, and the discontinued level number, group, and owner name (if the name is not the same as that of the superior group) appear in the left-hand margin.

R A C F G R O U P T R E E R E P O R T		
LEVEL	GROUP	(OWNER)
1	SYS1	(IBMUSER)
2	SYSPROG	(IBMUSER)
2	RACFADMN	(IBMUSER)

Figure 20. Sample Group Tree Report

Program properties table report

The program properties table report lists all the programs in the program properties table (PPT). The report also indicates whether each program is authorized to bypass password protection and whether it runs in a system key. The programs shown in this report may be able to bypass password protection for password protected data sets and thus also bypass all RACF protection for RACF-protected resources.

You can use the program properties table report to verify that only those programs that should be authorized to bypass password protection are, in fact, able to do so. Such programs are normally communication and database control programs, or other system control programs. You can also verify that only those programs that must run in a system key are authorized to do so.

PROGRAM NAME column headings

PROGRAM NAME

is the name of the program, as defined in the PPT.

BYPASS PASSWORD PROTECTION

indicates whether the program is authorized to bypass password protection checking when accessing RACF-protected or password-protected data sets. The values include YES, NO, and BATCH.

SYSTEM KEY

indicates whether the program is authorized to run in a system key (keys 0-7) and is thus able to bypass system security controls. The value is either YES or NO.

Program properties table report messages

The following message may appear beneath the report column headings:

NO ENTRIES IN PROGRAM PROPERTIES TABLE

Explanation: There are no entries in the program properties table. This message indicates an abnormal condition because the program properties table should contain several entries that were supplied by IBM.

Sample of Program properties table report

P R O G R A M P R O P E R T I E S T A B L E		
R E P O R T PROGRAM NAME	BYPASS PASSWORD PROTECTION	SYSTEM KEY
IEDQTCAM	NO	YES
ISTINM01	YES	YES
IKTCAS00	NO	YES
AHLGTF	NO	YES
HHLGTF	NO	YES
IHLGTF	NO	YES
IEFIIC	NO	YES
IEEMB860	YES	YES
IEEVMNT2	NO	YES
IASXWR00	NO	YES
CSVVFCRE	NO	YES
HASJES20	YES	YES
DFSMVRC0	NO	YES
IATINTK	YES	YES
DXRRLM00	NO	YES
APSPPIEP	NO	YES
IATINTKF	YES	YES
DSNYASCP	NO	YES
DSNUTILB	NO	YES
IEAVTDSV	YES	YES
IFASMF	NO	YES
CSVLLCRE	YES	YES
AVFMNBLD	NO	YES
ERBMFMFC	NO	NO
ERB3GMFC	NO	NO
IGGOCLX0	NO	YES
IGDSSI01	YES	YES
COFMINIT	YES	YES
COFMISD0	NO	YES

Figure 21. Sample Program Properties Table Report

RACF authorized caller table report

The RACF authorized caller table report lists the names of all programs in the RACF authorized caller table. The report also indicates whether each program is authorized to issue a VERIFY (RACINIT) request (which performs user verification) or a LIST (RACLIST) request (which loads profiles into main storage), or both.

You can use this report to verify that only those programs authorized to modify an access control environment element (ACEE) are able to issue a VERIFY request. This verification is an important security

requirement because the ACEE contains a description of the current user. This description includes the user ID, the current connect group, the user attributes, and the group authorities. A program that is authorized to issue a VERIFY request can alter the ACEE to simulate any user ID.

You can also use the report to verify that only those programs authorized to access any profile on the RACF data set are able to issue a LIST request. Because profiles contain complete descriptions of the characteristics associated with RACF-defined entities, you must carefully control access to them.

Note: IBM does not recommend using the RACF authorized caller table.

MODULE NAME column headings

MODULE NAME

is the name of the program module as it is defined in the RACF authorized caller table.

RACINIT AUTHORIZED

indicates whether the module is authorized to issue a VERIFY request. The value is either YES or NO.

RACLIST AUTHORIZED

indicates whether the module is authorized to issue a LIST request. The value is either YES or NO.

RACF authorized caller table report messages

The following message may appear beneath the report column headings:

```
NO ENTRIES IN RACF AUTHORIZED CALLER TABLE
```

Explanation: There are no entries in the RACF authorized caller table. This message does not indicate an error condition. When RACF is initially installed, for example, the RACF authorized caller table normally contains no entries.

Sample RACF authorized caller table report

R E P O R T	R A C F	A U T H O R I Z E D	C A L L E R	T A B L E
MODULE NAME	RACINIT AUTHORIZED	RACLIST AUTHORIZED		

NO ENTRIES IN RACF AUTHORIZED CALLER TABLE				

Figure 22. Sample RACF Authorized Caller Table Report

RACF class descriptor table report

The class descriptor table report lists class name and status for all general resource classes in the class descriptor table, including information about auditing activity, statistics, the activity of OPERATIONS users, and the universal access authority (UACC).

You can use the class descriptor table report to determine the resource classes defined to RACF for your system. In this way, you can obtain information about the protection status of any resource in the class descriptor table.

CLASS NAME column headings in the class descriptor table report

CLASS NAME

is the class name found in the RACF class descriptor table. The dynamic classes are noted with a "(D)" after the class name.

STATUS

indicates whether the class is active or inactive.

AUDITING

indicates whether there is auditing for the class. The value is either YES or NO.

STATISTICS

indicates whether RACF is gathering statistics for the class. The value is either YES or NO.

DEFAULT UACC

indicates that the default UACC defined for the class in the class descriptor table. RACF uses this UACC for profiles defined to the class, unless the UACC operand is specified on the RDEFINE command that writes the profile.

The following values may appear:

- ALTER
 - For discrete profiles, ALTER indicates that, by default, all users have control over the resource and the resource profile and can authorize other users or groups (or both) to access the resource. (Note that the security administrator may have disabled the use of ALTER access for profile management.)
 - For generic profiles, ALTER indicates that, by default, all users have control over the resource and can allocate data sets protected by the generic profile. Only the profile owner has full control over the resource profile.
- CONTROL indicates that, by default, all users have access authority to update, insert, or delete records in the VSAM data set and perform other operations as if the data set password were supplied.
- UPDATE indicates that, by default, all users can access the resource for both reading and writing.
- READ indicates that, by default, all users can access the resource for reading only.
- NONE indicates that, by default, users cannot access the resource.
- ACEE indicates that the UACC is taken from the accessor environment element (ACEE).

OPERATIONS

indicates whether RACF is to use the OPERATIONS attribute authority during authorization checking. A value of YES indicates RACF performs authorization checking; a value of NO indicates it does not.

Class descriptor table report messages

The following message may appear beneath the report column headings:

```
NO ENTRIES IN THE RACF CLASS DESCRIPTOR TABLE
```

Explanation: There are no entries in the class descriptor table. RACF includes a basic class descriptor table, which is required for RACF processing. If you receive this message, report the condition to your RACF security administrator or installation manager.

Sample class descriptor table report

CLASS NAME	R A C F STATUS	C L A S S AUDITING	D E S C R I P T O R STATISTICS	T A B L E DEFAULT UACC	R E P O R T OPERATIONS ALLOWED
\$CAMP (D)	INACTIVE	NO	NO	NONE	NO
#NUMCLAS (D)	INACTIVE	YES	YES	NONE	NO
@NEWCLAS (D)	INACTIVE	NO	NO	NONE	NO
AIMS	INACTIVE	NO	NO	NONE	NO
APPL	INACTIVE	NO	NO	NONE	NO
DASDVOL	INACTIVE	NO	NO	ACEE	YES
DBCLASS5 (D)	INACTIVE	NO	NO	NONE	NO
DBCLASS6 (D)	INACTIVE	NO	NO	NONE	NO
DSNR	INACTIVE	NO	NO	ACEE	NO
FACILITY	INACTIVE	NO	NO	NONE	NO
GCICSTRN	INACTIVE	NO	NO	NONE	NO
GDASDVOL	INACTIVE	NO	NO	ACEE	YES
GIMS	INACTIVE	NO	NO	NONE	NO
GLOBAL	INACTIVE	NO	NO	NONE	NO
GMBR	INACTIVE	NO	NO	NONE	NO
GTERMINL	INACTIVE	NO	NO	ACEE	NO
PCICSPSB	INACTIVE	NO	NO	NONE	NO
QCICSPSB	INACTIVE	NO	NO	NONE	NO
RACFVARS	INACTIVE	NO	NO	NONE	NO
RVARSMBR	INACTIVE	NO	NO	NONE	NO
SECLABEL	INACTIVE	NO	NO	NONE	NO
TAPEVOL	INACTIVE	NO	NO	ACEE	YES
TCICSTRN	INACTIVE	NO	NO	NONE	NO
TERMINAL	INACTIVE	NO	NO	ACEE	NO
TIMS	INACTIVE	NO	NO	NONE	NO
VMATCH	INACTIVE	NO	NO	NONE	YES
VMCMD	INACTIVE	NO	NO	NONE	YES
VMDISK	INACTIVE	NO	NO	NONE	YES
VMRDR	INACTIVE	NO	NO	NONE	YES

Note: DSMON generates its RACF Class Descriptor Table report listing classes from both the static and dynamic class descriptor tables. The dynamic classes will be noted with a "(D)" after the class name in the first column of the report. Also, note that the classes are listed in alphabetical order.

Figure 23. Class Descriptor Table Report

RACF exits report

The RACF exits report lists the names of all the installation-defined RACF exit routines and specifies the size of each exit routine module. For RACF's static exits, DSMON prints an error message if the RACF communications vector table (RCVT), which contains the address of each RACF exit routine module, indicates that an exit routine module should exist but the module cannot be loaded, or the entry address does not correspond with the address specified in the RCVT.

You can use this report to verify that the only active exit routines are those that your installation has defined. The existence of any other exit routines may indicate a system security exposure, because RACF exit routines could be used to bypass RACF security checking. Similarly, if the length of an exit routine module differs from the length of the module your installation defined, the module may have unauthorized modifications.

Note: For the dynamic exits IRREVSX01 and IRRVAF01, note that these are the exit names, not necessarily the module names associated with the exit. MVS dynamic exit service supports multiple exit routines for a single exit point. The DSMON exits report lists IRREVSX01 or IRRVAF01 when at least one active exit routine is defined at the time the report is created. The report will not include any routine names or sizes, listing the length of IRREVSX01 and IRRVAF01 as NA (not available).

See [z/OS MVS Programming: Authorized Assembler Services Reference ALE-DYN](#) for information on the dynamic exit service CSVDYNEX macro which is used by RACF to define and query its dynamic exits. See [z/OS MVS System Commands](#) for information on the DISPLAY command's support of dynamic exits. The MVS DISPLAY command can be used to find the names of the modules associated with the exits. Additionally see the exit chapter in [z/OS Security Server RACF System Programmer's Guide](#) for information on IRREVSX01 and IRRVAF01.

EXIT MODULE NAME column headings

EXIT MODULE NAME

is the name of the RACF exit routine module, as defined by your installation.

MODULE LENGTH

is the length of the exit routine module in bytes (decimal).

RACF exits report messages

The following message may appear beneath the report column headings:

```
NO RACF EXITS ARE ACTIVE
```

Explanation: There are no active RACF exit routines. This absence does not indicate an abnormal condition, unless your installation has defined RACF exit routines.

Sample RACF exits report

EXIT MODULE NAME		MODULE LENGTH		R A C F		E X I T S		R E P O R T	
-----		-----		-----		-----		-----	
NO RACF EXITS ARE ACTIVE									

Figure 24. Sample RACF Exits Report

RACF global access checking table report

The global access checking table report lists all entries in the global access checking table. Each entry consists of a resource name and its associated global access checking authority level.

Also, you can use the global access checking table report to determine whether protection for a sensitive resource is adequate. By examining the global access information for an entry, you can discover whether the global access authority level provides the correct security for the resource.

CLASS NAME column headings in global access checking table report

CLASS NAME

is the class name found in the global access checking table.

ENTRY NAME

is the entry name or names defined in each class. If the GLOBAL class is inactive, GLOBAL INACTIVE appears in this column. If the GLOBAL class is active but no members are defined for the class, NO ENTRIES appears in the column.

ACCESS LEVEL

specifies the global access checking authority level for the entry.

Global access checking table report messages

The following message may appear beneath the report column headings:

```
GLOBAL INACTIVE
```

Explanation: There are no entries in the RACF global access checking table. This message does not indicate an error condition. When RACF is initially installed, for example, the RACF global access checking table normally contains no entries.

RACF global access table report

R E P O R T		R A C F	G L O B A L	A C C E S S	T A B L E
CLASS	ACCESS	ENTRY			
NAME	LEVEL	NAME			

--					
DATASET		-- GLOBAL	INACTIVE	--	
RVARSMBR		-- GLOBAL	INACTIVE	--	
SECLABEL		-- GLOBAL	INACTIVE	--	
DASDVOL		-- GLOBAL	INACTIVE	--	
TAPEVOL		-- GLOBAL	INACTIVE	--	
TERMINAL		-- GLOBAL	INACTIVE	--	
APPL		-- GLOBAL	INACTIVE	--	
TIMS		-- GLOBAL	INACTIVE	--	
AIMS		-- GLOBAL	INACTIVE	--	
TCICSTRN		-- GLOBAL	INACTIVE	--	
PCICSPSB		-- GLOBAL	INACTIVE	--	
GMBR		-- GLOBAL	INACTIVE	--	
DSNR		-- GLOBAL	INACTIVE	--	
FACILITY		-- GLOBAL	INACTIVE	--	
VMMDISK		-- GLOBAL	INACTIVE	--	
VMRDR		-- GLOBAL	INACTIVE	--	
VMCMD		-- GLOBAL	INACTIVE	--	
VMNODE		-- GLOBAL	INACTIVE	--	
VMBATCH		-- GLOBAL	INACTIVE	--	
SCDMBR		-- GLOBAL	INACTIVE	--	
FCICSFCT		-- GLOBAL	INACTIVE	--	
JCICSJCT		-- GLOBAL	INACTIVE	--	
DCICSDCT		-- GLOBAL	INACTIVE	--	
SCICSTST		-- GLOBAL	INACTIVE	--	

Figure 25. Sample RACF Global Access Checking Table Report

RACF started procedures table reports

The status of the STARTED class determines the started procedures table reports that get generated. If the STARTED class is not active, the report is created using the installation replaceable load module, ICHRIN03, as shown in [Figure 26 on page 119](#). If the STARTED class is active, two reports are generated. Along with the report generated for the installation replaceable load module, ICHRIN03, a second report is created using the STARTED class profiles. An example of this second report is shown in [Figure 27 on page 120](#).

The started procedures table report lists each entry in the started procedures table. Each entry contains the procedure name, user identification, the group name associated with the procedure, the privileged status, and the trusted status. If the STARTED class is active, the report that gets generated also shows the job name associated with the procedure and the TRACE attribute.

In order for the started procedures table report to show your installation's currently active profiles, you should issue:

```
SETR RACLIST(STARTED) REFRESH
```

before running the report. Be aware that this command could cause some disruption if profiles are being changed on the system at the exact time the command is issued.

Using STARTED class profiles allows you to dynamically change the table entries without having to re-IPL. For more details, refer to [z/OS Security Server RACF Security Administrator's Guide](#).

You can use the started procedures table report to determine which started procedures are defined to RACF and which RACF user IDs and groups they will use. RACF user IDs associated with the started procedure can access RACF-protected resources. Therefore, you can check the information in the RACF

started procedures table to determine which users and groups are associated with the started procedure that RACF recognizes, and determine whether those users are privileged or trusted.

You can also use the report to determine which started procedures are privileged or trusted. If the started procedure has the PRIVILEGED attribute, it can bypass all RACROUTE REQUEST=AUTH and REQUEST=FASTAUTH processing, including the security classification checks, and can therefore affect the overall security of the system. TRUSTED means the same as PRIVILEGED, except that auditing can be requested by using the SETROPTS LOGOPTIONS command or the UAUDIT operand on the ALTUSER command.

PROCEDURE NAME column headings

PROCEDURE NAME

is the procedure name, or an asterisk ("*") for a generic entry.

ASSOCIATED USER

is the RACF user identification associated with the procedure. An equal sign ("=") indicates that the procedure name is used for the RACF user identification.

ASSOCIATED GROUP

specifies the RACF group associated with the procedure. An equal sign ("=") indicates that the procedure name is used for the RACF group name.

PRIVILEGED

indicates whether the procedure has the privileged attribute. A value of YES indicates that the procedure has the attribute; a value of NO indicates it does not.

TRUSTED

indicates whether the procedure has the trusted attribute. A value of YES indicates that the procedure has the attribute; a value of NO indicates it does not.

TRACE

indicates whether the STARTED class profile has trace activated. If the attribute is activated, then when the started task is initiated, RACF issues message IRR812I to the operator to record the activity.

Started procedures table report messages

No messages appear at the end of this report.

R A C F S T A R T E D P R O C E D U R E S T A B L E				
R E P O R T				
FROM THE STARTED PROCEDURES TABLE (ICHRIN03):				

PROCEDURE NAME	ASSOCIATED USER	ASSOCIATED GROUP	PRIVILEGED	TRUSTED

JES2	STCUSER	STCGROUP	NO	YES
IRRDPTAB	STCUSER	STCGROUP	NO	NO
IEEVMPGR	STCUSER	STCGROUP	NO	YES
APSWPROC	STCUSER	STCGROUP	NO	YES
VTAM	STCUSER	STCGROUP	NO	YES
LLA	STCUSER	STCGROUP	NO	YES
LLAEPC	STCUSER	STCGROUP	NO	YES
RPCD	RPCD	STCGROUP	NO	YES
SECCLNTD	SECCLNTD	STCGROUP	NO	YES
SECD	SECD	STCGROUP	NO	YES
RSFJ	STCUSER	STCGROUP	NO	NO
RSFK	STCUSER	STCGROUP	NO	NO
RSFL	STCUSER	STCGROUP	NO	NO
*	=		NO	NO

Figure 26. Sample RACF Started Procedures Table Report (ICHRIN03)

R A C F S T A R T E D P R O C E D U R E S T A B L E R E P O R T FROM PROFILES IN THE STARTED CLASS:

PROFILE NAME	ASSOCIATED USER	ASSOCIATED GROUP	PRIVILEGED	TRUSTED	TRACE
CICS.REGIONA	CICSA		NO	NO	NO
CICS.REGIONB	CICSB		NO	NO	NO
NOSTDATA.NOSTDATA	-STDATA NOT SPECIFIED, ICHRIN03 WILL BE USED-				
NOUSER.JOBX	-USER NOT SPECIFIED, ICHRIN03 WILL BE USED-				
ANETVIEW.* (G)	STCUSR	SYS1	NO	YES	NO
APPC.* (G)	STCUSR	SYS1	NO	YES	NO
APSWPROC.* (G)	STCUSR	SYS1	NO	YES	NO
ASCH.* (G)	STCUSR	SYS1	NO	YES	NO
ASCHINT.* (G)	STCUSR	SYS1	NO	YES	NO
BLSJPRMI.* (G)	STCUSR	SYS1	NO	YES	NO
CATALOG.* (G)	STCUSR	SYS1	NO	YES	NO
CDSADV.* (G)	CDSADV	SYS1	NO	NO	NO
CDSCLRK.* (G)	CDSCLRK	SYS1	NO	NO	NO
CDSD.* (G)	CDSD	SYS1	NO	NO	NO
DTSD.* (G)	DTSD	SYS1	NO	NO	NO
DTSTP.* (G)	DTSTP	SYS1	NO	NO	NO
DUMPSRV.* (G)	STCUSR	SYS1	NO	YES	NO
IEEVMPGR.* (G)	STCUSR	SYS1	NO	YES	NO
IRRDPTAB.* (G)	STCUSR	SYS1	NO	NO	NO
JES2.* (G)	STCUSR	SYS1	NO	YES	NO
LLA.* (G)	STCUSR	SYS1	NO	YES	NO
LLAEPC.* (G)	STCUSR	SYS1	NO	YES	NO
NETVFCT.* (G)	STCUSR	SYS1	NO	NO	NO
NETVREL1.* (G)	STCUSR	SYS1	NO	NO	NO
NETVREL2.* (G)	STCUSR	SYS1	NO	NO	NO
NETVREL3.* (G)	STCUSR	SYS1	NO	NO	NO
NETVSSI.* (G)	STCUSR	SYS1	NO	NO	NO
NEV313.* (G)	STCUSR	SYS1	NO	NO	NO
RACF.* (G)	STCUSR	SYS1	NO	NO	NO
RPCD.* (G)	RPCD	SYS1	NO	NO	NO
RSFJ.* (G)	STCUSR	SYS1	NO	NO	NO
RSFK.* (G)	STCUSR	SYS1	NO	NO	NO
RSFL.* (G)	STCUSR	SYS1	NO	NO	NO
RUNJOB.* (G)	STCUSR	SYS1	NO	NO	NO
SECCLNTD.* (G)	SECCLNTD	SYS1	NO	NO	NO
SECD.* (G)	SECD	SYS1	NO	NO	NO
SMF.* (G)	STCUSR	SYS1	NO	YES	NO
TCAS.* (G)	STCUSR	SYS1	NO	NO	NO
TSOCMD.* (G)	STCUSR	SYS1	NO	NO	NO
TSODB.* (G)	STCUSR	SYS1	NO	NO	NO
TSOICMD.* (G)	STCUSR	SYS1	NO	NO	NO
VLF.* (G)	STCUSR	SYS1	NO	YES	NO
VTAM.* (G)	STCUSR	SYS1	NO	YES	NO
** (G)	=MEMBER	STCGRP	NO	NO	YES

Figure 27. Sample RACF Started Procedures Table Report (STARTED Class Active)

Selected user attribute report

The selected user attribute report lists all RACF users with the SPECIAL, OPERATIONS, AUDITOR, ROAUDIT or REVOKE attribute and indicates whether a user possesses the attribute on a system (user) or group level.

You can use the selected user attribute report to verify that only those users who need to be authorized to perform certain functions have been assigned the corresponding attribute.

USERID column headings

USERID

is the user's system identifier.

ATTRIBUTE TYPE

identifies each attribute and indicates whether the user has the attribute on a system (user) or a group level. SYSTEM indicates the user has that attribute on a system level, or at all times. GROUP indicates

user has the attribute only within one or more of the groups to which the user is connected. If neither SYSTEM nor GROUP appears, the user does not possess that attribute on either level.

If a user has one or more attributes on a group level, you can determine the names of the corresponding group or groups through the LISTUSER command or the "User Services" panel.

The report lists the following attribute types:

SPECIAL

gives the user complete control over all the RACF profiles in the RACF database and authority to issue all RACF commands, except those reserved for the auditor's use.

OPERATIONS

gives the user authority to perform maintenance operations and provides full authority to access RACF-protected DASD data sets and certain resource classes.

AUDITOR

gives the user complete authority to audit security controls and the use of system resources.

ROAUDIT

gives the user authority to audit the use of system resources.

REVOKE

prevents, on a system level, a RACF-defined user from entering the system at all. On a group level, a user can enter the system but cannot use any group authorities associated with the group, or access data sets using that group's authority.

Note: When REVOKE is specified with a future date, the status change does not occur until the specified date. Until that date, the report does not list the user as revoked.

For more information on each attribute, especially at the group level, see [z/OS Security Server RACF Security Administrator's Guide](#).

ASSOCIATIONS

are the characteristics of the user ID association. The report lists the following associations:

NODE.USERID

is the node (local or remote) and user ID of the associated user

PASSWORD SYNC

tells whether password synchronization has been requested between the listed user and associate user

ASSOCIATION TYPE

describes the type of association, the status of the user ID association, or both

Selected user attribute report messages

The following message may appear beneath the report column headings:

NO SELECTED USERS FOUND

Explanation: There are no users with the SPECIAL, OPERATIONS, AUDITOR, ROAUDIT, or REVOKE attributes on either a system or group level.

Note: Under normal circumstances, this message should not appear. At least one user should have the SPECIAL attribute on a system level, and at least one user should have the AUDITOR or ROAUDIT attribute on a system level. If this message appears, notify your RACF security administrator or your installation manager.

Sample Selected user attribute report

USERID	S E L E C T E D			U S E R	A T T R I B U T E		R E P O R T		
	SPECIAL	OPERATIONS	AUDITOR		ROAUDIT	REVOKE	ASSOCIATIONS	PASSWORD SYNC	ASSOCIATION TYPE
JPETUSR	SYSTEM	SYSTEM	SYSTEM						

Figure 28. Selected User Attribute Report

Selected user attribute summary report

The selected user attribute summary report shows totals for installation-defined users and for users with the SPECIAL, OPERATIONS, AUDITOR, ROAUDIT, REVOKE, and CONTAIN attribute at both the system and the group level. You can use the summary report to verify that the number of users with each of the selected attributes, on either a system or a group level, is the number your installation wants or expects.

Note: The selected user attribute summary report is produced automatically after the selected user attribute report; it cannot be requested separately.

TOTAL DEFINED USERS column headings

TOTAL DEFINED USERS

is the number of users defined by your installation.

TOTAL SELECTED ATTRIBUTE USERS

is the number of users with each of the selected attributes (SPECIAL, OPERATIONS, AUDITOR, ROAUDIT, REVOKE, CONTAIN and NEVERCONTAIN) at both the system and group level.

Selected user attribute summary report messages

No messages appear at the end of this report.

S E L E C T E D U S E R A T T R I B U T E S U M M A R Y R E P O R T							
TOTAL DEFINED USERS:	1						
TOTAL SELECTED ATTRIBUTE USERS:							
ATTRIBUTE BASIS	SPECIAL	OPERATIONS	AUDITOR	ROAUDIT	REVOKE	CONTAIN	
SYSTEM	1	1	1	0	0	0	
GROUP	0	0	0	0	0	0	

Figure 29. Selected User Attribute Summary Report

Selected data sets reports

The selected data sets report lists all the data sets, including the RACF database or databases, that meet one or more of the selection criteria that DSMON uses. For each selected data set, the report specifies the serial number of the volume on which the data set resides, the selection criterion, whether the data set is RACF-indicated or RACF-protected, and the universal access authority (UACC) for the data set. If a data set or RACF database meets more than one selection criterion, there is a separate entry for each criterion.

You can use the selected data sets report to determine which system and RACF data sets are protected by RACF and which are not. You can also check to learn whether the UACC associated with each of the data sets is compatible with the resource access control requirements of your installation.

DATA SET NAME column headings

DATA SET NAME

is the name of the data set.

VOLUME SERIAL

is the serial number of the direct access volume on which the data set resides. If the data set is not cataloged, this column is blank.

SELECTION CRITERION

is the criterion that was used to select the data set for the report.

The following entries may appear:

LNKLST

The data set is part of the LNKLST concatenation (which is SYS1.LINKLIB and any data sets concatenated to SYS1.LINKLIB by using the LNKLSTxx member of SYS1.PARMLIB) for this IPL.

APF

specifies that the data set is an APF-authorized library.

For information about defining the format and contents of the list of APF-authorized libraries used by MVS, refer to [z/OS MVS Initialization and Tuning Reference](#).

Note:

1. Depending on your APF list definition, the list of APF-authorized libraries may be incomplete in the Selected Data Sets report generated by the FUNCTION ALL or FUNCTION SYSAPF control statements. Only APF-authorized libraries contained in the IEAAPFxx or PROGxx members of SYS1.PARMLIB, or specified by the MVS SETPROG operator command, are reflected in the report. APF-specification members can come from any member of PARMLIB, or from a command which dynamically adds APF data sets. Therefore, LPA, MLPA, and FLPA authorized libraries that are not defined in the APF LIST are not flagged as APF.
2. Perform one of the following options to include all APF-authorized libraries in the Selected Data Sets report.
 - Define all your LPA, MLPA, and FLPA libraries in the applicable IEAAPFxx or PROGxx members of SYS1.PARMLIB. This allows MVS to recognize them as APF-authorized at all times.
 - Use the FUNCTION USRDSN and USEROPT USRDSN control statements and specify the APF-authorized libraries that are not defined in the APF List. With this option, USRDSN is the SELECTION CRITERION field,
 - If the APF-authorized library is part of the LNKLST concatenation, specify either FUNCTION ALL or FUNCTION SYSLNK. In this case, the SELECTION CRITERION field contains LNKLST-APF.

LNKLST-APF

specifies that the data set is a linklist data set that is also an APF authorized library.

MASTER CATALOG

indicates that the data set is the MVS master catalog.

USER CATALOG

indicates that the data set is a user catalog.

RACF PRIMARY

indicates that the data set is a primary RACF database, containing RACF access control information. This information includes user, group, data set, and general-resource profiles.

RACF BACKUP

indicates that the data set is a backup or recovery RACF database.

SYSTEM

indicates that the data set is one of the following system data sets:

SYS1.CMDLIB
SYS1.LINKLIB
SYS1.LPALIB
SYS1.NUCLEUS
SYS1.PARMLIB
SYS1.PROCLIB
SYS1.SVCLIB
SYS1.UADS

USRDSN

is the user data set specified on the USEROPT control statement.

RACF INDICATED

indicates whether the data set is RACF-indicated.

The following entries may appear:

YES

indicates that the RACF indicator for the data set is on.

NO

indicates that the RACF indicator for the data set is off. RACF will not check for a discrete profile.

N.C.

indicates that the data set is not listed (cataloged) in the master catalog.

N.M.

indicates that the DASD volume on which the data set resides is not mounted or has been dynamically deleted.

N.F.

indicates DSMON cannot find the data set on the specified volume. For APF data sets, this may indicate a security exposure that should be investigated and corrected.

RACF PROTECTED

indicates whether the data set has a RACF profile. The following entries may appear:

YES

indicates that the data set has a discrete or generic profile. If the RACF indicator for the data set is off, the data set is protected by a generic profile.

NO

indicates that no profile exists for the data set. The data set is not protected in any way by RACF.

Note:

1. An error condition exists when the RACF indicator for a data set is on but no profile exists for the data set. The data set is not accessible until the condition is corrected.
2. For a data set profile that has WARNING set, RACF issues a warning message, but permits access to the data set. Thus, although the data set has a RACF profile and is indicated as RACF-protected in the report (YES), it can nevertheless be accessed and is not really protected. You may want to list the contents of the data set profile (through the LISTDSD command) to see whether WARNING is set.

UACC

is the data set's universal access authority (UACC), if it is defined. The UACC is the default access authority that specifies how the data set can be accessed by users or groups not in the access list of the data set's RACF profile.

Note: The UACC does not necessarily indicate the actual authority that a user has to access the data set. The global access checking table may contain an entry applicable to the data set, or the user may be on the access list, if the data set has a discrete profile.

The following universal access authorities may appear:

ALTER

For a data set that is protected by a discrete profile, ALTER allows all users to read, update, or delete the data set.

CONTROL

For VSAM (virtual storage access method) data sets, CONTROL provides all users with the same authority that is provided with the VSAM CONTROL password; that is, authority to perform control interval access (access to individual VSAM data blocks), and to retrieve, update, insert, or delete records in the specified data set.

For non-VSAM data sets, CONTROL is equivalent to UPDATE.

UPDATE

allows all users to read or update the data set. UPDATE does not, however, authorize a user to delete the data set.

READ

allows all users to access the data set for reading or copying only.

NONE

does not allow users to access the data set.

Selected data set report messages

The following message may appear beneath the report column headings:

NO SELECTED DATA SETS FOUND

Explanation: DSMON did not find any data sets meeting the criteria.

Note: Under normal circumstances, this message should not appear. If it does, notify your RACF security administrator or installation manager.

Sample selected data sets report

DATA SET NAME	S E L E C T E D VOLUME SERIAL	D A T A S E L E C T I O N C R I T E R I O N	S E T S R A C F I N D I C A T E D	R E P O R T R A C F P R O T E C T E D	U A C C
CATALOG.AOCSMP.USERCAT	D94WV2	USER CATALOG	N.M.	YES	UPDATE
CATALOG.CICSCAT	DB3CL2	USER CATALOG	NO	YES	NONE
CATALOG.CICSDCT	DB3HW1	USER CATALOG	NO	YES	NONE
CATALOG.CMNA00	CMNA00	USER CATALOG	N.M.	YES	NONE
CICS.CURRENT.SDFHAUTH	DB2LD1	APF	NO	YES	NONE
CICS.CURRENT.SDFHEXCI	DB2LD1	APF	NO	YES	READ
CICS.CURRENT.SDYUAUTH	DB2LD1	APF	NO	YES	NONE
CICS.NEW.SDFHAUTH	DB2LD1	APF	NO	YES	NONE
CICSCAT.USERCAT	CIC330	USER CATALOG	N.M.		
DB1L.SDSNEXIT	SMS066	APF	NO	YES	READ
DB2.DB2L.DB2PM.SDG0LOAD	DB2LS2	APF	NO	YES	READ
DB2.DB2M.DB2PM.SDG0LOAD	DB2S01	APF	NO	YES	READ
DB2.LOCAL.LOADLIB	DB2LS0	APF	NO	YES	READ
DB2.USER.CATALOG	DB2PR0	USER CATALOG	NO	YES	NONE
DB2L.DSNEXIT	DB2LS1	APF	NO	YES	READ
DB2M.DSNEXIT	DB2MS0	APF	NO	YES	READ
LINKLIST.DB2L.DSNLINK	DB2LS1	APF	NO	YES	READ
LINKLIST.DB2L.DSNLOAD	DB2LS1	LNKLST - APF	NO	YES	READ
LINKLIST.DB2M.DSNLINK	DB2MS0	APF	NO	YES	READ
LINKLIST.DB2M.DSNLOAD	DB2MS0	LNKLST - APF	NO	YES	READ
LINKLIST.DB2PM.SDG0LINK	DB2MS0	APF	NO	YES	READ
NCP1.SSPLIB	TPPAK2	APF	NO	YES	READ
NETVIEW.NETVIEW.USERLNK	TPPAK5	APF	NO	YES	NONE
NETWORK.ANOMVS.USERLNK	TPPAK5	APF	NO	YES	READ
POSTX.CBC.OSVIR2M0.USERCAT	BPXRTL	USER CATALOG	NO	YES	NONE
SYS1.ACCOUNT	PPP002	APF	YES	YES	NONE
SYS1.AUTHLIB	PPP002	LNKLST - APF	YES	YES	READ
SYS1.CEE.SCEELKED	PRIPK3	APF	NO	YES	READ
SYS1.CEE.SCEERUN	PRIPK3	APF	NO	YES	READ
SYS1.CICS410.LINKLIB	DB2LD1	APF	NO	YES	NONE
SYS1.CICS410.LPALIB	DB2LD1	LNKLST - APF	NO	YES	NONE
SYS1.CMDLIB	PRIPK3	APF	NO	YES	READ
		LNKLST - APF			
		SYSTEM			

Figure 30. Sample Selected Data Sets Report

Appendix A. The RACF report writer



Attention: The report writer is *no longer* the recommended utility for processing RACF audit records. The RACF SMF data unload utility is the preferred reporting utility. The report writer does not support all of the audit records introduced after RACF 1.9.2. See [Chapter 3, “The RACF SMF data unload utility,”](#) on page 49, for more details.

The RACF report writer (RACFRW) uses SMF dates in the form *yyddd*. If you attempt to select a date range of records with a starting date that occurs before January 1, 2000 (for example, 99364) and the ending date occurs on or after January 1, 2000 (for example, 00002) the report writer will reject your request as it will consider the year 00 as coming before the year 99. Similarly, when sorting records by date, the report writer will treat 00 as coming before 99. IBM does not intend to enhance the RACF report writer to recognize this condition and to process the records differently, as IBM has stabilized RACFRW and will not make functional improvements to it. Other than this problem with record ordering, which should only occur if the input file has records both before and after January 1, 2000, RACFRW should properly process records with dates after January 1, 2000, if it would have handled those records if they had contained earlier dates.

A successful security mechanism requires that appropriate personnel, particularly the auditor and the security administrator, be able to assess the implementation of the security mechanism and the use of the resources it protects. The RACF report writer provides a wide range of reports that enable you to monitor and verify the use of the system and resources.

The RACF report writer lists the contents of system management facilities (SMF) records in a format that is easy to read. SMF records reside in the SMF data file. You can also tailor the reports to select specific SMF records that contain certain kinds of RACF information. With the RACF report writer, you can obtain:

- Reports that describe attempts to access a particular RACF-protected resource in terms of user name, user identity, number and type of successful accesses, and number and type of attempted security violations.
- Reports that describe user and group activity.
- Reports that summarize system use and resource use.

How the RACF report writer operates

The RACF report writer consists of three phases:

- Command and subcommand processing
- Record selection
- Report generation

See Figure 31 on page 128 for an overview of the RACF report writer. The figure also shows the replaceable module, ICHRSMFI, for the RACF report writer, and the RACF report writer installation-wide exit, ICHRSMFE.

ICHRSMFI is a nonexecutable module that contains default values for the RACF report writer sort parameters, dynamic-allocation parameters, and processing options. See *z/OS Security Server RACF System Programmer's Guide* for a description of the contents of the module and an explanation of how to modify the module if necessary.

ICHRSMFE is an installation-wide exit that the RACF report writer calls during the record selection phase. The exit allows you to add functions such as the following to the RACF report writer:

- Create additional selection and or rejection criteria (or both) for records that the RACF report writer processes
- Modify naming conventions in records that the RACF report writer processes

- Add other reports to those that the RACF report writer provides.

Detailed information about coding the ICHRSMFE exit routine appears in [z/OS Security Server RACF System Programmer's Guide](#).

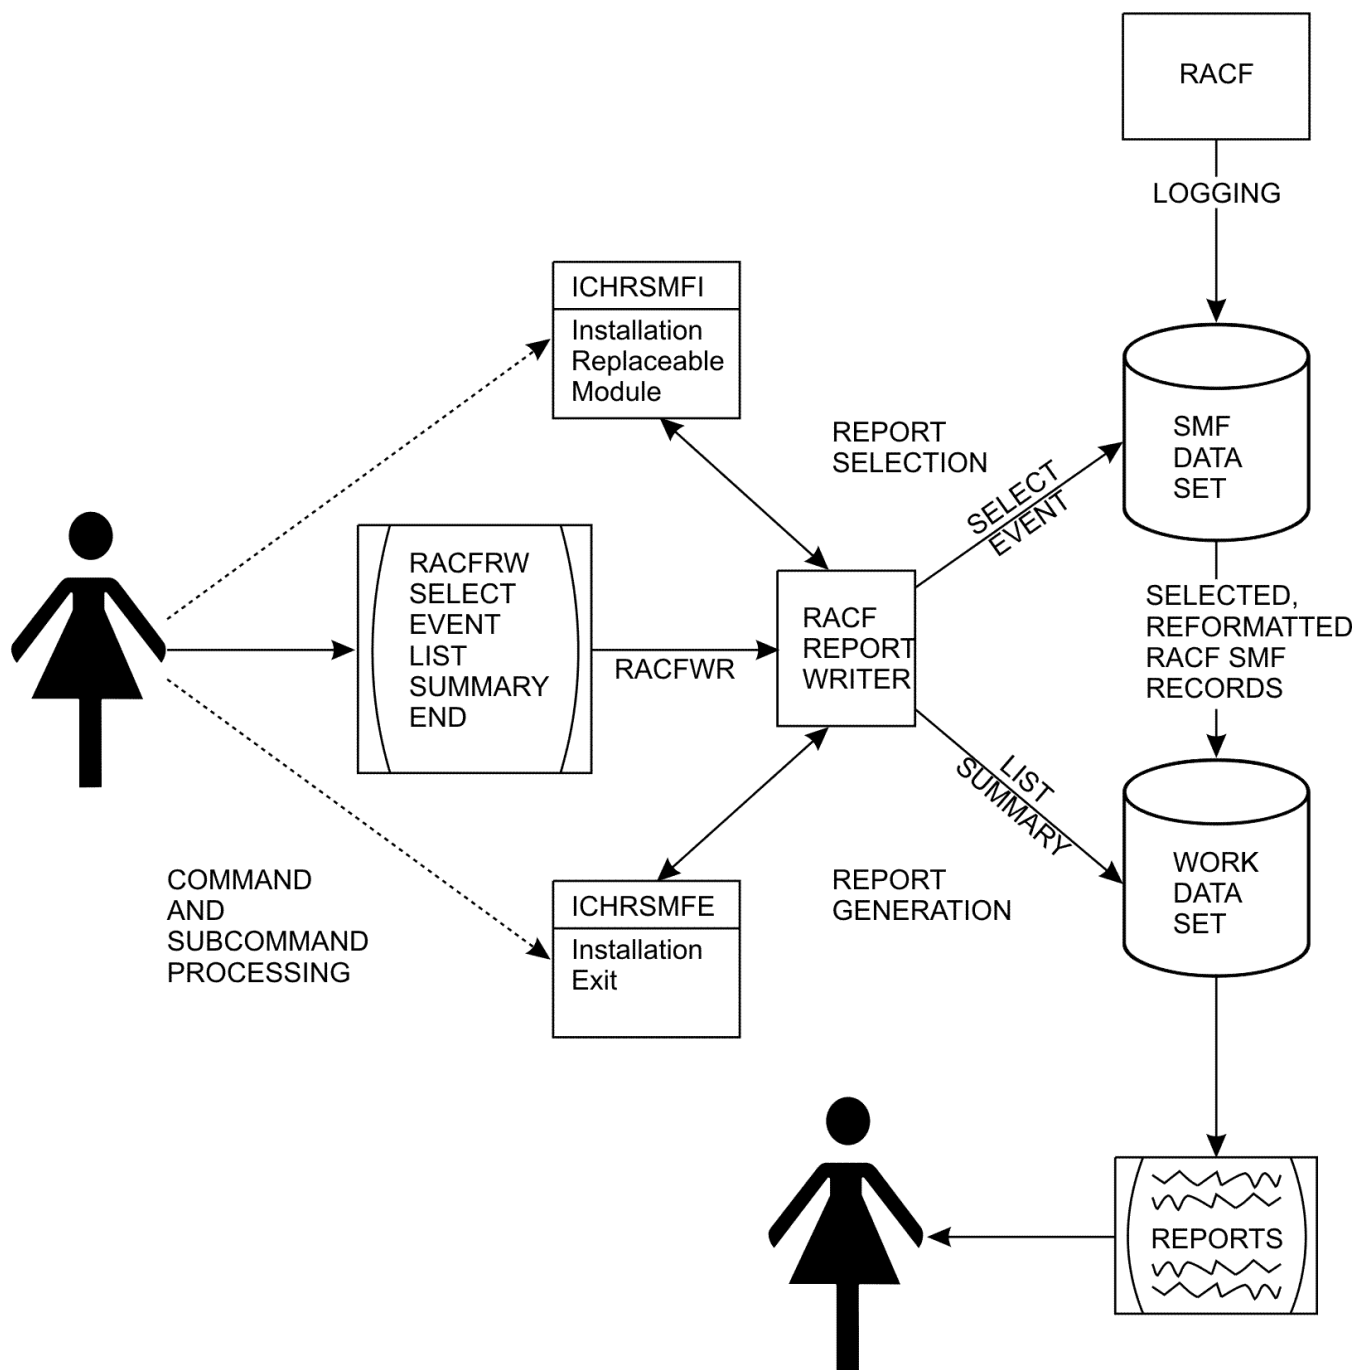


Figure 31. RACF Report Writer Overview

Phase 1

Command and subcommand processing

The first phase, *command and subcommand processing*, starts when you enter the TSO command RACFRW or run the report writer as a batch job. As a command, RACFRW invokes the RACF report writer through the terminal monitor program (TMP) and places you in subcommand mode. In subcommand

mode, you can enter the RACF report writer subcommands SELECT, EVENT, LIST, SUMMARY, and END. When the RACF report writer is invoked from a batch job, the batch job invokes the TMP through a job step in the JCL, and RACFRW commands and subcommands can be specified as data in stream to the job. See [“The RACF report writer and the SMF input data set” on page 131.](#)

Briefly, the SELECT and EVENT subcommands specify which of the input records the RACF report writer selects and uses to generate the reports. You can then produce those reports by using the LIST subcommand to format and print a listing of each SMF record you select and the SUMMARY subcommand to format and print a summary listing of the SMF records. After entering all the subcommands you need, enter the END subcommand. END terminates subcommand mode and the first processing phase.

Note: Pressing **PA1** or the attention key at any time during this first phase terminates the RACF report writer immediately and returns control to the TMP.

Phase 2

Record selection

During the second phase, *record selection*, the RACF report writer compares each record from the input file—the SMF records—against the criteria you specify on the SELECT and EVENT subcommands. The RACF report writer accepts as input only RACF-related SMF records. These are process records (SMF type 20, 30, 80, and 83) and status records (SMF type 81). In addition, the report writer generates a "fake" type 81 record for every SMF type 80 record that results from a SETROPTS or RVARY command.

For a description of SMF record types 20 and 30, see [z/OS MVS System Management Facilities \(SMF\)](#). For a description of SMF record types 80, 81, and 83, see [z/OS Security Server RACF Macros and Interfaces](#).

Notes:

1. The SMF type 81 record contains “UCB” instead of an EBCDIC device name if the master RACF primary database is on a device with an address greater than X'FFF'. When the RACF report writer formats the type 81 record, this information is displayed for you to see.
2. The SMF type 83 subtype 1 record is generated when SETROPTS MLACTIVE is in effect and a RACF command (ALTDSD, ADDSD, DELDSD) has changed the security label in a profile. The record contains the names of the cataloged data sets affected by the security-label change. A link value is contained in both the SMF type 80 record for the RACF command and the SMF type 83 subtype 1 record. The link value is used to connect the list of data set names affected by the security-label change with the RACF command that caused the change. The text in the report-writer output is "LINK=*numeric value*".

If there are migrated items in the list, and the migration facility is unavailable at the time the command is issued, the following messages will be printed after the items:

** Unable to verify this ** migrated item.(1)

The number in parentheses denotes diagnostic information used by IBM support.

For more information about using the LISTDSD command, see [z/OS Security Server RACF Command Language Reference](#).

If you do not specify any SELECT or EVENT subcommands, the RACF report writer selects all of the records from the input file for further processing. If you specify options that limit your report, only limited information is saved.

Record reformatting

To sort and print the SMF input records, the RACF report writer must reformat them. The report writer allocates an in-storage buffer for reformatting, using it on each SMF record being processed. The size of this buffer is determined by the WRKLRECL field in the installation-replaceable module ICHRSMFI unless

LRECL is specified on SORTIN DD. The LRECL value in the SORTIN DD statement overrides the WRKLRECL statement used by RACFRW.

The report writer makes sure that the buffer is large enough for the base section of the SMF record. However, it does not guarantee that the relocate sections of the SMF record will fit.

In the report writer output, the process records that do not fit into the buffer are noted as *truncated*. The status records that do not fit will be noted as *bypassed*. The WRKLRECL default is 4096.

The RACF report writer copies the reformatted records to a work data set. You can save this work data set and use the reformatted records as input to a later run of the RACF report writer.

If the input consists of records previously saved using the report writer, those records are already reformatted. The RACF report writer skips the reformatting step for those records. Operands on the RACFRW command specify whether the RACF report writer is to reformat the input records and whether the work data set is to be saved for subsequent runs of the RACF report writer.

When the RACF report writer has compared all the input records against the selection criteria and, if necessary, has reformatted the selected records and copied them to a work data set the second processing phase is complete.

Phase 3

Report generation

During the third phase, *report generation*, the RACF report writer generates the reports that you request with the LIST and SUMMARY subcommands. It uses as input only the records from the work data set. The RACF report writer always produces a header page with a list of the subcommands that you have entered and describes the meanings of values for such activities as job initiation, TSO logon, resource access, and use of RACF commands that appear in the reports. The other reports depend on operands you have specified, but the RACF report writer always produces the reports you request according to a specific order. See the examples at the end of this chapter.

If you want a general summary report of overall system activity related to RACF, you can specify the GENSUM operand on the RACFRW command. The RACF report writer:

1. Collects the data for the general summary report during the record selection phase (see [“Phase 2” on page 129](#)) and prints it before any other reports during phase 3.
2. Produces reports for the LIST subcommand and lists all SMF records from the work data set in the sequence that you specified.
3. Produces a separate summary report of the SMF records for each SUMMARY subcommand you enter with a RACFRW command. Depending on the subcommand you enter, the report contains records by group, resource, command, RACF event, or owner activity.

Sample reports produced by GENSUM, LIST, and SUMMARY are shown in the section [“Sample reports” on page 156](#). When it has completed the last report, the RACF report writer terminates and returns control to the TMP.

RACF report writer command and subcommands

The following tables summarize the main RACFRW command operands and subcommands that control report writer processing:

Table 15. RACFRW Command Summary	
Operand	Result
GENSUM	Produces a general summary report of system activity related to RACF
NOGENSUM	Produces no general summary report

Table 15. RACFRW Command Summary (continued)	
Operand	Result
FORMAT	Specifies that SMF records are to be formatted for use by the report writer
NOFORMAT	Specifies that the input SMF records are already formatted for use by the report writer; no reformatting is necessary
SAVE	Saves the reformatted records on a work data set. Only those records that satisfy the specified SELECT/EVENT criteria are saved

Table 16. Summary of RACFRW Subcommands	
Subcommand	Result
SELECT	Specifies which SMF records to choose from the input file for report writer processing
EVENT	Specifies further which SMF records to choose from the input file; for the report writer to process these records, each record must meet the criteria
LIST	Specifies that the report writer is to list each record that is processed by SELECT/EVENT groups
SUMMARY	Specifies that the report writer is to print summary reports for records processed by SELECT/EVENT groups
END	Terminates subcommand processing

Planning considerations

To use the RACF report writer at your installation, you must have:

- The DFSORT IBM Program Product (Program Number 5740-SM1), or equivalent.
- An output device that can handle 133 character lines.

The RACF report writer and the SMF input data set

The input data set to the RACF report writer consists of the following SMF record types:

20

Job initiation

30

Common address work data

80

RACF processing

81

RACF initialization

83

RACF processing



Attention: Even though some commands use the relocate 44 section of the record, the output of these records is not consistent. The RACF SMF data unload utility is the preferred reporting utility.

SMF records

Records from the SMF data set or log stream must first be dumped to a data set that RACF can use as input. If you have access to the SMF data set or log stream, you can use the SMF dump program (IFASMFDP or IFASMFDL) to dump the SMF records. (If your installation does not allow you to access the

SMF data set or log stream, see your SMF system programmer to find out how you can obtain the SMF records as input to the RACF report writer.)

Running the report writer as a batch job

For large SMF data sets, you should run the report writer as part of a batch job. The following JCL is an example of how to dump the SMF records to a temporary data set and run the report writer as a batch job.

In [Figure 32 on page 132](#), the SMF dump program IFASMFDump dumps record types 20, 30, 80, 81, and 83 from an SMF data set (SYS1.MANA) to a temporary data set (QSAMOUT DD) for use by the report writer.

```

/*****
/*****
/*
/*          RUN THE SMF DUMP PROGRAM.
/*
/*
/*****
/*****
//SMFDUMP EXEC PGM=IFASMFDUMP
//SYSPRINT DD SYSOUT=*
//VSAMIN   DD DSN=SYS1.MANA,DISP=SHR
//QSAMOUT  DD DSN=QSAMOUT,DISP=(NEW,PASS,DELETE),
//          SPACE=(TRK,(25,50),RLSE),UNIT=SYSALLDA
//SYSIN    DD *
            INDD(VSAMIN,OPTIONS(DUMP))
            OUTDD(QSAMOUT,TYPE(020,030,080,081,083))
            DATE(89195,89195)
            SID(MVS1)
            SID(MVS3)
/*****
/*****
/*
/*          RUN THE RACF REPORT WRITER AS A BATCH JOB
/*          AND USE SMF DATA FROM QSAMOUT.
/*
/*
/*****
/*****
//RACFRW2 EXEC PGM=IKJEFT01
//SORTWKxx DD your sort work files
//SYSPRINT DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//RSMFIN   DD DISP=(SHR,PASS,DELETE),DSN=*.SMFDUMP.QSAMOUT
//SYSTSIN  DD *,DLM=XX
            RACFRW TITLE('RACF REPORTS') GENSUM
            SELECT VIOLATIONS
            LIST TITLE('ACCESS VIOLATIONS SUMMARY REPORT')
            SUMMARY RESOURCE BY(USER)
            END
XX
```

Figure 32. JCL for Dumping SMF Records and Running the Report Writer as a Batch Job

You can specify options for IFASMFDump on the SYSIN INDD statement, and the selection criteria for the SMF records on the SYSIN OUTDD statement. You can also specify the start and end date for the dump program in Julian format (YYDDD) on SYSIN DATE and the system identification on SYSIN SID.

For more information about IFASMFDump and the SMF dump options, including outputting log stream output using IFASMFDL, see [z/OS MVS System Management Facilities \(SMF\)](#).

RACFRW then uses the temporary data set QSAMOUT as input defined on the RSMFIN DD statement, and you can specify the report-writer command and subcommands as in-stream data to SYSTSIN DD.

Running the report writer using the RACFRW command

You can also run the RACF report writer as a TSO command. In TSO ready mode enter **RACFRW**. RACF places you in subcommand mode, and you can enter the report writer subcommands (SELECT, EVENT, LIST, SUMMARY, and END).

If you run the report writer as a TSO command, you must pre-allocate the data set that contains the selected SMF records as RSMFIN and use it as input to the report writer command and subcommands.

See [“Pre-allocating data sets” on page 133](#) for more information about pre-allocating data sets for the report writer.

Pre-allocating data sets

If you run the report writer as a TSO command, pre-allocate the data sets required by the RACF report writer using the following ddnames:

RSMFIN

The input data set or sets. Note, however, that if you enter the DATASET operand on the RACFRW command, the RACF report writer assigns a system-generated DD name to this input data set and ignores RSMFIN. If you neither pre-allocate the input data set nor specify the DATASET operand, the RACF report writer issues message ICH64305I, and terminates immediately.

SYSPRINT

The output data set. If you do not pre-allocate this output data set, the RACF report writer allocates this data set to a SYSOUT data set (which goes to the terminal on which you are entering the commands and subcommands).

SORTIN

The work data set. If you enter the SAVE operand on the RACFRW command, the RACF report writer assigns SORTIN to the work data set that you specify in the SAVE operand. If you pre-allocate the work data set or specify the SAVE operand, the RACF report writer saves this work data set for future use; otherwise, it allocates the work data set to a temporary data set and deletes it at job termination. See the SAVE and FORMAT/NOFORMAT options described in [“RACFRW command” on page 134](#).

If the logical record length is specified, it overrides the WRKLRECL field in the installation-replaceable ICHRSMFI module. The default value of WRKLRECL is 4096. If the logical record length you specify is not large enough to hold the largest SMF record from RSMFIN, the report writer truncates the record, losing some of the information for the record's output.

SORTLIB

The system library that contains the SORT/MERGE load modules. If you do not pre-allocate this system library, the RACF report writer allocates it to the sort data set named in SORTDSN in ICHRSMFI. Initially, the name in SORTDSN is SYS1.SORTLIB.

SORTDDNM

The SORT/MERGE messages. The RACF report writer allocates these messages to the data set named in SORTDDNM in ICHRSMFI. If you do not pre-allocate these messages, they go to the terminal on which you are entering the commands and subcommands, because the initial name in SORTDDNM is SYSOUT.

SORTWKxx

The SORT/MERGE work file(s), named SORTWK01 to SORTWKnn. If you do not pre-allocate these files, dynamic allocation occurs, using the dynamic allocation parameter specified in SORTDYN in ICHRSMFI. Initially, SORTDYN contains 'DYNALLOC=3350'.

Note that any data set that you pre-allocate remains allocated after the RACF report writer terminates, while any data set allocated by the RACF report writer is deallocated before termination.

RACF report writer return codes

After completing, the RACF report writer returns control to the terminal monitor program (TMP) with a return code in register 15.

The following are possible return codes:

Return Code	Meaning
-------------	---------

0	The report writer has terminated normally.
---	--

12

The report writer has not terminated successfully for one of the following reasons:

- It could not dynamically allocate any needed resource that was not pre-allocated by the user
- It could not open any needed resource
- It received a nonzero return code from a service routine that it has invoked
- It received a nonzero return code from the SORT/MERGE routines.

If you receive a return code of 12, check to see whether any error messages were issued when you invoked the report writer.

- If you receive a return code of 12 when the report writer is running in batch, check that the job statement in the JCL specifies MSGLEVEL=(1,1).
- If you receive a return code of 12 when you invoke the report writer from a TSO terminal, make sure the following option is included in your user profile:

```
profile wtpmsg msgid
```

For more information about report writer error messages, see [z/OS Security Server RACF Messages and Codes](#).

Useful hints

When you use the RACF report writer, consider the following:

- You must use the SMF dump program, IFASMFDP, to dump the SMF data set, which is a VSAM data set, into a QSAM data set, which is what the RACF report writer requires. For additional information about IFASMFDP, see [z/OS MVS System Management Facilities \(SMF\)](#).
- In an installation using RACF to protect multiple systems, each system writes RACF-generated SMF records to a different data set. You can concatenate all of these data sets into a single data set for input to the RACF report writer. Later, should you have to separate the information based on the identifier of the system that generated it, you could use the SYSID operand on either the LIST or the SELECT subcommand.
- By using the SELECT and EVENT subcommands, you can retrieve individual SMF records of interest for display at a TSO terminal (display screen).
- If your SMF file is large or resides on multiple tape volumes, you may consider specifying the SAVE operand for the work data set that you create. This action reduces the amount of time and number of devices you need, should you need to use this work data set again to produce additional reports. Note that by using SELECT and EVENT subcommands, you can create and save a subset of a work data set that you saved in a previous run of the RACF report writer.
- Your system programmer can provide special SMF record selection and tailoring by using the RACF report-writer exit routine ICHRSMFE. For more information, see [z/OS Security Server RACF System Programmer's Guide](#).
- The RACF report writer runs as a postprocessor of RACF and does not interfere with normal RACF processing.

RACFRW command

This section shows the function and syntax of the RACF report writer command (RACFRW) and subcommands (SELECT, EVENT, LIST, SUMMARY, and END). The command and subcommands are not listed alphabetically, but in the order in which you are likely to enter them. This order is: RACFRW, SELECT, EVENT, LIST, SUMMARY, and END.

The following key defines the symbols used to represent the syntax of the command and subcommands:

UPPERCASE

characters must appear as shown

lowercase

characters indicate that the user supplies the information

list...

indicates that the item can be listed more than once

{ }

group alternative items; you can only specify one item

[]

indicates an optional item that you can specify

KEYWORD

indicates the default when no item is specified

The TSO command RACFRW invokes the RACF report writer. After you enter the RACFRW command, TSO places you in subcommand mode and prompts you to enter the RACF report-writer subcommands until you enter the END subcommand.

On the RACFRW command, you can specify the source and disposition of input records, the data to be passed to the installation-wide exit routine (ICHRSMFE), whether the RACF report writer is to reformat the input records, and whether the RACF report writer is to print a general summary report. (See [z/OS Security Server RACF System Programmer's Guide](#) for further information about the installation-wide exit ICHRSMFE.)

The Syntax of the RACFRW Command:

```
RACFRW      [TITLE('q-string')]
            [DATA('q-string')]
            [{FORMAT }]
            [{NOFORMAT}]
            [{DSNAME } (name-list...)]
            [{DATASET}]
            [SAVE(name)]
            [LINECNT( { 60 } ) ]
            [ {number} ]
            [{GENSUM } ]
            [{NOGENSUM}]
```

TITLE('q-string')

specifies a string of up to 132 characters, enclosed in single quotation marks, to be used as a default heading for the report pages, if the TITLE operand on either the SUMMARY or LIST subcommand does not specify a unique report heading for a requested report.

DATA('q-string')

specifies a string of up to 256 characters of data, enclosed in single quotation marks, to be passed to the installation-wide exit routine (ICHRSMFE).

FORMAT

specifies that the RACF SMF records used as input to the RACF report writer must be reformatted (from the way they appear in the SMF records) before processing. For additional information about the reformatted records, see [z/OS Security Server RACF System Programmer's Guide](#). FORMAT implies that the RACF report writer has not previously processed the input records. FORMAT is the default value.

NOFORMAT

specifies that the RACF SMF records used as input to the RACF report writer are already reformatted and suitable for processing. NOFORMAT implies that the input records have been processed previously by the RACF report writer and saved. You can save input records by specifying the SAVE operand.

Note: Specifying FORMAT for a data set that is already reformatted or specifying NOFORMAT for a data set that is not already reformatted can cause unpredictable results.

If report-writer input is from SMF, records are not reformatted. If input is a file saved from a previous report-writer run, records are reformatted.

Restriction:

If records have been reformatted and saved using the SAVE operand on one release of RACF report writer, the same release must be used to process the saved reformatted records. For example, RACF 1.9 reformatted records must be processed with RACF 1.9. SMF records from previous RACF releases, however, are supported. If you want to process SMF data from previous releases, archive the original SMF records rather than the reformatted records.

DSNAME(name-list...) or DATASET(name-list...)

specifies the name of one or more cataloged data sets to be concatenated and used as input to the RACF report writer. If you omit this operand, the RACF report writer uses as input the data set you have pre-allocated to the RSMFIN DD name. For more information about preallocating RSMFIN, see [“Pre-allocating data sets” on page 133](#).

SAVE(name)

specifies the name of a sequential data set to be assigned to the work data set that is to contain the selected, reformatted RACF SMF records. If this ‘name’ data set is new, the RACF report writer allocates and catalogs it. If this ‘name’ data set is old, the RACF report writer replaces the data currently in the data set with the new data and keeps the data set. You can use this saved work-data set as input to a later run of the RACF report writer.

If you omit this operand and have not pre-allocated a SORTIN DD name, the work-data set is deleted at job termination.

LINECNT(number)

specifies the maximum number of lines to be written before ejecting to a new page. The minimum number that you can specify is 20. If you specify a number lower than 20, LINECNT defaults to 20. If you omit this operand, LINECNT defaults to 60.

GENSUM

specifies that a general summary report is to be printed. This report contains various statistics about all the RACF SMF records processed, such as total JOB/LOGON attempts, successes, and violations, total resource accesses, successes, and violations, and a breakdown of JOB/LOGON and resource access violations by hour.

NOGENSUM

specifies that a general summary report is not to be printed. NOGENSUM is the default value.

RACFRW subcommands

When you invoke RACFRW as a TSO command, you are placed in subcommand mode. You can then enter subcommands to select the records and the format for the reports.

SELECT subcommand

The SELECT subcommand allows you to choose specific records from the input file containing the RACF SMF records. The RACF report writer reformats these selected records, if necessary, and copies them to an MVS work-data set. Although all input records are used for the general summary report, the RACF report writer can list and generate summary reports for only the records that are indicated on the SELECT subcommand. The SELECT subcommand determines which records get processed.

Note: RACF reports are only as good as the SMF records used as input to them. You need to carefully consider your installation's needs when selecting audit options and be sure the report writer has enough data to make useful reports.

SELECT/EVENT groups

SELECT and EVENT subcommands provide a way to tailor RACF report-writer output. It is easier for you to review a few, selected reports than to examine all the data at once. SELECT and EVENT commands work together to restrict the SMF records that the report writer uses for input. You can run the report writer several times on the same SMF data using different SELECT and EVENT criteria to obtain several reports on specific topics. You can issue SELECT subcommand separately or with EVENT subcommands to form what is called a SELECT/EVENT group.

For each run of the report writer, you can specify zero or more SELECT/EVENT groups. Each group consists of a SELECT subcommand followed by zero or more EVENT subcommands. A second SELECT subcommand indicates the beginning of another group.

For an SMF record to be used in a RACF report, it must meet the criteria of at least one of the SELECT/ EVENT groups. The SMF record must meet all the criteria of the SELECT subcommand plus all the criteria of at least one of the EVENT subcommands in that group.

A SELECT/EVENT group must begin with a SELECT subcommand, even if it is a SELECT subcommand with no operands. You can then follow this subcommand with up to 49 EVENT subcommands that specify additional selection criteria for that group. If you do not specify an EVENT subcommand, RACF uses only the criteria from the SELECT subcommand. For more information, see [“EVENT subcommand” on page 141](#).

If you specify multiple SELECT subcommands or SELECT/EVENT groups or both, you can specify the groups in any order. The listing and summary reports that you request, however, will reflect *all* the records that have been selected by *all* the groups, not just the records selected by one particular SELECT/EVENT group. If you do not issue any SELECT subcommands or SELECT/EVENT groups, *all* the RACF SMF records from the input file are selected.

The RACF report writer can process a maximum of 50 SELECT and EVENT subcommands. If you enter more than 50, TSO accepts only the first 50, then prompts you to enter a subcommand other than SELECT or EVENT.

The following example produces a listing of all unsuccessful logons and all successful SETROPTS commands.

```
RACFRW
SELECT VIOLATIONS
EVENT LOGON
SELECT SUCCESSES
EVENT SETROPTS
LIST
END
```

The next example provides a listing of every unsuccessful RACF event (logons, accesses, SVCs, commands) plus successful logons and successful SETROPTS commands.

```
RACFRW
SELECT VIOLATIONS
SELECT SUCCESSES
EVENT LOGON
EVENT SETROPTS
LIST
END
```

The following example results in a listing of every RACF-related SMF record.

```
RACFRW
LIST
END
```

Note: Use a comma to separate items in a list of operands for SELECT or EVENT. If you must continue items in a list on another line, use the standard TSO continuation, as in the following example:

```
SELECT DATE(89195:89197) TIME(010000:120000) USER(user1,user2,+
user3,user4,user5)
```

See the syntax of the SELECT and EVENT subcommands for those operands that allow you to specify lists of items.

The syntax of the SELECT subcommand:

```
{SELECT} [DATE {(begin-number:end-number)} ]
{SEL    } [      {(number-list...)}      ]

          [TIME {(begin-number:end-number)} ]
          [      {(number-list...)}      ]

          [{VIOLATIONS}]
          [{SUCSESSES } ]
          [{WARNINGS  } ]

          [{USER(name-list...)}]
          [{NOUSER    } ]

          [{JOB(name-list...)} ]
          [{NOJOB     } ]

          [{OWNER(name-list...)}]
          [{NOOWNER   } ]

          [GROUP(name-list...)]

          [STEP(name-list...)]

          [{STATUS}]
          [{PROCESS}]

          [SYSID(value-list...)]

          [ AUTHORITY( [NORMAL] [SPECIAL]
                      [ OPERATIONS] [AUDITOR]
                      [  EXIT] [FAILSOFT]
                      [  BYPASSED] [TRUSTED]) ]

          [ REASON( [CLASS] [USER] [SPECIAL]
                   [RESOURCE] [RACINIT]
                   [COMMAND] [CMDVIOL] [AUDITOR]
                   [SECAUDIT] [VMAUDIT]
                   [SECLABELAUDIT] [LOGOPTIONS]
                   [COMPATMODE] [APPLAUDIT]) ]

          [TERMINAL(name-list...)]
```

DATE(begin-number:end-number) or DATE(number-list...)

specifies a range (in ascending order) or a list of dates in the form YYDDD that are to be selected for further processing.

TIME(begin-number:end-number) or TIME(number-list...)

specifies a range (in ascending order) or a list of times in the form HHMMSS that are to be selected for further processing.

VIOLATIONS

specifies that only records identifying security violations are to be selected for further processing. This field applies to PROCESS records only.

SUCSESSES

specifies that only records identifying successful access attempts are to be selected for further processing. SUCSESSES applies to PROCESS records only.

WARNINGS

specifies that only records for which a warning message was issued are to be selected for further processing. This field applies to PROCESS records only.

If you do not specify VIOLATIONS, SUCSESSES, or WARNINGS, none of these is used as a selection criterion.

USER(name-list...)

specifies a list of user IDs that are to be selected for further processing. USER applies to PROCESS records only. If you omit both the USER and NOUSER operands, the RACF report writer selects all records containing user IDs. (See Notes [“1” on page 141](#) and [“2” on page 141.](#))

NOUSER

specifies that:

- Records containing user IDs are not to be selected for further processing
- Records containing undefined users are selected. You can use the list to define those user IDs if you want.

If you omit both the USER and NOUSER operands, the RACF report writer selects all records containing user IDs. If you specify both the NOUSER and NOJOB operands, the RACF report writer ignores both operands. (See Notes [“1” on page 141](#) and [“2” on page 141.](#))

JOB(name-list...)

specifies a list of job names that are to be selected for further processing. JOB applies to PROCESS records only. If you omit both the JOB and NOJOB operands, the RACF report writer selects all records containing job names. (See Note [“1” on page 141.](#))

NOJOB

specifies that records that contain job names are not to be selected for further processing. If you omit both the JOB and NOJOB operands, the RACF report writer selects all records containing job names. If you specify both the NOUSER and NOJOB operands, the RACF report writer ignores both operands. (See Note [“1” on page 141.](#))

OWNER(name-list...)

specifies a list of resource owner names that are to be selected for further processing. OWNER applies to PROCESS records only. If you omit both the OWNER and NOOWNER operands, owner is not a selection criterion.

NOOWNER

specifies that records that contain resource owner names are not to be selected for further processing. If you omit both the OWNER and NOOWNER operands, owner is not a selection criterion.

GROUP(name-list...)

specifies a list of group names that are to be selected for further processing. GROUP applies to PROCESS records only. (See Note [“1” on page 141.](#))

STEP(name-list...)

specifies a list of step names that are to be selected for further processing. STEP applies to PROCESS records only. (See Note [“1” on page 141.](#))

STATUS

specifies that only STATUS records are to be selected for further processing. STATUS records are RACF SMF record types 80 (generated by the SETROPTS or RVARY command) and 81.

PROCESS

specifies that only SMF record types 20, 30, 80, and 83 are to be selected for further processing.

SYSID(value-list...)

specifies a list of system identifiers that are to be selected for further processing.

AUTHORITY(type...)

specifies a list of authority types that are to be selected for further processing. AUTHORITY applies to PROCESS records only. Type can be any of the following:

SPECIAL

Selects records produced because the user had the SPECIAL or group-SPECIAL attribute

OPERATIONS

Selects records produced when access was granted because the user had the OPERATIONS or group-OPERATIONS attribute

AUDITOR

Selects records produced because the user had the AUDITOR or group-AUDITOR attribute

EXIT

Selects records produced when access was granted by an installation-wide exit routine

NORMAL

Selects records produced when access was granted for a reason other than those already listed (for example, when the user had sufficient access authority)

FAILSOFT

Selects records produced when failsoft processing was in effect

BYPASSED

Selects records produced because of accesses in which RACF authority checking was bypassed because BYPASS was specified on the user ID

TRUSTED

Selects records produced when access was granted because the user had the trusted attribute.

REASON(value...)

specifies the reasons for logging the records that are to be selected for further processing. The REASON operand applies to PROCESS records only. Its value can be any of the following:

CLASS

Selects records produced because auditing of profile changes was in effect for a particular class. This record was produced because SETROPTS AUDIT was in effect.

USER

Selects records produced because auditing was in effect for the specific users. This record was produced because UAUDIT was specified for the user.

SPECIAL

Selects records produced because:

- SETROPTS SAUDIT is in effect, which produces records for RACF commands requiring SPECIAL or group-SPECIAL authority.
- SETROPTS OPERAUDIT is in effect, which produces records for resource accesses requiring OPERATIONS or group-OPERATIONS authority.

If both SAUDIT and OPERAUDIT are in effect, records for both are selected. If neither one is in effect, no records are selected.

RESOURCE

Selects records produced because auditing was in effect for the specific resource or because a RACHECK installation-wide exit routine requested auditing. (See Note [“3”](#) on page 141.)

RACINIT

Selects records produced by a RACINIT request.

COMMAND

Selects records produced by commands that are always logged.

CMDVIOL

Selects records produced because auditing of command violations was in effect. This record was produced because SETROPTS CMDVIOL was in effect.

AUDITOR

Selects records produced because auditing of the specific resource was in effect. This record was produced because GLOBALAUDIT was specified in the profile. (See Note [“3”](#) on page 141.)

SECAUDIT

Selects records produced because auditing of resources according to SECLEVEL was in effect. This record was produced because SETROPTS SECLEVELAUDIT was in effect.

VMAUDIT

Selects records produced because auditing of specific z/VM® events was in effect.

SECLABELAUDIT

Selects records produced because auditing of resources according to security label was in effect.

LOGOPTIONS

Selects records produced because LOGOPTIONS auditing was in effect for a particular class.

COMPATMODE

Selects records produced because SETROPTS COMPATMODE was in effect.

APPLAUDIT

Selects records produced because SETROPTS APPLAUDIT was in effect.

TERMINAL(name-list...)

specifies a list of terminal IDs that are to be selected for further processing. TERMINAL applies to PROCESS records only.

Note:

1. Users who are not defined to RACF do not have a RACF user ID. Furthermore, they cannot connect to RACF. For this reason, the RACF SMF records associated with these MVS users contain the job name in place of the user ID and the step name in place of the group name.

Specifying SELECT USER(USERA) selects records for USERA including all records that have a job name in place of a user ID. If you want only records for USERA, specify:

```
SELECT  USER(USERA)  NOJOB
```

Similarly, specifying SELECT GROUP(GROUPA) selects records for GROUPA, including records that have a step name in place of a group name. If you want only records for GROUPA, specify:

```
SELECT  GROUP(GROUPA)  STEP(any-name)
```

There is no NOSTEP parameter.

2. If the user name is available in the relocate section of SMF record type 80, RACF includes it in both the PROCESS records listing and the SUMMARY reports.
3. The RACF report writer can select a record because of either RESOURCE or AUDITOR or both RESOURCE and AUDITOR.

EVENT subcommand

The EVENT subcommand allows you to specify selection criteria related to particular RACF events. For a record to be selected for further processing by the RACF report writer, it must satisfy *all* the selection criteria that you specify on this EVENT subcommand.

You can use the EVENT subcommand only with a SELECT subcommand in a SELECT/EVENT group. With the EVENT subcommand, you can create a subset of the records that have already met the selection criteria specified on the SELECT subcommand. ([“SELECT subcommand” on page 136](#) describes SELECT/EVENT groups in more detail.)

The EVENT subcommand applies to PROCESS records only.

Keep in mind that the report is compiled by the number of records processed, which is determined by the SELECT subcommand, not just the records listed, which is determined by the EVENT subcommand. Therefore, it is possible for a report to have record totals in it that do not match the number of records for which you have set the criteria. The report totals list all the records that it processed in creating the report.

The syntax of the EVENT subcommand:

```
{EVENT}      event-name
{EV          }

              [EVQUAL(value-list...)]
              [CLASS(name-list...)]
              [NAME(name-list...)]
```

```

[DSQUAL(name-list...)]

[INTENT( [ALTER] [CONTROL] [UPDATE] ]
[      [READ]   [NONE]   )      ]

[ALLOWED( [ALTER] [CONTROL] [UPDATE] ]
[        [READ]   [NONE]   )      ]

[NEWNAME(name-list...)]

[NEWDSQUAL(name-list...)]

[  {begin-number:end-number}  ]
[ LEVEL( {                     } ) ]
[  {number-list...           }  ]

```

event-name

specifies one of the following valid event names:

LOGON

TSO logon or batch job initiation

ACCESS

Access to a RACF-protected resource

ADDVOL

Add a volume to a multivolume data set or tape volume set

RENAME

Rename a data set, SFS file, or SFS directory

DELETE

Delete a resource

DELVOL

Delete one volume of a multivolume data set or tape volume set

DEFINE

Define a resource

ALLSVC

All of the preceding functions (ACCESS, ADDVOL, RENAME, DELETE, DELVOL, and DEFINE)

ADDSD

ADDSD command

ADDGROUP

ADDGROUP command

ADDUSER

ADDUSER command

ALTDSD

ALTDSD command

ALTGROUP

ALTGROUP command

ALTUSER

ALTUSER command

CONNECT

CONNECT command

DELDSD

DELDSD command

DELGROUP

DELGROUP command

DELUSER

DELUSER command

PASSWORD

PASSWORD command

PERMIT

PERMIT command

RALTER

RALTER command

RDEFINE

RDEFINE command

RDELETE

RDELETE command

REMOVE

REMOVE command

RVARY

RVARY command

SETROPTS

SETROPTS command

ALLCOMMAND

All of the preceding RACF commands (ADDSD through SETROPTS)

APPCLU

Partner LU verification through use of APPCLU profile.

GENERAL

General purpose auditing

Not all of the EVENT subcommand operands are valid with certain event names.

EVQUAL(value-list...)

specifies a list of event qualifiers to be selected.

CLASS(class-name...)

specifies a list of resource class names to be selected. Only the DATASET class and class names found in the class descriptor table are valid.

NAME(name-list...)

specifies a list of resource names to be selected. In the NAME field, you must specify a fully qualified data set name, *not* a profile name for RACF SVC events (ACCESS, ADDVOL, RENAME, DELETE, DELVOL, DEFINE, ALLSVC). However, you must specify a profile name, *not* a fully qualified data set name, in the NAME field for RACF command events (ADDSD, ALTDSD, DELDSD, PERMIT, RALTER, RDEFINE, RDELETE, ALLCOMMAND).

To select specific data sets, you must specify fully qualified dataset names in the 'name-list'. Also, if a dataset has been renamed and you want to use this operand to select the old dataset name, you must specify the fully qualified, old data set name in the 'name-list'. This operand is not valid with the LOGON event name. You can specify generic names if you are looking for commands issued against that profile.

DSQUAL(name-list...)

specifies a list of dataset qualifiers to be selected. Valid dataset qualifiers are any user IDs or group names used as the high-level qualifier of a dataset name or any qualifiers supplied by the ICHRSMFE installation-wide exit routine. If a data set has been renamed and you want to use this operand to select the old dataset name, you must specify the qualifier of the old dataset name in the 'name-list'.

To obtain records that are pertinent solely to the dataset class, you must also specify CLASS(DATASET); otherwise, you receive records for all valid classes.

INTENT

specifies a list of intended access authorities to be selected. An intended access authority is the minimum authority needed by a user to access a particular resource (not the actual authority held by the user). The valid intended access authorities are ALTER, CONTROL, UPDATE, READ, and NONE. The INTENT operand is valid only with the ACCESS event name.

ALLOWED

specifies a list of allowed access authorities to be selected. An allowed access authority is the actual authority held by the user requesting access to a particular resource (not the minimum authority needed by the user to access that resource). The valid, allowed access authorities are ALTER, CONTROL, UPDATE, READ, and NONE. The ALLOWED operand is valid only with either the ACCESS or the ADDVOL event names.

NEWNAME(name-list...)

specifies a list of new, fully qualified resource names to be selected. This operand is valid only with the RENAME event name.

NEWDSQUAL(name-list...)

specifies a list of qualifiers for new dataset or generic names to be selected. Valid qualifiers are any user IDs or group names used as the high-level qualifier of a dataset name or any qualifiers supplied by the ICHRSMFE installation-wide exit routine. This operand is valid only with the RENAME event name.

LEVEL(begin-number:end-number) or LEVEL(number-list)

specifies a range (in ascending order) or a list of resource levels to be selected.

The meaning of the level indicator is set by your installation with the ADDSD, ALTDSD, RDEFINE, and RALTER commands. See *z/OS Security Server RACF Command Language Reference* for more information about the LEVEL operand.

LIST subcommand

The LIST subcommand formats and prints a listing of each individual RACF SMF record (both PROCESS and STATUS) that passes the selection criteria specified on the SELECT and EVENT subcommands. On the LIST subcommand, you can specify the title, sort sequence, and format control for the listing. The RACF report writer processes only one LIST subcommand at a time; if you enter more than one, the RACF report writer recognizes only the last LIST subcommand that you have entered. (The RACF report writer does all processing after you enter the END command.)

If you want to execute a LIST subcommand more than once to produce your reports, you must run the report writer each time. If you use the same selection criteria for each LIST subcommand you run, use the SAVE operand on RACFRW to specify the work-data set that is to contain the selected, reformatted SMF records. In this way, you can avoid unnecessary processing each time you run the report writer.

The syntax of the LIST subcommand:

```
{LIST}      [TITLE('q-string')]
{L          }

           [SORT( [DATE] [TIME] [SYSID]      ]
           [      [USER] [GROUP] [EVENT]     ]
           [      [EVQUAL] [TYPE] [NAME]     ]
           [      [CLASS] [TERMINAL] [JOBID]  ]
           [      [OWNER] [SECLABEL]         ]
           [      [APPLAUDIT])               ]

           [{ASCEND }]
           [{DESCEND}]

           [NEWPAGE]
```

TITLE('q-string')

specifies a string of up to 132 characters, enclosed in single quotation marks, to be used as the heading for each page of this particular listing. If you omit this operand but specify a default heading in the TITLE operand of the RACFRW command, the default heading appears on each page of the listing. If you omit both this operand and the RACFRW TITLE operand, no heading at all appears on the listing.

SORT(field-list)

specifies the fields of the input record (a reformatted RACF SMF record) that are to be used for sorting. If you specify the LIST subcommand without specifying the SORT operand, the RACF report writer sorts the records by RCDTYPE, at offset 5(5) in the reformatted SMF record, with STATUS records preceding PROCESS records. If you specify SORT operand values, the records are then further sorted within the STATUS and PROCESS groups by the fields that you specify on the SORT operand.

The sequence in which you specify the SORT operands determines the sequence in which the RACF report writer sorts the records. For example, specifying SORT(OWNER GROUP USER DATE TIME) causes the RACF report writer to sort according to the profile owner first, then the group name, then the user name. If you omit the SORT operand, the order in which the records were written to SMF is not necessarily the order in which the records appear in the output listing, unless you have specified EQUALS in the SORTEQU field of the installation-replaceable module (ICHRSMFI).

The following table describes the operands you can use to select a sort sequence. Even though these operands apply only to process records, specifying them does not affect the order of status records.

OPERAND	DESCRIPTION
DATE	Julian date (YYDDDF) that the job entered the system
TIME	Time of day (HHMMSSTH)
SYSID	System identifier
USER	User (job) names
GROUP	Group (step) names
EVENT	Security-event codes
EVQUAL	Security-event code qualifiers
TYPE	Event types: 1 = JOB/LOGON events 2 = SVC events 3 = command events
NAME	Names of resources within event types: user ID for JOB/LOGON events RESOURCE NAME for SVC and command events
CLASS	Resource class names
TERMINAL	Terminal ID
JOBID	Job ID from SMF job management record
OWNER	Owner of the resource
SECLABEL	Security label
APPLAUDIT	APPLAUDIT key 8-byte key linking records of APPC/MVS transactions

ASCEND

specifies that the fields identified by the DATE and TIME operands are to be sorted in ascending order. If you omit the DATE and TIME operands, this operand is ignored.

ASCEND is the default value.

DESCEND

specifies that the fields identified by the DATE and TIME operands are to be sorted in descending order. If you omit both the DATE and TIME operands, this operand is ignored.

NEWPAGE

specifies that the listing is to start printing on a new page whenever the value in the major (first) sort field changes. If you omit the SORT operand, this operand is ignored.

SUMMARY subcommand

The SUMMARY subcommand causes the RACF report writer to format and print reports that summarize the information in the RACF SMF records that meet the selection criteria on the SELECT and EVENT subcommands.

Using the SUMMARY subcommand, you can request reports that summarize the following:

- Group activity
- User activity
- Resource activity
- Security-event activity
- RACF command activity
- Owner activity
- Group activity broken down by resource
- User activity broken down by resource
- Resource activity broken down by user
- Resource activity broken down by group
- Resource activity broken down by security event
- Security event activity broken down by resource
- RACF command activity broken down by user
- RACF command activity broken down by group
- RACF command activity broken down by resource
- Owner activity broken down by resource.

On a SUMMARY subcommand, you can specify only one of the activities mentioned in the preceding list. You can, however, enter as many as 16 different SUMMARY subcommands for each RACFRW command. You can thus request reports of all possible activities in one run of the RACF report writer. (Note that, if you accidentally enter more than one SUMMARY subcommand for the same type of activity, it does not cause an error; the RACF report writer recognizes only the last one.) The order in which you enter the SUMMARY subcommands is the order in which the summary reports are printed.

The syntax of the SUMMARY subcommand:

```
{SUMMARY}      name1    [BY(name2)]
{SUM           }
{              }

[ {VIOLATIONS} ]
[ {SUCSESSES } ]
[ {WARNINGS  } ]

[NEWPAGE]

[TITLE('q-string')]
```

name1

specifies the major field on which information is to be grouped and summarized. The valid values for name1 are: GROUP, USER, RESOURCE, EVENT, COMMAND, and OWNER.

BY(name2)

specifies a minor field within the major field on which information is to be grouped and summarized also. The valid values for name2 are: GROUP, USER, RESOURCE, and EVENT.

Note: Only the following single name and name1 [BY(name2)] combinations are valid:

Name	name1 [BY(name2)]
GROUP	RESOURCE BY(USER)
USER	RESOURCE BY(GROUP)
RESOURCE	RESOURCE BY(EVENT)
EVENT	EVENT BY(RESOURCE)
COMMAND	COMMAND BY(USER)
OWNER	COMMAND BY(RESOURCE)
GROUP BY(RESOURCE)	COMMAND BY(GROUP)
USER BY(RESOURCE)	OWNER BY(RESOURCE)

VIOLATIONS

specifies that only information about access violations is to be included in the summary.

SUCCESES

specifies that only information about successful access attempts is to be included in the summary. If you omit VIOLATIONS, SUCCESES, and WARNING, the summary includes information for both access violations and successful access attempts.

WARNINGS

specifies that only accesses that were successful only because WARNING mode was in effect are to be included in the summary. The information appears under the WARNINGS heading.

If you do not specify VIOLATIONS, SUCCESES, or WARNINGS, the report summarizes all access attempts.

NEWPAGE

specifies that the summary report is to start printing on a new page whenever the value in name1 changes. NEWPAGE is valid only when BY(name2) is specified.

TITLE('q-string')

specifies a string of up to 132 characters, enclosed in single quotation marks, to be used as the heading for each page of this particular summary report. If you omit this operand but specify a default heading in the TITLE operand of the RACFRW command, the default heading appears on each page of the summary report. If you omit both this operand and the RACFRW TITLE operand, no heading at all appears on the summary report.

END subcommand

The END subcommand terminates subcommand mode. All report-generation processing is done after you enter the END subcommand.

The syntax of the END subcommand:

```
END
```

Using the RACF report writer

Because of variations from one installation to another, it is not possible to identify all of the ways an auditor might use the RACF report writer. The following list, however, identifies some possibilities:

- [“Monitoring password violation levels” on page 148](#)
- [“Monitoring access attempts in WARNING mode” on page 148](#)

- [“Monitoring access violations” on page 150](#)
- [“Monitoring the use of RACF commands” on page 150](#)
- [“Monitoring specific users” on page 151](#)
- [“Monitoring SPECIAL users” on page 151](#)
- [“Monitoring OPERATIONS users” on page 151](#)
- [“Monitoring failed accesses to resources protected by a security level” on page 152](#)
- [“Monitoring accesses to resources protected by a security label” on page 152.](#)

The following detailed descriptions of these tasks include brief examples of the report writer command and subcommands needed for each. (In the examples, lowercase entries can be modified to suit the needs of your installation.) For sample reports, see [“Sample reports” on page 156.](#)

Monitoring password violation levels

Monitoring password violation levels enables you to:

- Determine how effectively new RACF users are coping with the LOGON process
- Determine if the number of password violations stabilizes over time
- Determine where (at which terminals) these password violations are occurring.

To obtain a report that describes password violations, you can use the following command and subcommands:

```
RACFRW GENSUM. . .
SELECT PROCESS
EVENT LOGON EVQUAL(1)
LIST . . .
END
```

Results—Monitoring password violation levels

These subcommands create a general summary report and a listing of the selected process records. (See [Figure 37 on page 160](#) and [Figure 39 on page 161](#) for samples of the general summary report and listings of selected process records.)

The total number of job or logon violations in the general summary report includes all types of violations (invalid password, invalid group, invalid OIICARD, and invalid terminal). Because the EVENT subcommand causes the RACF report writer to select only those process records that describe an invalid password, you can use the number of process records selected to determine the percentage of password violations. If, for example, the number of process records selected is 13 and the total number of job or logon attempts is 393, you can compute the percentage of password violations by dividing 13 by 393. In this particular example, the value is 3.3%.

The violation percentage is a useful number to record and track over time. As users become more familiar with using their user ID and password, this percentage should tend to stabilize at a relatively low level.

You can look at the terminal name in the listing of process records to determine where persistent violations are originating. The records selected are record types 20, 30, and 80 (process records) with an event code of 1 for job initiation or TSO logon. (See [Figure 34 on page 157](#) for a list of RACF events and their qualifiers.)

Monitoring access attempts in WARNING mode

Your installation may choose to use warning mode during the initial implementation of RACF. During this period, resource profiles contain a warning indicator (specified when the owner creates or later changes the profile). When the warning indicator is set, RACF allows all requesters to access the resource, and, if the requester would not otherwise be allowed access, RACF sends a message to the requester. Logging occurs at the owner-specified access type and level.

If the owner of a resource has specified in the profile one of the following:

- AUDIT(FAILURE(READ))
- AUDIT(ALL(READ)) (or the defaults for these are in effect)

or if you, as auditor, specify one of the following:

- GLOBALAUDIT (FAILURE(READ))
- GLOBALAUDIT (ALL(READ))

RACF logs each access to the resource, and you can use the RACF report writer to provide a list of the accesses RACF allowed only because the warning indicator was set.

Using the warning indicator can help your installation to migrate gradually to RACF. Checking the requesters and resources in the report-writer listing can enable you to develop access lists without disrupting authorized work and without the immediate need to write and test a RACF exit routine.

As the auditor, however, you must be aware that if your installation sets the warning indicator in a resource profile any requester can access the resource. You should verify that the profile for a highly classified resource (such as payroll or business-planning data) does not contain the warning indicator.

To obtain a list of the profiles in a particular class that have the warning indicator set, you can issue the RACF SEARCH command with the WARNING operand:

```
SEARCH CLASS(class-name) WARNING
```

For example, to list the profiles in the TERMINAL class that contain the warning indicator, enter:

```
SEARCH CLASS(TERMINAL) WARNING
```

To obtain a report of accesses granted only because the warning indicator was set, you can use the following command and subcommands:

```
RACFRW ...
  SELECT PROCESS WARNINGS
  LIST ...
END
```

Results—Monitoring access attempts in WARNING mode

These subcommands produce a listing of the selected process records. The records selected are those that contain an event code of 2 for resource access and a qualifier from the following table.

EVENT NUMBER	DESCRIPTION
3	Warning issued because of access.
5	Warning issued because of PROTECTALL.
8	Warning issued because of missing security label from job, user, or profile.
9	Warning issued because of insufficient security label authority.

10

Warning issued because data set is not cataloged.

13

Warning issued because of insufficient CATEGORY/SECLEVEL.

The WARNING indicator is also set in records for the following events: LOGON, RENAME, DEFINE.

Monitoring access violations

When warning mode is in effect, and during normal operation of RACF, it is essential to your job as an auditor that you be able to monitor access violations. RACF detects and logs an access violation when it denies a user access to a resource because that user is not authorized to access the resource. An access violation is, therefore, a symptom that someone either does not understand their role as a RACF user or is trying to bypass RACF protection. You can use a report of access violations to identify such users and to help your installation identify when it may need to change access lists or universal access codes (UACCs).

You can request the report for data set violations and for violations in any of the classes identified in the class descriptor table.

To obtain an access violation report, you can use the following command and subcommands with the resource classes for which you want information:

```
RACFRW ...
LIST ...
  SELECT PROCESS
    EVENT ACCESS EVQUAL(1) CLASS(a valid resource class,...,
      a valid resource class)
    EVENT LOGON EVQUAL(4)
END
```

Results—Monitoring access violations

These subcommands create a listing of all process records that meet the criteria set in the EVENT subcommands. The EVENT ACCESS subcommand selects all process records that contain access violations for the specified classes (an event code of 2 and an event qualifier of 1). The EVENT LOGON subcommand expands the scope of the report to include all user attempts to log on from a terminal or console the user is not authorized to use (an event code of 1 and an event qualifier of 4).

Monitoring the use of RACF commands

In any installation, the security administrator is probably the most frequent user of RACF commands. Occasionally, users without any privileged attributes may enter ADDSD, PERMIT, or RDEFINE, or another, similar command against one of their resources; however, some users may try to use the whole range of RACF commands. Unless the user is authorized, RACF does not execute the command. Each unauthorized attempt to use a RACF command, however, represents a potential security violation, an event that you should know about. You monitor the use of commands with the command-summary report.

To obtain a command-summary report, you can use the following command and subcommand:

```
RACFRW ...
SUMMARY COMMAND BY (USER)
END
```

A sample command-by-user summary report appears in [Figure 52 on page 172](#).

If you detect certain users making persistent, unauthorized use of RACF commands, you can extract the details of the commands used and the resources involved. To obtain details of any command violations logged for specific users, use the following command and subcommands:

```
RACFRW ...  
  SELECT VIOLATIONS USER(userid(s) ...)   
  LIST ...  
END
```

Where *userid(s)* is the ID of the user making unauthorized use of RACF commands. Note that RACF does not automatically log the events that these reports describe. To obtain meaningful data, you must direct RACF to log the activities of specific users or command violations or both. The reports are useful only after RACF has logged the events for the time interval that is meaningful to you. See [“Monitoring specific users” on page 151](#), [“Monitoring SPECIAL users” on page 151](#), and [“Monitoring OPERATIONS users” on page 151](#) for related information.

Monitoring specific users

If you have directed RACF, either through the UAUDIT operand on the ALTUSER command or the corresponding ISPF panel, to log the RACF-related activities of one or more specific users, you can use the report writer to obtain a listing of the activities of these users.

To obtain a listing of all records RACF has logged because you requested auditing of one or more specific users, you can use the following command and subcommands:

```
RACFRW ...  
  SELECT PROCESS REASON(USER) ...  
  LIST ...  
END
```

Monitoring SPECIAL users

If you have directed RACF, either through the SAUDIT operand on the SETROPTS command or the corresponding ISPF panel, to log the RACF-related activities of SPECIAL or group-SPECIAL users, you can use the report writer to obtain a listing of the activities of these users.

To obtain a listing of all records RACF has logged because you requested auditing of SPECIAL or group-SPECIAL users or because the command required the SPECIAL or group-SPECIAL attribute and the user had it, you can use the following command and subcommands:

```
RACFRW ...  
  SELECT PROCESS AUTHORITY(SPECIAL)   
  LIST ...  
END
```

Monitoring OPERATIONS users

The OPERATIONS and group-OPERATIONS attributes are very powerful. OPERATIONS allows a user access to almost all resources. Group-OPERATIONS allows a user access to almost all resources within the scope of the group and its subgroups. (The only resources not accessible to the OPERATIONS or group-OPERATIONS user are those that have been explicitly barred by placing the OPERATIONS user in the access list of a resource with an access level of NONE at either the user ID level or the group level.) Therefore, you should carefully monitor the activities of these users to ensure that all accesses to installation resources are for valid reasons.

To obtain a report of the activities of OPERATIONS and group-OPERATIONS users, you can use the following command and subcommand:

```
RACFRW ...  
  LIST ...  
    SELECT PROCESS AUTHORITY(OPERATIONS)  
  END
```

Note: RACF logs the activities of users with the OPERATIONS and group-OPERATIONS attributes if the following are true:

- The SETROPTS OPERAUDIT is in effect.
- The access to the resource was successful because the user had the OPERATIONS or group-OPERATIONS attribute.

Monitoring failed accesses to resources protected by a security level

If you have directed RACF, through the SECLEVELAUDIT operand on the SETROPTS command or on the corresponding ISPF panel, to log accesses to resources that are protected by a security level, you can use the report writer to obtain a listing of any access attempts that have failed because the user did not have the sufficient security classification to access the resource.

When security-level auditing is in effect, RACF logs all attempts to access any resource protected by a given security level (such as "confidential") or higher. Therefore, you can create a report to list access violations to those protected resources and determine which users are attempting to access sensitive information at your installation.

To obtain a report of unauthorized access attempts to resources with a security-level classification, you can use the following command and subcommands:

```
RACFRW  
  SELECT PROCESS REASON(SECAUDIT)  
    EVENT ACCESS EVQUAL(6) CLASS(a valid resource class, . . . ,  
      a valid resource class)  
  LIST  
  END
```

Results—Monitoring failed accesses to resources protected by a security level

These subcommands create a listing of all process records that have been logged because security-level auditing was in effect (REASON(SECAUDIT)) and meet the criteria set in the EVENT ACCESS subcommand (event code 2). The EVENT subcommand selects all failed attempts (event qualifier 6) to access any resource within the resource class that has a security level equal to or higher than the level specified on the SECLEVELAUDIT operand of the SETROPTS command or on the corresponding ISPF panel.

Monitoring accesses to resources protected by a security label

If you have directed RACF, through the SECLABELAUDIT operand on the SETROPTS command or on the corresponding ISPF panel, to log accesses to resources that are protected by a security label according to the audit options in the SECLABEL profile, you can use the report writer to obtain a listing of all attempts to access the resource.

When the SECLABELAUDIT option is in effect, RACF logs accesses to resources by SECLABEL. Therefore, you can create a report to list attempts to access those protected resources and determine which users are attempting to access sensitive information at your installation.

To obtain a report of attempts to access resources with a security label, you can use the following command and subcommands:


```
RACFRW
  SELECT PROCESS REASON(SECLABELAUDIT)
  EVENT ACCESS
LIST
END
```

Results—Monitoring accesses to resources protected by a security label

These subcommands create a listing of all process records that have been logged because the security-label auditing option was in effect (REASON(SECLABELAUDIT)) and meet the criteria set in the EVENT subcommand ACCESS (event code 2).

RACF report writer examples

This section gives some examples of how to use the RACF report writer command and subcommands to produce various reports.

The first five examples show how to obtain single reports; however, to create all the reports that you require at your installation, you may need to execute the RACF report writer more than once.

An execution of the RACF report writer consists of the RACFRW command, report definition subcommands, and the END subcommand. Example 5 shows how the report writer executed a series of subcommands to produce multiple reports that you did not intend to produce; example 6 shows how you can correct the subcommands to produce the number of reports you want.

Example 1—Obtaining a report for all RACF SMF records

To obtain a report of all RACF SMF records, listed in the order read from the input file, and a general summary report, showing overall RACF-related system activity, enter:

```
RACFRW TITLE('BIG LISTING') GENSUM
LIST
END
```

Example 2—Obtaining a report for all MVS jobs run by users not defined to RACF

To obtain a report of all batch jobs that are not associated with RACF or a RACF-defined user, or all jobs run by TSO users, or started tasks not defined to RACF, enter:

```
RACFRW
  SELECT NOUSER PROCESS
  LIST TITLE('JOB LIST REPORT') SORT(USER) NEWPAGE
```

In the example, RACF selects only those process records that meet the criteria and sorts by job name.

To obtain a summary of these jobs, enter:

```
SUMMARY RESOURCE TITLE('JOB SUMMARY REPORT')
END
```

Example 3—Obtaining a report for data set violations

To obtain a report of all violations against data sets owned by USERA (USERA is the high-level qualifier of the data-set name) in January 1989, sorted in date and time sequence, enter:

```
RACFRW TITLE('USERA DATASETS LIST REPORT')
  SELECT VIOLATIONS DATE(89001:89031)
  EVENT ALLSVC CLASS(DATASET) DSQUAL(USERA)
  EVENT ALLCOMMAND CLASS(DATASET) DSQUAL(USERA)
```

```
LIST SORT(DATE TIME)
```

To obtain a summary of this activity, enter:

```
SUMMARY RESOURCE BY(USER) TITLE('USERA DATA SETS SUMMARY REPORT')
```

Example 4—Obtaining a report for data set activity by job, system, and user

To obtain a report on data set activity by (a) jobs A and B on system 308A and (b) users C and D on system 308B, enter:

```
RACFRW
SELECT JOB(A B) NOUSER SYSID(308A)
EVENT ALLSVC CLASS(DATASET)
EVENT ALLCOMMAND CLASS(DATASET)
SELECT USER(C D) NOJOB SYSID(308B)
EVENT ALLSVC CLASS(DATASET)
EVENT ALLCOMMAND CLASS(DATASET)
LIST TITLE('SELECTED DATA SET ACTIVITY REPORT') SORT(SYSID)
END
```

Example 5—Obtaining multiple reports the wrong way

Situation

Assume you need to produce the following separate reports:

- A detailed listing of all access violations, sorted by user
- A resource-by-user summary report, with totals for access violations only
- A listing of all successful accesses, sorted by date and time
- A resource-by-user summary report, with totals for successful accesses only.

You must produce these four *separate* reports because each report is to be distributed to four different people, each of whom is entitled to see only the information on one report.

Assume that you enter:

```
(1) RACFRW
(2) SELECT VIOLATIONS
(3) LIST TITLE('ACCESS VIOLATIONS LIST REPORT') SORT(USER)
(4) SUMMARY RESOURCE BY(USER) TITLE ('ACCESS VIOLATIONS SUMMARY REPORT')
(5) SELECT SUCCESSES
(6) LIST TITLE('ACCESS SUCCESS LIST REPORT') SORT(DATE TIME)
(7) SUMMARY RESOURCE BY(USER) TITLE('ACCESS SUCCESS SUMMARY REPORT')
(8) END
```

Results—Obtaining multiple reports the wrong way

Instead of receiving the four requested reports, you receive *two* reports:

- A list report of all violations and successes, sorted by date and time
- A summary report of resources-by-user, with both violations and successful accesses.

How RACF executed

Here is what happened:

• RACF record selection

You intended to first select, list, and summarize only violations from the SMF input file (statements 2, 3, and 4). Second, you wanted to select, list, and summarize only successful accesses (statements 5, 6, and 7), and finally, you wanted to produce two summary reports, one for access violations and one for access successes (statements 4 and 7).

However, the RACF report writer does not execute in that sequence. RACF first selects records based on *all* the SELECT and EVENT subcommands entered between the RACFRW command and the END subcommand. Only after this selection process is complete are any of the requested reports produced. In this example, the RACF report writer checked each record from the input file to see whether it was either an access violation (statement 2) or a successful access (statement 5). Because all of the SMF records met at least one of these conditions, the RACF report writer selected all of the records for further processing.

• RACF LIST function

The RACF report writer next produced a single list report (statement 6). RACF ignored the first LIST subcommand (statement 3) because only one LIST subcommand, the last one entered (statement 6), is valid for each execution of the RACF report writer. The report that was produced listed by date and time all the records selected (both access violations and successful accesses) as specified in statement 6.

• RACF SUMMARY report

Next, the RACF report writer produced a single summary report (statement 7). Because the SUMMARY subcommand in statement 4 is the same as that in statement 7, RACF ignored the first SUMMARY subcommand and produced one summary report. If you enter identical SUMMARY subcommands between RACFRW and END, RACF only uses the last subcommand and produces one summary report.

Thus, the single summary report for this example produced totals for all the records selected (both access violations and successful accesses).

Example 6—Obtaining multiple reports the correct way

To produce the four listings that you intended, enter two separate RACFRW commands:

(1)

```
RACFRW
SELECT VIOLATIONS
LIST TITLE('ACCESS VIOLATIONS LIST REPORT') SORT(USER)
SUMMARY RESOURCE BY(USER) TITLE ('ACCESS VIOLATIONS SUMMARY REPORT')
END
```

(2)

```
RACFRW
SELECT SUCCESSES
LIST TITLE('ACCESS SUCCESS LIST REPORT') SORT(DATE TIME)
SUMMARY RESOURCE BY(USER) TITLE ('ACCESS SUCCESS SUMMARY REPORT')
END
```

Note: RACF interprets each RACFRW command separately and produces the four reports. To ensure you get the reports you want:

1. If you want to store the results in a GDG data set, use DISP=MOD on your JCL to prevent the results of the second RACFRW operation from writing over the results of the first.
2. After the first SELECT/LIST/SUMMARY subcommands (for RACFRW in statement 1), be sure to enter END.
3. Run the RACFRW command again (statement 2) for the second SELECT/LIST/SUMMARY subcommands and enter END.

Sample reports

This section includes examples of the various reports that you can request the RACF report writer to generate. Review each sample report to determine its usefulness to your particular installation.

The following list summarizes the sample reports and the command or subcommand you issue to request the report:

Figure	Report	Command/Subcommand Issued
4-11	Summary Activity Report	From SMF
4-12	Standard Header Page	Each time you invoke the RACF report writer, it produces a standard header page that lists the subcommands that you entered and describes the meanings of the event and event qualifier values used in the reports.
4-13	General Summary	RACFRW GENSUM
4-14	Listing of Status Records (types 80 and 81)	LIST (see Note)
4-15	Listing of Process Records (types 20, 30, 80 and 83)	LIST (see Note)
4-16	Short User Summary	SUMMARY USER
4-17	Short Group Summary	SUMMARY GROUP
4-18	Short Resource Summary	SUMMARY RESOURCE
4-19	Short Command Summary	SUMMARY COMMAND
4-20	Short Event Summary	SUMMARY EVENT
4-21	Short Owner Summary	SUMMARY OWNER
4-22	User by Resource Summary	SUMMARY USER BY(RESOURCE)
4-23	Group by Resource Summary	SUMMARY GROUP BY(RESOURCE)
4-24	Resource by User Summary	SUMMARY RESOURCE BY(USER)
4-25	Resource by Group Summary	SUMMARY RESOURCE BY(GROUP)
4-26	Resource by Event Summary	SUMMARY RESOURCE BY(EVENT)
4-30	Event by Resource Summary	SUMMARY EVENT BY(RESOURCE)
4-28	Command by User Summary	SUMMARY COMMAND BY(USER)
4-29	Command by Group Summary	SUMMARY COMMAND BY(GROUP)

Figure	Report	Command/Subcommand Issued
4-30	Command by Resource Summary	SUMMARY COMMAND BY(RESOURCE)
4-31	Owner by Resource Summary	SUMMARY OWNER BY(RESOURCE)

Note: A single LIST subcommand produces both the listing of status records and the listing of process records.

An explanation of the standard header page of the report is given in [“Event code qualifiers” on page 69](#). It documents *why* the event code qualifiers were set.

SUMMARY ACTIVITY REPORT									
START DATE-TIME	07/29/89-13:18:18					END DATE-TIME	08/06/89-10:15:36		
RECORD TYPE	RECORDS READ	PERCENT OF TOTAL	AVG. RECORD LENGTH	MIN. RECORD LENGTH		RECORD LENGTH	MAX. RECORD LENGTH	RECORDS WRITTEN	
0	2	.55 %	35.00			35	35	0	
2	0							1	
3	0							1	
4	41	11.33 %	251.48			207	263	0	
5	24	6.63 %	143.70			137	144	0	
20	52	14.36 %	94.23			91	98	52	
30	133	36.74 %	577.61			244	2,174	133	
80	108	29.83 %	450.78			80	1,685	108	
81	2	.55 %	756.00			756	756	2	
TOTAL	362	100 %	402.00			35	2,174	297	
NUMBER OF RECORDS IN ERROR 0									

Figure 33. Summary Activity Report from SMF

```

90.053 13:51:40
COMMAND GROUP ENTERED -
  RACFRW GENSUM
  LIST
  END
EVENT/QUALIFIER KEY -----
  EVENT  QUALIFIER  MEANING
    1
      0      JOB INITIATION / TSO LOGON/LOGOFF
      0      SUCCESSFUL INITIATION
      1      INVALID PASSWORD
      2      INVALID GROUP
      3      INVALID OIDCARD
      4      INVALID TERMINAL/CONSOLE
      5      INVALID APPLICATION
      6      REVOKED USERID ATTEMPTING ACCESS
      7      USERID AUTOMATICALLY REVOKED
      8      SUCCESSFUL TERMINATION
      9      UNDEFINED USERID
     10      INSUFFICIENT SECURITY LABEL AUTHORITY
     11      NOT AUTHORIZED TO SECURITY LABEL
     12      SUCCESSFUL RACINIT INITIATION
     13      SUCCESSFUL RACINIT DELETE
     14      SYSTEM NOW REQUIRES MORE AUTHORITY
     15      REMOTE JOB ENTRY - JOB NOT AUTHORIZED
     16      SURROGAT CLASS IS INACTIVE
     17      SUBMITTER IS NOT AUTHORIZED BY USER
     18      SUBMITTER IS NOT AUTHORIZED TO SECURITY LABEL
     19      USER IS NOT AUTHORIZED TO JOB
     20      WARNING - INSUFFICIENT SECURITY LABEL AUTHORITY
     21      WARNING - SECURITY LABEL MISSING FROM JOB, USER, OR PROFI
     22      WARNING - NOT AUTHORIZED TO SECURITY LABEL
     23      SECURITY LABELS NOT COMPATIBLE
     24      WARNING - SECURITY LABELS NOT COMPATIBLE
     25      CURRENT PASSWORD HAS EXPIRED
     26      INVALID NEW PASSWORD
     27      VERIFICATION FAILED BY INSTALLATION
     28      GROUP ACCESS HAS BEEN REVOKED
     29      OIDCARD IS REQUIRED
     30      NETWORK JOB ENTRY - JOB NOT AUTHORIZED
     31      WARNING - UNKNOWN USER FROM TRUSTED NODE PROPAGATED
     32      SUCCESSFUL INITIATION USING PASSTICKET
     33      INDICATES ATTEMPTED REPLAY OF PASSTICKET

```

Figure 34. Standard Header Page (1/3)

```

90.053 13:51:40                                RACF REPORT
  2      RESOURCE ACCESS
        0      SUCCESSFUL ACCESS
        1      INSUFFICIENT AUTHORITY
        2      PROFILE NOT FOUND - RACFIND SPECIFIED ON MACRO
        3      ACCESS PERMITTED DUE TO WARNING
        4      FAILED DUE TO PROTECTALL
        5      WARNING ISSUED DUE TO PROTECTALL
        6      INSUFFICIENT CATEGORY/SECLEVEL
        7      INSUFFICIENT SECURITY LABEL AUTHORITY
        8      WARNING - SECURITY LABEL MISSING FROM JOB, USER, OR PROFILE
        9      WARNING - INSUFFICIENT SECURITY LABEL AUTHORITY
       10      WARNING - DATA SET NOT CATALOGUED
       11      DATA SET NOT CATALOGUED
       12      PROFILE NOT FOUND - REQUIRED FOR AUTHORITY CHECKING
       13      WARNING: INSUFFICIENT CATEGORY/SECLEVEL
  3      ADDVOL/CHGVOL
        0      SUCCESSFUL PROCESSING OF NEW VOLUME
        1      INSUFFICIENT AUTHORITY
        2      INSUFFICIENT SECURITY LABEL AUTHORITY
        3      LESS SPECIFIC PROFILE EXISTS WITH DIFFERENT SECLABEL
  4      RENAME RESOURCE
        0      SUCCESSFUL RENAME
        1      INVALID GROUP
        2      USER NOT IN GROUP
        3      INSUFFICIENT AUTHORITY
        4      RESOURCE NAME ALREADY DEFINED
        5      USER NOT DEFINED TO RACF
        6      RESOURCE NOT PROTECTED
        7      WARNING - RESOURCE NOT PROTECTED
        8      USER IN SECOND QUALIFIER IS NOT RACF DEFINED
        9      LESS SPECIFIC PROFILE EXISTS WITH DIFFERENT SECLABEL
       10      INSUFFICIENT SECURITY LABEL AUTHORITY
       11      RESOURCE NOT PROTECTED BY SECURITY LABEL
       12      NEW NAME NOT PROTECTED BY SECURITY LABEL
       13      NEW SECLABEL MUST DOMINATE OLD SECLABEL
       14      WARNING - INSUFFICIENT SECURITY LABEL AUTHORITY
       15      WARNING - RESOURCE NOT PROTECTED BY SECURITY LABEL
       16      WARNING - NEW NAME NOT PROTECTED BY SECURITY LABEL
       17      WARNING - NEW SECLABEL MUST DOMINATE OLD SECLABEL
  5      DELETE RESOURCE
        0      SUCCESSFUL SCRATCH
        1      RESOURCE NOT FOUND
        2      INVALID VOLUME
  6      DELETE ONE VOLUME OF A MULTIVOLUME RESOURCE
        0      SUCCESSFUL DELETION
  7      DEFINE RESOURCE
        0      SUCCESSFUL DEFINITION
        1      GROUP UNDEFINED
        2      USER NOT IN GROUP
        3      INSUFFICIENT AUTHORITY
        4      RESOURCE NAME ALREADY DEFINED
        5      USER NOT DEFINED TO RACF
        6      RESOURCE NOT PROTECTED
        7      WARNING - RESOURCE NOT PROTECTED
        8      WARNING - SECURITY LABEL MISSING FROM JOB, USER, OR PROFILE
        9      WARNING - INSUFFICIENT SECURITY LABEL AUTHORITY
       10      USER IN SECOND QUALIFIER IS NOT RACF DEFINED
       11      INSUFFICIENT SECURITY LABEL AUTHORITY
       12      LESS SPECIFIC PROFILE EXISTS WITH DIFFERENT SECLABEL

```

Figure 35. Standard Header Page (2/3)

```

90.053 13:51:40                                RACF REPORT
 8      ADDSD COMMAND
 9      ADDGROUP COMMAND
10      ADDUSER COMMAND
11      ALTDSD COMMAND
12      ALTGROUP COMMAND
13      ALTUSER COMMAND
14      CONNECT COMMAND
15      DELDSD COMMAND
16      DELGROUP COMMAND
17      DELUSER COMMAND
18      PASSWORD COMMAND
19      PERMIT COMMAND
20      RALTER COMMAND
21      RDEFINE COMMAND
22      RDELETE COMMAND
23      REMOVE COMMAND
24      SETROPTS COMMAND
25      RVARY COMMAND
      0      NO VIOLATIONS DETECTED
      1      INSUFFICIENT AUTHORITY
      2      KEYWORD VIOLATIONS DETECTED
      3      SUCCESSFUL LISTING OF DATA SETS
      4      SYSTEM ERROR IN LISTING OF DATA SETS
26      APPCLU
      0      PARTNER VERIFICATION WAS SUCCESSFUL
      1      SESSION ESTABLISHED WITHOUT VERIFICATION
      2      LOCAL LU KEY WILL EXPIRE IN <= 5 DAYS
      3      PARTNER LU ACCESS HAS BEEN REVOKED
      4      PARTNER LU KEY DOES NOT MATCH THIS LU KEY
      5      SESSION TERMINATED FOR SECURITY REASON
      6      REQUIRED SESSION KEY NOT DEFINED
      7      POSSIBLE SECURITY ATTACK BY PARTNER LU
      8      SESSION KEY NOT DEFINED FOR PARTNER LU
      9      SESSION KEY NOT DEFINED FOR THIS LU
     10      SNA SECURITY RELATED PROTOCOL ERROR
     11      PROFILE CHANGE DURING VERIFICATION
     12      EXPIRED SESSION KEY
27      GENERAL
      0-99    GENERAL AUDIT RECORD WRITTEN
-REPORT KEY -----
.AN '*' PREFIXED TO A USER OR GROUP NAME INDICATES THE NAME IS ACTUALLY A JOB OR STEP NAME,
  RESPECTIVELY
.THE PHRASE 'UNDEFINED USER' REFERS TO THOSE TSO LOGONS WHICH SPECIFIED USERIDS THAT WERE
NOT
  DEFINED TO RACF,
  AND TO BATCH JOBS WHICH DID NOT SPECIFY THE 'USER=' OPERAND ON THEIR JOB STATEMENTS
.A '+' PREFIXED TO A RESOURCE NAME INDICATES THAT A GENERIC PROFILE WAS ACCESSED
.A '(G)' APPENDED TO A RESOURCE NAME MEANS THAT THE RESOURCE NAME IS GENERIC
.A '-' APPENDED TO A VMXEVENT DESCRIPTION MEANS THAT THE EVENT CONTINUES ON THE NEXT LINE

```

Figure 36. Standard Header Page (3/3)

90.053 13:51:40	RACF REPORT - GENERAL SUMMARY							
	READ	SELECTED	%SELECTED					
STATUS RECORDS	49	49	100 %					
PROCESS RECORDS	126	126	100 %					
TOTAL PROCESS RECORDS FOR DEFINED USERS	125	125	99 % (OF ALL PROCESS RECORDS)					
TOTAL PROCESS RECORDS FOR UNDEFINED USERS	1	1	1 % (OF ALL PROCESS RECORDS)					
--- JOB / LOGON STATISTICS ---								
TOTAL JOB/LOGON/LOGOFF	19							
TOTAL JOB/LOGON SUCCESSES	4	21 % OF TOTAL ATTEMPTS						
TOTAL JOB/LOGON VIOLATIONS	10	53 % OF TOTAL ATTEMPTS						
TOTAL JOB/LOGON ATTEMPTS BY UNDEFINED USERS	1	5 % OF TOTAL ATTEMPTS						
TOTAL JOB/LOGON SUCCESSES BY UNDEFINED USERS	0	0 % OF TOTAL ATTEMPTS						
TOTAL JOB/LOGON VIOLATIONS BY UNDEFINED USERS	1	5 % OF TOTAL ATTEMPTS						
TOTAL JOB/LOGON SUCCESSFUL TERMINATION	5							
JOB/LOGON VIOLATIONS BY HOUR -								
0-1	1-2	2-3	3-4	4-5	5-6	6-7	7-8	
0	0	0	0	0	0	0	0	
8-9	9-10	10-11	11-12	12-13	13-14	14-15	15-16	
0	0	0	0	10	0	0	0	
16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	
0	0	0	0	0	0	0	0	
--- RESOURCE STATISTICS ---								
TOTAL RESOURCE ACCESSSES (ALL EVENTS)	45							
TOTAL RESOURCE ACCESS SUCCESSES	44	98 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS WARNINGS	0	0 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS VIOLATIONS	1	2 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESSSES (ALL EVENTS) BY UNDEFINED USERS	0	0 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS SUCCESSES BY UNDEFINED USERS	0	0 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS WARNINGS BY UNDEFINED USERS	0	0 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS VIOLATIONS BY UNDEFINED USERS	0	0 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESSSES USING GENERIC PROFILE	5	11 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS SUCCESSES USING GENERIC PROFILE	5	11 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS WARNINGS USING GENERIC PROFILE	0	0 % OF TOTAL ACCESSSES						
TOTAL RESOURCE ACCESS VIOLATIONS USING GENERIC PROFILE	0	0 % OF TOTAL ACCESSSES						
RESOURCE ACCESS VIOLATIONS BY HOUR -								
0-1	1-2	2-3	3-4	4-5	5-6	6-7	7-8	
0	0	0	0	0	0	0	0	
8-9	9-10	10-11	11-12	12-13	13-14	14-15	15-16	
0	0	0	0	1	0	0	0	
16-17	17-18	18-19	19-20	20-21	21-22	22-23	23-24	
0	0	0	0	0	0	0	0	

Figure 37. General Summary Report

90.053	13:51:40		RACF REPORT - LISTING OF STATUS RECORDS												
DATE	TIME	SYSID	MISC.	OPTIONS	EXITS	CLASS	PROT	STAT	AUD	GEN	GCMD	GLBL	GLST	RLST	LOPT
90.053	12:17:41	R190	ORIGIN:	SETROPTS		DATASET	YES	YES	NO	YES	YES	YES			DFLT
			TERMUACC:	READ		USER			NO						
			CMNDVIOL:	YES		GROUP			NO						
			LOGSPEC:	YES		RVARSMBR	YES	NO	NO	YES	YES	YES			DFLT
			RACINIT:	STATS		RACFVARS	YES	NO	NO	YES	YES			YES	DFLT
			ADSP:	ACTIVE		SECLABEL	YES	NO	NO	YES	YES	YES			DFLT
			REALDSN:	NO		DASDVOL	NO	NO	NO	YES	YES	YES			DFLT
			JES:			GDASDVOL	NO	NO	NO						DFLT
			BATCHALLRACF			TAPEVOL	YES	NO	NO	YES	YES	YES			DFLT
			XBMAILRACF			TERMINAL	YES	NO	NO	YES	YES	YES			DFLT
			EARLYVERIFY			GTERMINTL	YES	NO	NO						DFLT
			TAPEDSN:	NO		APPL	NO	NO	NO	YES	YES	YES			DFLT
			PROT-ALL:	NO		TIMS	NO	NO	NO	YES	YES	YES			DFLT
			PROGCTL:	NO		GIMS	NO	NO	NO						DFLT
			OPERAUDIT:	NO		AIMS	NO	NO	NO	YES	YES	YES			DFLT
			ERASE:	YES		TCICSTRN	NO	NO	NO	YES	YES	YES			DFLT
			NOSECLEVEL			GCICSTRN	NO	NO	NO						DFLT
			ALL			PCICSPSB	NO	NO	NO	YES	YES	YES			DFLT
			SECLEVELAUDITING	INACTIVE		QCICSPSB	NO	NO	NO						DFLT
			EGN:	INACTIVE		GLOBAL	NO	NO	NO						DFLT
			SESSIONINTERVAL	30		GMBR	NO	NO	NO	YES	YES	YES			DFLT
			JES B1 SECURITY:			DSNR	NO	NO	NO	YES	YES	YES			DFLT
			NJUSERID:	UNKUSER		FACILITY	NO	NO	NO	YES	YES	YES			DFLT
			UNDEFINEDUSER:	++++++		VMDISK	NO	NO	NO	YES	YES	YES			DFLT
			DEFAULT LANGUAGE CODES:			VMDR	NO	NO	NO	YES	YES	YES			DFLT
			PRIMARY CODE:	ENU		SECDATA	NO	NO	NO						DFLT
			SECONDARY CODE:	ENU		PROGRAM	NO	NO	NO						DFLT
			APPLAUDIT:	YES		APPCLU	NO	NO	NO	YES	YES	YES			DFLT
						JESJOBS	YES	NO	NO	YES	YES	YES			DFLT
						JESINPUT	YES	NO	NO	YES	YES	YES			DFLT
						CONSOLE	YES	NO	NO	YES	YES	YES			DFLT
						TEMPDSN	YES	NO	NO	YES	YES	YES		YES	DFLT
						DIRAUT	YES	NO	NO	YES	YES	YES			DFLT
						SURROGAT	YES	NO	NO	YES	YES	YES			DFLT
						NODMBR	YES	NO	NO	YES	YES	YES			DFLT
						NODES	YES	NO	NO	YES	YES			YES	DFLT
			OTHER OPTIONS -												
			'LIST OF GROUPS' ACCESS CHECKING IS ACTIVE												
			SINGLE LEVEL NAMES NOT ALLOWED												
			INTERVAL: 253 DAYS												
			HISTORY: NONE												
			REVOKE: NO												
			WARNING: NONE												
			INACTIVE: NO												
			NO PASSWORD SYNTAX RULES												
			SECURITY OPTIONS:												
			SECLABELCONTROL: INACTIVE												
			CATDSNS: INACTIVE												
			MLQUIET: INACTIVE												
			MLSTABLE: INACTIVE												
			MLS: INACTIVE												
			MLACTIVE: INACTIVE												
			GENERICOWNER: INACTIVE												
			SECLABELAUDIT: INACTIVE												
			COMPATMODE: INACTIVE												

Figure 38. Listing of Status Records

If the LRECL value specified is too small, the report output shown in [Figure 38 on page 160](#) contains the report heading and the following text:

```
**** STATUS RECORD BYPASSED; LRECL TOO SMALL ****
```

The LRECL value is obtained from the SORTIN DD statement or the WRKLRECL field in the ICHRSMFI module. See [“Record reformatting” on page 129](#) for more details.

90.053 13:51:40 RACF REPORT - LISTING OF PROCESS RECORDS									
DATE	TIME	SYSID	*JOB/USER NAME	*STEP/ GROUP	--TERMINAL-- ID	LV	Q	E	U
90.053	12:15:03	R190	IBMUSER	SYS1	LE02	0	1	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(NONE),REASON=(NONE)									
90.053	12:15:08	R190	IBMUSER	SYS1	LE02	0	2	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=IBMUSER									
AUTH=(NORMAL),REASON=(ENTITY OR FAILSOFT PROCESSING)									
LOGSTR='LOGSTR DATA'									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
DATASET=SYS1.BROADCAST,GENPROF=SYS1.BROADCAST,VOLUME=SP00L1,LEVEL=00									
INTENT=READ,ALLOWED=ALTER									
90.053	12:17:33	R190	IBMUSER	SYS1	LE02	0	10	0	
JOBID=(IBMUSER 90.053 12:15:01).USERDATA=(),OWNER=IBMUSER									
AUTH=(SPECIAL),REASON=(SPECIAL/OPERATIONS)									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
ADDDSD IBMUSER.RACHECK.DATA UACC(NONE) SET									
#####') AUTHORITY(USE) NOGRPACC									
UACC(NONE) NOADSP									
OWNER(IBMUSER) NOSPECIAL NOOPERATIONS NOCLAUTH NOAUDITOR									
NOOIDCARD									
90.053	12:17:41	R190	IBMUSER	SYS1	LE02	0	24	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(SPECIAL),REASON=(COMMAND)									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
SETROPTS STATISTICS(DATASET)									
90.053	12:17:43	R190	IBMUSER	SYS1	LE02	0	8	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=IBMUSER									
AUTH=(SPECIAL),REASON=(SPECIAL/OPERATIONS)									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
ADDDSD IBMUSER.RACHECK.DATA UACC(NONE) SET									
NEW SECLABEL=NO SECLABEL,OLD SECLABEL=SYSHIGH									
90.053	12:17:44	R190	IBMUSER	SYS1	LE02	0	19	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=IBMUSER									
AUTH=(SPECIAL),REASON=(SPECIAL/OPERATIONS)									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
PERMIT IBMUSER.RACHECK.DATA CLASS(DATASET)									
ID(RACFU01) ACCESS(READ)									
90.053	12:17:49	R190	IBMUSER	SYS1	LE02	0	21	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(SPECIAL),REASON=(SPECIAL/OPERATIONS)									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
RDEFINE DIRECTRY FP.IBMUSER.DIR LEVEL(00) NONOTIFY									
90.053	12:20:09	R190	IBMUSER	SYS1	LE02	0	15	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=IBMUSER									
AUTH=(SPECIAL),REASON=(SPECIAL/OPERATIONS)									
USER SECLABEL=SYSHIGH,SESSION=TSO LOGON,TERMINAL=LE02									
DELDSD IBMUSER.NOACC.DATA SET									
NEW SECLABEL=SYSHIGH,OLD SECLABEL=NO SECLABEL									
90.053	12:26:42	R190	*IBMUSER	*RACFPROF	FFFFFFF	0	1	11	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(NONE),REASON=(RACINIT FAILURE)									
USER SECLABEL=UNDEF,SESSION=TSO LOGON,TOKEN USER									
ATTRIBUTES=(
90.053	12:29:32	R190	IBMUSER	SYS1		0	13	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=IBMUSER									
AUTH=(SPECIAL),REASON=(SPECIAL/OPERATIONS)									
USER SECLABEL=SYSHIGH,TOKEN STATUS=(CREATED BY PRE 1.9									
RACF CALL									
ALTUSER TSOG6 NOSECLABEL									
NEW SECLABEL=NO SECLABEL,OLD SECLABEL=L2C1									
90.053	12:29:56	R190	TSOG5	SYS1		0	1	1	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(NONE),REASON=(RACINIT FAILURE)									
USER SECLABEL=UNDEF									
90.053	12:36:49	R190	TSOG5	SYS1		0	1	1	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(NONE),REASON=(RACINIT FAILURE)									
USER SECLABEL=L1C1									
90.053	12:41:10	R190	IBMUSER	SYS1	LE02	0	1	8	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(NONE),REASON=(NONE)									
90.053	01:12:01	R190	*LISTBC	*		0	2	0	
JOBID=(IBMUSER 90.053 12:15:01),USERDATA=(),OWNER=									
AUTH=(TRUSTED),REASON=(LOGOPTIONS)									
USER SECLABEL=SYSHIGH,SESSION=SYSTEM ADDRESS SPACE,									
TOKEN=(DEFAULT TOKEN),TOKEN USER ATTRIBUTES=									
(TRUSTED COMPUTER BASE) DATASET=BROADCAST.IBMUSER,									
VOLUME=TEMP01,LEVEL=00,INTENT=ALTER,ALLOWED=ALTER									
90.053	01:24:53	R190	IBMUSER	SYS1		0	2	0	
JOBID=(IBMUSERX 90.053 12:15:01),USERDATA=(),OWNER=IBMUSER									
AUTH=(NORMAL),REASON=(LOGOPTIONS)									
SESSION=INTERNAL READER BATCH									
JOB, JESINPUT=INTRDR, EXENODE=N1									
SUBMITTING USER=IBMUSER, SUBMITTING NODE=N1, SUBMITTING									
GROUP=SYS1 DATASET=SYS1.MANA, GENPROF=SYS1.*, VOLUME=PAGE08,									
LEVEL=00, INTENT=READ, ALLOWED=ALTER									

Figure 39. Listing of Process Records

Note: For [Figure 39 on page 161](#):

- Token-related information in the report is extracted from the Type 53 relocate sections. The format of these records is documented in [z/OS Security Server RACF Macros and Interfaces](#).

- TOKEN STATUS=(CREATED BY PRE RACF 1.9 CALL) means that the TOKLT19 bit was set. This bit was set when a token is created and based on a pre-RACF 1.9 ACEE. The bit was on in the UTOKEN that was copied to the SMF record.
- The following text may appear in the report:

```
**** RECORD TRUNCATED BY RACFRW - INFORMATION LOST ****
```

This indicates that the LRECL value on the SORTIN DD statement was too small or that the value of WRKLRECL (in the ICHRSMFI module) was too small. See [“Record reformatting” on page 129](#) for more details.

- When a profile is not found and *BYPASS* was the user ID on RACHECK, the audit record will have the entity name, not the profile name.

89.196 14:23:38		RACF REPORT - SHORT USER SUMMARY							
		R E S O U R C E				S T A T I S T I C S			
USER/ *JOB	NAME	JOB/LOGON		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
READ	TOTAL	SUCCESS	VIOLATION	SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE
*CLRMANB		1	0	0	0	0	0	0	0
0	0								
IBMUSER		7	0	0	0	0	0	0	0
0	0								
RACUSR1		0	0	1	0	0	0	0	0
0	1								
RACUSR1	MARY BAILEY	0	0	21	0	0	21	0	0
0	21								
RACUSR2		0	0	1	0	0	0	0	0
0	1								
RACUSR2	MARY PURCELL	0	0	1	0	0	1	0	0
0	1								
RACUSR3		0	0	1	0	0	0	0	0
0	1								
RACUSR3	HARRIET BIRD	0	0	1	0	0	1	0	0
0	1								
RACUSR4		0	0	1	0	0	0	0	0
0	1								
RACUSR4	JOHN H. BUKOWSKI	0	0	1	0	0	1	0	0
0	1								
RACUSR5		0	0	1	0	0	0	0	0
0	1								
RACUSR5	MELANIE WILKES	0	0	1	0	0	1	0	0
0	1								
RACUSR6		0	0	1	0	0	0	0	0
0	1								
RACUSR6	FRED PRETOCK	0	0	1	0	0	1	0	0
0	1								
RACUSR7		0	0	1	0	0	0	0	0
0	1								
RACUSR7	HESTER WILSON	0	0	1	0	0	1	0	0
0	1								
SLCUSR1		0	0	1	0	0	0	0	0
1	1								
SLCUSR5		0	0	0	0	1	0	0	0
1	1								
ACCUMULATED TOTALS -		8	0	35	0	1	27	0	0
2	36								
PERCENTAGE OF TOTAL ACCESSES -				97 %	0 %	3 %	75 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY									6 %
ACCUMULATED TOTALS -		1	0	0	0	0	0	0	0
0	0								
PERCENTAGE OF TOTAL ACCESSES -				0 %	0 %	0 %	0 %	0 %	0 %

Figure 40. Short User Summary Report

89.196 14:23:38		RACF REPORT - SHORT GROUP SUMMARY							
		R E S O U R C E				S T A T I S T I C S			
GROUP/ *STEP		JOB/LOGON		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
READ	TOTAL	SUCCESS	VIOLATION	SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE
**		1	0	0	0	0	0	0	0
0	0								
SYS1		7	0	35	0	1	27	0	0
2	36								
ACCUMULATED TOTALS -		8	0	35	0	1	27	0	0
2	36								
PERCENTAGE OF TOTAL ACCESSES -				97 %	0 %	3 %	75 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY									6 %
ACCUMULATED TOTALS -		1	0	0	0	0	0	0	0
0	0								
PERCENTAGE OF TOTAL ACCESSES -				0 %	0 %	0 %	0 %	0 %	0 %

Figure 41. Short Group Summary Report

RACF REPORT - SHORT RESOURCE SUMMARY

RESOURCE NAME		S U C C E S S			I N T E N T S		
		W A R N I N G	V I O L A T I O N	A L T E R	C O N T R O L	U P D A T E	
READ	TOTAL						
CLASS = DATASET							
0	RACUSR1.NEW.DS1	3	0	0	2	0	0
0	RACUSR2.NEW.DS2	3	0	0	2	0	0
0	RACUSR3.NEW.DS3	3	0	0	2	0	0
0	RACUSR4.NEW.DS4	3	0	0	2	0	0
0	RACUSR5.NEW.DS5	3	0	0	2	0	0
0	RACUSR6.NEW.DS6	3	0	0	2	0	0
0	RACUSR7.NEW.DS7	3	0	0	2	0	0
0	SLCUSR0.SLCDSND0	2	0	0	2	0	0
0	SLCUSR1.SLCDSND1	3	0	0	2	0	0
1	SLCUSR3.SLCDSND3	2	0	0	2	0	0
0	SLCUSR4.SLCDSND4	2	0	0	2	0	0
0	SLCUSR5.SLCDSND5	2	0	1	2	0	0
1	CLASS = SEC DATA						
0	SECLEVEL	3	0	0	3	0	0
0	ACCUMULATED TOTALS -	35	0	1	27	0	0
2	PERCENTAGE OF TOTAL ACCESSES -	97 %	0 %	3 %	75 %	0 %	6 %
0	GENERIC PROFILE USED						
0	ACCUMULATED TOTALS -	0	0	0	0	0	0
0	PERCENTAGE OF TOTAL ACCESSES -	0 %	0 %	0 %	0 %	0 %	0 %

Figure 42. Short Resource Summary Report

Note: In this example, the SUCCESS number is shown as 3, while the ALTER column shows 2. This occurred because the report writer also processed other events – in this case DEFINE events. Keep in mind the totals reflect the number of records processed, not just the number listed. Therefore, there may be data recorded in the totals that are not listed specifically in the report itself.

90.053 13:51:40		RACF REPORT - SHORT COMMAND SUMMARY
QUALIFIER		OCCURRENCES
EVENT = 8	- ADDSD COMMAND	
	0 - NO VIOLATIONS DETECTED	3
	ACCUMULATED TOTALS -	3
EVENT = 9	- ADDGROUP COMMAND	
	0 - NO VIOLATIONS DETECTED	1
	ACCUMULATED TOTALS -	1
EVENT = 10	- ADDUSER COMMAND	
	0 - NO VIOLATIONS DETECTED	7
	ACCUMULATED TOTALS -	7
EVENT = 13	- ALTUSER COMMAND	
	0 - NO VIOLATIONS DETECTED	1
	ACCUMULATED TOTALS -	1
EVENT = 14	- CONNECT COMMAND	
	0 - NO VIOLATIONS DETECTED	1
	ACCUMULATED TOTALS	1
EVENT = 15	- DELDSD COMMAND	
	0 - NO VIOLATIONS DETECTED	2
	ACCUMULATED TOTALS -	2
EVENT = 16	- DELGROUP COMMAND	
	0 - NO VIOLATIONS DETECTED	1
	ACCUMULATED TOTALS -	1
EVENT = 17	- DELUSER COMMAND	
	0 - NO VIOLATIONS DETECTED	1
	ACCUMULATED TOTALS -	1
EVENT = 19	- PERMIT COMMAND	
	0 - NO VIOLATIONS DETECTED	14
	ACCUMULATED TOTALS	14
EVENT = 20	- RALTER COMMAND	
	0 - NO VIOLATIONS DETECTED	2
	ACCUMULATED TOTALS -	2
EVENT = 21	- RDEFINE COMMAND	
	0 - NO VIOLATIONS DETECTED	7
	ACCUMULATED TOTALS -	7
EVENT = 22	- RDELETE COMMAND	
	0 - NO VIOLATIONS DETECTED	7
	ACCUMULATED TOTALS -	7
EVENT = 23	- REMOVE COMMAND	
	0 - NO VIOLATIONS DETECTED	1
	ACCUMULATED TOTALS	1
EVENT = 24	- SETROPTS COMMAND	
	0 - NO VIOLATIONS DETECTED	49
	ACCUMULATED TOTALS -	49

Figure 43. Short Command Summary Report

```

90.053 13:51:40                                RACF REPORT - SHORT EVENT SUMMARY
QUALIFIER                                OCCURRENCES
EVENT = 1 - JOB INITIATION / TSO LOGON
    0 - SUCCESSFUL INITIATION/LOGON                4
    1 - INVALID PASSWORD                          1
    8 - SUCCESSFUL TERMINATION                     5
    10-INSUFF. SECURITY LABEL AUTHORITY            4
    11-NOT AUTHORIZED TO SECURITY LABEL            3
    18-SUBMITTER UNAUTHOR. TO SEC. LABEL          1
    26-INVALID NEW PASSWORD                       1
    ACCUMULATED TOTALS -                          19
EVENT = 2 - RESOURCE ACCESS
    0 - SUCCESSFUL ACCESS                          9
    1 - INSUFFICIENT AUTHORITY                    1
    ACCUMULATED TOTALS -                          10
EVENT = 8 - ADDSD COMMAND
    0 - NO VIOLATIONS DETECTED                    3
    ACCUMULATED TOTALS -                          3
EVENT = 9 - ADDGROUP COMMAND
    0 - NO VIOLATIONS DETECTED                    1
    ACCUMULATED TOTALS -                          1
EVENT = 10 - ADDUSER COMMAND
    0 - NO VIOLATIONS DETECTED                    7
    ACCUMULATED TOTALS -                          7
EVENT = 13 - ALTUSER COMMAND
    0 - NO VIOLATIONS DETECTED                    1
    ACCUMULATED TOTALS -                          1
EVENT = 14 - CONNECT COMMAND
    0 - NO VIOLATIONS DETECTED                    1
    ACCUMULATED TOTALS -                          1
EVENT = 15 - DELSD COMMAND
    0 - NO VIOLATIONS DETECTED                    2
    ACCUMULATED TOTALS -                          2
EVENT = 16 - DELGROUP COMMAND
    0 - NO VIOLATIONS DETECTED                    1
    ACCUMULATED TOTALS -                          1
EVENT = 17 - DELUSER COMMAND
    0 - NO VIOLATIONS DETECTED                    1
    ACCUMULATED TOTALS -                          1
EVENT = 19 - PERMIT COMMAND
    0 - NO VIOLATIONS DETECTED                    14
    ACCUMULATED TOTALS -                          14
EVENT = 20 - RALTER COMMAND
    0 - NO VIOLATIONS DETECTED                    2
    ACCUMULATED TOTALS -                          2
EVENT = 21 - RDEFINE COMMAND
    0 - NO VIOLATIONS DETECTED                    7
    ACCUMULATED TOTALS -                          7
EVENT = 22 - RDELETE COMMAND
    0 - NO VIOLATIONS DETECTED                    7
    ACCUMULATED TOTALS -                          7
EVENT = 23 - REMOVE COMMAND
    0 - NO VIOLATIONS DETECTED                    1
    ACCUMULATED TOTALS -                          1
EVENT = 24 - SETROPTS COMMAND
    0 - NO VIOLATIONS DETECTED                    49
    ACCUMULATED TOTALS -                          49
    ACCUMULATED TOTALS -                          126

```

Figure 44. Short Event Summary Report

89.196 14:23:38		RACF REPORT - SHORT OWNER SUMMARY						
OWNER		----- I N T E N T S -----						
TOTAL		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE	READ
RACUSR1		6	0	0	5	0	0	
0	6							
RACUSR2		3	0	0	2	0	0	
0	3							
RACUSR3		3	0	0	2	0	0	
0	3							
RACUSR4		3	0	0	2	0	0	
0	3							
RACUSR5		3	0	0	2	0	0	
0	3							
RACUSR6		3	0	0	2	0	0	
0	3							
RACUSR7		3	0	0	2	0	0	
0	3							
SLCUSR0		2	0	0	2	0	0	
0	2							
SLCUSR1		3	0	0	2	0	0	
1	3							
SLCUSR3		2	0	0	2	0	0	
0	2							
SLCUSR4		2	0	0	2	0	0	
0	2							
SLCUSR5		2	0	1	2	0	0	
1	3							
ACCUMULATED TOTALS -		35	0	1	27	0	0	
2	36							
PERCENTAGE OF TOTAL ACCESSES -		97 %	0 %	3 %	75 %	0 %	0 %	6 %

Figure 45. Short Owner Summary Report

89.218 12:36:12		RACF REPORT - USER BY RESOURCE SUMMARY						
RESOURCE NAME		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE	READ
----- I N T E N T S -----								
TOTAL								
USER = IBMUSER								
NAME = JOHN P. ZILLER								
CLASS = SEC DATA								
SECLEVEL								
0	1	1	0	0	1	0	0	
ACCUMULATED TOTALS -								
0	1	1	0	0	1	0	0	
PERCENTAGE OF TOTAL ACCESSES -								
GENERIC PROFILE USED								
ACCUMULATED TOTALS -								
0	0	0	0	0	0	0	0	
PERCENTAGE OF TOTAL ACCESSES -								
0 % 0 % 0 % 0 % 0 % 0 % 0 %								
USER = RACUSR1								
CLASS = DATASET								
RACUSR1.NEW.DS1								
0	0	0	0	0	0	0	0	
NAME = MARY BAILEY								
CLASS = DATASET								
RACUSR1.NEW.DS1								
0	2	2	0	0	1	0	0	
RACUSR1.SMFS23								
0	2	2	0	0	2	0	0	
NAME = MARY BAILEY								
CLASS = SEC DATA								
SECLEVEL								
0	5	5	0	0	5	0	0	
ACCUMULATED TOTALS -								
0	9	9	0	0	8	0	0	
PERCENTAGE OF TOTAL ACCESSES -								
GENERIC PROFILE USED								
ACCUMULATED TOTALS -								
0	0	0	0	0	0	0	0	
PERCENTAGE OF TOTAL ACCESSES -								
0 % 0 % 0 % 0 % 0 % 0 % 0 %								
USER = RACUSR2								
CLASS = DATASET								
RACUSR2.NEW.DS2								
0	0	0	0	0	0	0	0	
NAME = JOHN P. ZILLER								
CLASS = DATASET								
RACUSR2.NEW.DS2								
0	2	2	0	0	1	0	0	
ACCUMULATED TOTALS -								
0	2	2	0	0	1	0	0	
PERCENTAGE OF TOTAL ACCESSES -								
GENERIC PROFILE USED								
ACCUMULATED TOTALS -								
0	0	0	0	0	0	0	0	
PERCENTAGE OF TOTAL ACCESSES -								
0 % 0 % 0 % 0 % 0 % 0 % 0 %								
USER = RACUSR3								
CLASS = DATASET								

Figure 46. User by Resource Summary Report

89.218 12:36:12		RACF REPORT - GROUP BY RESOURCE SUMMARY							
		----- I N T E N T S -----							
TOTAL		RESOURCE NAME	SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE	READ
GROUP = SYS1									
CLASS = DATASET									
0	RACUSR1.NEW.DS1		2	0	0	1	0	0	
	2								
0	RACUSR1.SMFS23		2	0	0	2	0	0	
	2								
0	RACUSR2.NEW.DS2		2	0	0	1	0	0	
	2								
0	RACUSR3.NEW.DS3		2	0	0	1	0	0	
	2								
0	RACUSR4.NEW.DS4		2	0	0	1	0	0	
	2								
0	RACUSR5.NEW.DS5		2	0	0	1	0	0	
	2								
0	RACUSR6.NEW.DS6		2	0	0	1	0	0	
	2								
2	SLCUSRD1.SLCDSND1		2	0	0	0	0	0	
	2								
1	SLCUSRD3.SLCDSND3		1	0	0	0	0	0	
	1								
2	SLCUSRD5.SLCDSND5		0	0	2	0	0	0	
	2								
CLASS = SECDATA									
SECLEVEL			6	0	0	6	0	0	
0	6								
5	ACCUMULATED TOTALS -		23	0	2	14	0	0	
	25								
PERCENTAGE OF TOTAL ACCESSES -			92 %	0 %	8 %	56 %	0 %	0 %	20 %
GENERIC PROFILE USED									
ACCUMULATED TOTALS -			0	0	0	0	0	0	
0	0								
PERCENTAGE OF TOTAL ACCESSES -			0 %	0 %	0 %	0 %	0 %	0 %	0 %

Figure 47. Group by Resource Summary Report

89.218 12:36:12		RACF REPORT - RESOURCE BY USER SUMMARY						
USER/ *JOB		----- I N T E N T S -----						
TOTAL		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE	READ
DATASET = RACUSR1.NEW.DS1								
RACUSR1 MARY BAILEY		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR1.SMFS23								
RACUSR1 MARY BAILEY		2	0	0	2	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	2	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	100 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR2.NEW.DS2								
RACUSR2 JOHN P. ZILLER		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR3.NEW.DS3								
RACUSR3 HARRIET BIRD		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR4.NEW.DS4								
RACUSR4 JOHN H. BUKOWSKI		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							

Figure 48. Resource by User Summary Report

89.218 12:36:12		RACF REPORT - RESOURCE BY GROUP SUMMARY						
GROUP/ *STEP		----- I N T E N T S -----						
TOTAL		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE	READ
DATASET = RACUSR1.NEW.DS1								
SYS1		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR1.SMFS23								
SYS1		2	0	0	2	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	2	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	100 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR2.NEW.DS2								
SYS1		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR3.NEW.DS3								
SYS1		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
GENERIC PROFILE USED								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %
DATASET = RACUSR4.NEW.DS4								
SYS1		2	0	0	1	0	0	
0	2							
ACCUMULATED TOTALS -		2	0	0	1	0	0	
0	2							
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %
UNDEFINED USERS (JOBS) ONLY								
ACCUMULATED TOTALS -		0	0	0	0	0	0	
0	0							

Figure 49. Resource by Group Summary Report

```

89.218 12:36:12          EVENT/QUALIFIER          RACF REPORT - RESOURCE BY EVENT SUMMARY
                                OCCURRENCES
DATASET = RACUSR1.NEW.DS1
  7 - DEFINE RESOURCE
    0 - SUCCESSFUL DEFINITION                      1
    ACCUMULATED TOTALS -                          1
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
  8 - ADDSD COMMAND
    0 - NO VIOLATIONS DETECTED                     1
    ACCUMULATED TOTALS -                          1
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
    ACCUMULATED TOTALS -                          2
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
DATASET = RACUSR1.SMFS23
  8 - ADDSD COMMAND
    0 - NO VIOLATIONS DETECTED                     1
    ACCUMULATED TOTALS -                          1
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
  19 - PERMIT COMMAND
    0 - NO VIOLATIONS DETECTED                     1
    ACCUMULATED TOTALS -                          1
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
    ACCUMULATED TOTALS -                          2
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
DATASET = RACUSR2.NEW.DS2
  7 - DEFINE RESOURCE
    0 - SUCCESSFUL DEFINITION                      1
    ACCUMULATED TOTALS -                          1
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0
  8 - ADDSD COMMAND
    0 - NO VIOLATIONS DETECTED                     1
    ACCUMULATED TOTALS -                          1
    GENERIC PROFILE USED
    ACCUMULATED TOTALS -                          0

```

Figure 50. Resource by Event Summary Report

```

89.218 12:36:12
QUALIFIER
EVENT = 2 - RESOURCE ACCESS
0 - SUCCESSFUL ACCESS

2
1
3
DATASET = SLCUSR1.SLCDSND1
DATASET = SLCUSR3.SLCDSND3

ACCUMULATED TOTALS -
GENERIC PROFILE USED
ACCUMULATED TOTALS -
UNKNOWN EVENT CODE QUALIFIER
0

2
2
DATASET = SLCUSR5.SLCDSND5

ACCUMULATED TOTALS -
GENERIC PROFILE USED
ACCUMULATED TOTALS -
0
5
ACCUMULATED TOTALS -
GENERIC PROFILE USED
ACCUMULATED TOTALS -
0
EVENT = 7 - DEFINE RESOURCE
0 - SUCCESSFUL DEFINITION

1
1
1
1
1
1
DATASET = RACUSR1.NEW.DS1
DATASET = RACUSR2.NEW.DS2
DATASET = RACUSR3.NEW.DS3
DATASET = RACUSR4.NEW.DS4
DATASET = RACUSR5.NEW.DS5
DATASET = RACUSR6.NEW.DS6

6
ACCUMULATED TOTALS -
GENERIC PROFILE USED
ACCUMULATED TOTALS -
0
6
ACCUMULATED TOTALS -
GENERIC PROFILE USED
ACCUMULATED TOTALS -
0
EVENT = 8 - ADDSD COMMAND
0 - NO VIOLATIONS DETECTED

1
1
1
1
1
1
1
DATASET = RACUSR1.NEW.DS1
DATASET = RACUSR1.SMFS23
DATASET = RACUSR2.NEW.DS2
DATASET = RACUSR3.NEW.DS3
DATASET = RACUSR4.NEW.DS4
DATASET = RACUSR5.NEW.DS5
DATASET = RACUSR6.NEW.DS6

7
ACCUMULATED TOTALS -
GENERIC PROFILE USED
ACCUMULATED TOTALS -
0
7
ACCUMULATED TOTALS -
GENERIC PROFILE USED

```

Figure 51. Event by Resource Summary Report

89.218 12:36:12		RACF REPORT - COMMAND BY USER SUMMARY		
QUALIFIER		OCCURRENCES	USER	NAME
EVENT = 8 - ADDSD COMMAND				
0 - NO VIOLATIONS DETECTED				
		2	RACUSR1	MARY BAILEY
		1	RACUSR2	JOHN P. ZILLER
		1	RACUSR3	HARRIET BIRD
		1	RACUSR4	JOHN H. BUKOWSKI
		1	RACUSR5	MELANIE WILKES
		1	RACUSR6	
	ACCUMULATED TOTALS -	7		
	ACCUMULATED TOTALS -	7		
EVENT = 10 - ADDUSER COMMAND				
0 - NO VIOLATIONS DETECTED				
		0	IBMUSER	
		1	IBMUSER	THOR
		6	RACUSR1	MARY BAILEY
		7		
	ACCUMULATED TOTALS -			
	1 - INSUFFICIENT AUTHORITY			
		1	RACUSR7	HESTER WILSON
		2	SLCUSR0	(NAME UNKNOWN)
		2	SLCUSR1	(NAME UNKNOWN)
		2	SLCUSR3	(NAME UNKNOWN)
		2	SLCUSR4	(NAME UNKNOWN)
		2	SLCUSR5	(NAME UNKNOWN)
		2	SLCUSR6	(NAME UNKNOWN)
	ACCUMULATED TOTALS -	13		
	ACCUMULATED TOTALS -	20		
EVENT = 13 - ALTUSER COMMAND				
0 - NO VIOLATIONS DETECTED				
		0	IBMUSER	
		1	IBMUSER	THOR
		21	RACUSR1	MARY BAILEY
		22		
	ACCUMULATED TOTALS -	22		
	ACCUMULATED TOTALS -	22		
EVENT = 17 - DELUSER COMMAND				
0 - NO VIOLATIONS DETECTED				
		0	IBMUSER	
		1	IBMUSER	THOR
		1		
	ACCUMULATED TOTALS -	1		
	ACCUMULATED TOTALS -	1		

Figure 52. Command by User Summary Report

89.218 12:36:12		RACF REPORT -	COMMAND BY GROUP SUMMARY
	QUALIFIER	OCCURRENCES	GROUP
EVENT = 8	- ADDSD COMMAND		
	0 - NO VIOLATIONS DETECTED	7	SYS1
	ACCUMULATED TOTALS -	7	
	ACCUMULATED TOTALS -	7	
EVENT = 10	- ADDUSER COMMAND		
	0 - NO VIOLATIONS DETECTED	7	SYS1
	ACCUMULATED TOTALS -	7	
	1 - INSUFFICIENT AUTHORITY	13	SYS1
	ACCUMULATED TOTALS -	13	
	ACCUMULATED TOTALS -	20	
EVENT = 13	- ALTUSER COMMAND		
	0 - NO VIOLATIONS DETECTED		
	ACCUMULATED TOTALS -	22	SYS1
	ACCUMULATED TOTALS -	22	
	ACCUMULATED TOTALS -	22	
EVENT = 17	- DELUSER COMMAND		
	0 - NO VIOLATIONS DETECTED		
	ACCUMULATED TOTALS -	1	SYS1
	ACCUMULATED TOTALS -	1	
	ACCUMULATED TOTALS -	1	
EVENT = 19	- PERMIT COMMAND		
	0 - NO VIOLATIONS DETECTED		
	ACCUMULATED TOTALS -	1	SYS1
	ACCUMULATED TOTALS -	1	
	ACCUMULATED TOTALS -	1	
EVENT = 20	- RALTER COMMAND		
	0 - NO VIOLATIONS DETECTED		
	ACCUMULATED TOTALS -	1	SYS1
	ACCUMULATED TOTALS -	1	

Figure 53. Command by Group Summary Report

89.218 12:36:12		RACF REPORT - COMMAND BY RESOURCE SUMMARY	
QUALIFIER		OCCURRENCES	RESOURCE
EVENT = 8 - ADDSD COMMAND			
0 - NO VIOLATIONS DETECTED			
	ACCUMULATED TOTALS -	1	DATASET = RACUSR1.NEW.DS1
	GENERIC PROFILE USED	1	DATASET = RACUSR1.SMFS23
	ACCUMULATED TOTALS -	1	DATASET = RACUSR2.NEW.DS2
	GENERIC PROFILE USED	1	DATASET = RACUSR3.NEW.DS3
	ACCUMULATED TOTALS -	1	DATASET = RACUSR4.NEW.DS4
	GENERIC PROFILE USED	1	DATASET = RACUSR5.NEW.DS5
	ACCUMULATED TOTALS -	1	DATASET = RACUSR6.NEW.DS6
	GENERIC PROFILE USED	7	
	ACCUMULATED TOTALS -	0	
	GENERIC PROFILE USED	7	
	ACCUMULATED TOTALS -	0	
EVENT = 19 - PERMIT COMMAND			
0 - NO VIOLATIONS DETECTED			
	ACCUMULATED TOTALS -	1	DATASET = RACUSR1.SMFS23
	GENERIC PROFILE USED	1	
	ACCUMULATED TOTALS -	0	
	GENERIC PROFILE USED	1	
	ACCUMULATED TOTALS -	0	
EVENT = 20 - RALTER COMMAND			
0 - NO VIOLATIONS DETECTED			
	ACCUMULATED TOTALS -	1	SECDATA = SECLEVEL
	GENERIC PROFILE USED	1	
	ACCUMULATED TOTALS -	0	
	GENERIC PROFILE USED	1	
	ACCUMULATED TOTALS -	0	
EVENT = 21 - RDEFINE COMMAND			
0 - NO VIOLATIONS DETECTED			
	ACCUMULATED TOTALS -	3	SECDATA = SECLEVEL
	GENERIC PROFILE USED	3	
	ACCUMULATED TOTALS -	0	
	GENERIC PROFILE USED	3	

Figure 54. Command by Resource Summary Report

89.218 12:36:12		RACF REPORT - OWNER BY RESOURCE SUMMARY							
RESOURCE NAME		SUCCESS	WARNING	VIOLATION	ALTER	CONTROL	UPDATE	READ	TOTAL
OWNER = IBMUSER									
CLASS = SECADATA									
SECLEVEL		1	0	0	1	0	0	0	1
ACCUMULATED TOTALS -		1	0	0	1	0	0	0	1
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	100 %	0 %	0 %	0 %	
GENERIC PROFILE USED									
ACCUMULATED TOTALS -		0	0	0	0	0	0	0	0
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %	
OWNER = RACUSR1									
CLASS = DATASET									
RACUSR1.NEW.DS1		2	0	0	1	0	0	0	2
RACUSR1.SMFS23		2	0	0	2	0	0	0	2
CLASS = SECADATA									
SECLEVEL		5	0	0	5	0	0	0	5
ACCUMULATED TOTALS -		9	0	0	8	0	0	0	9
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	89 %	0 %	0 %	0 %	
GENERIC PROFILE USED									
ACCUMULATED TOTALS -		0	0	0	0	0	0	0	0
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %	
OWNER = RACUSR2									
CLASS = DATASET									
RACUSR2.NEW.DS2		2	0	0	1	0	0	0	2
ACCUMULATED TOTALS -		2	0	0	1	0	0	0	2
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %	
GENERIC PROFILE USED									
ACCUMULATED TOTALS -		0	0	0	0	0	0	0	0
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %	
OWNER = RACUSR3									
CLASS = DATASET									
RACUSR3.NEW.DS3		2	0	0	1	0	0	0	2
ACCUMULATED TOTALS -		2	0	0	1	0	0	0	2
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %	
GENERIC PROFILE USED									
ACCUMULATED TOTALS -		0	0	0	0	0	0	0	0
PERCENTAGE OF TOTAL ACCESSES -		0 %	0 %	0 %	0 %	0 %	0 %	0 %	
OWNER = RACUSR4									
CLASS = DATASET									
RACUSR4.NEW.DS4		2	0	0	1	0	0	0	2
ACCUMULATED TOTALS -		2	0	0	1	0	0	0	2
PERCENTAGE OF TOTAL ACCESSES -		100 %	0 %	0 %	50 %	0 %	0 %	0 %	

Figure 55. Owner by Resource Summary Report

Merging SMF records produced by RACF for z/VM with SMF records produced by RACF for MVS

Although the content of RACF's audit records is the same in z/VM as it is in MVS, the record format is slightly different. Therefore, if you want to merge the SMF records produced by RACF for z/VM with those produced by RACF for MVS, the z/VM records must be reformatted. For more information, see the specific RACF Auditor's Guide you use with your z/VM system.

Appendix B. XML Schema

For information on the XML schema for the member, IRRSCHEM, see the current version of SYS1.SAMPLIB.

Appendix C. Accessibility

Accessible publications for this product are offered through [IBM Documentation for z/OS \(www.ibm.com/docs/en/zos\)](http://www.ibm.com/docs/en/zos).

If you experience difficulty with the accessibility of any z/OS documentation see [How to Send Feedback to IBM](#) to leave documentation feedback.

Notices

This information was developed for products and services that are offered in the USA or elsewhere.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
United States of America*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan*

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

This information could include missing, incorrect, or broken hyperlinks. Hyperlinks are maintained in only the HTML plug-in output for IBM Documentation. Use of hyperlinks in other output formats of this information is at your own risk.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

*IBM Corporation
Site Counsel
2455 South Road*

Poughkeepsie, NY 12601-5400
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the IBM website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or

reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

IBM Online Privacy Statement

IBM Software products, including software as a service solutions, ("Software Offerings") may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering's use of cookies is set forth below.

Depending upon the configurations deployed, this Software Offering may use session cookies that collect each user's name, email address, phone number, or other personally identifiable information for purposes of enhanced user usability and single sign-on configuration. These cookies can be disabled, but disabling them will also eliminate the functionality they enable.

If the configurations deployed for this Software Offering provide you as customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM's Privacy Policy at ibm.com/privacy and IBM's Online Privacy Statement at ibm.com/privacy/details in the section entitled "Cookies, Web Beacons and Other Technologies," and the "IBM Software Products and Software-as-a-Service Privacy Statement" at ibm.com/software/info/product-privacy.

Policy for unsupported hardware

Various z/OS elements, such as DFSMSdfp, JES2, and MVS, contain code that supports specific hardware servers or devices. In some cases, this device-related element support remains in the product even after the hardware devices pass their announced End of Service date. z/OS may continue to service element code; however, it will not provide service related to unsupported hardware devices. Software problems related to these devices will not be accepted for service, and current service activity will cease if a problem is determined to be associated with out-of-support devices. In such cases, fixes will not be issued.

Minimum supported hardware

The minimum supported hardware for z/OS releases identified in z/OS announcements can subsequently change when service for particular servers or devices is withdrawn. Likewise, the levels of other software products supported on a particular release of z/OS are subject to the service support lifecycle of those

products. Therefore, z/OS and its product publications (for example, panels, samples, messages, and product documentation) can include references to hardware and software that is no longer supported.

- For information about software support lifecycle, see: [IBM Lifecycle Support for z/OS \(www.ibm.com/software/support/systemsz/lifecycle\)](http://www.ibm.com/software/support/systemsz/lifecycle)
- For information about currently-supported IBM hardware, contact your IBM representative.

RSA Secure code

This product contains code licensed from RSA Data Security Incorporated.



Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at [Copyright and Trademark information \(www.ibm.com/legal/copytrade.shtml\)](http://www.ibm.com/legal/copytrade.shtml).

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Java™ and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

The registered trademark Linux® is used pursuant to a sublicense from the Linux Foundation, the exclusive licensee of Linus Torvalds, owner of the mark on a worldwide basis.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Index

Special Characters

(OWNER) column heading
in the group tree report [112](#)

A

access control [1](#)
ACCESS LEVEL column heading
in the RACF global access checking table report [117](#)
accessibility
contact IBM [179](#)
accountability [1](#)
administration control [14](#)
administration, RACF
classroom courses [xiv](#)
ALLOWED operand [143](#)
ALTER access authority
in the selected data set report [124](#)
ALTUSER command
logging RACF-related activities of a user [151](#)
APPC/MVS
auditing considerations
relationship of audit records [23](#)
APPLAUDIT [27](#)
APPLAUDIT key [145](#)
APPLAUDIT suboperand
APPLAUDIT suboperand of REASON operand [140](#)
ASCEND operand [145](#)
assistive technologies [179](#)
ASSOCIATED GROUP column heading
in the RACF started procedures table reports [119](#)
ASSOCIATED USER column heading
in the RACF started procedures table reports [119](#)
ASSOCIATION TYPE association
list of users with [121](#)
associations
ASSOCIATION TYPE [121](#)
NODE.USERID [121](#)
PASSWORD SYNC [121](#)
ASSOCIATIONS column heading
in the selected user attribute report [121](#)
AT keyword
auditing [37](#)
LOGSTR relocate section [37](#)
attribute
AUDITOR [1](#), [121](#)
group AUDITOR [1](#)
OPERATIONS [121](#)
REVOKE [121](#)
ROAUDIT [121](#)
SPECIAL [1](#), [121](#)
ATTRIBUTE TYPE column heading
in the selected user attribute report [120](#)
audit controls
RACF/Db2 external security module [44](#)
setting [17–25](#), [27–30](#)

audit tools
audit control functions
RACF SMF data unload utility [2](#)
DSMON [2](#)
logging routines [2](#)
RACF report writer [2](#)
auditing
AT keyword [37](#)
checking Db2 authorization [42](#)
ONLYAT keyword [38](#)
RACF remote sharing facility [36–40](#)
RRSFDATA class [37–40](#)
z/OS UNIX events [31](#)
AUDITING column heading
in the RACF class descriptor table report [114](#)
auditor
asking security questions [8](#)
audit tools provided [1](#)
auditor-controlled logging [4](#)
concept of accountability [1](#)
controlling auditing [2](#)
group-wide auditor responsibilities [1](#)
logging specific events [2](#)
obtaining reports [127](#)
overriding owner-controlled logging
specifying audit controls [4](#)
using the RACROUTE Request=AUTH exit routine [4](#)
responsibilities [1](#)
setting [17–25](#), [27–30](#)
system-wide auditor responsibilities [1](#)
use of DSMON [105](#)
use of the warning indicator [149](#)
using RACF report writer [8](#), [127](#)
verifying owner controlled logging [4](#)
AUDITOR attribute
auditing RACF system [1](#)
AUDITOR suboperand of AUTHORITY operand [139](#)
AUDITOR suboperand of REASON operand [140](#)
listing users with [121](#)
needed to run DSMON [105](#)
AUTH requests [4](#)
AUTHORITY operand
AUDITOR suboperand [139](#)
BYPASSED suboperand [139](#)
EXIT suboperand [139](#)
FAILSOFT suboperand [139](#)
NORMAL suboperand [139](#)
OPERATIONS suboperand [139](#)
SPECIAL suboperand [139](#)
TRUSTED suboperand [139](#)
authorization [9](#)
authorization requests
auditing not done [21](#)
automatic command direction [38](#)
automatic password direction [40](#)
automatically directed application updates
auditing [38](#)

automatically directed commands
 auditing [38](#)
automatically directed passwords
 auditing [40](#)

B

BY(name2) operand [146](#)
BYPASS PASSWORD PROTECTION column heading
 in the program properties table report [112](#), [113](#)

C

class descriptor table report
 description [114](#)
 sample of [115](#)
 use of [114](#)
CLASS NAME column heading
 in the RACF class descriptor table report [114](#)
 in the RACF global access checking table report [117](#)
CLASS operand [143](#)
classroom courses, RACF [xiv](#)
command and subcommand processing
 described [128](#)
 END subcommand [128](#)
 EVENT subcommand [128](#)
 LIST subcommand of RACFRW command [128](#)
 RACF report writer [128](#)
 RACRPORT EXEC [128](#)
 SELECT subcommand [128](#)
 SMFMERGE [128](#)
 SUMMARY subcommand [128](#)
command direction [37](#)
command syntax description [134](#)
command-summary report [150](#)
commands
 for RRSF [36](#)
 operator [36](#)
 RESTART [36](#)
 SET [36](#)
 STOP [36](#)
 TARGET [36](#)
COMPATMODE suboperand
 COMPATMODE suboperand of REASON operand [140](#)
contact
 z/OS [179](#)
CONTROL universal access authority
 in the selected data set report [124](#)
control user access [1](#)
controlling auditing
 classes [45](#), [47](#)
controlling logging
 by auditor [4](#)
 by owner [4](#)
courses about RACF [xiv](#)
CPU MODEL column heading
 in the system report [110](#)
CPU-ID column heading
 in the system report [110](#)

D

DATA operand

DATA operand (*continued*)
 RACFRW command [135](#)
DATA SET NAME column heading
 in the selected data set report [122](#)
database, Db2
 for IRRADU00 output [59](#)
DATASET operand
 RACFRW command [136](#)
DATE operand [138](#)
Db2
 creating a Db2 table space for IRRADU00 output [59](#)
 creating Db2 tables for IRRADU00 output [59](#)
 creating optimization statistics for the Db2 database [62](#)
 database for IRRADU00 output [59](#)
 Db2 utility statements required to delete the group records [62](#)
 deleting the IRRADU00 data from the Db2 database [62](#)
 loading the Db2 tables for IRRADU00 output [60](#)
 reorganizing the unloaded RACF SMF data in the Db2 database [62](#)
 SQL utility statements creating a table for IRRADU00 output [59](#)
 SQL utility statements defining a table space for IRRADU00 output [59](#)
 table names provided in SYS1.SAMPLIB [62](#)
 using with IRRADU00 output [58](#)
 utility statements required to load the tables with IRRADU00 output [60](#)
Db2 load utility
 sample statements for IRRADU00 output [58](#)
DEFAULT UACC column heading
 in the RACF class descriptor table report [114](#)
DESCEND operand [145](#)
DFSORT
 ICETOOL
 customizing reports [57](#)
directed commands
 AT keyword [37](#)
 auditing [37](#)
 ONLYAT keyword [38](#)
DSMON (data security monitor)
 class descriptor table report [114](#)
 control statements
 LINECOUNT [106](#)
 USEROPT [107](#)
 control statements for DSMON functions [106](#)
 description [105](#)
 functions for generating reports [108](#)
 generated by DSMON
 class descriptor table report [114](#)
 group tree report [111](#)
 started procedures table report [118](#)
 global access checking table report [117](#)
 group tree report [111](#), [118](#)
 how to run [105](#)
 JCL to run on MVS [105](#)
 list of reports produced [109](#)
 program properties table report [112](#)
 RACF authorized caller table report [113](#)
 RACF exits report [116](#)
 selected data sets report [122](#)
 selected user attribute report [120](#)
 selected user attribute summary report [122](#)
 system report [110](#)

DSNAME operand
 RACFRW command [136](#)
DSQUAL operand [143](#)

E

END subcommand of RACFRW command
 description [147](#)
 syntax [147](#)
ENTRY NAME column heading
 in the RACF global access checking table report [117](#)
EVENT subcommand of RACFRW command
 ALLOWED operand [143](#)
 CLASS operand [143](#)
 dependency of SELECT subcommand [141](#)
 described [141](#)
 DSQUAL operand [143](#)
 event-name operand [142](#)
 event-name operand values listed [143](#)
 EVQUAL operand [143](#)
 INTENT operand [143](#)
 issued with SELECT subcommand [137](#)
 LEVEL operand [144](#)
 monitoring
 access violations [150](#), [152](#), [153](#)
 NAME operand [143](#)
 NEWDSQUAL operand [144](#)
 NEWNAME operand [144](#)
 password violation levels [148](#)
 syntax [142](#)
event-name operand [142](#)
events
 logging [2](#)
EVQUAL operand [143](#)
example
 DSMON reports [112](#)
EXECUTE access authority
 needed to run DSMON [105](#)
EXIT MODULE NAME column heading
 in the RACF exits report [117](#)

F

failsoft processing
 logging [2](#)
FORMAT operand
 RACFRW command [135](#)
FUNCTION control statement
 control statements
 FUNCTION [106](#)
 DSMON (data security monitor) [106](#)
functions
 that DSMON uses to generate reports [108](#)

G

GENSUM operand
 RACFRW command [136](#)
global access checking
 auditing not done [21](#)
global access checking table report
 description of [117](#)
 use of [117](#)

group AUDITOR attribute
 list of users with [121](#)
 responsibility limits defined [1](#)
GROUP column heading
 in the group tree report [112](#)
GROUP operand [139](#)
group OPERATIONS attribute
 list of users with [121](#)
 monitoring
 group OPERATIONS users [151](#)
group REVOKE attribute
 list of users with [121](#)
group ROAUDIT attribute
 list of users with [121](#)
group tree report
 description [111](#)
 sample of [112](#)
 use of [111](#)
group-SPECIAL attribute
 list of users with [121](#)
 monitoring
 group-SPECIAL users
 [151](#)

I

IBM Health Checker for z/OS [7](#)
ICETOOL
 generating reports [55](#)
 IRRADU00 reports [56](#)
 RACFICE PROC [55](#)
 record selection criteria [55](#)
 report
 example [56](#)
 report format [54](#)
ICHRSMFE exit routine [127](#)
ICHRSMFI module
 SORTEQU field [145](#)
installation access control [1](#)
installation accountability [1](#)
installation exit ICHRSMFE [127](#)
installation-replaceable module ICHRSMFI [127](#)
INTENT operand [143](#)
Interactive System Productivity Facility (ISPF) program [2](#)
IRRADU00 utility
 creating a Db2 database [59](#)
 creating a Db2 table space [59](#)
 creating optimization statistics for the Db2 database [62](#)
 creating the Db2 tables [59](#)
 Db2 table names [62](#)
 Db2 utility statements required to delete the group records [62](#)
 Db2 utility statements required to load the tables [60](#)
 deleting data from the Db2 database [62](#)
 description [49](#)
 effectively using [52](#)
 example [51](#)
 loading the Db2 tables [60](#)
 operational considerations [49](#)
 output [52](#)
 reorganizing the unloaded RACF SMF data in the Db2 database [62](#)
 SQL utility statements creating a table [59](#)
 SQL utility statements defining a table space [59](#)

- IRRADU00 utility (*continued*)
 - steps for using IRRADU00 output with Db2 [58](#)
 - using [49](#)
 - using output with Db2 [58](#)
- IRRADULD
 - member in SYS1.SAMPLIB [58](#)
- IRRADUTB
 - member in SYS1.SAMPLIB [58](#)
- IRRDBU00 utility
 - auditor's use of [6, 7](#)
- IRRICE
 - member in SYS1.SAMPLIB [7, 54](#)
 - SMF records [7](#)
- IRRUT100 utility
 - auditor's use of [6](#)
- ISPF panels
 - advantages [5](#)
 - sample for password rules [5](#)
- ISPF program [2](#)

J

- JCL (job control language)
 - for DSMON [105](#)
- JOB operand [139](#)

K

- keyboard
 - navigation [179](#)
 - PF keys [179](#)
 - shortcut keys [179](#)

L

- LEVEL column heading
 - in the group tree report [112](#)
- LEVEL operand [144](#)
- LINECNT operand
 - RACFRW command [136](#)
- LINECOUNT control statement
 - DSMON (data security monitor) [106](#)
- LIST request
 - list of programs authorized to issue [114](#)
- LIST subcommand of RACFRW command
 - ASCEND operand [145](#)
 - DESCEND operand [145](#)
 - description [144](#)
 - NEWPAGE operand [145](#)
 - restrictions [144](#)
 - SORT operand [144](#)
 - syntax [144](#)
 - TITLE operand [144](#)
- LISTDSD command [2](#)
- LISTGRP command [2](#)
- LISTUSER command [2](#)
- logging
 - access levels [4](#)
 - accesses to
 - resources at specific audit levels [5](#)
 - resources within a certain SECLABEL [5](#)
 - specific data sets [5](#)
 - specific general resources [5](#)

- logging (*continued*)
 - auditor-controlled logging [4](#)
 - AUTH requests [4](#)
 - changes to any RACF profile [5](#)
 - events RACF always logs [2](#)
 - events RACF never logs [2](#)
 - failsoft processing [2](#)
 - LIST requests [114](#)
 - obtaining printed reports [8](#)
 - owner-controlled logging [4](#)
 - RACF commands
 - issued by group-SPECIAL user [5](#)
 - issued by SPECIAL user [5](#)
 - violations [5](#)
 - RACF data in SMF records [8](#)
 - RACF-related activities [151](#)
 - RACF-related activities of specific users [5](#)
 - RACROUTE REQUEST=VERIFY requests [2](#)
 - setting audit controls [17–25, 27–30](#)
 - specific events [2](#)
 - types of accesses [4](#)
 - use of RVARY command [2](#)
 - use of SETROPTS command [2](#)
 - VERIFY requests [113](#)
- LOGOPTIONS suboperand
 - LOGOPTIONS suboperand of REASON operand [140](#)
- LOGSTR
 - AT keyword [37](#)
 - RACF/Db2 external security module [43](#)
 - relocate section [37](#)
 - using data [43](#)

M

- management control [15](#)
- messages
 - program properties table report [113](#)
 - RACF authorized caller table report [114](#)
 - RACF exits report [117](#)
 - selected data sets report [125](#)
 - selected user attribute report [121](#)
 - system report [111](#)
- miscellaneous security concerns [10](#)
- modifying resource profile [4](#)
- MODULE LENGTH column heading
 - in the RACF exits report [117](#)
- MODULE NAME column heading
 - in the RACF authorized caller table report [114](#)
- monitoring
 - access attempts
 - by security label [152](#)
 - by security level [152](#)
 - in warning mode [148](#)
 - access violations
 - UACC [150](#)
 - with RACF report writer [150](#)
 - with RACFRW command [152, 153](#)
 - OPERATIONS users
 - with RACF report writer [151](#)
 - with RACFRW command [152](#)
 - password violation levels
 - LOGON process [148](#)
 - password violation occurrences [148](#)

- monitoring *(continued)*
 - password violation stabilization [148](#)
 - SPECIAL users
 - with RACF report writer [151](#)
 - with RACFRW command [151](#)
 - specific users
 - with RACF report writer [151](#)
 - with RACFRW command, by specified user [151](#)
 - use of RACF commands
 - with RACF report writer [150](#)
 - with RACFRW command, by specified user [151](#)
 - with RACFRW command, by users [150](#)

N

- NAME operand
 - EVENT subcommand of RACFRW command [143](#)
- name1 operand
 - SUMMARY subcommand of RACFRW command [146](#)
- navigation
 - keyboard [179](#)
- NEWDSQUAL operand
 - EVENT subcommand of RACFRW command [144](#)
- NEWNAME operand [144](#)
- NEWPAGE operand
 - LIST subcommand of RACFRW command [145](#)
 - SUMMARY subcommand of RACFRW command [147](#)
- NODE.USERID association
 - list of users with [121](#)
- NOFORMAT operand
 - RACFRW command [135](#)
- NOGENSUM operand
 - RACFRW command [136](#)
- NOJOB operand
 - SELECT subcommand of RACFRW command [139](#)
- NONE access authority
 - in the selected data set report [125](#)
- NOOWNER operand [139](#)
- NOUSER operand
 - SELECT subcommand of RACFRW command [139](#)

O

- ONLYAT keyword
 - auditing [38](#)
- OPERATING SYSTEM/LEVEL column heading
 - in the system report [110](#)
- OPERATIONS attribute
 - list of users with [121](#)
 - monitoring
 - OPERATIONS users [151](#)
 - OPERATIONS suboperand of AUTHORITY operand [139](#)
- OPERATIONS column heading
 - in the RACF class descriptor table report [114](#)
- operator commands
 - for RRSF [36](#)
 - RESTART [36](#)
 - SET [36](#)
 - STOP [36](#)
 - TARGET [36](#)
- OWNER operand [139](#)
- owner-controlled logging
 - done by resource owner [4](#)

- owner-controlled logging *(continued)*
 - overridden by auditor [4](#)

P

- panels
 - using [2](#)
- password rules
 - ISPF panel for [5](#)
- PASSWORD SYNC association
 - list of users with [121](#)
- password violation levels
 - calculating percentages [148](#)
 - example [148](#)
 - monitoring [148](#)
- printed reports
 - from DSMON [105](#)
 - from the RACF report writer [8](#)
- printing reports from DSMON [105](#)
- printing reports from the report writer [8](#)
- PRIVILEGED column heading
 - in the RACF started procedures table reports [119](#)
- PROCEDURE NAME column heading
 - in the RACF started procedures table reports [119](#)
- PROCESS operand
 - SELECT subcommand of RACFRW command [139](#)
- PROCESS records [129](#)
- PROGRAM NAME column heading
 - in the program properties table report [112](#)
- program properties table report
 - description [112](#)
 - messages [113](#)
 - sample of [113](#)
 - use of [112](#)
- protection plan [11](#)

R

- RACF
 - access control [1](#)
 - controlling auditing [2](#)
- RACF
 - commands
 - RALTER command [29](#)
- RACF auditor
 - definition of [1](#)
- RACF authorized caller table report
 - description [113](#)
 - messages [114](#)
 - use of [113](#)
- RACF commands
 - ALTUSER command [151](#)
 - LISTDSD command [2](#)
 - LISTGRP command [2](#)
 - LISTUSER command [2](#)
 - RLIST command [2](#)
 - RVARY command [2](#)
 - SEARCH command [2](#)
 - SETROPTS command
 - monitoring access to resources with a security label [153](#)
 - monitoring access to resources with a security level [152](#)

- RACF commands (*continued*)
 - SETROPTS command (*continued*)
 - monitoring SPECIAL users [151](#)
- RACF database
 - sample DDL statements [58](#)
- RACF exits report
 - description [116](#)
 - messages [117](#)
 - sample of [117](#)
 - use of [116](#)
- RACF global access table report
 - sample of [118](#)
- RACF implementation/integrity [9](#), [11](#)
- RACF INDICATED field
 - in the selected data set report [124](#)
- RACF PROTECTED field
 - in the selected data set report [124](#)
- RACF remote sharing facility (RRSF)
 - auditing [36](#)
- RACF report writer
 - command description [130](#)
 - compared to RACF commands [8](#)
 - default values [130](#)
 - examples [153](#)
 - installation exit ICHRSME [127](#)
 - installation-replaceable module ICHRSME [127](#)
 - merging RACF for z/VM SMF records with RACF for MVS SMF records [175](#)
 - monitoring
 - access attempts by security label [152](#)
 - access attempts by security level [152](#)
 - access attempts in WARNING mode [148](#)
 - access violations [150](#)
 - OPERATIONS users [151](#)
 - password violation levels [148](#)
 - RACF commands [150](#)
 - SPECIAL users [151](#)
 - specific users [151](#)
 - obtaining reports [127](#)
 - overview [127](#)
 - record selection criteria [137](#)
 - report generation [130](#)
 - report types
 - access to RACF-protected resource [127](#)
 - descriptions of group activity [127](#)
 - descriptions of user activity [127](#)
 - summaries of resource use [127](#)
 - summaries of system use [127](#)
 - return codes from [133](#)
 - SMF record types [129](#)
 - SMF records [8](#)
 - subcommand description [130](#)
 - terminal monitor program [130](#)
 - TMP [130](#)
 - use of SMF records [129](#)
 - use of work data set [130](#)
 - using [8](#)
 - warning mode example [149](#)
 - year 2000 [127](#)
- RACF Report Writer [127](#)
- RACF SMF data unload utility
 - description [49](#)
 - effectively using [52](#)
 - operational considerations [49](#)
- RACF started procedures table report
 - sample of [119](#), [120](#)
- RACF/Db2 external security module
 - checking authorization [42](#)
 - profile checking [42](#)
 - setting audit controls [44](#)
 - using LOGSTR data [43](#)
- RACFICE
 - generating reports [55](#)
 - IRRADU00 reports [56](#)
 - using [55](#)
- RACFRW command
 - command syntax [130](#)
 - command syntax description [134](#)
 - DATA operand [135](#)
 - default maximum record length [130](#)
 - description [134](#)
 - DSNAME operand [136](#)
 - END subcommand [147](#)
 - EVENT subcommand [141](#)
 - FORMAT operand [135](#)
 - GENSUM operand [130](#), [136](#)
 - LINECNT operand [136](#)
 - LIST subcommand of RACFRW command [144](#)
 - monitoring
 - access violations [150](#), [152](#), [153](#)
 - OPERATIONS users [152](#)
 - RACF commands [150](#)
 - RACF commands issued by user [151](#)
 - SPECIAL users [151](#)
 - specific users [151](#)
 - NOFORMAT operand [135](#)
 - NOGENSUM operand [136](#)
 - sample reports [156](#)
 - SAVE operand [136](#)
 - SELECT subcommand [136](#)
 - subcommand description [130](#)
 - SUMMARY subcommand [146](#)
 - syntax [134](#)
 - TITLE operand [135](#)
 - using RACF report writer [8](#)
 - warning mode example [149](#)
- RACINIT AUTHORIZED column heading
 - in the RACF authorized caller table report [114](#)
- RACLINK command
 - auditing [40](#), [41](#)
 - examples [41](#)
 - phases [40](#)
- RACLIST AUTHORIZED column heading
 - in the RACF authorized caller table report [114](#)
- RACROUTE REQUEST=VERIFY request [2](#)
- RALTER
 - command
 - using when auditing [29](#)
- READ access authority
 - in the selected data set report [125](#)
 - needed to run DSMON [105](#)
- read-only auditor
 - group-wide auditor responsibilities [1](#)
 - system-wide auditor responsibilities [1](#)
- REASON operand
 - AUDITOR suboperand [140](#)
 - CLASS suboperand [140](#)

- REASON operand (*continued*)
 - CMDVIOL suboperand [140](#)
 - COMMAND suboperand [140](#)
 - RACINIT suboperand [140](#)
 - RESOURCE suboperand [140](#)
 - SPECIAL suboperand [140](#)
 - USER suboperand [140](#)
- record selection
 - RACF report writer [129](#)
- records
 - PROCESS records [129](#)
 - SMF records [129](#)
 - STATUS records [129](#)
- reports
 - access to RACF-protected resource [127](#)
 - customizing [57](#)
 - descriptions of group activity [127](#)
 - descriptions of user activity [127](#)
 - general summary [160](#)
 - generated by DSMON
 - program properties table report [112](#)
 - RACF authorized caller table report [113](#)
 - RACF exits report [116](#)
 - selected data sets report [122](#)
 - selected user attribute report [120](#)
 - selected user attribute summary report [122](#)
 - system report [110](#)
 - list of summaries from the report writer [146](#)
 - listing of status [161](#)
 - produced by DSMON [109](#)
 - RACFRW sample reports [156](#)
 - standard header page for report writer [160](#)
 - summaries of resource use [127](#)
 - summaries of system use [127](#)
 - summary
 - group activity [163](#)
 - group activity by resource [168](#)
 - owner activity [166](#)
 - owner activity by resource [157](#), [174](#)
 - RACF command activity [165](#)
 - RACF command activity by group [174](#)
 - RACF command activity by resource [174](#)
 - RACF command activity by user [173](#)
 - resource activity [164](#)
 - resource activity by group [170](#)
 - resource activity by resource [169](#)
 - resource activity by security event [171](#)
 - security event activity [166](#)
 - security event activity by resource [172](#)
 - user activity [162](#)
 - user activity by resource [167](#)
 - using ICETOOL [56](#), [57](#)
 - using RACFICE [56](#)
- resource owners
 - controlling logging [4](#)
- responsibilities of auditors [1](#)
- return codes
 - from RACF report writer [133](#)
- REVOKE attribute
 - list of users with [121](#)
- RLIST command [2](#)
- ROAUDIT attribute
 - listing users with [121](#)
 - needed to run DSMON [105](#)

- RRSF (RACF remote sharing facility)
 - auditing considerations [36](#)
 - automatically directed application updates [38](#)
 - automatically directed commands [38](#)
 - automatically directed passwords [40](#)
 - commands [36](#)
 - directed commands [37](#)
 - operator commands [36](#)
 - RACLINK command
 - examples [41](#)
 - phases [40](#)
 - RRSFDATA class [37–40](#)
- RRSFDATA class
 - controlling auditing [37–40](#)
- rules
 - establishing password syntax
 - ISPF panel [5](#)
- RVARY command [2](#)

S

- sample
 - ISPF panel [5](#)
- sample reports
 - DSMON report
 - system report [111](#)
 - DSMON reports
 - class descriptor table report [115](#)
 - group tree report [112](#)
 - from the report writer [156](#)
- SAVE operand
 - RACFRW command [136](#)
- SEARCH command
 - listing profiles that have the warning indicator [149](#)
- SECAUDIT suboperand
 - SECAUDIT suboperand of REASON operand [140](#)
- SECLABELAUDIT suboperand
 - SECLABELAUDIT suboperand of REASON operand [140](#)
- security administrator
 - monitoring
 - SPECIAL users [151](#)
 - SPECIAL attribute [1](#)
 - use of RACF commands [150](#)
- security topics for RACF
 - classroom courses [xiv](#)
- SELECT subcommand of RACFRW command
 - AUTHORITY operand [139](#)
 - DATE operand [138](#)
 - dependency of EVENT subcommand [141](#)
 - GROUP operand [139](#)
 - issued with EVENT subcommand [137](#)
 - JOB operand [139](#)
 - monitoring
 - access violations [150](#), [152](#), [153](#)
 - OPERATIONS users [152](#)
 - SPECIAL users [151](#)
 - specific users [151](#)
 - use of RACF commands [151](#)
 - NOJOB operand [139](#)
 - NOOWNER operand [139](#)
 - NOUSER operand [139](#)
 - OWNER operand [139](#)
 - password violation levels [148](#)
 - PROCESS operand [139](#)

SELECT subcommand of RACFRW command (*continued*)

- RACFRW command [136](#)
- REASON operand [140](#)
- restrictions [137](#)
- STATUS operand [139](#)
- STEP operand [139](#)
- SUCCESES operand [138](#)
- syntax [138](#)
- SYSID operand [139](#)
- TERMINAL operand [141](#)
- USER operand [138](#)
- VIOLATIONS operand [138](#)
- warning mode example [149](#)
- WARNINGS operand [138](#)
- selected data sets report
 - description [122](#)
 - messages [125](#)
 - sample of [125](#)
 - use of [122](#)
- selected user attribute report
 - description [120](#)
 - messages [121](#)
 - sample of [121](#)
- selected user attribute summary report
 - description [122](#)
 - sample of [122](#)
- SELECTION CRITERION column heading
 - in the selected data set report [123](#)
- SETROPTS command
 - logging use of [2](#)
 - monitoring
 - access to resources with a security label [153](#)
 - access to resources with a security level [152](#)
 - group-SPECIAL users [151](#)
 - SPECIAL users [151](#)
- SAUDIT operand [151](#)
- SECLABELAUDIT [153](#)
- SECLEVELAUDIT operand [152](#)
- shortcut keys [179](#)
- SMF data unload utility
 - see RACF SMF data unload utility [49](#)
- SMF data unload, output to XML [65](#)
- SMF record
 - type 44 relocate section [38](#), [39](#)
- SMF records
 - listing contents of [127](#)
 - merging RACF for z/VM SMF records with RACF for MVS
 - SMF records [175](#)
 - PROCESS records [129](#)
 - RACF report writer [127](#)
 - STATUS records [129](#)
 - types
 - type 20 [129](#)
 - type 30 [129](#)
 - type 80 [129](#)
 - type 81 [129](#)
 - type 83 [129](#)
 - used by RACF report writer [129](#)
- SMF-ID column heading
 - in the system report [111](#)
- SORT operand [144](#)
- SPECIAL attribute
 - list of users with [121](#)
 - monitoring

SPECIAL attribute (*continued*)

- monitoring (*continued*)
 - SPECIAL users [151](#)
- SPECIAL suboperand of AUTHORITY operand [139](#)
- SPECIAL suboperand of REASON operand [140](#)
- specifying audit controls [4](#)
- standard header page for report writer [160](#)
- started procedures table report
 - description [118](#)
 - use of [118](#)
- STATISTICS column heading
 - in the RACF class descriptor table report [114](#)
- STATUS column heading
 - in the RACF class descriptor table report [114](#)
- STATUS operand [139](#)
- STATUS records [129](#)
- STEP operand [139](#)
- SUCCESES operand
 - SUMMARY subcommand of RACFRW command [147](#)
- summary of changes [xv](#)
- summary reports from the report writer [146](#)
- SUMMARY subcommand of RACFRW command
 - BY(name2) operand [146](#)
 - description [146](#)
 - monitoring
 - use of RACF commands [150](#)
 - name1 operand [146](#)
 - NEWPAGE operand [147](#)
 - SUCCESES operand [147](#)
 - syntax [146](#)
 - TITLE operand [147](#)
 - used with EVENT subcommand [146](#)
 - used with SELECT subcommand [146](#)
 - VIOLATIONS operand [147](#)
 - WARNINGS operand [147](#)
- SYS1.SAMPLIB data set
 - IRRADULD [58](#)
 - IRRADUTB [58](#)
 - IRRICE 7, [54](#)
 - sample Db2 mappings [52](#)
 - sample DFSORT mappings [52](#)
- SYSID operand [139](#)
- system information [9](#)
- SYSTEM KEY column heading
 - in the program properties table report [112](#), [113](#)
- system report
 - description [110](#)
 - messages [111](#)
 - produced when RACF is inactive [105](#)
 - sample report [111](#)
 - using [110](#)
- SYSTEM RESIDENCE VOLUME column heading
 - in the system report [111](#)
- system-wide auditor responsibilities [1](#)

T

- table space for Db2
 - creating [59](#)
- technical security concerns [12](#)
- terminal monitor program [130](#)
- TITLE operand
 - RACFRW command [135](#)
 - SUMMARY subcommand of RACFRW command [147](#)

- TMP (terminal monitor program) [130](#)
- TOTAL DEFINED USERS column heading
 - in the selected attribute summary report [122](#)
- TOTAL SELECTED ATTRIBUTE USERS column heading
 - in the selected attribute summary report [122](#)
- TRACE column heading
 - in the RACF started procedures table reports [119](#)
- trademarks [184](#)
- TRUSTED column heading
 - in the RACF started procedures table reports [119](#)
- type 20 SMF record [129](#)
- type 30 SMF record [129](#)
- type 80 SMF record [129](#)
- type 81 SMF record [129](#)
- type 83 SMF record [129](#)

U

- UACC (universal access authority)
 - monitoring the use of [150](#)
- UACC field
 - in the selected data set report [124](#)
- UPDATE universal access authority
 - in the selected data set report [125](#)
- usage of attributes [11](#)
- user attribute [1](#)
- user interface
 - ISPF [179](#)
 - TSO/E [179](#)
- USER operand [138](#)
- user responsibilities
 - auditor's role (user with AUDITOR attribute) [1](#)
 - security administrator's role (user with SPECIAL attribute) [1](#)
- user-controlled logging
 - done by resource owner [4](#)
 - overridden by auditor [4](#)
- user-written exit routine ICHRSMFE [127](#)
- user-written module ICHRSMFI [127](#)
- USERID column heading
 - in the selected user attribute report [120](#)
- USEROPT control statement
 - DSMON (data security monitor) [107](#)
- USRDSN field
 - in the selected data set report [124](#)

V

- VERIFY request
 - list of programs authorized to issue [113](#)
- verify user access [1](#)
- VIOLATIONS operand [138](#), [147](#)
- VMAUDIT suboperand
 - VMAUDIT suboperand of REASON operand [140](#)
- VOLUME SERIAL column heading
 - in the selected data set report [122](#)

W

- warning indicator [149](#)
- warning mode
 - cautions when using [149](#)
 - defined [149](#)

- warning mode (*continued*)
 - monitoring access attempts [148](#)
 - report example [149](#)
 - warning indicator [149](#)
- WARNING operand
 - SEARCH command [149](#)
- WARNINGS operand
 - SELECT subcommand of RACFRW command [138](#)
 - SUMMARY subcommand of RACFRW command [147](#)
- work data set [130](#)

X

- XML, obtaining output from SMF data unload [65](#)

Y

- year 2000
 - RACF report writer [127](#)

Z

- z/OS UNIX
 - auditable events [34](#)
 - auditing considerations [31](#)
 - controlling auditing
 - classes [31](#)
- z/OS UNIX System
 - Services
 - auditing options [35](#)
 - commands [34](#)
 - superuser authority [35](#)



Product Number: 5655-ZOS

SA23-2290-70

